iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 12 **Issue:** V **Month of publication:** May 2024

DOI: https://doi.org/10.22214/ijraset.2024.62727

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 12 Issue V May 2024- Available at www.ijraset.com

Research on Object Motion, Fire and Gas Detection Using ESP32

Boyina Amulya[1], Thummeti Laxmi Varshitha Reddy[2], Messa Adwith[3], Madapati Praneeth[4]
[1]*Assistant professor,* [2, 3, 4]*UG Student, Department of ECE, CMR College of Engineering & Technology, Hyderabad, Telangana*

Abstract: ***Working parents frequently worry about leaving their young children unattended at home, but thanks to technological advancements, it is now simpler to keep an eye on things and send information quickly. With the aid of the Internet of Things, parents may simply monitor their children's behavior within the home or keep an eye on guests at the entrance. By sensing motion and sending photographs on Telegram, this hardware-based application seeks to improve home security and kid safety by assisting in identifying any anomalous activity. This hardware-based architecture saves time and aids in monitoring in lieu of the owner. The fast expansion of industrial facilities and infrastructure is causing pollution, climate change, and other environmental problems. The suggested device uses humidity sensors, temperature detectors (DHT 11), gas detectors (MQ2, MQ7, and MQ135),and other sensors to identify the unfavorable gases present in the production process.***
Keywords: Internet of Things (IoT), Home security, Motion sensors, Telegram, Anomalous activity, Monitoring, Industrial facilities, Pollution, Climate change, Environmental Problems, Humidity Sensors, Temperature detectors (DHT 11),Gas detectors (MQ2, MQ7, MQ135)

I. INTRODUCTION

A major development in safety and security systems is integrating object motion, fire, and gas detection functionalities utilizing the ESP32 microcontroller. Integrating ultrasonic and PIR motion sensors allows forreal- time danger identification and surveillance. Flame and temperature sensors are used in fire detection, which quickly notifies users and initiates mitigating actions. Gas detection detects dangerous gas concentrations and triggers preventative measures. It is made possible by sensors such as MQ2, MQ7, and MQ135. This creative solution, which isseamlessly integrated with the ESP32 platform, guarantees effective danger management while providing users with enhanced situational awareness and quick intervention capabilities.

II. RELATED WORK

The development and application of safety and security systems with the ESP32 microcontroller, with an emphasis on the integration of features for gas, fire, and object detection. To establish reliable hazard detection and mitigation systems, numerous studies have investigated sensor combinations and communication methods. To enable real-time monitoring and threat identification, for instance, research has explored the effectiveness of passive infrared and ultrasonic sensors for object motion detection. Another area of focus has been gas detection, with studies exploring gas sensors such as MQ2, MQ7, and MQ135 to detect dangerous gas concentrations and start preventative measures. These efforts have laid the foundation for comprehensive safety and security solutions on the ESP32 platform by providing insightful information on sensor selection, data processing methods, and system integration tactics. Current initiatives aim to further improve the efficiency, reliability and scalability of safety and security systems based on ESP32 for variety settings and applications by building upon earlier research findings.

Another area of interest has been fire detection, with studies concentrating on temperature and flame sensors connected with the ESP32 platform. These sensors quickly identify unusually high heat levels that are a sign of a fire, sending out notifications right away and starting fire control procedures. Additionally, research has explored machine learning methods for identifying fire patterns, which enhances the system's capacity to discern between real fire occurrences and false alarms brought on by outside variables. Research on the detection of gases has advanced significantly as well thanks tothe incorporation of gas sensors like MQ2, MQ7, and MQ135.These sensors make it possible to identify dangerous gas concentrations, which makes prompt intervention and preventative actions easier. Furthermore, research has investigated data fusion strategies and sensor calibration strategies to enhance the precision and dependability of gas detection.

All things considered, earlier studies have provided significant insights into creating and implementing comprehensive safety and security systems utilizing the ESP32 microcontroller.Current and upcoming research attempts to further improve system performance, scalability, andapplicability in many situations by building upon these insights.

©IJRASET: All Rights are Reserved

The study are looking into the efficacy of different sensor types, such as passive infrared and ultrasonic sensors, for object motion detection. These sensors detect movement inside predefined regions, enabling real-time surveillance and threat identification.Furthermore, research has looked at sophisticated motion analysis and trajectory prediction algorithms to improve detection precision and lower false alarms.Detection of object motion By employing sensors such as PIR and ultrasonic sensors, flame and temperature sensors for fire detection, and MQ2, MQ7, and MQ135 sensors for gas detection, these studies have significantly contributed to improving system dependability and performance.

III. PROPOSED METHODOLOGY

An ESP32 microcontroller will be required as the initial component and intellectual resources of our system. It's a strong and adaptable platform for Internet of Things applications. To detect any movement within its range, a motion sensor will also be required. This will make it easier for us to monitor any moving objects or individuals.

We'll then upgrade our setup with a gas sensor and a fire sensor. These sensors will monitor for any indications of hazardous gasses or fire. If they notice anything strange, they'll communicate with the microcontroller by sending signals.

The ESP32 can be connect to an LCD screen to display the data. In this manner, we can quickly view the sensor's condition,along with any motion, fire, or gas detected.We'll add a buzzer to alert us in case of an emergency. A buzzer alert will ring to draw our attention if any of the sensors pick up something concerning.

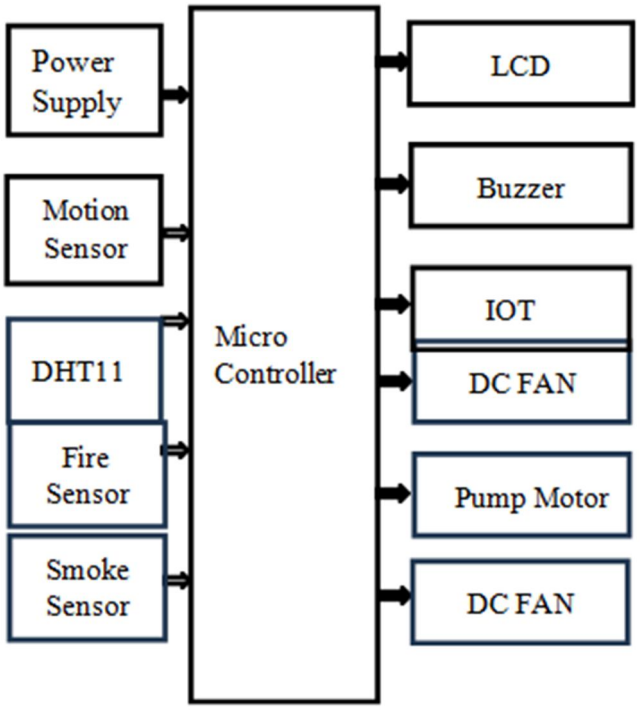


Fig. Block Diagram

To measure temperature and humidity, we can add a DHT11 sensor last. We may be able to identify any fire threats and obtain further environmental information from this.The ESP32 will require programming in order to process the sensor data. The motion sensor, gas sensor, and fire sensor will all be continuously checked by the code for changes. The code will initiate the necessary operations, such as displaying the information on the LCD screen and activating the buzzer, if any of these sensors pick up something interesting.

We can link the ESP32 to a DC fan to increase its usefulness even further. The microprocessor can activate the fan to assist in cooling down the area and avert any possible fire threats if the temperature climbs above a predetermined level.

To summarize, the suggested approach for creating and executing gas, fire, and item motion detection systems with ESP32 entails utilizing a mix of sensors, an LCD screen, a buzzer, and a microcontroller. We may construct a system that notifies us of any motion, fire or gas detection and takes necessary action by developing code to monitor and respond to the sensor data. Remember that the actual implementation involves much more complexity and that this is only a high- level overview.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

A systematic approach is suggested to guarantee thorough hazard detection and mitigation capabilities in the design and implementation of object motion, fire and gas detection using ESP32 microcontrollers, motion sensors, microcontrollers, LCDs, fire sensors, gas sensors, buzzers, DHT11, and DC fan.

First, the ESP32 microcontroller must be integrated with various sensors and output devices as part of the hardware configuration. Data collection and visualization are made possible via the ESP32 connected to the motion sensor, DHT11 temperature and humidity sensor, and LCD display. To offer visual and aural feedback in reaction to detected risks,a buzzer and DC fan are also integrated.

To ensure precise and reliable danger detection, sensor calibration is necessary.To establish baseline measurements and define acceptable thresholds for detecting abnormal situations, calibration processes are conducted for every sensor. The detecting system's efficacy and accuracy are improved by this calibration procedure.

To identify potential threats, data processing entails examiningsensor data that the ESP32 microcontroller has acquired. To improve detection accuracy and reliability, advanced algorithms are employed for data fusion, pattern recognition, and anomaly detection. Sensor data may be classified and normal and abnormal environmental conditions can be distinguished using machine learning algorithms.

The system initiates suitable response mechanisms to limit risks when it detects hazards like object motion, fire, or gas leakage. For example, when object motion detection is used, users can be alerted of any invasions through the LCD display and buzzer. The buzzer and DC fan are triggered by fire detection, alerting the occupants and enhancing airflow toslow the spread of the fire. When a gas is detected, ventilation systems are activated and people are warned to leave the area to avoid being exposed to potentially dangerous gases.

To evaluate the suggested methodology's efficacy and dependability in practical situations, it is put through a thorough testing and validation process. The system's performance parameters, such as false alarm rate, response time, and detection accuracy, are tested experimentally in simulated situations. Subsequently, field tests are conducted to verify the system's dependability and expandability in various settings and applications.

The suggested methodology for the designing and implementating object motion, fire, and gas detection using ESP32 microcontrollers provides a comprehensive approach to danger detection and mitigation. Through the integration of numerous sensors, the utilization of sophisticated data processing methods, and implementing suitable response mechanisms, the system guarantees prompt identification and efficient reduction of possible risks, ultimately augmenting security and safety in diverse environments.

IV. .IMPLEMENTATION AND RESULTS

To ensure a reliable and efficient system, a number of crucial procedures must be followed in the implementing the design for object motion, fire and gas detection utilizing ESP32 microcontrollers in conjunction with motion sensor, microcontroller, LCD, fire sensor, gas sensor, buzzer,DHT11, and DC fan.

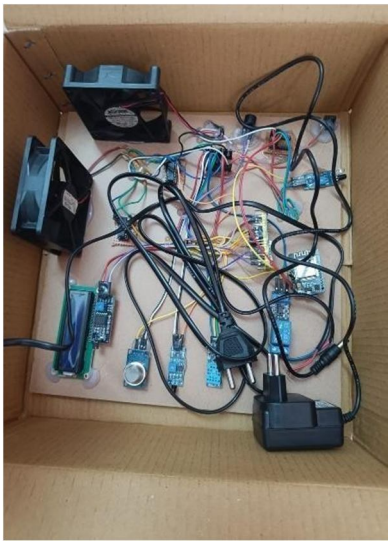


Fig: Working Model

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 12 Issue V May 2024- Available at www.ijraset.com

The hardware configuration is essential for the smooth integration of all components. The central processing unit, or CPU, is the ESP32 microcontroller, which handles control, processing, and data gathering. Numerous sensors are attached to it, such as the DHT11 sensor, which measures temperature and humidity, the motion sensor, which detects movement of objects, the fire sensor, which detects fires or unusual heat, and the gas sensor, which detects dangerous substances. A buzzer and DC fan provide audible and visible alerts in reaction to detected threats, and an LCD displayadditionally gives consumers real-time feedback.

To guarantee accurate and dependable detection, precise calibration and configuration are necessary during the sensor integration process. For every sensor, calibration processes are conducted in order to set appropriate thresholds for alarm triggering and baseline readings. For example, the monitored area may require adjusting the motion sensor's sensitivity and range, and the gas sensor's sensitivity to a given gas needs to be calibrated.

When evaluating sensor data and spotting possible dangers, data processing is essential. The ESP32 microcontroller uses preset algorithms to interpret incoming sensor data and looks for patterns that could indicate a fire, gas leak, or movement of objects. To increase detection accuracy and reliability, advanced approaches like data fusion and machine learning can be used, especially in complex situations with variable conditions.

The system initiates suitable response mechanisms to minimize risks and guarantee safety upon identifying potential threats. To warn users of possible intruders, the system may, for example, sound the buzzer and display a warning message on the LCD screen if motion is detected. When a fire is detected, the system activates the DC fan and buzzer to warn residents and boost airflow to put out the fire. In a similar vein, gas detection triggers the system to activate ventilation and notify people to leave the area.



Fig: Motion Detection

We will connect the ESP32 microcontroller to every required part. Our system's main control unit will be the ESP32. GPIO pins will facilitate the connection of the microcontroller to the sensors.

Connect the motion sensor to an ESP32 GPIO pin. Any movement that falls within the motion sensor's detection range will cause it to signal the microcontroller. This will enable us to keep an eye on and identify any nearby items or people.

Next, we'll use the relevant libraries to link the LCD to the ESP32. An LCD screen will be connected to the ESP32 to display the sensor data. The LCD and microcontroller can interface using the relevant libraries.

Real-time information regarding detected motion, fire, and gas levels will be displayed on the LCD.

We're going to wire a buzzer to an additional GPIO pin on the ESP32 for emergency situations. The buzzer will sound an audible alarm when the microcontroller senses a possible threat, according to any of the sensors. This will notify those in the vicinity to take appropriate action.

DHT11 sensor can be integrated to measure humidity and temperature. This sensor will give useful environmental information that can be used to identify possible fire threats. The ESP32's additional GPIO pin will be linked to the DHT11.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

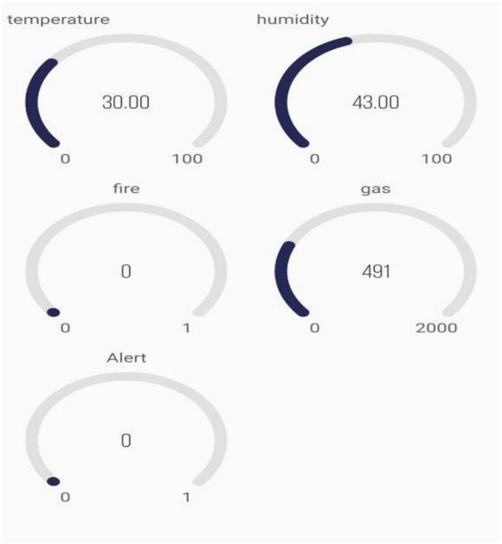


Fig:Results of Detection



Fig: Temperature and Humidity



Fig: Fire Detection

V. CONCLUSION


In this study, a strong safety solution is provided by the ESP32microcontroller's integration of components for gas, fire, and object motion detection. By using sophisticated algorithms and careful calibration, the system guarantees precise hazard identification. When it detects something, it immediately sets off the proper reactions, which include buzzer alerts, LCD warnings, and DC fan activation. Extensive testing verifies its effectiveness in various contexts. In the end, our implementation improves safety and situational awareness by offering prompt actions to successfully reduce hazards in various settings. An important development in improving safety and security in various settings is the use of ESP32 microcontrollers in conjunction with various sensors and output devices. ESP32 microcontroller has been used to develop a comprehensive detection and response system by integrating motion sensors, gas sensors, fire sensors, and other components. While sophisticated algorithms and data processing techniques enable real-time analysis of sensor data for rapid identification of potential dangers, calibration and proper design of sensors ensure reliable detection of hazards.

REFERENCES

[1] Krishna and Lavanya displayed a paper on "BrilliantlyDomestic Robotization Framework utilizing BitVoicer" at the 11th Universal Conference on Cleverly Frameworks and Control in 2017.
[2] Miriyampalli et al. distributed a paper titled "Gas Spillage Discovery based on IoT utilizing Raspberry Pi" in the Worldwide Diary for Inquire about in Connected Science and Designing Innovation (IJRASET).
[3] Jamadagni et al. examined their work at the Universal Conference on Computing Techniques and Communication (ICCMC) in 2019 on a certain topic.
[4] Zhaoyang, Haolin, and Kun presented a strategy for motion-based protest discovery at the 2020 2nd Universal Conference on Data Innovation and Computer Application(ITCA) in Guangzhou, China.

[5] Soni et al. displayed a paper on "Plan and Execution of Question Movement Location Utilizing Wire" at the 2021 Worldwide Conference on Innovative Headways and Developments (ICTAI) in Tashkent, Uzbekistan.
[6] Komalapati et al. shared their work on "Keen Fire Location and Observation Framework Utilizing IoT" at the2021 Worldwide Conference on Counterfeit Insights and Keen Frameworks (ICAIS) in Coimbatore, India.
[7] Sthevanie et al. talked about a "Fire Location Caution Framework in House Fire Mishap Avoidance" at the 11th Worldwide Conference on Data and Communication Innovation (ICoICT) in 2023, Melaka, Malaysia.
[8] In 2022, at the Seventh Universal Conference on Parallel, Dispersed and Framework Computing (PDGC) held in Solan, Himachal Pradesh, India, Firebase and ESP32 were utilized in an computerization system.
[9] Samuda et al. displayed a "Low-cost Model for IoT- based Keen Observing through Wire" at the 2023 5th Worldwide Conference on Shrewd Frameworks and Innovative Innovation (ICSSIT) in Tirunelveli, India.
[10] Siddineni et al. shared their plan of an "IoT based Observation Framework utilizing Blynk, IFTTT, and Wire" at the 12th Universal Conference on Computing Communication and Organizing Advances (ICCCNT) in Kharagpur, India, in 2021.
[11] Hou et al. conducted inquire about on an "Shrewdly Domestic Security Reconnaissance Framework Based on ZigBee" at the 2008 Worldwide Symposium on Brilliantly Data Innovation Application Workshops in Shanghai, China.
[12] Tan et al. too displayed their investigate on the same subject as specified over at the 2008 Universal Symposium on Cleverly Data Innovation Application Workshops in Shanghai, China.
[13] Jie et al. presented "A Real-time Vessel Reconnaissance Framework Utilizing GPRS" at the IEEE Asia Pacific Conference on Circuits and Frameworks (APCCAS) in 2006.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

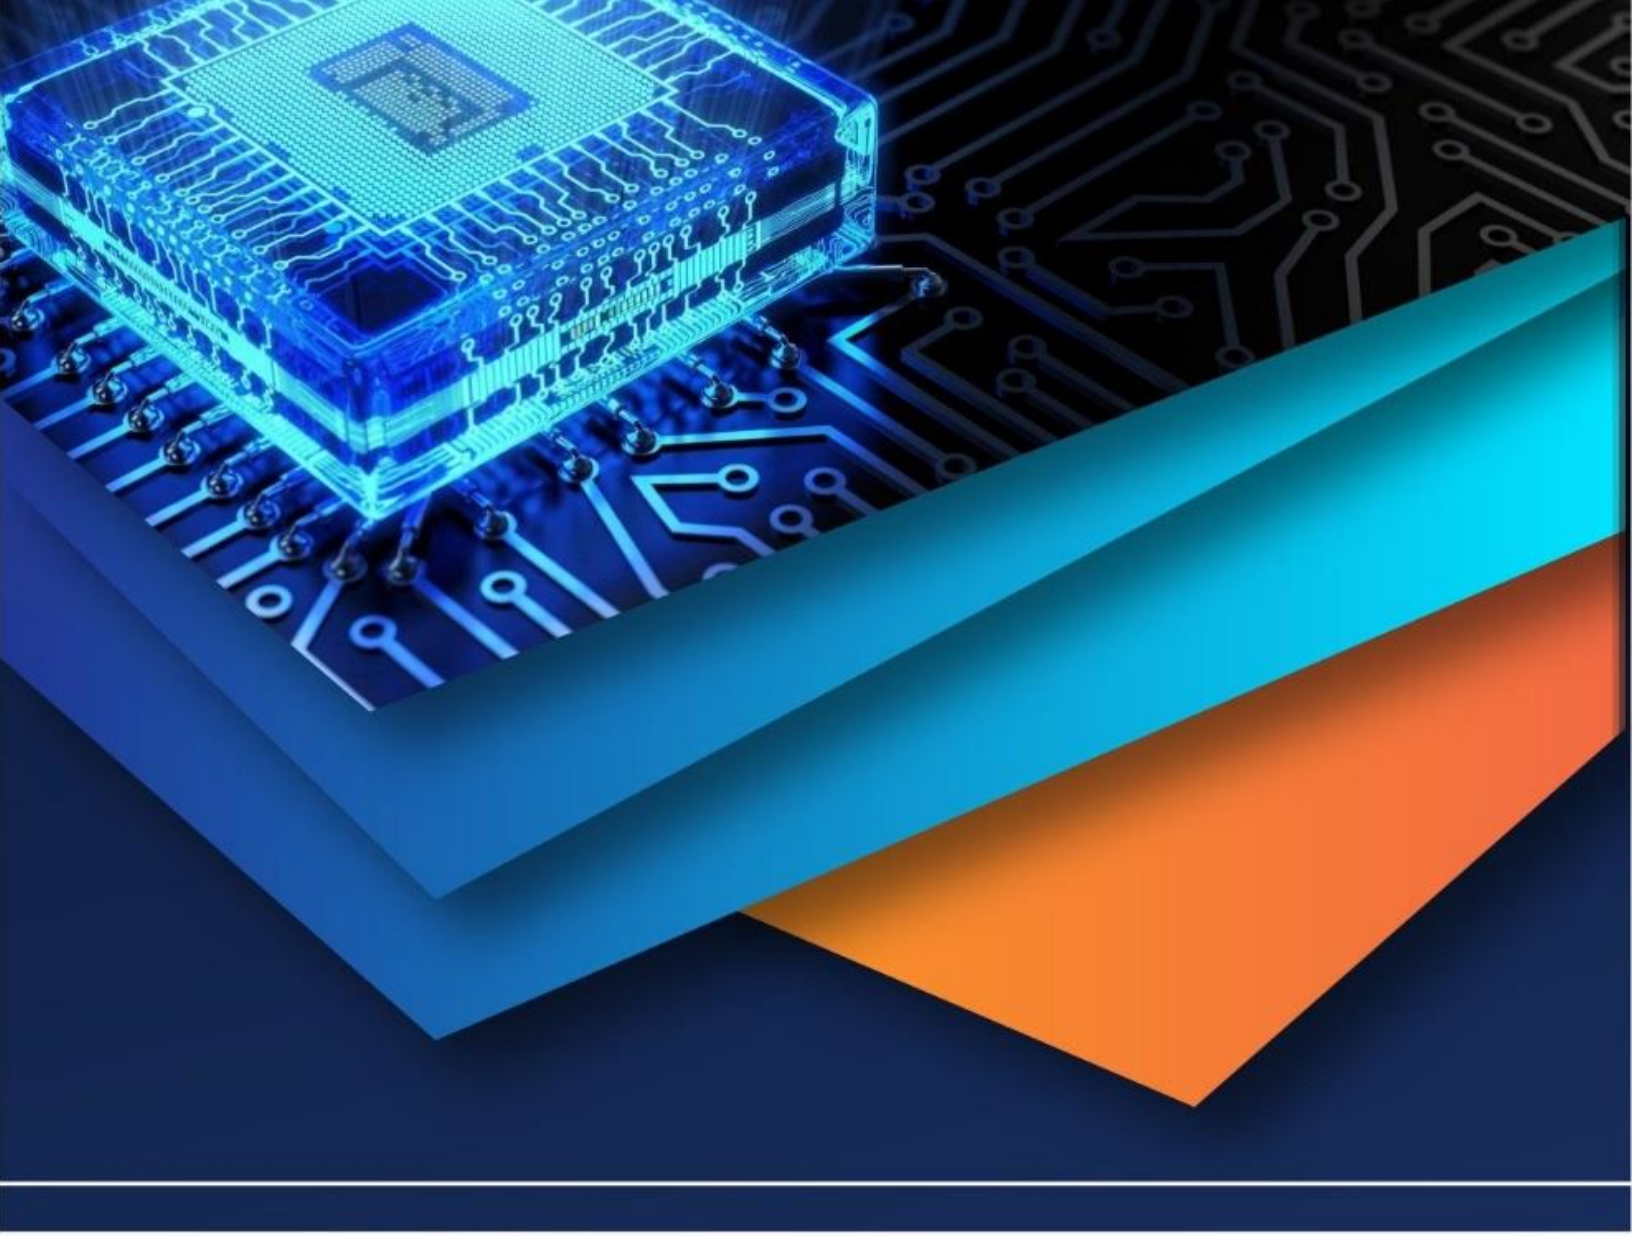

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)