



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 13    Issue: III    Month of publication: March 2025**

**DOI: <https://doi.org/10.22214/ijraset.2025.67582>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Review on Modelling & Simulation of A Hybrid Microgrid System Incorporating Renewable Energy Sources

Ms. Rohini Ramteke<sup>1</sup>, Prof. Diksha khare<sup>2</sup>, Prof. Saurabh Bagde<sup>3</sup>, Prof. Rajendra Bhombe<sup>4</sup>

<sup>1</sup>PG Scholar, <sup>2,3</sup>Assistant Professor, <sup>4</sup>Professor, Department of Electrical Engineering, Gurunanak Institute Of Engineering And Technology, Nagpur, India

**Abstract:** Researching renewable energy is a new direction, and technical advancement will be crucial in changing the energy dynamics of society and lowering dependency on fossil fuels. The goal is to effectively capture renewable energy and transform it into electrical power. One of the most important parts of this transformation is connecting this green power to the main grid. The design, modelling, control, and modelling of a microgrid are thoroughly examined in this work, with a focus on power transformers and photovoltaic systems (PV). An in-depth analysis of the electrical system model that mimics a photovoltaic system's functioning is carried out. The MPPT (Maximum Power Point Tracking) control method is used in the study to maximise the performance of the PV system.

**Keywords:** Solar, grid connectivity, voltage source converter, maximum power point tracking (MPPT), SPWM etc.

## I. INTRODUCTION

There are usually very few commercial buildings that use solar energy and other heating purposes such as water heating. But this is a very limited use of solar energy, because solar energy is found all over the world. We must utilise more solar energy and less energy that may be produced by burning coal as well as other coal-based fuels. The commercial building is intended to accommodate the highest quality PV solar power plants. That buildings use more electricity for daily use in the form of cooling, lighting, heating etc. We would like to install a solar power project in commercial buildings to share the energy needs of different applications.

Microgrid within each commercial building creates a solar energy sharing network. The most potent energy source on the planet, solar energy is a type of natural energy as well as the solution to the current energy crisis. Photovoltaic production is an effective way to use solar energy. Solar energy is available worldwide and many countries can use solar energy on a daily basis in a variety of ways. Photovoltaic (PV) panels are widely used to generate electricity and that electricity can be used to install electricity. Electrical installation means 24 \* 7 electricity supply, but solar radiation is only available during the day and PV solar panels only generate electricity during the day. We can share the store's battery backup and use the energy at night to fix this issue. Equilibrium generation and storage, high distribution efficiency due to distributed production and widespread distribution of low line loss.

## II. EXISTING SYSTEM

Research is currently underway. Due to environmental pollution solar panels get dusty and polluted resulting in low electricity production. The dignity of any objects such as buildings, tree etc. we can block the sun's rays and cannot reach the solar panel. That causes a decrease in the production of solar panels.

## III. PROPOSED SYSTEM

Nowadays renewable energy sources have been developed to meet future energy efficiency and are now widely marketed. However, unknown problems arise with large numbers of systems based on the electronics used in an existing AC distribution network. Everyone needs electricity and a high amount of energy used in everyday life. This project of electricity through solar energy. In commercial buildings there is roof space available for installing the project and solar panels that receive additional power during the day

#### IV. OBJECTIVE

The following succinctly describes the primary goals of this investigation:

- Learning the microgrid distribution network and control system.
- An in-depth understanding of the working concept of a solar-powered charging controller.
- Study of energy-saving units according to the need for electricity.
- Understanding the concept of green energy in the form of solar PV.

#### V. LITERATURE SURVEY

Drs. Jayeshkumar Pitroda, Lalakiya Biraj, Naghera Dhiraj, Narodiya Jay, Patel Harsh Proposed Volume 2, Issue 5 of the International Journal of Creative Research on Civil Engineering (IJCRCE). The current society uses electrical energy for free. This energy source is mainly generated by burning fossil fuels. These fossil fuels slow down and contribute to pollution. Throughout the daily solar cycle of the year, thereby reducing the dependence on energy-efficient heating and cooling systems. It is clear from evaluating the data that passive solar house design is essential for reducing energy use by using solar energy. This environmentally friendly design idea makes strategic use of solar heat, highlighting the use of elements like thoughtfully placed windows, walls, and flooring to retain heat from the sun in the winter and release it in the summer. The literature evaluations that follow highlight the many benefits that come with having a solar-powered system.

Deepak Purohit, Goverdhan Singh, Udit Mamodiya, investigated "The technique of using solar panels to capture solar energy is covered in "Review Paper on Solar Energy Systems," which was published in the International Journal for Engineering Research & General Sciences (volume 5, Issue 5, September-October, 2017). The process by which sunlight is transformed into electrical energy by these panels—which are made up of several solar cells—is referred to as solar energy conversion. The solar plant is made up of linked solar panels, each of which has several cells organised according to unique metal lines. By creating a quadrilateral shape, these lines efficiently trap light over a vast surface area. Electrons can be released from the complex metal arrangement and travel along tiny lines to the metal frame. The resultant current passes via the supply cables and into the diode box, which is located behind the panel.

L.G. Meegahapola, Member, IEEE, D. Robinson, A.P. Agalgaonkar, Senior Member, IEEE proposed "The expanding importance of Sustainable Mobility is explored in the article "Solar Energy at Cars: Ideas, Opportunities, & Problems," which was given at the GTAA Meeting on Mulhouse of May 26–27, 2010. The significant influence that automobile systems have on the release of carbon dioxide emissions, global warming, and the urgent need to cut back on the use of fossil fuels are the main causes of this increased attention. Recently, there have been significant efforts made to incorporate solar energy in electric and hybrid cars, prompted by improvements in the efficiency and affordability of photovoltaic panels. Even with these advancements, there is still disagreement about whether it is practical to use solar energy in automobiles. The goal of the article is to explore the potential concepts, possibilities, and difficulties related to solar energy integration in cars while addressing frequently asked issues and concerns. The information offered is based on the writers' own research, specifically in relation to hybrid solar vehicles.

Kumaresh.V, Mridul Malhotra, Ramakrishna N and Saravana Prabu. R reviewed and reviewed in "The paper "Solar MPPT Systems," which was published from Volume 4, Number 3 (2014) under ISSN 2231-1297, examines the growing need for power in a variety of fields. The necessity to capture solar energy and transform it into energy has become more apparent as a way to reduce fuel usage, as electricity is essential to many industries. Cost and efficiency concerns have historically prevented solar cells from being widely used in electrical applications. However, recent developments have significantly increased the effectiveness of solar cells, especially with the use of MPPT (Maximum Power Point Tracking) algorithms. In order to shed light on the revolutionary influence of many MPPT algorithms in the field of solar energy utilisation, the study carefully analyses and explores the applications of each method.

X. Q. Zhai, R. Z. Wang, Y. J. Dai, J. Y. Wu, Y. X. Xu, L. H. Deng develops Design And Experimental Analysis Of Solar-Powered Hybrid Hybrid System In The Ecological Building "2005 International Building Conference, Tokyo, 27-29 September 2005. The importance of environmental building as a new design idea has increased dramatically on a worldwide scale, making it a crucial issue for the construction sector. With the help of natural energy sources like wind and solar electricity, this strategy seeks to attain the goal of significantly lowering dependency on fossil fuels. This paradigm change has made solar systems increasingly important. Modern solar systems, in contrast to their more traditional predecessors, are integrated into building designs rather than existing in the binary as either inactive or working. The concepts of halting and starting become redundant when solar components are seamlessly integrated into contemporary constructions. Notable are the performance parameters of solar collecting systems, which average about 40%.



These systems show an average warming capacity of 12 kW when it comes to solar cooling, along with a COP of 0.28. Through the use of redesigned tubes, the natural air intake operating mode further improves efficiency by lowering the air temperature differential between the inlet and output.

The typical working mode is reduced by four times as a result of this adjustment, which doubles the natural air velocity. Moreover, under winter conditions, the low-temperature rooms that are outfitted with a solar-powered low-temperature system record temperatures that are 9.3°C and 3°C greater, respectively, below ground and in the air, above their counterparts.

Qianwen Xu, Student Member, IEEE, Jianfang Xiao, Member, IEEE, Peng Wang, Senior Member, IEEE, Xuwei Pan, Member, IEEE, and Changyun Wen, Fellow, IEEE Sakshi Gupta, Neha Sharma proposes "A Decentralized Control Strategy for Autonomous Shared Power Sharing and Reimbursement of Costs in Integrated Energy Conservation Systems". A power management approach is outlined that utilises integrated energy storage devices to accomplish both state-of-charge (SoC) acquisition and temporary power sharing at the same time. Using a stand-alone SoC recover loop, a unique virtual capacitance droop management approach is presented in this framework to maximise power conservation in an energy storage (ES) system with variable response characteristics. Furthermore, ES is controlled using a typical virtual resistance decrease control technique, which has a sluggish and flexible response. An example of the suggested method is used using a hybrid battery/supercapacitor system (SC). Interestingly, to adequately account for the SC and battery, the load capacity is automatically divided into the higher and lower frequency components. This design allows for uninterrupted operation as a power saving without requiring mode switching or operating transitions because the SC's SoC is immediately identified. A thorough design guide is being developed to guarantee smooth cooperation in order to attain the intended short-term capacity and ease the procurement of SoCs. In order to verify the effectiveness of the suggested approach, a number of thorough simulations and assessments have been carried out, with positive outcomes.

Yanzhi Wang, Student Member, IEEE, Xue Lin, Student Member, IEEE, and Massoud Pedram, Companion, IEEE. The idea is to include energy storage and solar (PV) power generation into the Smart Grid, which will effectively reduce the amount of fossil fuels used. This is especially important now that variable energy pricing are in place since customers may use power-control devices and PV-based power generation to optimise their energy demand profiles and lower their electricity costs. During the recurring payment period, the energy price that demand amount are considered, together with the real role of the power price. PV power production and power consumption estimates are used in the household storage control algorithm due to the complexity of the electricity pricing function the energy storage capacity. It deals with a variety of power losses that occur during system operation, such as those caused by the rotating power conversion cycle's breakdown rate and system failure rate. In order to efficiently regulate the charge/discharge of the system of storage with polynomial time complexities at the start of each day, a proximal technique is presented to compute these properties. In order to improve the system even further, at the conclusion of each day during the payment period, a reinforcement learning technique is added to stochastically estimate the remaining energy in the system for storage.

## VI. PROJECT DESCRIPTION

Primarily, the static synchronous compensation feeds power into the grid by acting as a regulated voltage source inverter (VSI). It balances the supply current such that, in relation to the supply voltage, it is in line with the intended phase-angle value. The reactive part is the current that is injected from the inverter; some of this electrical energy can be used to offset the reactive part and harmonics that are created by induction generators and non-linear loads. By increasing the power factor, this process raises the quality of the electricity. In order to accomplish these goals, the electrical converter's current command is generated by subtracting and synchronising the grid voltage. In order to improve power quality at normal connection at the point common coupling (PCC), grid connection methods have been inverted. An illustration of the grid-connected system,

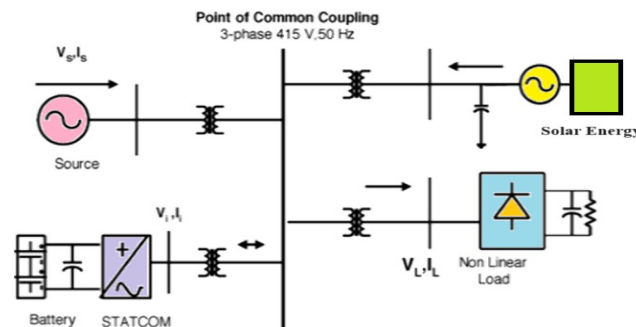


Fig.1.Grid Connected Solar Energy System

In this project we use PV solar panels on the roofs of commercial buildings such as schools, colleges, hotels, supermarkets etc. electrical power generated from solar panels is provided by the charging controller. The charging control provides some power to the solar tracking system. The solar tracking device is used to properly align the solar panel with respect to the sun's location. The remaining power can be used for commercial loading and battery charging. Battery backup is used for night time. DC supply is transmitted via DC distribution cable and distributed via DCDB (DC Distribution Box). For longer transmission we can use the boost converter. Whenever an error occurs the microgrid network is disconnected using a single button. The microgrid network is repeated simultaneously to expand the microgrid network.

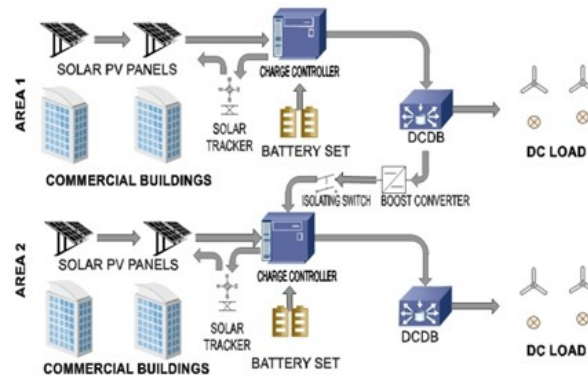


Fig.2.Solar PV based Microgrid for Buildings

Solar power generation can also be used in commercial buildings to meet all electrical needs.

When daily power usage is exceeded, the use of battery backup is necessary to meet the needs of commercial buildings. Among the main direct energy sources, solar energy is particularly noteworthy since it provides the basis for the production of additional sources of energy such as wind, wave, biomass, and hydropower. Although there are large latitude differences, a large area of the Earth absorbs sufficient solar radiation, which helps to heat the water and buildings at lower elevations.

## VII. APPLICATIONS

- 1) Reliable Power Supply – Ensures a stable and uninterrupted power supply by integrating multiple renewable energy sources.
- 2) Grid Stability Improvement – Enhances grid reliability by using a combination of PV, wind, and fuel cell energy sources.
- 3) Energy Storage Management – Utilizes batteries and supercapacitors to store excess energy for future use.
- 4) DC Microgrid Implementation – Provides efficient power distribution to both DC (48V) and AC (110V) loads.
- 5) Renewable Energy Utilization – Reduces dependency on conventional energy sources by maximizing the use of clean energy.
- 6) Industrial Power Supply – Suitable for industries requiring stable power with backup energy storage.
- 7) Remote and Off-Grid Applications – Useful in rural or remote areas where conventional grid access is limited.
- 8) Smart Grid Integration – Can be incorporated into modern smart grid systems for optimized energy management.
- 9) Energy Efficiency Enhancement – Improves power efficiency by using individualized converters for controlled energy delivery.

## VIII. CONCLUSION

The integration of multiple renewable sources, coupled with energy storage components, enhances system reliability and sustainability. The DC microgrid successfully delivers high-quality power to both DC and AC loads, improving energy efficiency. The results validate that the system minimizes power fluctuations, enhances grid stability, and optimizes energy utilization. This approach supports the transition to renewable energy-based power systems, reducing dependency on fossil fuels. The proposed system offers a promising solution for modern power distribution and sustainable energy management.

The proposed hybrid renewable energy system finds applications in various fields requiring reliable and sustainable power solutions. It is ideal for remote areas, smart grids, and industrial applications where stable energy is crucial. The system can be integrated into residential and commercial buildings to reduce dependency on conventional power sources. Additionally, it supports electric vehicle (EV) charging stations and telecommunications infrastructure, ensuring uninterrupted power supply. The system's ability to store excess energy using batteries and supercapacitors makes it beneficial for emergency backup systems, reducing grid instability. Its implementation in microgrids enhances energy security and promotes the use of green energy.

## IX. ACKNOWLEDGMENT

I would like to use this opportunity to show our sincere appreciation and respect to our project guide at the Gurunanak Institute Of Engineering And Technology, Nagpur, India, who gave us direction and space to complete this assignment.

## REFERENCES

- [1] Dr. Jayeshkumar Pitroda, Lalakiya Biraj, Naghera Dhiraj, Narodiya Jay, Patel Harsh Proposed “A Critical Literature Review on Benefits Due to Passive Solar Energy System in Educational Building”, International Journal of Constructive Research in Civil Engineering (IJCRCE) Volume 2, Issue 5, 2016.
- [2] Deepak Purohit, Goverdhan Singh, Udit Mamodiya, investigated “A Review Paper on Solar Energy System”, International Journal of Engineering Research and General Science Volume 5, Issue 5, September-October, 2017
- [3] L.G. Meegahapola, Member, IEEE, D. Robinson, A.P. Agalgaonkar, Senior Member, IEEE proposed “Solar energy for cars: perspectives, opportunities and problems”, GTAA Meeting, Mulhouse, 26-27 May, 2010
- [4] Kumaresh.V, Mridul Malhotra, Ramakrishna N and Saravana Prabu. R evaluated and analyzed in “ Literature Review on Solar MPPT Systems,” ISSN 2231-1297, Volume 4, Number 3 (2014),
- [5] X. Q. Zhai, R. Z. Wang, Y. J. Dai, J. Y. Wu, Y. X. Xu, L. H. Deng developed Design And Experimental Analysis Of Solar-Powered Hybrid Energy System In The Ecological Building” The 2005 World Sustainable Building Conference, Tokyo, 27-29 September 2005.
- [6] Qianwen Xu, Student Member, IEEE, Jianfang Xiao, Member, IEEE, Peng Wang, Senior Member, IEEE, Xuewei Pan, Member, IEEE, and Changyun Wen, Fellow, IEEE Sakshi Gupta, Neha Sharma proposes “A Decentralized Control Strategy for Autonomous Transient Power Sharing and State-of-Charge Recovery in Hybrid Energy Storage Systems”. IEEE Transactions On Sustainable Energy, Vol. 8, No. 4, October 2017
- [7] Yanzhi Wang, Student Member, IEEE, Xue Lin, Student Member, IEEE, and Massoud Pedram, Fellow, IEEE. Proposed Integrating residential photovoltaic (PV) power generation and energy storage systems into the Smart Grid is an effective way of reducing fossil fuel consumptions. IEEE Transactions On Sustainable Energy, Vol. 7, No. 1, January 2016.
- [8] Sanjeevikumar, P.; Grandi, G.; Blaabjerg, F.; Wheeler, P.; Hammami, M.; Siano, P. A Comprehensive Analysis and Hardware Implementation of Control Strategies for High Output Voltage DC-DC Boost Power Converter. Int. J. Comput. Intell. Syst. (IJCIS) 2018, 10, 140–152.
- [9] Hemanshu, R.; Hossain, M.J.; Mahmud, M.A.; Gadh, R. Control for Microgrids with Inverter Connected Renewable energy Resources. In Proceedings of the IEEE PES General Meeting, Washington, DC, USA, 27–31 July 2019.
- [10] Adhikari, S.; Li, F.X. Coordinated V-f and P-Q Control of Solar Photovoltaic Generators With MPPT and Battery Storage
- [11] WESSOF, E. IEA: Global installed PV Capacity Leaps to 303 Gigawatts. Green Tech Media. April 2017. [<https://www.greentechmedia.com/articles/read/iea-global-installed-pv-capacity-leaps-to-303-gw#gs.yisqIQ8>, 20th December 2017]
- [12] TSAGAS, I. Spain Approves ‘Sun Tax’, Discriminates Against Solar PV. Renewable Energy World. October 2018. <http://www.renewableenergyworld.com/articles/2015/10/spain-approves-sun-tax-discriminates-against-solar-pv.html>, 20th December 2018.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)