iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 10 **Issue:** V **Month of publication:** May 2022

DOI: https://doi.org/10.22214/ijraset.2022.43315

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 10 Issue V May 2022- Available at www.ijraset.com

A Review Paper on Design & Analysis of LeafSpring

Prof. Ritesh Banpurkar, Bhushan Funde
[1]HOD, [2]PG Student, Department of Mechanical Engineering, Abha Gaikwad Patil College of Engineering, Nagpur

***Abstract:** This paper reviews some of the general study on the design, analysis and fabrication of composite leaf spring. Leaf springs are one of the oldest suspension components they are still frequently used, especially in commercial vehicles. The literature has indicated a growing interest in the replacement of steel spring with composite leaf spring.The suspension system in a vehicle significantly affects the behavior of vehicle, i.e. vibration characteristics including ride comfort, stability etc. Leaf springs are commonly used in the vehicle suspension system and are subjected to millions of varying stress cycles leading to fatigue failure. A lot of research has been done for improving the performance of leaf spring. Lot of materials are used for leaf spring .but it is found that fiberglass material has better strength characteristic and lighter in weight as compare to steel for leaf spring. In this paper the author is reviewed few papers on use of alternate materials and effect of material on leaf spring performance.*

***Keywords:** steel leaf spring, ANSYS, PRO-E software.*

I. INTRODUCTION

Leaf springs are mainly used in suspension systems to absorb shock loads in automobiles like light motor vehicles, heavy duty trucks and in rail systems. The main function of leaf spring assembly as suspension element is not only to support vertical load, but also to isolate road-induced vibrations. The behaviour of leaf spring is complicated due to its clamping effects and inter-leaf contact etc. It carries lateral loads, brake torque, driving torque in addition to shock absorb. Springs are crucial suspension elements on cars, necessary to minimize the vertical vibrations, impacts and bumps due to road irregularities and create a comfortable ride. The suspensionleaf spring is one of the potential items for weight reduction inautomobile as it accounts for ten to twenty percent of the unsprung weight. The introduction of composites helps in designing a better suspension system with better ride quality ifit can be achieved without much increase in cost and decrease in quality and reliability. In the design of springs, strain energy becomes the major factor. In the present scenario the main focus of automobile manufacturers is weight reduction of the automobile. Weight reduction can be achieved mainly by introducing the better material, design optimization and better manufacturing processes. In automobiles, leaf spring is one of the potential parts for weight reduction as it accounts for 10% - 20% of the unsprung weight. Composite materials have made it possible to reduce the weight of leaf springwithout any reduction in load carrying capacity and stiffness. Composite materials are now used extensively in place ofmetal parts. Several papers were devoted to the application of composite materials for automobiles.

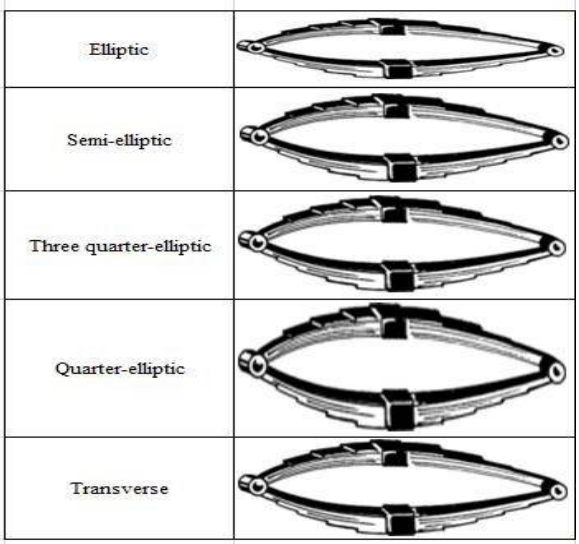


Figure1.1 Types of leaf spring

©IJRASET: All Rights are Reserved

The figure shows a laminated semi- elliptic spring. The top leaf is known as the master leaf. The eye is provided forattaching the spring with another machine member. The amount of bend that is given to the spring from the centralline, passing through the eyes, is known as camber. The camber is provided so that even at the maximum load the deflected spring should not touch the machine member towhich it is attached. The central clamp is required to hold the leaves of the spring.

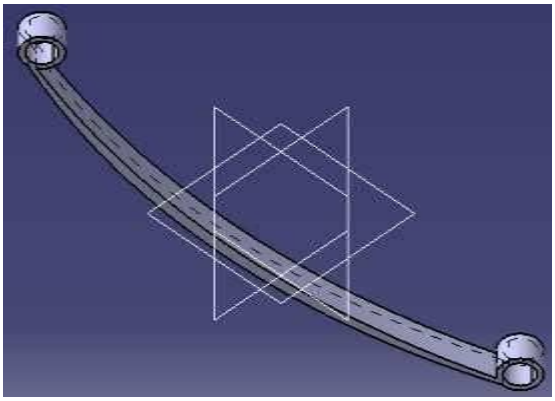


Fig: 1 Leaf Spring Designed in CATIA V5R20

To design composite leaf spring, a stress analysis wasperformed using the finite element method done using ANSYS software. Modeling was done for every leaf with CATIA V5R20 as shown in fig1.Also, analysis carried out for composite leaf spring with bonded end joints for Mild Steel, E-Glass/Epoxyand Jute E- Glass/Epoxy. The maximum and shear stresses along the adhesive layer were measured; represent FEA results for composite leaf springs of (Mild Steel E-Glass/Epoxy and Jute E-Glass/Epoxy). The maximum and shear stresses along the bonded adhesive layer for Mild Steel E-glass/Epoxy and Jute E-Glass/Epoxy were measured and plotted as shown in Figs.

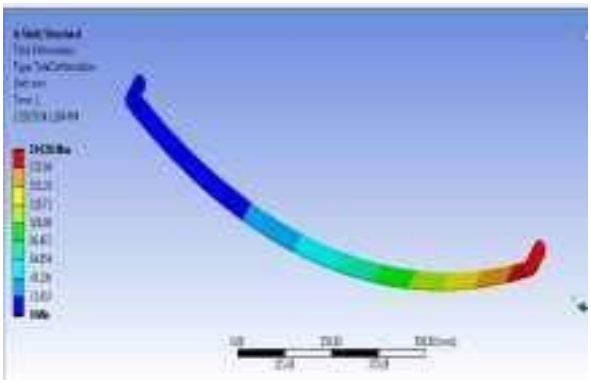


Fig: 2 Static Structural Analysis for Mild Steel

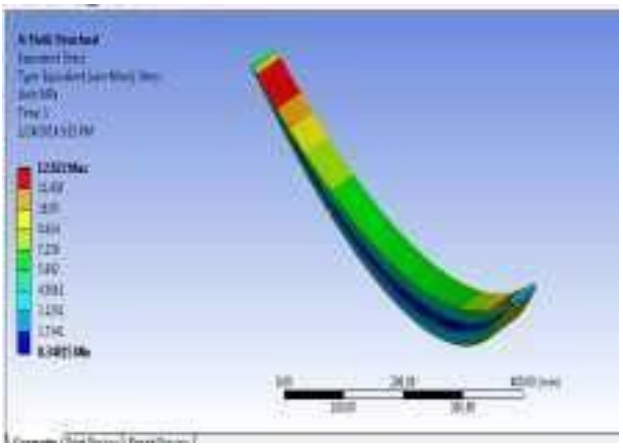


Fig: 3 Static Structural Analysis for E-Glass/Epoxy

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

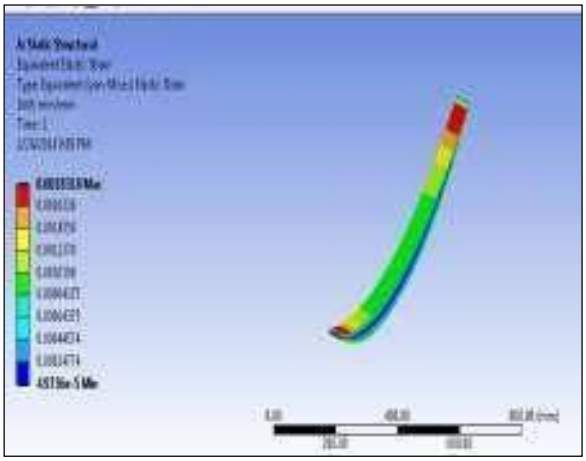


Fig: 4 Static Structural Analysis for Jute E-Glass/Epoxy

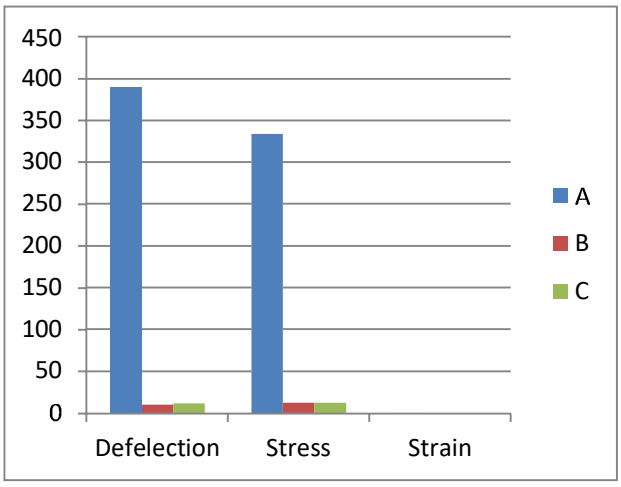


Fig: 5 Comparison of Materials Based on the Stress,Strain, Deflections with 1000N load

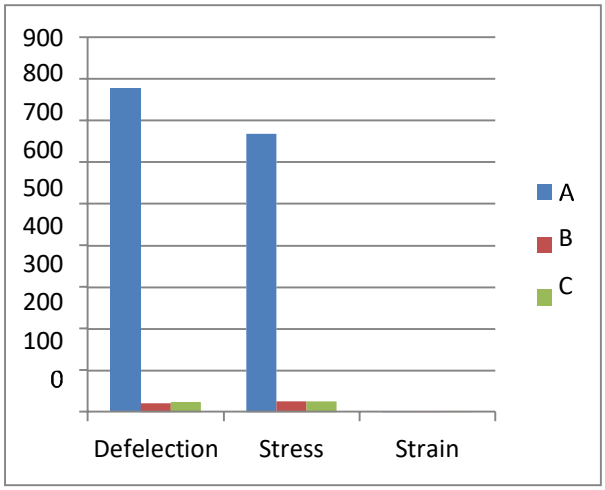


Fig: 6 Comparison of Materials Based on the Stress,Strains, Deflections with 2000N load

Note: a – steel leaf spring, b – e-glass/epoxy leaf spring,c - jute/e-glass/epoxy leaf spring

Material	**Young's modulus**	**Poisson's ratio**	**Tensile strength**	**Density**
Steel	190-210 MPa	0.27-0.30	572.3 MPa	1000 kg/m^3
E-glass /Epoxy	24000 MPa	0.3	205 MPa	1520 kg/mm^3
Jute/E-glass /epoxy	21000 MPa	0.22	185 MPa	1460 kg/mm^3

Object Name	*SECOND-LEAF|SECOND-LEAF*	*THIRD-LEAF|THIRD-LEAF*	*FORTH-LEAF|FORTH-LEAF*	*FIFTH-LEAF|FIFTH-LEAF*	*SIXTH-LEAF|SIXTH-LEAF*	*SEVENTH-LEAF|SEVENTH-LEAF*	*2ND|2ND*
State	Meshed						
Graphics Properties							
Visible	Yes						
Transparency	1						
Definition							
Suppressed	No						
Stiffness Behavior	Flexible						
Coordinate System	Default Coordinate System						
Reference Temperature	By Environment						
Treatment	None						
Material							
Assignment	E-Glass						
Nonlinear Effects	Yes						
Thermal Strain Effects	Yes						
Bounding Box							
Length X	1228.4 mm	1000. mm	700. mm	580. mm	430. mm	300. mm	1150. mm
Length Y	264.01 mm	139.05 mm	68.451 mm	48.18 mm	28.825 mm	16.981 mm	187.85 mm
Length Z	50. mm						
Properties							
Volume	4.6418e+005 mm³	3.1413e+005 mm³	2.145e+005 mm³	1.7649e+005 mm³	1.2999e+005 mm³	89524 mm³	3.6843e+005 mm³
Mass	100.26 kg	67.852 kg	46.332 kg	38.123 kg	28.078 kg	19.337 kg	79.581 kg
Centroid X	3.4638 mm	-1.0377e-013 mm	1.8814e-014 mm	6.0243e-014 mm	-6.2385e-015 mm	4.3346e-015 mm	3.469 mm
Centroid Y	-99.67 mm	-163.74 mm	-193.73 mm	-206.59 mm	-219.16 mm	-229.17 mm	-141.07 mm
Centroid Z	-1.9061e-014 mm	1.26e-014 mm	-1.3447e-014 mm	-3.2192e-014 mm	-9.8356e-015 mm	1.9677e-014 mm	-1.6431e-014 mm
Moment of Inertia Ip1	7.3445e+005 kg·mm²	1.2123e+005 kg·mm²	25818 kg·mm²	14067 kg·mm²	7229.4 kg·mm²	4292.2 kg·mm²	2.5115e+005 kg·mm²
Moment of Inertia Ip2	1.6387e+007 kg·mm²	5.8794e+006 kg·mm²	1.9334e+006 kg·mm²	1.0886e+006 kg·mm²	4.4107e+005 kg·mm²	1.495e+005 kg·mm²	9.25e+006 kg·mm²
Moment of Inertia Ip3	1.7079e+007 kg·mm²	5.9724e+006 kg·mm²	1.9399e+006 kg·mm²	1.0868e+006 kg·mm²	4.366e+005 kg·mm²	1.4573e+005 kg·mm²	9.468e+006 kg·mm²
Statistics							
Nodes	7029	6963	4752	3927	2904	2046	8151
Elements	3310	4200	2860	2360	1740	1220	4920
Mesh Metric	None						

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

II. CONCLUSION

The automobile chassis is mounted on the axles, not direct but with some form of springs. The stresses and deflection of steel leaf spring and composite leaf spring are found with great difference.Deflection of composite leaf spring is less ascompared to steel leaf spring with the same loading condition. Weight and cost are also less in composite leaf spring as compared to steel leaf spring with the same parameters. Conventional steel leaf spring is also found to be 5.5 times heavier then Jute E- Glass/Epoxy leaf spring. Material saving of 71.4 % isachieved by replacing Jute E-Glass/epoxy in place of steel for fabricating the leaf spring. Composite leaf spring can be used on smooth roads with very high performance expectations.

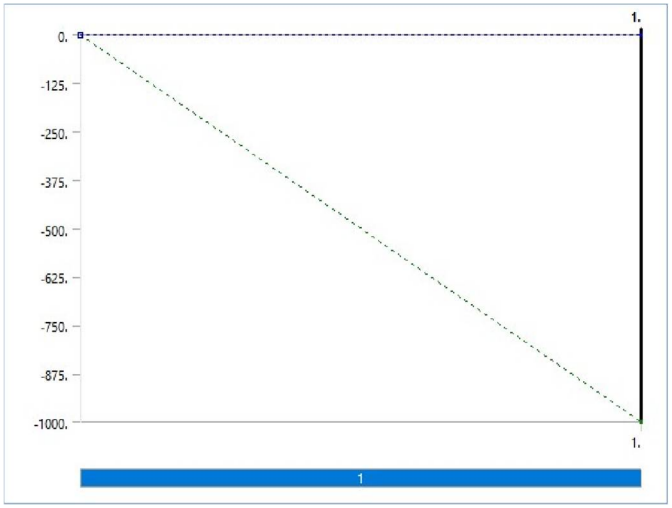


TABLE 15
Model (A4) > Static Structural (A5) > Solution

Object Name	*Solution (A6)*
State	Solved
Adaptive Mesh Refinement	
Max Refinement Loops	1.
Refinement Depth	2.
Information	
Status	Done
MAPDL Elapsed Time	28. s
MAPDL Memory Used	955. MB
MAPDL Result File Size	25.313 MB
Post Processing	
Beam Section Results	No
On Demand Stress/Strain	No

REFERENCES

[1] Kumarkrishna and aggarwal m.l, "A Finite Element Approach For Analysis Of A Multi Leaf Spring Using Cae Tools" RESEARCH JOURNAL OF RECENT SCIENCES issn 2277-2502 vol. 1(2), 92-96, feb. (2012) res.j.recent sci.

[2] Shishay and amare gebremeskel, "design,simulation, and prototyping of singlecomposite leaf spring for light weight vehicle".global journal of researches in engineering mechanical and mechanicsengineering volume 12 issue 7 version 1.0 year 2012 type: double blind peer reviewed international research journal publisher: global journals inc. (usa) online issn: 2249- 4596 print issn:0975-5861

[3] Jadhav mahesh v, zoman digambar b, y r kharde and r r kharde, "performance analysis of two mono leaf spring used for maruti 800 vehicle". International journal of innovative technology and exploring engineering (ijitee) issn: 2278-3075, volume-2, issue-1, december 2012.

[4] Y. N. V. Santhosh kumar and m. Vimal teja "design and analysis of composite leaf spring". International journal of mechanical and industrial engineering (ijmie), issn no. 2231 –6477, vol-2, issue-1, 2012.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |


[5] Manas patnaik, l.p. Koushik and manoj mathew, "determination of camber and leaf span of a parabolic leaf spring for optimized stress and displacement using artificial neural networks". International journal of modern engineering research (ijmer) www.ijmer.com vol.2, issue.4, july-aug 2012pp-2771-2773 issn: 2249-6645.

[6] Baviskar a. C., bhamre v. And g., sarode s. S, " design and analysis of a leaf spring for automobile suspension system". A review international journal of emerging technology and advanced engineering website: www.ijetae.com (issn 2250-2459, iso 9001:2008 certified journal, volume 3, issue 6, june 2013) pp 407-410.

[7] Bhushan, b. Deshmukh and dr. Santosh b. Jaju " design and analysis of fiber reinforce polymer (frp) leaf spring". - a review int j engg techsci vol 2(4) 2011,289-291

[8] M.venkatesan and d.helmen devaraj , "design and analysis of composite leaf spring in light vehicle". International journal of modern engineering research (ijmer) www.ijmer.com vol.2, issue.1, jan- feb 2012 pp-213-218 issn: 2249-6645.

[9] M. Patunkar, d. R. Dolas, "modelling and analysis of composite leaf spring. Under the static load condition by using fea" international journal of mechanical& industrial

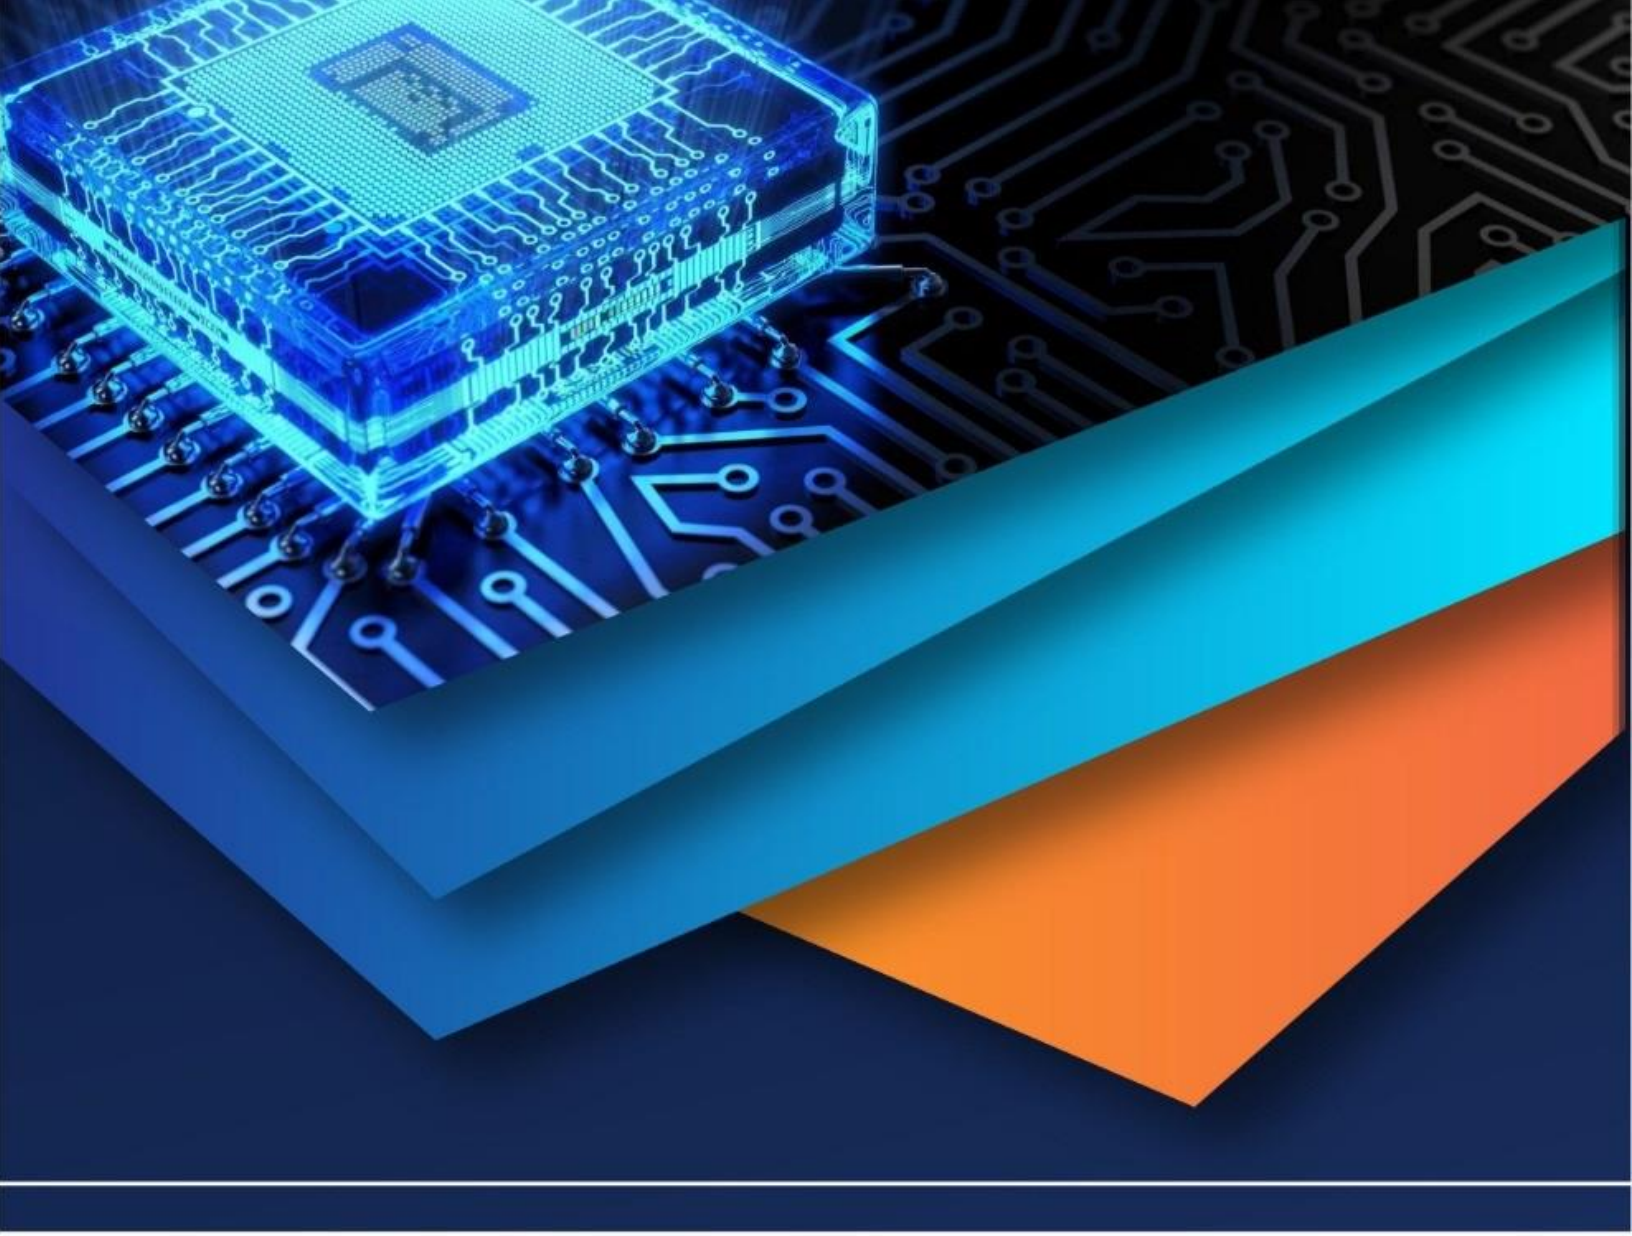

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)