



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** IV **Month of publication:** April 2026

DOI: <https://doi.org/10.22214/ijraset.2026.79262>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Smart Accident Free Equipment ATmega328P

Prof. C.M.Maind, Durga Pingale, Netra Lokhande, Anushka Kulunge, Shravani Patil
Department of Electronics and Telecommunication Engineering AISSMS Polytechnic, Pune, India

Abstract: *The S.A.F.E (Smart Accident Free Equipment) system is an innovative smart helmet designed to enhance riders' safety using embedded electronics and wireless communication. This project integrates an Arduino-based system with multiple sensors to monitor critical safety conditions in real time. The system consists of two main sections: a transmitter unit placed inside the helmet and a receiver unit installed in the vehicle. The transmitter uses sensors such as an IR sensor for helmet wear detection, an additional IR sensor for drowsiness detection, and an MQ-3 sensor for alcohol detection. These sensors continuously collect data and transmit it wirelessly using a 433 MHz RF module.*

The receiver processes the incoming data and controls the vehicle's ignition system through a relay module. The engine starts only when the rider is wearing the helmet and has not consumed alcohol. Additionally, the system detects drowsiness using a time-window-based logic and alerts the rider using a buzzer and display unit.

This smart helmet system aims to reduce road accidents by enforcing safety rules and providing real-time alerts. It is a cost-effective and practical solution that can be widely implemented to improve road safety and prevent accidents caused by negligence or unsafe riding conditions.

I. INTRODUCTION

Road accidents are one of the major causes of injury and death, especially among two-wheeler riders. Many of these accidents occur due to negligence such as not wearing a helmet, driving under the influence of alcohol, or falling asleep while riding. Although helmets are legally mandatory, many riders still ignore safety rules. To address these issues, the S.A.F.E (Smart Accident Free Equipment) system is developed as a smart helmet that uses embedded technology to improve road safety. This system integrates sensors, microcontrollers, and wireless communication to monitor the rider's condition in real time. The smart helmet consists of two main parts: a transmitter unit placed inside the helmet and a receiver unit installed in the vehicle. It detects whether the rider is wearing the helmet, checks for alcohol consumption, and monitors drowsiness. Based on these conditions, the system either allows or prevents the vehicle from starting and provides alerts using a buzzer and display. This project aims to reduce accidents by enforcing safety measures automatically and ensuring that riders follow essential precautions before and during riding.

II. LITERATURE SURVEY

In recent years, many researchers have focused on developing smart helmet systems to improve the safety of two-wheeler riders. Various technologies such as IoT, Arduino, sensors, and wireless communication have been used to enhance traditional helmets.

A study on an IoT-based smart helmet system proposed the use of sensors like alcohol sensors and vibration sensors to detect accidents and prevent the vehicle from starting if safety conditions are not met. It also included an emergency alert system to send messages to predefined contacts during accidents. Another research work focused on drowsiness detection and theft prevention using sensors such as pulse sensors and motion sensors. The system alerts the rider when signs of fatigue are detected and also provides warnings if the helmet is stolen, improving both safety and security.

A review paper on smart helmets highlighted that integrating technologies like RF communication, alcohol detection (MQ-3), and helmet wear detection using IR sensors can significantly reduce accidents. It emphasized that such systems help enforce safety rules automatically and improve rider awareness. Some advanced smart helmet models also include features like GPS tracking and GSM communication, which help in sending the rider's location to emergency services in case of an accident. These systems aim to reduce response time and increase survival chances. Additionally, research shows that major causes of two-wheeler accidents include alcohol consumption, drowsiness, and not wearing helmets, which can be effectively addressed using sensor-based smart helmet systems.

III. PROBLEM STATEMENT

Road accidents involving two-wheeler riders are increasing rapidly due to unsafe riding practices such as not wearing helmets, driving under the influence of alcohol, and drowsy driving.

Despite strict traffic rules and awareness campaigns, many riders continue to ignore basic safety measures, leading to serious injuries and fatalities. Traditional helmets provide physical protection but lack any intelligent system to monitor the rider's condition or enforce safety rules. There is no mechanism to prevent a rider from starting the vehicle if they are not wearing a helmet or are under the influence of alcohol. Additionally, drowsiness while riding is difficult to detect and can result in dangerous situations. Therefore, there is a need for a smart, automated, and reliable system that can monitor the rider's safety conditions in real time and take preventive actions. The system should ensure helmet usage, detect alcohol consumption and drowsiness, and restrict vehicle operation under unsafe conditions to reduce accidents and improve road safety.

IV. PROPOSED METHODOLOGY

The proposed system consists of two units: a transmitter (helmet) and a receiver (vehicle). The transmitter uses sensors such as an IR sensor for helmet wear detection, another IR sensor for drowsiness detection, and an MQ-3 sensor for alcohol detection. These sensors continuously monitor the rider's condition. The collected data is processed by the Arduino and transmitted wirelessly using an RF module. The receiver unit receives this data and controls the vehicle ignition using a relay module. The engine starts only if the rider is wearing the helmet and no alcohol is detected. If unsafe conditions like alcohol consumption, drowsiness, or no helmet are detected, the system either stops the engine or gives an alert using a buzzer and display.

V. COMPONENTS USED

1) **Arduino UNO**-Arduino UNO is a microcontroller-based development board used to control electronic components and sensors. It is based on the ATmega328P microcontroller.

It has 14 digital input/output pins and 6 analog input pins, which are used to connect sensors, LEDs, and other devices. It can be easily programmed using the Arduino IDE with simple code. In this project, the Arduino UNO acts as the main controller, which reads sensor data, processes it, and controls output devices like buzzer, relay, and RF module.

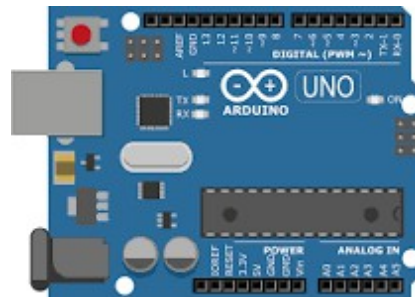


Fig: Arduino UNO

2) **IR Sensor**-An IR (Infrared) sensor is an electronic device used to detect objects or obstacles using infrared light. It consists of an IR transmitter and an IR receiver.

The transmitter emits infrared rays, and when these rays hit an object, they are reflected back and detected by the receiver. Based on this, the sensor gives an output signal.



Fig: IR Sensor

3) **MQ-3**-The MQ-3 sensor is a gas sensor used to detect the presence of alcohol in the air. It is highly sensitive to alcohol vapors like ethanol. It works by measuring the change in resistance when alcohol gas comes in contact with the sensor. Based on this, it gives an analog or digital output. In this project, the MQ-3 sensor is used to: Detect alcohol from the rider's breath. Prevent the vehicle from starting if alcohol is detected.



Fig:MQ-3

4) **Helmet**-A helmet is a protective gear worn by riders to prevent head injuries during accidents. It is made of a hard outer shell and a soft inner padding for safety.

In this project, the helmet is used as a base unit to mount all components like sensors, Arduino, and RF transmitter. It plays an important role in detecting whether the rider is wearing it or not.



Fig:Helmet

5) **LCD**-An LCD (Liquid Crystal Display) is an electronic display module used to show text and data. In this project, a 16x2 LCD is used, which can display 16 characters in 2 rows.

It is connected to the Arduino using an I2C module, which reduces the number of wires.



Fig:LCD

6) **LED**-An LED (Light Emitting Diode) is an electronic component that emits light when electric current passes through it. It works on the principle of electroluminescence, where electrical energy is converted into light energy. In this project, the LED is used as an indicator to show different system conditions such as alerts or status of the system.




Fig:LED

7) **Buzzer**-A buzzer is an electronic audio device used to produce sound as an alert or warning signal. It works when an electrical signal is applied, converting it into a sound (beep). It is commonly used in alarm systems and safety devices.



Fig:Buzzer


- 8) Register- A register is a small, high-speed storage location inside a microcontroller or CPU used to temporarily hold data during processing. It is used to store instructions, data, or addresses that are currently being used by the system. Registers are very fast compared to memory and help in quick execution of operations



Fig: Register

- 9) Software Tools: Visual Studio Code (VS Code): Visual Studio Code is a code editor developed by Microsoft. It allows developers to write, edit, and manage code in different programming languages. For IoT projects, VS Code is useful because it supports extensions, debugging tools, and project management features that make coding easier and more efficient.

Arduino IDE : Arduino IDE is software used to write and upload programs to Arduino boards like the Arduino Uno. It provides a simple interface to write code, compile it, and send it to the microcontroller, allowing projects to run smoothly on the Arduino board

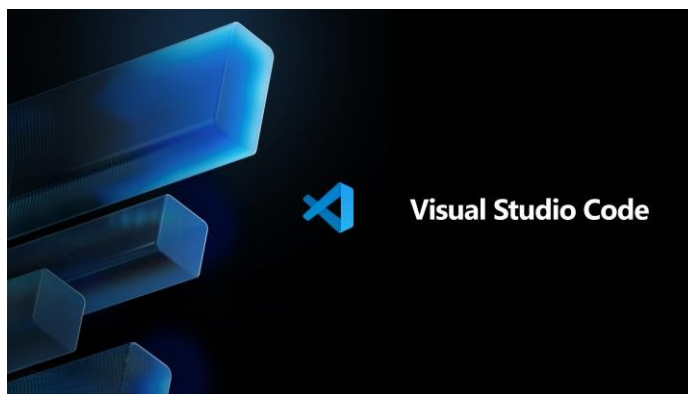

VI. RESULT

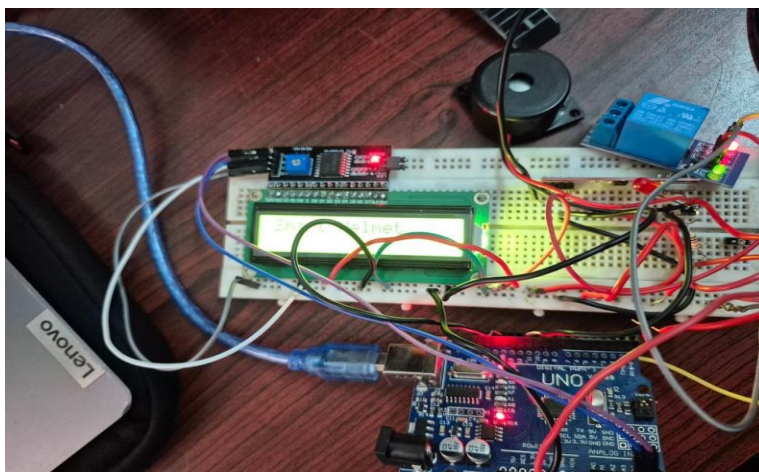


Fig :Circuit Connection

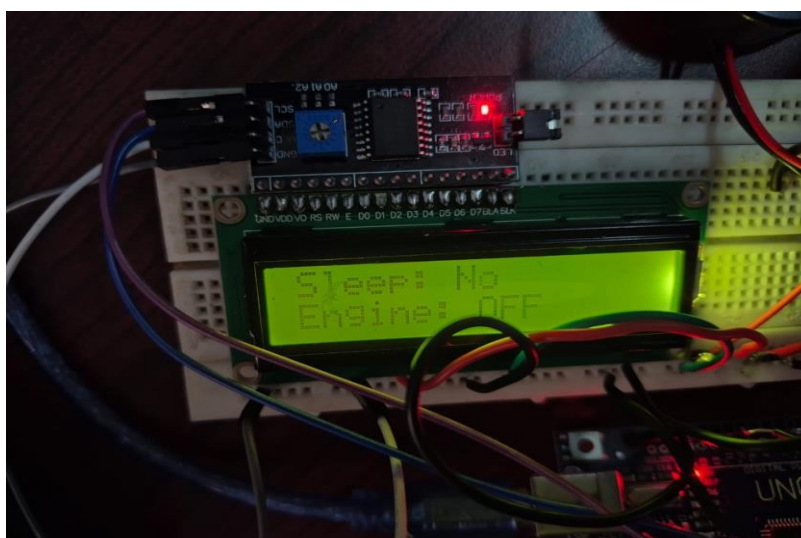


Fig:System on

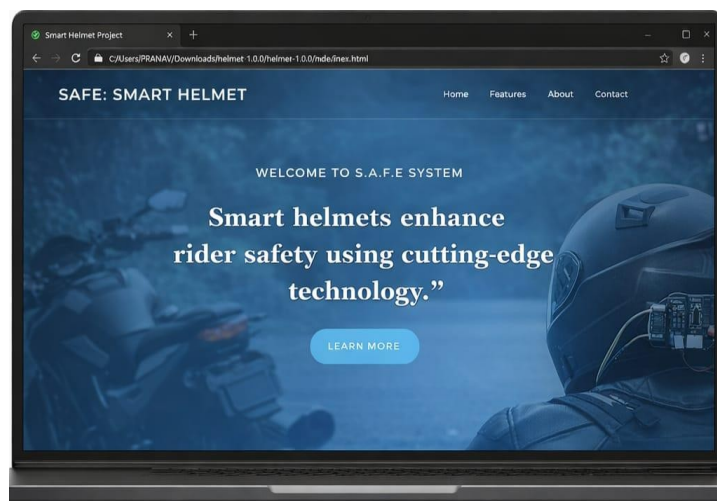


Fig:System Website

The Smart Helmet Monitoring and Control System (S.A.F.E) is designed to improve the safety of two-wheeler riders by automatically monitoring important conditions such as helmet usage, alcohol consumption, and drowsiness. The system uses different sensors, an Arduino UNO microcontroller, RF modules, and relay modules to create a smart safety system.

The system continuously checks whether the rider is wearing a helmet using an IR sensor. If the helmet is not worn, the system does not allow the vehicle to start. Another IR sensor is used for detecting drowsiness by monitoring eye closure. If the rider feels sleepy, the system activates a buzzer to alert the rider and prevent accidents. An MQ-3 alcohol sensor is used to detect alcohol in the rider's breath. If alcohol is detected, the Arduino sends a signal to the relay module to turn off the engine, ensuring that the vehicle cannot be operated under unsafe conditions.

The transmitter section, placed inside the helmet, collects data from all sensors and sends it wirelessly using a 433 MHz RF transmitter. The receiver section, installed in the vehicle, receives this data through an RF receiver and processes it using another Arduino UNO.

The Arduino compares the received values with preset conditions. If all safety conditions are satisfied (helmet worn and no alcohol detected), the system allows the engine to start using a relay module. Otherwise, the engine remains off. A 16x2 LCD display is used to show real-time information such as helmet status, alcohol detection, and engine condition. A buzzer and LED are used to provide alerts during unsafe situations like drowsiness or system errors.

The Arduino UNO acts as the main controller of the entire system. It collects data from sensors, processes it, and controls devices like the buzzer, relay, and display. This system helps reduce accidents by ensuring that riders follow basic safety rules and by providing real-time alerts.

VII. FUTURE SCOPE

The Smart Helmet system can be further improved by adding advanced features to enhance safety and usability. In the future, GPS and GSM modules can be integrated to send the rider's live location and emergency alerts to family members or hospitals in case of an accident.

The system can also be upgraded using IoT technology, allowing real-time monitoring and data storage on cloud platforms. This will help in tracking rider behavior and improving safety measures. Additional sensors such as accident detection (vibration sensor) and heart rate monitoring can be included to detect emergencies more accurately. A mobile application can also be developed to display all data and alerts in a user-friendly way.

Moreover, the system can be made more compact, wireless, and power-efficient for better practical implementation in real-world conditions.

VIII. CONCLUSION

The S.A.F.E (Smart Accident Free Equipment) system successfully demonstrates how technology can be used to improve road safety for two-wheeler riders. By integrating sensors, Arduino, and wireless communication, the system ensures that important safety conditions such as helmet usage, alcohol detection, and drowsiness monitoring are continuously checked.

The project prevents the vehicle from starting under unsafe conditions and provides real-time alerts to the rider. This helps in reducing accidents caused by negligence and unsafe driving behavior. Overall, the smart helmet system is a cost-effective, reliable, and practical solution that can be implemented in real life to enhance rider safety and promote responsible driving.

REFERENCES

- [1] Arduino Official Website – <https://www.arduino.cc>. Electronics Hub – <https://www.electronicshub.org>. Instructables – <https://www.instructables.com>.
- [2] Research Paper on Smart Helmet Systems – <https://www.researchgate.net>. MQ-3 Sensor Datasheet – <https://www.sparkfun.com>.
- [3] IR Sensor Working – <https://components101.com>.
- [4] RF Module (433MHz) – <https://lastminuteengineers.com>.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)