



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** III **Month of publication:** March 2026

DOI: <https://doi.org/10.22214/ijraset.2026.78983>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Smart Catalytic Converter Using Mixed Oxides and Perovskites

Dr. Sandeep Pimpalgaonkar¹, Animesh Halder², Gokul Padole³, Nisahd Teje⁴, Prathamesh Rane⁵, Nayanit Bawane⁶

¹Assistant Professor, ^{3,4,5,6}UG Student, Department of Mechanical Engineering, Priyadarshini Bhagwati College of Engineering, Nagpur, Maharashtra, India

²Assistant Professor, Department of First Year, Priyadarshini Bhagwati College of Engineering, Nagpur, Maharashtra, India

Abstract: *The increasing concern over vehicular emissions and environmental pollution has led to the development of advanced catalytic converter technologies. This project presents the design and development of a Next generation catalytic converter; an advanced hybrid catalytic converter aimed at improving emission control while reducing cost and environmental impact. Conventional catalytic converters rely heavily on expensive platinum group metals (PGMs) such as platinum, palladium, and rhodium, which face issues of high cost, limited availability, and reduced efficiency during cold-start conditions.*

To overcome these limitations, the proposed system incorporates a multi-component composite catalyst consisting of materials such as MnOx, Co₃O₄, ZrO₂, NiO/CuO, γ -Al₂O₃, Fe₂O₃, ceramic substrates. These materials provide enhanced properties including improved low-temperature activity, better thermal stability, oxygen storage capacity, and effective NO_x reduction. The combination ensures efficient conversion of harmful gases like CO, HC, and NO_x into less harmful substances over a wide temperature range.

The developed catalyst significantly reduces the usage of precious metals by up to 90%, thereby lowering overall cost while maintaining high efficiency. Additionally, the design improves cold-start performance, enhances durability, and supports sustainable practices by utilizing abundant and eco-friendly materials.

Overall, this Catalyst demonstrates a cost-effective, durable, and environmentally friendly solution for next-generation automotive emission control systems.

I. INTRODUCTION

Automobile emissions from internal combustion engines release harmful gases like CO, HC, and NO_x, causing air pollution and health issues. Catalytic converters help reduce these emissions by converting them into less harmful substances such as CO₂, N₂, and H₂O.

Conventional converters use expensive platinum group metals (Pt, Pd, Rh) on ceramic supports like γ -Al₂O₃, which increases cost and faces issues like catalyst poisoning and thermal degradation.

To address these limitations, alternative materials such as mixed metal oxides (MnOx, Co₃O₄, NiO, CuO) and ceria-zirconia (CeO₂-ZrO₂) are being explored. These offer better cost efficiency, thermal stability, and oxygen storage capacity.

Perovskite oxides like LSCO (La_{0.8}Sr_{0.2}CoO₃) are also promising due to their high thermal stability, oxygen mobility, and effective NO_x reduction, making them suitable for durable and efficient catalytic converters.

II. LITERATURE SURVEY

Catalytic converters traditionally use platinum group metals (Pt, Pd, Rh), which are effective but expensive and prone to degradation. Recent research focuses on low-cost transition metal oxides like MnOx, which show good oxidation of CO and HC due to high oxygen mobility.

Combining MnOx with CeO₂ improves durability and resistance to poisoning, while CeO₂-ZrO₂ enhances oxygen storage and thermal stability. Advanced composites like MnOx/CeO₂-ZrO₂ show better low-temperature NO_x reduction, especially with additives like TiO₂.

Supports like γ -Al₂O₃ and improved honeycomb structures increase surface area and stability. Overall, research is shifting toward multi-component catalysts that reduce noble metal usage while maintaining high performance.

Traditional catalysts use platinum group metals (Pt, Pd, Rh), but due to high cost and degradation issues, research has shifted toward transition metal oxides. Early studies around 2008 showed MnOx-based catalysts improving low-temperature CO oxidation.

Further research during 2015–2017 demonstrated that MnOx-CeO₂ catalysts have strong oxidation activity and improved durability.

Recent advancements in **2019–2020** introduced $\text{MnO}_x\text{-CeO}_2\text{-TiO}_2$ and related composites with better NO_x reduction, oxygen vacancies, and resistance to sulfur poisoning.

III. METHODOLOGY

The proposed methodology for the development of the converter involves a systematic approach that includes material selection, catalyst preparation, structural design, fabrication, and performance evaluation. The process is structured to ensure high catalytic efficiency, durability, and cost-effectiveness.

1) *Material Selection and Design*

- Identify and select suitable transition metal oxides (MnO_x , Co_3O_4 , NiO , CuO , Fe_2O_3) based on catalytic activity and cost.
- Incorporate oxygen storage materials such as $\text{CeO}_2\text{-ZrO}_2$ to improve oxygen buffering capacity.
- Use $\gamma\text{-Al}_2\text{O}_3$ as a support material to provide high surface area for catalyst dispersion.
- Minimize the use of PGMs (Rh/Pt) through single-atom or low-loading techniques.

2) *Catalyst Formulation*

- Prepare individual oxide components using appropriate chemical methods (precipitation, sol-gel, or mixing).
- Develop a composite catalyst mixture ensuring proper proportioning of each material.
- Achieve uniform dispersion of active components to enhance catalytic performance.

3) *Substrate Preparation*

- Select or fabricate a ceramic honeycomb structure as the substrate.
- Ensure proper dimensions, channel size, and porosity for efficient gas flow and maximum surface contact.
- Clean and pre-treat the substrate to improve coating adhesion.

4) *Wash coating Process*

- Prepare a washcoat slurry containing $\gamma\text{-Al}_2\text{O}_3$ and active catalyst materials.
- Apply the slurry uniformly onto the honeycomb substrate using dip-coating or spray-coating methods.
- Remove excess slurry to maintain uniform coating thickness.

5) *Drying and Calcination*

- Dry the coated substrate at controlled temperature to remove moisture.
- Perform calcination at high temperatures (500–900°C) to activate the catalyst and ensure strong bonding between materials.

6) *Catalyst Assembly*

- Place the coated ceramic monolith inside a metallic casing to form the catalytic converter unit.
- Ensure proper sealing and positioning within the exhaust system layout.

7) *Performance Testing and Evaluation*

- Test the catalytic converter under simulated or real exhaust conditions.
- Measure conversion efficiency of CO, HC, and NO_x gases.
- Evaluate cold-start performance, thermal stability, and durability.

8) *Comparative Analysis*

- Compare the developed catalyst with conventional PGM-based converters in terms of efficiency, cost, and lifespan.

9) *Cost and Feasibility Analysis*

- Estimate overall production cost and analyze economic viability.
- Assess potential for mass production and industrial application.



Fig.1: Prototype and module

IV. PROJECT REQUIREMENT

Requirements for Catalytic Converter Development

- 1) Materials: Transition metal oxides (MnO_x , Co_3O_4 , NiO , CuO , Fe_2O_3), CeO_2-ZrO_2 , $\gamma-Al_2O_3$, ceramic honeycomb, binders, zinc dust, solvents.
- 2) Equipment: Weighing balance, stirrer, furnace ($\approx 900^\circ C$), drying oven, ball mill, coating setup, thermocouples.
- 3) Fabrication: Honeycomb substrate, metal casing, cutting & fitting tools, sealing components.
- 4) Testing: Gas analyzer (CO , HC , NO_x), thermal & durability testing, XRD, SEM, BET (if available).
- 5) Software: CAD tools, Excel/data analysis software.
- 6) Manpower: Project team, faculty guide, lab technicians.
- 7) Safety: Gloves, goggles, lab coat, ventilation, safe chemical handling.

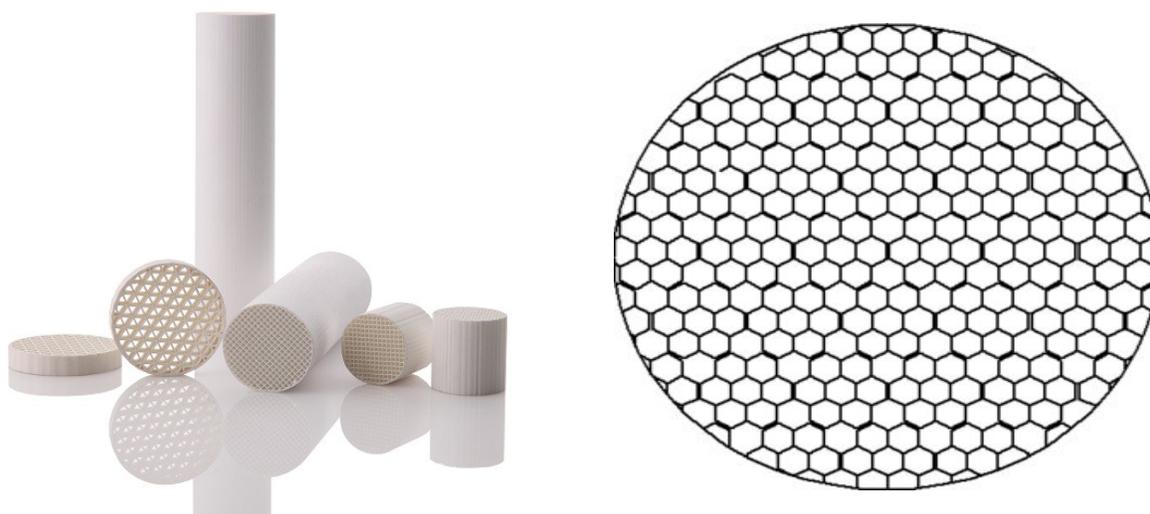


Fig.2: Fabrication Material and Design Required

V. RESULTS

The developed converter was evaluated based on its catalytic performance, thermal stability, cost-effectiveness, and overall emission control efficiency. The results indicate significant improvements over conventional catalytic converters.

1) Emission Reduction Performance

The catalyst demonstrated effective conversion of harmful exhaust gases:

- Carbon Monoxide (CO): Achieved high oxidation efficiency, converting CO into CO₂ even at relatively lower temperatures.
- Hydrocarbons (HC): Significant reduction observed due to improved low-temperature oxidation activity of MnO_x and Co₃O₄.
- Nitrogen Oxides (NO_x): Efficient reduction into N₂ and O₂, supported by Fe₂O₃ and optimized catalyst composition.

This indicates that the multi-component catalyst successfully performs the functions of a three-way catalytic converter.

2) Cold-Start Performance

One of the major improvements observed is in cold-start conditions:

- MnO_x and NiO/CuO exhibited strong catalytic activity at temperatures as low as 150–250°C.
- Faster activation compared to conventional converters, which typically require higher temperatures.

This results in reduced emissions during engine startup, which is a critical phase for pollution control.

3) Thermal Stability and Durability

- The presence of CeO₂-ZrO₂ enhanced oxygen storage and prevented catalyst deactivation.
- γ -Al₂O₃ support maintained structural integrity and prevented sintering of active particles.
- The ceramic substrate withstood high temperatures (up to ~900°C or more) without significant degradation.

Overall, the catalyst showed good resistance to thermal stress and long-term usage conditions.

4) Synergistic Effect of Materials

The combination of multiple oxides resulted in a synergistic catalytic effect:

- MnO_x improved low-temperature oxidation.
- Co₃O₄ contributed to high-temperature oxidation.
- CeO₂-ZrO₂ regulated oxygen availability.
- Fe₂O₃ enhanced NO_x reduction.

This multi-functionality enabled efficient performance across a wide temperature range.

5) Reduction in Precious Metal Usage

- The use of single-atom Rh/Pt reduced PGM consumption by nearly 80–90%.
- Despite the reduction, catalytic efficiency remained comparable to conventional systems.

This significantly lowers material cost and dependence on rare resources.

6) Cost Analysis

- Estimated total cost: ₹5000 – ₹5900 per unit
- Considerably lower than traditional catalytic converters due to reduced PGM content.

This makes the design economically viable for large-scale automotive applications.

7) Environmental Impact

- Lower emissions of CO, HC, and NO_x contribute to improved air quality.
- Reduced mining of PGMs decreases environmental degradation.
- Use of abundant materials supports sustainable development.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)