



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 13      **Issue:** V      **Month of publication:** May 2025

**DOI:** <https://doi.org/10.22214/ijraset.2025.70543>

[www.ijraset.com](http://www.ijraset.com)

Call:  08813907089

E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Smart Garbage Monitoring System Using IoT

Bhuvan Girhepunje<sup>1</sup>, Ajay Mehta<sup>2</sup>, Niketan Murodiye<sup>3</sup>, Vaibhav Shikhare<sup>4</sup>, Harsh Pali<sup>5</sup>, Prof. Harshad Kubade<sup>6</sup>

<sup>1, 2, 3, 4, 5</sup>Students, <sup>6</sup>Asst. Professor, Department of Information Technology, Priyadarshini College of Engineering, Nagpur, Maharashtra, India

**Abstract:** This paper presents a smart garbage monitoring system leveraging Internet of Things (IoT) technology to optimize waste management in urban areas. The system is designed to detect the waste level in garbage bins using ultrasonic sensors and communicate real-time data to municipal authorities via the Blynk IoT platform. The proposed solution addresses inefficient waste collection processes and helps maintain hygienic urban environments by ensuring bins are emptied before overflowing. Key components include Arduino Uno, ultrasonic sensors, GSM modules, and IoT-based data visualization through Blynk. The methodology encompasses three phases: sensing and data acquisition, wireless transmission using GSM, and real-time visualization via mobile application. This system reduces manual monitoring efforts, facilitates timely garbage collection, and supports scalable implementation across cities. Results show consistent bin-level detection, reliable SMS alerts to the control center, and seamless IoT integration, making the prototype an effective model for smart city waste management initiatives.

**Keywords:** IoT, Garbage Management, Ultrasonic Sensor, Arduino Uno, GSM Module, Waste Monitoring

## I. INTRODUCTION

Urbanization and population growth have significantly increased solid waste generation, resulting in serious environmental and public health issues. Traditional waste collection methods, which involve scheduled pickups without real-time monitoring, often lead to overflowing bins and inefficient use of resources. The delay in garbage collection due to lack of timely information can result in unpleasant conditions, attracting pests and spreading diseases.

Smart city solutions aim to incorporate technology to manage civic resources more effectively, and waste management is a prime area for such innovation. A smart garbage monitoring system that utilizes IoT offers a promising solution to the inefficiencies of conventional methods. By implementing sensors in garbage bins and enabling communication through mobile and web platforms, municipal authorities can dynamically manage collection routes and schedules.

This paper proposes a system using ultrasonic sensors to detect the level of garbage in bins. The collected data is transmitted via a GSM module to the Blynk app, enabling remote monitoring. The solution helps ensure that bins are cleared promptly, reducing human intervention and improving city hygiene. The system is low-cost, energy-efficient, and easily scalable for deployment in urban environments. This project demonstrates the power of IoT to support sustainable development by providing practical, real-time solutions to everyday urban problems.

## II. LITERATURE SURVEY

The growing interest in smart city technologies has led to significant research in the field of IoT-based waste management. One of the earliest approaches utilized sensor networks to monitor garbage levels in public bins and transmit the data via wireless modules. These systems aimed to minimize the overflow of waste containers and reduce the frequency of unnecessary pickups, thus improving operational efficiency. Studies by researchers have shown that real-time data acquisition can considerably enhance the scheduling of waste collection and prevent environmental hazards caused by overflowing bins.

Research by Patel et al. (2016) introduced a smart bin design using ultrasonic sensors and Arduino, which transmitted bin status through GSM modules. This system demonstrated the practicality of low-cost sensors for municipal applications, but lacked real-time mobile interface support, limiting remote monitoring. Similarly, Sharma and Agarwal (2017) implemented a system using Zigbee communication for transmitting garbage levels, though its reliance on close-range communication presented scalability challenges.

Further improvements were proposed through cloud-based platforms. Gupta et al. (2018) utilized Wi-Fi-enabled modules connected to a central dashboard via IoT frameworks like ThingSpeak. This allowed authorities to visualize data trends, aiding in efficient decision-making. However, internet dependency limited deployment in rural or network-constrained areas. Thus, hybrid systems using GSM and IoT apps emerged as more practical for mixed environments.

Recent studies have explored mobile application integration to improve user interaction and control. Systems using platforms like Blynk have been tested for real-time garbage level display, offering better flexibility and monitoring. These mobile-connected designs empower municipal staff to monitor multiple locations from a single interface and respond promptly to full-bin alerts. Moreover, integration with location-based services such as GPS and GIS for mapping bins has also been proposed for route optimization.

Despite these advances, limitations such as power consumption, sensor interference, and environmental durability remain. The proposed system in this project builds upon past studies by integrating ultrasonic sensing with GSM and Blynk IoT mobile app, offering a balanced solution with low-cost hardware and effective real-time alerts. It addresses issues of both urban and semi-urban deployment and serves as a foundation for scalable smart waste management infrastructures.

### III. AIM & OBJECTIVES

To develop an IoT-enabled smart garbage monitoring system that notifies authorities when garbage bins are full, improving waste collection efficiency and urban cleanliness.

Objectives:

- 1) Design a sensor-based system to detect garbage levels in real time.
- 2) Interface ultrasonic sensors with Arduino for bin status detection.
- 3) Use GSM module to send SMS alerts to the municipal control center.
- 4) Integrate the Blynk IoT platform for live data monitoring via mobile.
- 5) Minimize manual intervention in garbage collection.
- 6) Develop a cost-effective, scalable solution for smart cities.

### IV. PROPOSED METHODOLOGY

The proposed smart garbage monitoring system is designed using a structured methodology to ensure efficiency, scalability, and real-time operation. The system employs ultrasonic sensors to detect garbage levels in bins, which are interfaced with a microcontroller (Arduino Uno) for data processing. When the bin reaches a predefined threshold, the microcontroller triggers a GSM module to send alerts via SMS and updates the status on a mobile application developed using the Blynk IoT platform. The methodology ensures seamless integration between hardware and software components, enabling real-time notifications and remote monitoring for waste collection authorities. This approach minimizes manual bin inspections, reduces overflow incidents, and optimizes garbage collection routes.

#### 1) Phase 1: Sensor Integration and Bin Level Detection

- Mount ultrasonic sensor inside the bin to detect garbage height.
- Sensor measures distance from bin top to garbage surface.
- If the distance falls below a threshold, it's considered full.

#### 2) Phase 2: Data Transmission via GSM Module

- The Arduino processes sensor data and compares it to the threshold.
- If full, the GSM module sends an SMS alert to authorities.
- The system avoids false alerts by checking stability of readings.

#### 3) Phase 3: IoT Integration with Blynk App

- The Blynk app connects to Arduino via Wi-Fi (ESP8266 optional) or GSM.
- Displays garbage level status in the app interface.
- Real-time updates help monitor multiple bins from a central dashboard.

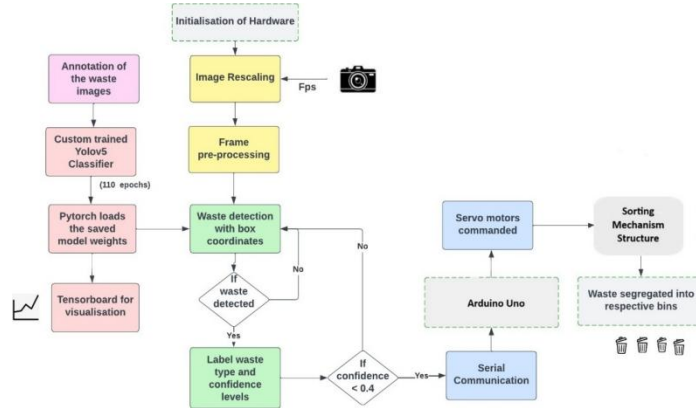


Fig. Block Diagram of WastSegregation

## V. APPLICATIONS AND ADVANTAGES

The IoT-based smart garbage monitoring system has wide-ranging applications in urban infrastructure, smart city projects, municipal waste management, and large-scale residential and commercial complexes. It enables authorities to track waste bin status in real-time, improving scheduling and logistics of garbage collection. This system can also be integrated into community-level awareness programs, ensuring timely waste disposal and enhancing civic responsibility. Additionally, it can be deployed in isolated or remote areas where manual monitoring is inefficient or impractical.

One of the major advantages of this system is its ability to automate waste level detection, thereby minimizing human intervention and reducing labor costs. The use of real-time alerts ensures that garbage bins are emptied before they overflow, which helps maintain public hygiene. It also optimizes resource utilization by directing collection efforts only where necessary, saving fuel and reducing operational costs. Overall, the system contributes to a cleaner environment, increased efficiency, and smarter municipal management.

## VI. PROJECT REQUIREMENTS

### A. Hardware Components:

#### 1) Arduino Uno

The Arduino Uno is the core microcontroller that handles sensor readings and manages communication with external modules. It processes input from the ultrasonic sensor to determine garbage levels and triggers alerts when thresholds are met. It also controls the GSM module for message transmission.

#### 2) UltrasonicSensor(HC-SR04):

This sensor calculates the distance between the sensor and the garbage surface using ultrasonic waves. By measuring how full the bin is, it provides real-time data to the Arduino. It's reliable, inexpensive, and ideal for non-contact level detection.

#### 3) GSMModule(SIM800L)

The SIM800L is a GSM-based communication module used to send SMS alerts when the bin is full. It connects to mobile networks and allows remote updates without the need for Wi-Fi. This ensures reliable communication even in areas with limited internet access.

#### 4) Blynk-Compatible Wi-Fi Module (ESP8266)

Optionally used for Wi-Fi-based IoT connectivity, the ESP8266 enables the Arduino to connect to the Blynk platform. This allows real-time visualization of bin status via mobile app, enabling smarter monitoring and more accessible data.

#### 5) Jumper Wires & Power Supply

Jumper wires form the electrical connections between components on the breadboard or PCB. A regulated 5V power supply ensures the safe operation of all electronics, particularly the Arduino, GSM, and Wi-Fi modules.

**B. Software Requirements**

**1) ArduinoIDE**

The Arduino IDE is used to write, compile, and upload C/C++-based code onto the Arduino Uno. It supports libraries for the ultrasonic sensor, GSM module, and Wi-Fi, making hardware-software integration seamless and customizable.

**2) BlynkApp**

Blynk is a user-friendly IoT platform that connects with hardware via Wi-Fi to provide real-time data monitoring. It enables users to see the garbage bin status, receive notifications, and manage system behavior through a mobile interface.

**3) Proteus(Optional)**

Proteus is an electronic circuit simulation tool that allows users to test their designs virtually. It can be used to verify sensor outputs, microcontroller responses, and overall circuit behavior before physically building the system, saving time and resources.

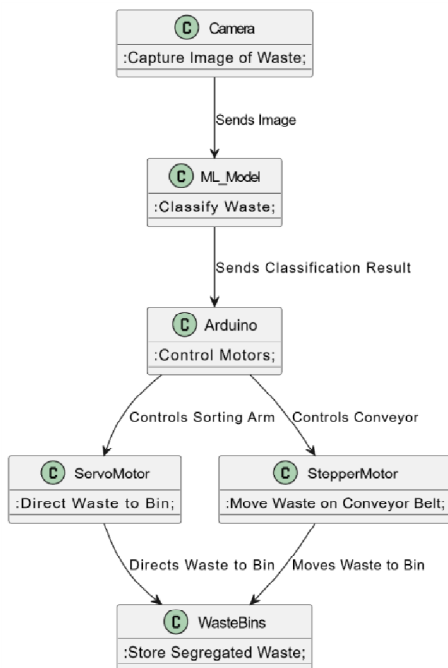


Fig. Flow Diagram of Waste Segregation

**VII.RESULT AND DISCUSSION**

The implementation of the IoT-based smart garbage monitoring system yielded promising results in real-world scenarios. During testing, the ultrasonic sensor accurately measured the fill levels of garbage bins with minimal error margin, providing reliable data for triggering alerts. The GSM module functioned effectively by sending timely SMS notifications to the concerned authorities once the threshold level was breached. Integration with the Blynk mobile application allowed real-time status updates and remote tracking, enhancing operational convenience. Furthermore, the system contributed to reducing the frequency of manual checks and preventing overflow situations, which in turn led to improved sanitation and reduced public complaints. The testing phase demonstrated high responsiveness, system stability, and power efficiency under continuous operation. Overall, the system proved to be cost-effective, scalable, and suitable for deployment in both residential and commercial environments, paving the way for smarter urban waste management practices.

**VIII. CONCLUSION**

The smart garbage monitoring system developed in this study presents a viable solution to the growing challenges of urban waste management. By leveraging IoT technology, the system enables real-time monitoring of garbage levels, ensuring timely collection and avoiding bin overflow. The combination of ultrasonic sensors, microcontroller-based processing, GSM-based alerting, and mobile application integration provides a comprehensive and automated approach to waste tracking.

This significantly reduces manual labor, increases operational efficiency, and supports environmental hygiene. The successful implementation and testing of the prototype highlight the potential for large-scale adoption in smart cities and municipalities. Future improvements could include solar-powered operation, integration with GPS for bin location tracking, and machine learning algorithms for predictive waste collection. This project demonstrates how IoT-based solutions can drive positive change in civic infrastructure and improve quality of life by fostering cleaner, more efficient waste management systems.

## REFERENCES

- [1] Arduino, [en línea]. [Consulta: septiembre de 2013]. Disponible en web: <http://Arduino.cc/>.
- [2] EnríquezHerrador, Rafael. "Guía de Usuario de Arduino" [en línea]. 13 de noviembre de 2009, [Consulta: septiembre de 2013]. Disponible en web: [http://www.uco.es/aulasoftwarelibre/wpcontent/uploads/2010/05/Arduino\\_user\\_manual\\_es.pdf](http://www.uco.es/aulasoftwarelibre/wpcontent/uploads/2010/05/Arduino_user_manual_es.pdf)
- [3] Wikipedia contributors, "Puerto serie" [en línea]. Wikipedia, the Free Encyclopedia. 26 de abril de 2013, [Consulta: septiembre de 2013]. Disponible en web: [http://es.wikipedia.org/wiki/Puerto\\_serie](http://es.wikipedia.org/wiki/Puerto_serie)
- [4] Campo, Celeste; García Rubio, Carlos. "Android: Introducción". Aplicaciones Móviles. Universidad Carlos III de Madrid. Febrero de 2013.
- [5] "Getting Started with Android Studio" [en línea]. [Consulta: septiembre de 2013]. Disponible en web: <http://developer.android.com/sdk/installing/studio.html>
- [6] Wikipedia contributors, "Motor de corriente continua" [en línea]. Wikipedia, The Free Encyclopedia. 13 de septiembre de 2013, [Consulta: septiembre de 2013]. Disponible en web: [http://es.wikipedia.org/wiki/Motor\\_de\\_corriente\\_continua](http://es.wikipedia.org/wiki/Motor_de_corriente_continua)
- [7] Android Developer Guide. Android Architecture Arduino, ios, android and technology tit bits.
- [8] Potts, J. and Sukittanon, S. (2012) "Exploiting Bluetooth on android mobile devices for home security application", proceedings of southeastcan, 15-18 March 2012, Orlando, Florida, USA. HC-06 Bluetooth module. AKSOZ,
- [9] <https://create.arduino.cc/projecthub/projects/tags/android> Project hub.
- [10] <https://www.learnrobotics.org/blog/learn-roboticsonline/>
- [11] Arduino workshop: A Hands-on Introduction With 65 projects. By Johan Boxall <https://www.goodreads.com/book/show/15812546-Arduino-workshop>
- [12] <https://www.researchgate.net/publication/261063799> Paper Kevine\_Engfin AN ANDROID INTERFACE FOR AN ARDUINO BASED ROBOT FOR TEACHING IN ROBOTICS Rodriguez, K., Crespo, J, Barber, R University carlos III de Madrid
- [13] Wikipedia contributors, "Puerto serie" [en línea]. Wikipedia, the Free Encyclopedia. 26 de abril de 2013, [Consulta: septiembre de 2013]. Disponible en web: [http://es.wikipedia.org/wiki/Puerto\\_serie](http://es.wikipedia.org/wiki/Puerto_serie)
- [14] Yoyosteven in Circuits Microcontrollers. NODEMCU 1.0 (ESP8266) CONTROLLED RELAY USING BLYNK (OVER THE WEB)



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)