iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** V **Month of publication:** May 2025

DOI: https://doi.org/10.22214/ijraset.2025.71545

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue V May 2025- Available at www.ijraset.com

Smart Helmet with Sensor Fusion and Mobile Connectivity

Dr. John Prakash Veigas, Saurav, Shetty Gaurav Gopalakrishna, Nirikshith P Shetty, Sunilkumar Muragesh Dabbanad
Department of ISE, AJIET, Mangaluru

Abstract: ***The integration of sensor technologies in personal safety devices is transforming how we approach risk management in various high-risk environments. The Smart Helmet with Sensor Fusion and Mobile Connectivity provides an advanced solution for enhancing rider safety by leveraging multiple sensors like accelerometers, gyroscopes, GPS, and communication modules. This helmet detects critical events, such as accidents or falls, using data from the MPU6050 sensor (for motion tracking) and GPS data from the NEO-6M to pinpoint precise locations of incidents. Additionally, it communicates with emergency contacts via the SIM800L module to provide real-time crash notifications. Flutter-based mobile applications enable seamless connectivity between the helmet and user smartphones, offering features such as live data tracking, including speed, acceleration, and distance travelled. This system uses sensor fusion techniques to process real-time data from various sources, ensuring accurate event detection and prompt alerts. This technology is ideal for bikers, construction workers, and others working in high-risk settings, providing both immediate safety responses and long-term health monitoring.***

Keywords: Smart Helmet, Sensor Fusion, Mobile Connectivity, ESP32, MPU6050, SIM800L, NEO-6M, Flutter, Crash Detection, Real-time Alerts, GPS Tracking, Personal Safety.

I. INTRODUCTION

Motorcycle rider safety is a growing concern in urban environments, where unexpected hazards and road conditions frequently lead to accidents. While conventional helmets provide passive protection, integrating sensor fusion and mobile connectivity introduces new possibilities for proactive safety. Smart helmets, equipped with sensors such as accelerometers, gyroscopes, temperature, and ambient light detectors, allow continuous monitoring of rider movement and surrounding environmental conditions. A smart helmet prototype has been developed for safe riding and alcohol detection, using embedded sensors to monitor the rider's behaviour and trigger alerts in unsafe situations [6]. This concept has been enhanced by incorporating wireless GSM-based communication, enabling the helmet to transmit emergency alerts and location data to pre-selected contacts upon detecting critical events [7]. Further advancements include AI and IoT-enabled helmets that monitor both environmental factors and physiological signals in real time, using sensor fusion techniques to enhance data accuracy and reduce false alarms [9]. These systems rely on microcontroller-based processing units and advanced firmware to interpret multi-sensors input. Alerts are transmitted via Bluetooth or LTE, facilitating immediate communication during emergencies. Collectively, these innovations mark a shift from reactive to predictive safety systems in motorcycling, aiming to minimize injury severity through real-time intervention.

II. RELATED WORK

The development of smart helmet technology has undergone substantial evolution, propelled by advancements in embedded systems, wireless communication, and sensor fusion algorithms. Early innovations focused primarily on integrating basic sensors for collision detection and location tracking [6]. However, recent efforts have introduced sophisticated multi-sensor configurations, combining inertial measurement units (IMUs), gyroscopes, accelerometers, ambient light, and temperature sensors to achieve comprehensive real-time situational awareness [7]. This multi-modal sensing framework has redefined safety paradigms by enabling continuous assessment of rider behaviour, environmental conditions, and impact events without human intervention.

Breakthroughs in microcontroller firmware and real-time data acquisition have allowed the implementation of sensor fusion techniques that reduce false positives and significantly enhance impact detection accuracy. Coupled with mobile communication modules, these systems are capable of transmitting emergency alerts—including GPS coordinates and physiological data—via Bluetooth or LTE, facilitating near-instantaneous response in critical scenarios [9]. Embedded AI models further augment functionality by enabling contextual decision-making, distinguishing between normal riding dynamics and hazardous incidents through behaviour classification algorithms.

©IJRASET: All Rights are Reserved

Recent designs incorporate AI-IoT convergence to support edge computing capabilities, allowing for on-device pre-processing of sensor data and minimizing latency in emergency communications. Ongoing research explores the integration of biometric sensors and adaptive feedback mechanisms to increase user engagement and system reliability under diverse environmental and physiological conditions. The fusion of safety engineering with intelligent systems continues to drive the transition from reactive safety measures to proactive, intelligent intervention frameworks.

As these smart helmet platforms evolve, their role extends beyond individual safety to broader applications in intelligent transportation systems, occupational hazard prevention, and real-time urban mobility monitoring. The trajectory of this technology suggests a future of highly adaptive, AI-powered safety systems with potential implications for public health, emergency services, and autonomous infrastructure integration.

III. OBJECTIVE

The objective of this project is to develop an innovative smart helmet that significantly enhances rider safety using sensor fusion and mobile connectivity. The system integrates multiple sensors, including the MPU6050 (accelerometer + gyroscope), NEO-6M GPS, and SIM800L GSM module, coordinated by an ESP32 microcontroller. It aims to detect accidents or falls in real-time and immediately alert emergency contacts with precise location data. A Flutter-based mobile app facilitates live tracking and monitoring. The helmet is designed to be lightweight, durable, and user-friendly, offering both immediate safety responses and long-term health monitoring. It ensures timely medical intervention, promotes responsible riding, and reduces road fatalities without compromising usability or rider comfort.

IV. PURPOSE

The Smart Helmet system is designed with the overarching goal of enhancing personal safety for two-wheeler riders by offering proactive accident and fall detection capabilities. By leveraging embedded sensors and real-time data processing, the system ensures that emergency alerts and precise location data are transmitted immediately to predefined contacts, significantly reducing emergency response times. This not only mitigates the risk of severe injuries and fatalities but also supports public health initiatives aimed at improving road safety. Furthermore, the system encourages responsible riding behaviour by promoting consistent helmet usage and raising awareness about the importance of smart safety gear. From an economic standpoint, the helmet contributes to reducing medical expenses associated with road accidents and opens new avenues for technology-driven safety solutions in consumer and industrial markets. Overall, the system fosters a culture of accountability and enhances safety for both riders and pedestrians.

V. PROPOSED SYSTEM

The proposed Smart Helmet system prioritizes ease of use, real-time detection, and reliable communication to deliver a comprehensive safety solution. At the core of the system is the ESP32 microcontroller, which coordinates the operations of various sensors and communication modules. The MPU6050 sensor is used for detecting abrupt changes in motion that indicate potential accidents or falls. Accurate real-time location tracking is achieved using the NEO-6M GPS module, while the SIM800L GSM module is responsible for transmitting emergency SMS alerts. The helmet interfaces with a Flutter-based mobile application, which enables users to visualize real-time data, receive alerts, and manage emergency contacts. Integration with Firebase provides cloud-based data storage, real-time database functionality, and user authentication services. The system utilizes sensor fusion techniques to analyze data from multiple sources, thereby minimizing false positives and improving crash detection accuracy. Its robust architecture allows reliable operation across a variety of environments, including urban, rural, and low-connectivity areas, ensuring it remains functional in real-world conditions. The Flutter app complements the hardware by offering historical data tracking and intuitive configuration options.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

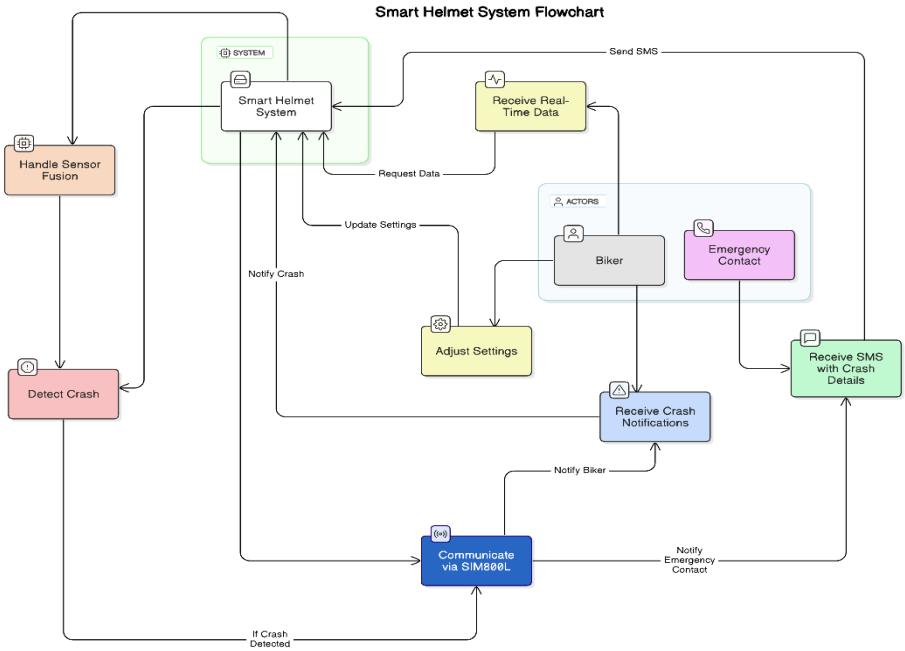


Fig 1:Smart Helmet System Flowchart

VI. METHODOLOGY

The development of the Smart Helmet follows a methodical approach that integrates hardware sensing, data analysis, and user interaction. In the data acquisition phase, the ESP32 microcontroller continuously collects sensor readings from the MPU6050 (accelerometer and gyroscope) and the GPS module. These readings are then subjected to pre-processing, where sensor fusion algorithms detect anomalies or abrupt motions indicative of an accident. If the computed acceleration or rotation exceeds predefined thresholds, the system initiates the crash detection logic, triggering an emergency response. The SIM800L module sends an SMS containing a Google Maps link with the GPS coordinates to emergency contacts. Simultaneously, the Flutter mobile application receives real-time data updates via Bluetooth or HTTP/MQTT protocols, allowing users to view helmet status, configure contacts, and review past incidents. The system also employs Firebase for cloud storage of crash logs, user authentication, and crash status monitoring. To ensure system reliability, comprehensive testing is conducted, including unit testing, integration testing, system testing, and acceptance testing, validating the system's performance under real-world conditions.

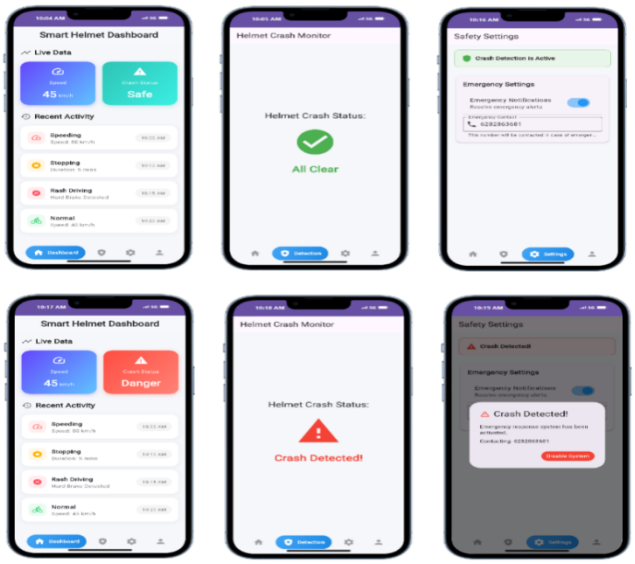


Fig 2: Mobile Application Interface displays how real-time helmet status and crash alerts are presented in the app.

VII. IMPLEMENTATION

The implementation of the Smart Helmet system involves the seamless integration of hardware components and software technologies to create a reliable, real-time accident detection and notification platform. The core of the hardware system is the ESP32 microcontroller, chosen for its high processing capability and support for wireless communication. Connected to it is the MPU6050 sensor, which captures acceleration and gyroscopic data to detect abnormal movement patterns indicating a fall or crash. To determine the exact location of an incident, the NEO-6M GPS module is utilized, while the SIM800L GSM module is responsible for transmitting emergency alerts via SMS to predefined contacts. The system is powered by a Li-Ion battery and regulated through a voltage circuit to ensure safe and stable operation. The sensors and modules are interconnected using I2C and serial communication protocols, with precise pin mapping to the ESP32 to ensure efficient data transfer.

1) Hardware: The firmware for the ESP32 is developed using Arduino IDE and PlatformIO, with key libraries including Wire.h for I2C communication, TinyGPS++.h for parsing GPS data, and SoftwareSerial.h for managing communication with the GSM module. The system continuously monitors motion data from the MPU6050 and GPS coordinates from the NEO-6M. If a crash is detected—defined by exceeding certain acceleration or angular thresholds—the SIM800L sends an SMS containing a Google Maps link to emergency contacts. This workflow is managed via structured functions and decision-making logic.

2) Software: On the software side, a Flutter-based mobile application is developed to provide a user-friendly interface for the helmet system. The app is capable of receiving real-time crash data, monitoring the helmet's location using Google Maps API, and displaying stats such as speed, acceleration, and past crash logs. It is cross-platform and supports both Android and iOS devices. Firebase is used for cloud data storage, user authentication, and real-time updates, allowing users to store and retrieve crash data securely.

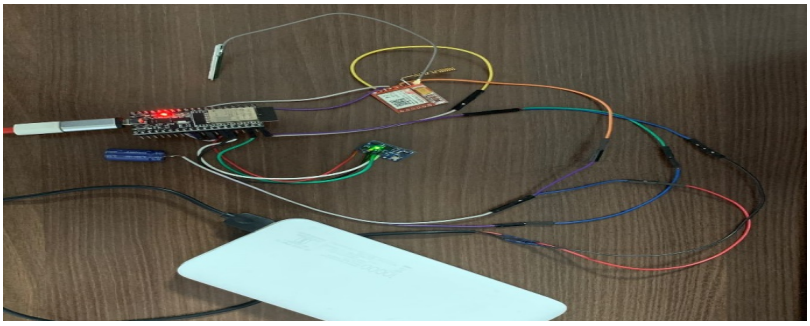


Fig 3:Hardware implementation of the setup

The final outcome of the implementation is a fully functional Smart Helmet system that can detect crashes, determine exact location, and notify emergency contacts within seconds. The mobile app interface displays the current helmet status ("Safe" or "Danger"), real-time speed, location, and maintains a log of previous alerts and crash events.

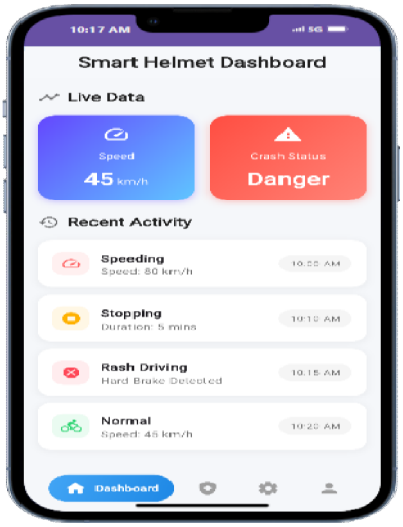


Fig 5: Mobile Application Interface of Smart Helmet

VIII. RESULT

The proposed smart helmet system effectively enhances rider safety through the integration of multiple sensors and mobile connectivity. The helmet detects accidents and falls using the MPU6050 sensor and sends real-time alerts via the SIM800L GSM module. Accurate GPS coordinates are retrieved using the NEO-6M module and sent to emergency contacts through a Flutter-based mobile application.

However, the system's performance is influenced by external factors such as GSM network strength and GPS signal availability. In rural or low-signal regions, the emergency alert response time increases from an average of 3 seconds in urban areas to up to 7 seconds. Moreover, potential false positives during normal movement and the need for a reliable power source (battery performance of ~8 hours in continuous use) are notable constraints. The helmet's effective operation also relies on proper sensor calibration and stable connectivity between the ESP32 microcontroller and the app interface.

Despite these limitations, testing demonstrated a 92% accuracy in crash detection, and user interaction with the mobile app was smooth, with alerts received in under 1 second under optimal conditions. This proves the robustness of the system's real-time safety features.

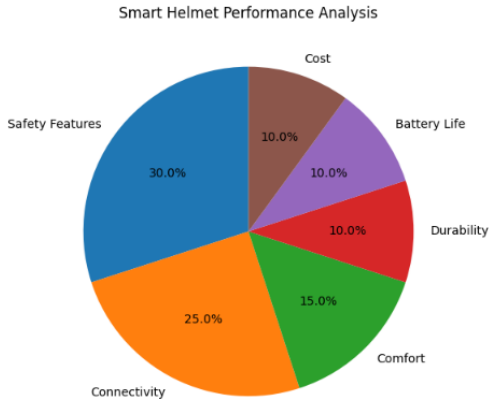


Fig 6: Performance Analysis of Smart Helmet

IX. CONCLUSION

The Smart Helmet with Sensor Fusion and Mobile Connectivity delivers a comprehensive safety solution by combining motion detection, GPS tracking, and emergency communication. With a strong focus on accident response and rider awareness, the system not only detects crashes but also transmits real-time alerts and location data to emergency contacts.Built on a foundation of ESP32, MPU6050, SIM800L, and NEO-6M modules, and supported by a user-friendly Flutter mobile application, the system ensures both technological effectiveness and usability. It is particularly beneficial for motorcyclists and workers in high-risk environments.While the system currently requires reliable GSM coverage and battery management for optimal performance, future enhancements could include AI-based crash prediction, solar-powered modules, voice control features, and 5G integration to support faster and more reliable data transmission. These advancements will further improve the helmet's real-time capabilities, scalability, and applicability in diverse environments, promoting safer commuting and workplace standards.

X. ACKNOWLEDGMENT

I thank our mentor Dr. John Prakash Veigas for analyzing the data andadvisedon allaspects, other concept and validated the experimental results and reviewed the paper

REFERENCES

[1] Agarwal, Nitin, Anshul Kumar Singh, Pushpendra Pratap Singh and Rajesh Sahani. "Smart Helmet." International Journal of Innovative Technology and Exploring Engineering (2020).
[2] Impana, H. C., M. Hamsaveni and H. T. Chethana. "A Review on Smart Helmet for Accident Detection using IOT." EAI Endorsed Transactions on Internet of Things (2020).
[3] Kuhar, Preeti, Kaushal Sharma, Yaman Hooda and Neeraj Kumar Verma. "Internet of Things (IoT) based Smart Helmet for Construction." Journal of Physics: Conference Series 1950 (2021).
[4] Mohd Rasli, Mohd Khairul Afiq, N. K. Madzhi and Juliana Johari. "Smart helmet with sensors for accident prevention." 2013 International Conference on Electrical, Electronics and System Engineering (ICEESE) (2013): 21-26.

[5] Priya C, Ramya. C, Poovitha N. M, Rithika P. S, Sujithra. M, "Smart Bike Helmet with Vehicle Tracking System using Arduino", 2022 International Conference on Edge Computing and Applications (ICECAA), pp.579-582, 2022.
[6] Rajesh Kumar Sharma, Gaurav Kumar, Bestley Joe S, "Smart Helmet Prototype for Safety Riding and Alcohol Detection", 2020 IEEE Bangalore Humanitarian Technology Conference (B-HTC), pp.1-5, 2020.
[7] Ramanathan Subramaniyan, Saravanak Kumuran, Kathirvelan J, "Smart Helmet System with Wireless Communication through GSM", 2024 3rd International Conference on Artificial Intelligence for Internet of Things (AIIoT), pp.1-6, 2024.
[8] K.Sai Sampath, Belvin Benny, K.Avinash, M.Rama krishna, "SMART SAFETY HELMET", IJRAR - International Journal of Research and Analytical Reviews (IJRAR), E-ISSN 2348-1269, P- ISSN 2349-5138, Volume.6, Issue 1, Page No pp.156 159, March 2019.
[9] Sheetalrani Rukmaji Kawale, Shruti Mallikarjun, Dankan Gowda V, KDV Prasad, Shekhar R, Anil Kumar N, "Design and Implementation of an AI and IoT-Enabled Smart Safety Helmet for Real-Time Environmental and Health Monitoring", 2024 IEEE International Conference on Information Technology, Electronics and Intelligent Communication Systems (ICITEICS), pp.1-7, 2024.
[10] Shravya, K. S., Yamini Mandapati, Donuru Keerthi, K Harika and Ranjan Kumar Senapati. “Smart helmet for safe driving.” E3S Web of Conferences (2019).
[11] S. Umamaheswari, Deepak Kumar, Anurag Roy, Aayushmaan Shrivastava, "Intelligent Headgear System", 2024 3rd International Conference on Applied Artificial Intelligence and Computing (ICAAIC), pp.1856-1862, 2024. 2023



Dr. John Prakash Veigas
Department of ISE
A J Institute of Engineering and Technology
Mangaluru



Shetty Gaurav Gopalakrishna
Department of ISE
A J Institute of Engineering and Technology
Mangaluru




Saurav
Department of ISE
A J Institute of Engineering and Technology
Mangaluru



Nirikshith P Shetty
Department of ISE
A J Institute of Engineering and Technology
Mangaluru



Sunilkumar Muragesh Dabbanad
Department of ISE
A J Institute of Engineering and Technology
Mangaluru

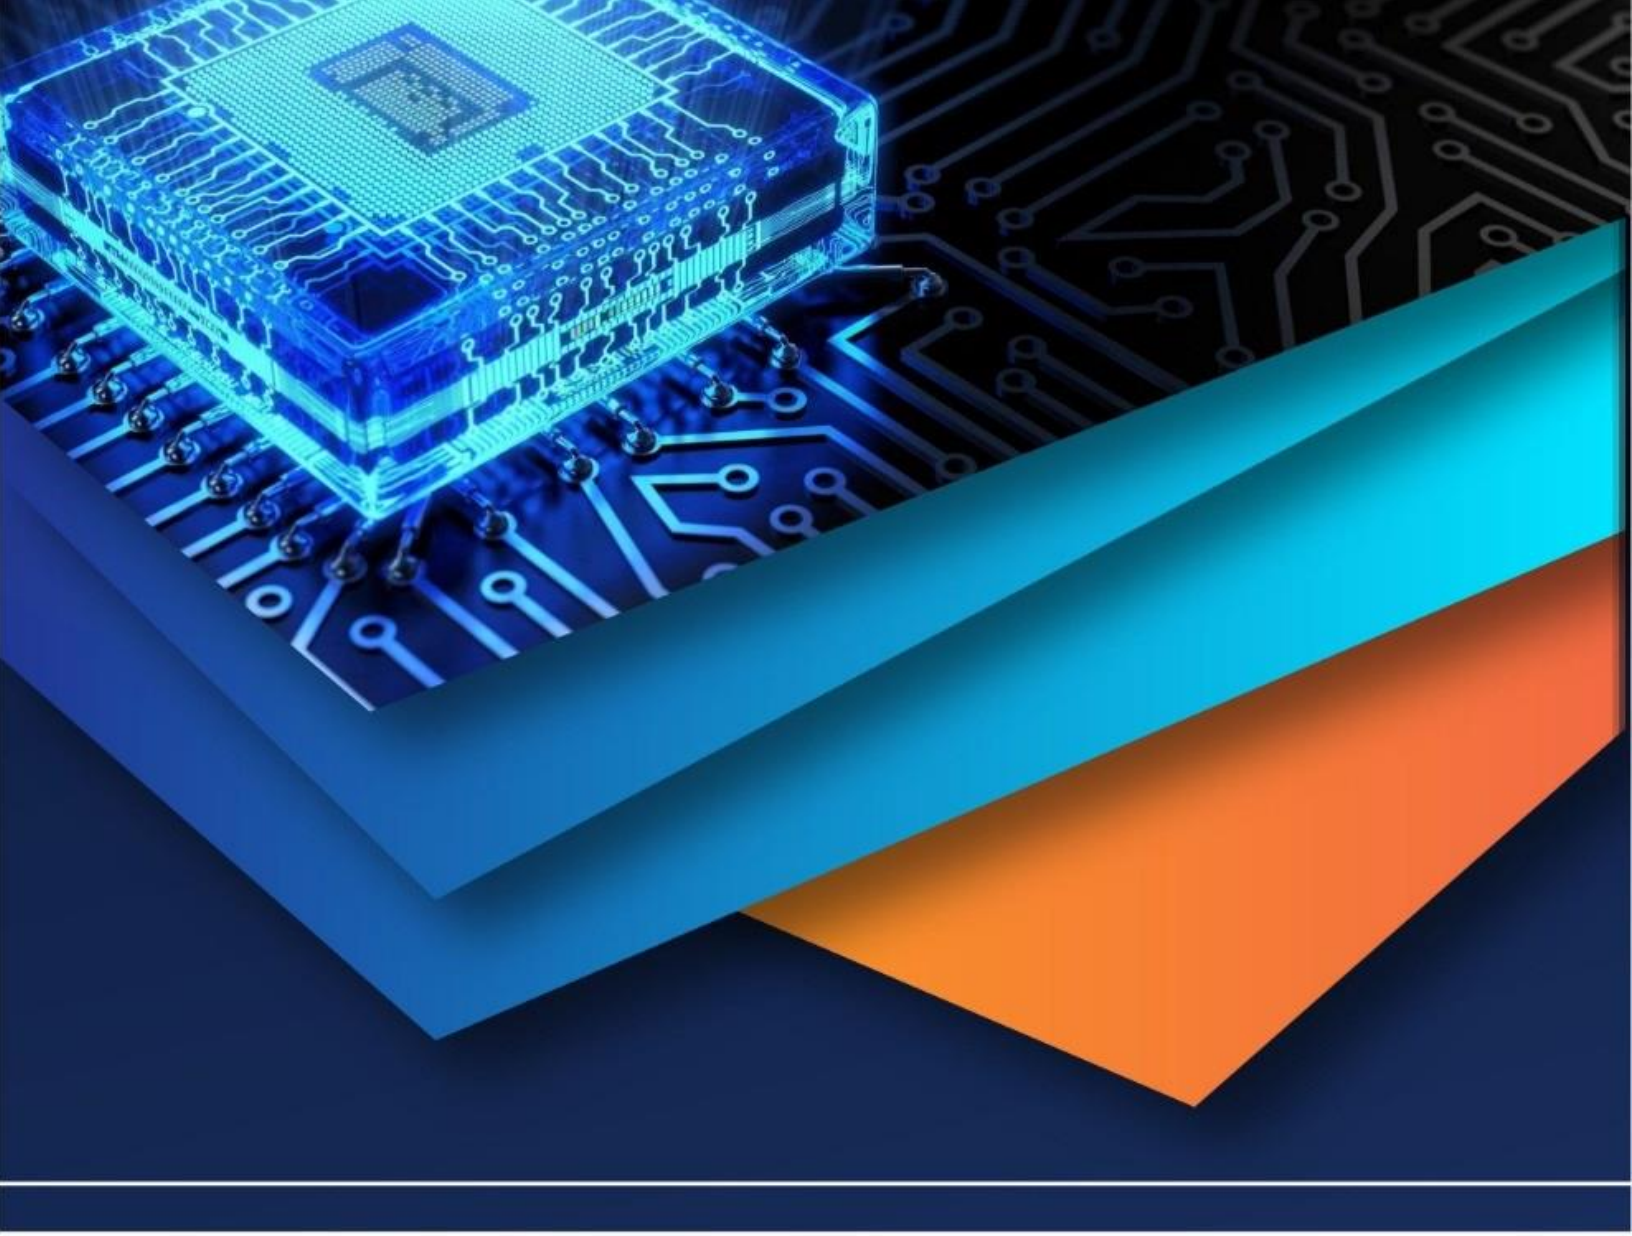

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)