iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** II **Month of publication:** February 2025

DOI: https://doi.org/10.22214/ijraset.2025.67083

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue II Feb 2025- Available at www.ijraset.com

Smart Home Using ESP32 and ESP RainMaker

S. Yoga Deva [1], B.S. Santhosh Babu[2], K.H. Sabarinath[3], K.J. Hariharan[4], Dr. S. Parthasarathy [5], Dr. S.M. Kannan[6], R. Thangasankaran[7]

[1, 2,3, 4]*Department of EEE,* [5]*Professor/EEE Director -KLN.IRP Department of EEE,* [6]*Professor & Head Department of EEE,* [7]*AP/EEE KLN.IRP Coordinator*

[1-7]*K.L.N. College of Engineering, Sivagangai, India*

Abstract: ***This study presents the design and implementation of a smart home automation system built around the ESP32 microcontroller, relay modules, and the ESP Rainmaker application. The system offers both remote control through a mobile app and manual control via physical switches, ensuring seamless operation even in the absence of an internet connection. By integrating Internet of Things technology, the system provides a flexible and user-friendly solution for managing household appliances. The ESP32 serves as the central controller, enabling real-time communication between connected devices and the ESP Rainmaker platform. The dual-mode control approach not only improves convenience and reliability but also supports energy-efficient home management. The proposed system is cost-effective, scalable, and versatile, making it suitable for a wide range of smart home applications. It highlights the potential of IoT-based technologies to enhance everyday living and lays a foundation for future advancements in home automation systems.***

Keywords: Home Automation, ESP32, ESP RainMaker, IoT, Smart Home, Relay Control, Remote Access, Manual Control, Energy Efficiency, Device Management, Internet of Things

I. INTRODUCTION

The rapid development of Internet of Things (IoT) technologies has transformed the way households handle and regulate their devices [1, 2, 3]. Smart home automation systems have become increasingly popular, providing users with improved convenience, better control, and enhanced energy efficiency [2, 4, 5]. By utilizing IoT platforms, microcontroller-driven solutions, and mobile applications, these systems allow for the smooth integration of home devices, facilitating both remote and manual operation [3, 4, 6]. Among the different microcontroller options available, the ESP32 is notable for being an economical, Wi-Fi-enabled choice that provides considerable benefits for smart home applications [6, 7, 10]. Its compatibility with IoT platforms like ESP RainMaker and its capacity to enable real-time communication between devices make it a strong option for contemporary home automation requirements [6, 8, 9]. These characteristics allow users to control and monitor household devices remotely, either from a smartphone or through conventional switches [3, 7, 8].

This research investigates the design and execution of a smart home system that utilizes the ESP32 microcontroller, relay modules, and the ESP RainMaker application [1, 6, 7]. The system facilitates both manual and remote operation of household devices, with the ESP32 serving as the main controller to oversee the relay modules according to user commands [6, 7, 8]. The integration with ESP RainMaker significantly bolsters the system's functionality by allowing for cloud-based control and real-time monitoring, thus providing users with enhanced flexibility and convenience [7, 8, 9].

By merging local control with cloud integration, this system offers a holistic approach to efficient home management, enabling automation, real-time surveillance, and energy-saving features. This research builds on prior studies that emphasize the transformative capabilities of IoT in developing smarter living spaces. With a cost-effective design and scalability, this project seeks to meet the growing need for dependable and flexible smart home solutions. The incorporation of the ESP32, relay modules, and ESP RainMaker provides a feasible method that can be expanded with future developments, such as energy monitoring and integration with voice assistants.

II. METHODOLOGY

The home automation system outlined in this research utilizes the ESP32 microcontroller, relay modules, and the ESP RainMaker application to facilitate both remote and manual management of home devices. This setup provides an effective and adaptable approach to modern home automation by integrating IoT technology with cloud control and physical switches.

At the heart of the system's design is the ESP32 microcontroller, which functions as the primary controller. Featuring built-in Wi-Fi capabilities, the ESP32 enables smooth communication with the cloud and allows for remote operation through the ESP RainMaker

©IJRASET: All Rights are Reserved

app. Relay modules are linked to the ESP32, allowing interaction with household devices like lights, fans, and other appliances. These relays function as switches, enabling users to turn devices on or off based on commands from the smartphone application or manual switches.

The initial phase of the system's functionality involves configuring the ESP32 and the relay modules. The ESP32 is programmed to connect with the ESP RainMaker application via an IoT platform, guaranteeing that the device is accessible remotely from any location. Following the programming of the microcontroller, the relay modules are linked to various household devices, granting control over the connected appliances.

The system offers both remote and manual control options. For remote functionality, users interface with the ESP RainMaker mobile app, which communicates with the ESP32 via the internet to send commands for turning devices on or off. Simultaneously, the relay modules are connected to physical switches, enabling local device control. This manual control feature guarantees that devices can still be operated even during connectivity problems or based on user preference.

To enhance reliability and user-friendliness, the ESP32 is programmed to process commands from both the cloud-based application and the manual switches. The interaction between the application and the hardware is managed through a user-friendly interface, where user actions are converted into commands that activate the respective relay modules. The ESP32 provides real-time status updates to the application, allowing users to consistently monitor the status of their connected devices.

Energy efficiency is a central focus of this system. Utilizing IoT-based control, the system ensures that devices operate only when needed, enabling users to optimize their energy usage. The capability for remote monitoring and control also facilitates energy management, giving users the option to turn off devices that are not in use.

The proposed system combines IoT technology, cloud connectivity, and manual controls to deliver a flexible, scalable, and energy-efficient home automation solution. This design empowers users by providing real-time and manual control over their household devices. Each aspect is illustrated for clarity in "Fig. 1".

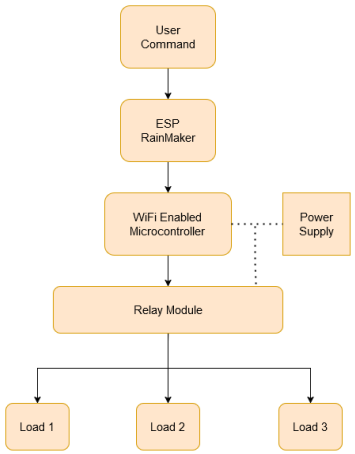


Fig. 1 Flow diagram

III. SYSTEM AND IMPLEMENTATION

The design and execution of the smart home automation system emphasize the incorporation of the ESP32, relay modules on a PCB, and the ESP RainMaker application for managing home devices both remotely and manually. The structure of the system is divided into two primary elements: hardware design and software implementation.

A. Hardware Design

The proposed smart home automation system's hardware design is based on an ESP32 microcontroller, a budget-friendly and Wi-Fi-capable device that functions as the main controller. The ESP32 supports dual-mode operation, receiving commands through the ESP RainMaker mobile app for remote management and from physical switches for manual control. This setup guarantees flexibility and dependability, enabling the system to function effectively even in the absence of an internet connection.

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue II Feb 2025- Available at www.ijraset.com

The ESP32 manages relay modules to control household appliances (such as lights and fans) by turning them on or off according to user input. By integrating both app-based and physical switch controls, the design offers redundancy and convenient access for users. A specially designed printed circuit board (PCB) was developed to enhance the hardware configuration. This PCB incorporates the ESP32, relay modules, and an HLK-10M05 AC/DC power supply module, which provides a consistent 5V DC output for system power. This compact step-down converter removes the necessity for external adapters, improving system integration and minimizing space usage. Moreover, each relay module is equipped with an LED indicator, supplying immediate visual feedback regarding the operational status of connected devices. Terminals for manual control switches are also provided, allowing easy local operation of devices.

The PCB layout is engineered to promote effective power distribution and reduce signal interference, enhancing the overall reliability and performance of the system. By consolidating all necessary components onto a single board, the design simplifies wiring, decreases complexity, and accelerates assembly, resulting in a sturdy and user-friendly system. The PCB layout is depicted in “Fig.2.” This hardware design not only enables efficient device management but also accommodates scalability and versatility for various smart home automation applications. The inclusion of both remote and manual control functions, coupled with a consolidated PCB design, underscores the practicality and effectiveness of this method.

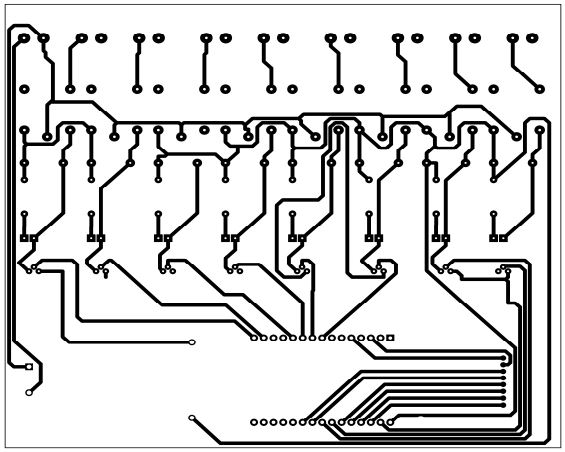


Fig. 2 PCB Layout

B. Software Implementation

The implementation of the software consists of both the firmware for the ESP32 and the ESP RainMaker mobile app, which together facilitate smooth interactions between the user and the system. The Arduino IDE is used to program the ESP32, where the relevant libraries and code are uploaded to manage the relay modules based on inputs from the mobile application or manual switches. Through the firmware, Wi-Fi is utilized to connect to the cloud via the ESP RainMaker platform, allowing commands to be transmitted from the user's smartphone. Each relay corresponds to a designated device (such as lights or fans), and the ESP32 receives on/off instructions for each device from the ESP RainMaker application.

The ESP RainMaker app is designed for remote operation of the devices. Users can download and install this application on their smartphones, enabling them to control the connected devices from any location. The app connects with the ESP32 through the cloud, relaying signals to activate or deactivate appliances. Additionally, it provides real-time updates, indicating the current status (on/off) of each device. The app allows for effortless addition, configuration, and management of multiple devices, ensuring an intuitive user experience.

The ESP RainMaker platform serves as the link between the ESP32 and the user’s smartphone, permitting communication between the two over the internet. This functionality enables remote management and monitoring of devices, providing enhanced flexibility and convenience. The cloud platform guarantees secure data transmission and updates the status of devices in real time.

IV. RESULT AND DISCUSSION

The findings from the smart home automation system highlight its capability to offer smooth management of household appliances, both through remote access and manual control. By utilizing the ESP32, relay modules, and the ESP RainMaker application, a dependable and effective system for real-time home automation has been developed.

©IJRASET: All Rights are Reserved

The system was evaluated for its capacity to manipulate household devices like lights and fans. Commands issued from the ESP RainMaker app elicited an average response time of under 1 second from the devices. Performance remained stable across different network environments, as long as the Wi-Fi connection was steady.

The physical switches linked to the relay modules performed as intended, enabling users to manually control devices without affecting remote-operation features. Both manual and remote-control functionalities operated independently, providing users with greater flexibility.

The ESP RainMaker application offered a user-friendly interface for device management. Users reported the app layout to be clear and easy to use. The functionality to rename devices and tailor controls further improved the overall user experience. “Fig.3” illustrates the User Interface.

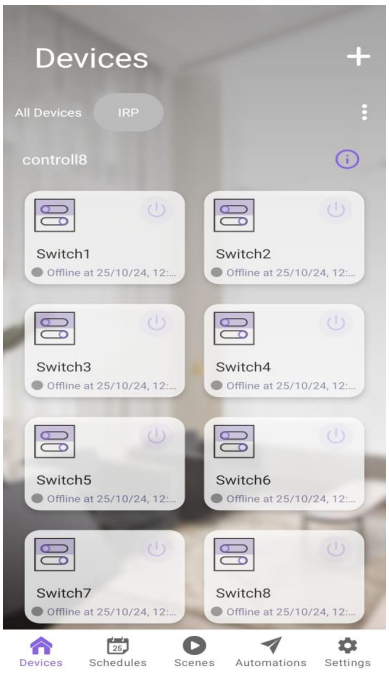


Fig. 3 ESP RainMaker User Interface

The system’s remote capabilities depended significantly on a reliable internet connection. Unstable connectivity might delay or hinder the execution of remote commands. While the system managed the tested devices effectively, increasing the number of connected devices could necessitate extra hardware or the optimization of the microcontroller’s resources. Despite utilizing encryption protocols, ESP RainMaker remains vulnerable to potential cyber threats. Therefore, regular updates and enhanced security measures are crucial. In comparison to conventional manual systems, the suggested automation system provided greater convenience and adaptability. The incorporation of IoT-based controls offered substantial benefits over independent automation systems by facilitating remote operation and real-time monitoring.

The Smart Home Automation configuration was established as illustrated in “Fig. 4”. The hardware arrangement was installed below the switch box, allowing flexibility in wiring the setup and switch.



Fig. 5 Implementation of Smart Home

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

V. CONCLUSIONS

This research effectively showcases the design and execution of a smart home automation system utilizing the ESP32 microcontroller, relay modules, and the ESP RainMaker platform. The system allows users to control devices both remotely and manually, ensuring reliable functionality even when there is no internet access. The combination of these two control methods improves convenience, energy savings, and adaptability, positioning it as a practical option for contemporary home automation requirements. Results from experiments validate the system's capability for real-time device management with minimal latency. The adoption of IoT technology facilitates effortless monitoring and control of household appliances, aiding in energy efficiency and user-friendliness. Additionally, the use of a custom PCB improves the system's compactness, dependability, and potential for future expansion. Future enhancements may involve adding more smart sensors, implementing voice control, and integrating AI-based automation to elevate user experience and efficiency. This project sets the groundwork for future developments in smart home technology, encouraging the creation of more intelligent, user-centric, and energy-efficient home automation systems.

REFERENCES

[1] PS, Abdul Lateef Haroon, Mohammed Shafiulla, Shaik Mohammed Naveed, Suhail Ahmed, Shaik Mohammed Nawaz, and Utkarsh Kumar. "Home Automation Using Wi-Fi: ESP32-Based System for Remote Control and Environmental Monitoring." In 2024 Third International Conference on Distributed Computing and Electrical Circuits and Electronics (ICDCECE), pp. 1-7. IEEE, 2024.

[2] Lawrence, Scovien Olle, and Dur Muhammad Soomro. "IoT-Based Smart Home Switch System Using the ESP32 Microcontroller." Evolution in Electrical and Electronic Engineering 3, no. 2 (2022): 856-862.

[3] Babu, E. Mahesh, K. Satheeesh, B. Mohith, and J. Madhu Sudhan. "IoT Based Home Automation Using ESP32 & Google Home." MATERIAL SCIENCE 23, no. 04 (2024). M. Wegmuller, J. P. von der Weid, P. Oberson, and N. Gisin, “High resolution fiber distributed measurements with coherent OFDR,” in Proc. ECOC’00, 2000, paper 11.3.4, p. 109.

[4] Durani, Homera, Mitul Sheth, Madhuri Vaghasia, and Shyam Kotech. "Smart automated home application using IoT with Blynk app." In 2018 Second international conference on inventive communication and computational technologies (ICICCT), pp. 393-397. IEEE, 2018.

[5] Imam, Abubakar Surajo, Abdussalam Garba, A. S. Isah, I. F. Chukwu, Muhammad Ahmad Baballe, and Sagir Shehu. "Design of an ESP32-Based IoT Smart Home Automation Management System." Journal homepage: https://gjrpublication. com/gjrecs 4, no. 04 (2024).

[6] Arowolo, Matthew Oluwole, Adekunle Okikioluwa Owolabi, Henry Onaopemipo Bankole-Ajayi, and Oluwaseyi Paul Akinyele. "Exploring the development of a user-friendly home management system with ESP Rainmaker firmware." ABUAD Journal of Engineering Research and Development 6, no. 2 (2023): 122-135.


[7] Ravikant Akate, Sushant Waghmare, Bhagyashri Phuke,Aarti Kharat, Onkar Jogas. “Enhancing Home Automation with ESP Rain Maker and ESP32.” International Journal of Innovative Science and Research Technology. Volume 9, Issue 7, July – 2024. https://doi.org/10.38124/ijisrt/IJISRT24JUL143.

[8] Santhikiran, B., L. Nagaraju, Sk Abdul Sattar, D. Bharath Chandra, and Y. Jayasankar. "Design and Implementation of Smart Home System Based on IoT and Esprainmaker." International Transactions on Electrical Engineering and Computer Science 2, no. 2 (2023): 70-79.

[9] Malunjkar Sakshi Bhaupatil, Phad Adinath Changdev, Shinde Rushikesh Santosh, Pawar Rushikesh Shahaji, Prof. Rathod.G.G. “Home Automation using ESP-32 and Android App.” International Journal of Advanced Research in Science, Communication and Technology. Volume 3, Issue 3, May 2023.

[10] Pavithra, D., and Ranjith Balakrishnan. "IoT based monitoring and control system for home automation." In 2015 global conference on communication technologies (GCCT), pp. 169-173. IEEE, 2015.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

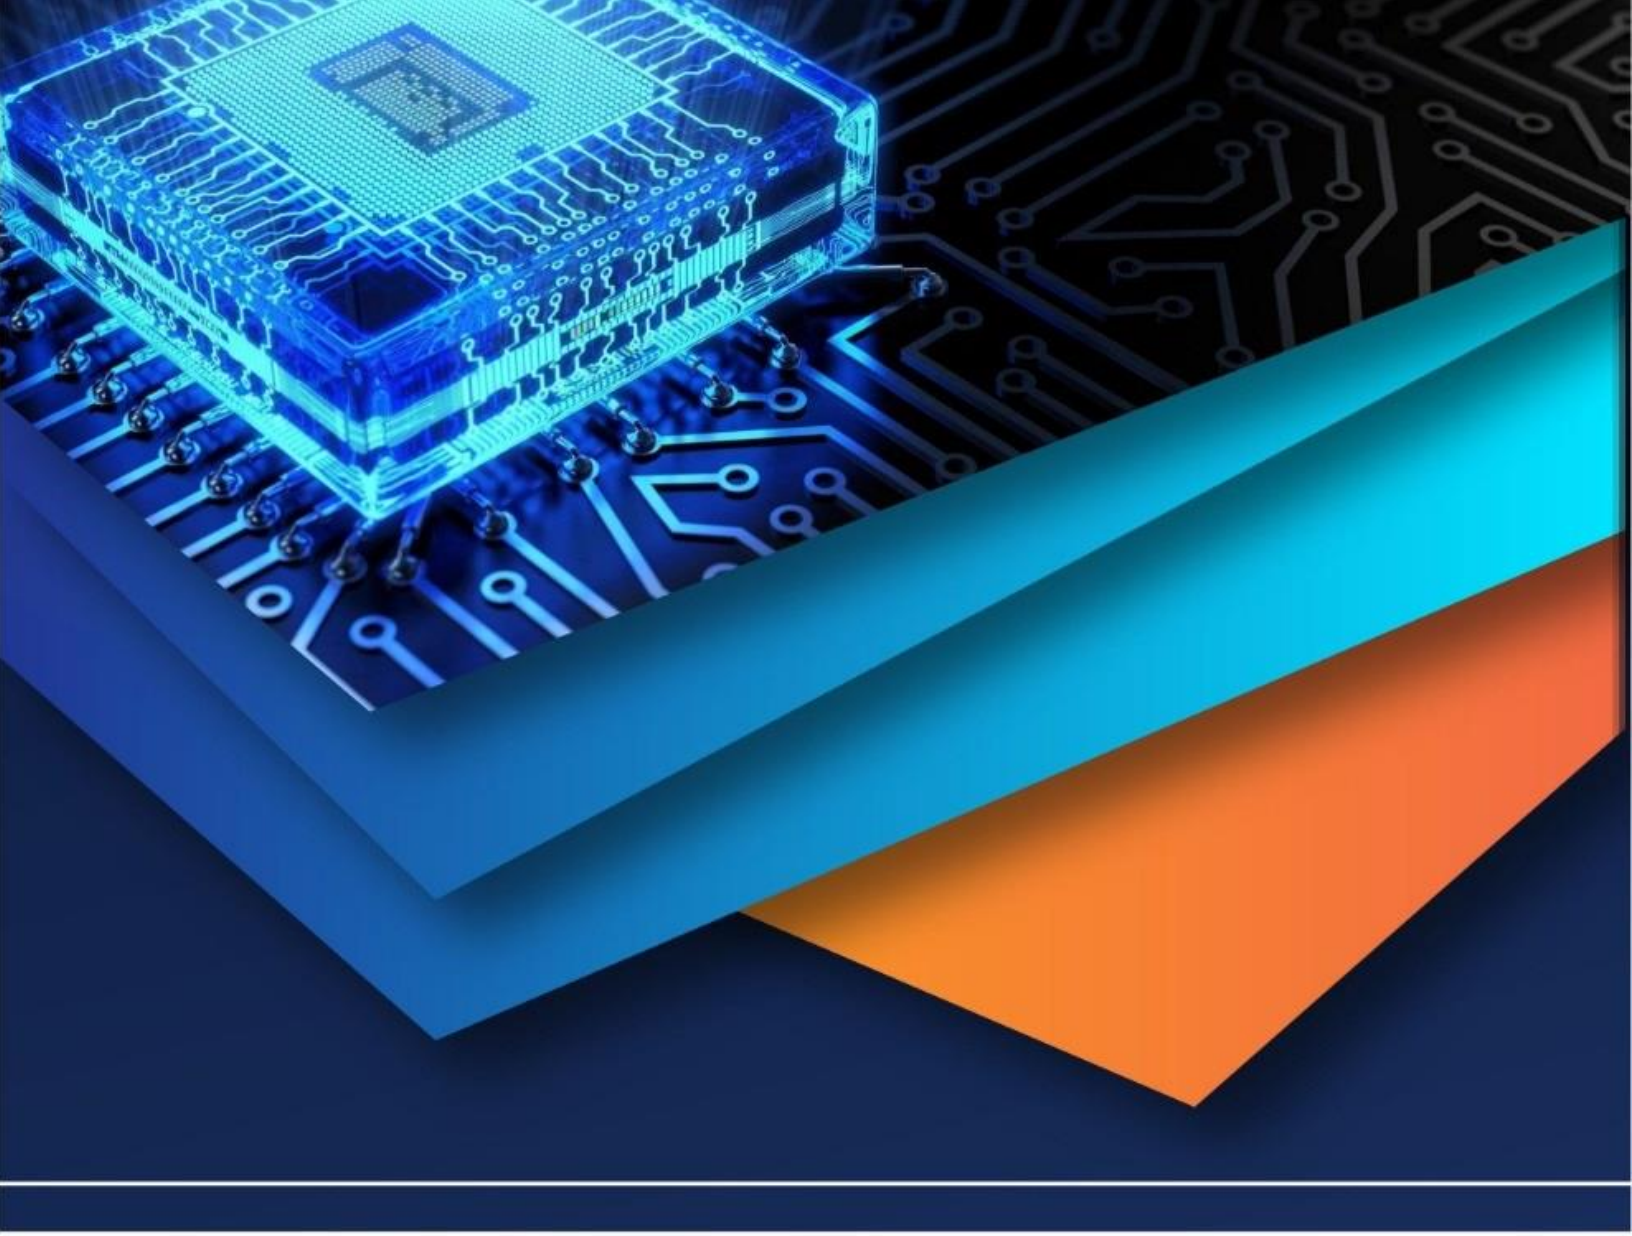

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)