



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** I **Month of publication:** January 2025

DOI: <https://doi.org/10.22214/ijraset.2025.66729>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Study of Traffic Congestion Analysis on Urban Road: A Case Study of Indore City

Muskan Gangwal¹, Dr. H. K. Mahiyar²

¹M. Tech Student, ²Professor, of Civil Engineering - Applied Mechanics Department Sgsits, Indore India.

Abstract: The traffic congestion is the one of the most wide spread and world wide problem. Traffic has serious negative effect on the economy, society and environment. Jawahar Marg is a key arterial road with a mix of commercial and residential building's. The road consists of intersections with traffic signals. The road experiences heavy congestion, especially during rush hours due to the presence of specific factors, such as shopping centers, schools, office buildings etc. Finding the traffic volume on Jawahar Marg road in Indore is the goal of this paper. The study draws attention to the problem, including congestion come with more traffic. This paper studied traffic on the main road in Indore that runs between Rajmohalla to Chhotigwaltoli road which approximately 3.20km long. Traffic congestion is a result of the city focused development, continuing population growth and an increase in the number of vehicle/capacity ratio of less than 1, but as traffic grows, they may soon reach their peak. E or F have been determined to be the LOS. We perform a regression analysis in SPSS (Statistical package for social science) Software to predict regression equation for future prediction if needed. The regression analysis is done to demonstrate correlation in dependent and independent variable using SPSS Software to check best fitted model. Anova test and t-test are used to verify correlation and regression.

Keywords: Traffic Congestion, Regression Analysis, SPSS (statistical package for social science).

I. INTRODUCTION

India's population is growing at a rapid pace. People are migrating to cities from rural areas. As a result, more people are living in cities. When traffic demand is high enough that vehicle interactions cause the slow down, congestion begins. Jawahar Marg, located in Indore, is one of city prominent roads and serves as a major arterial route that connects various sectors, markets, and residential areas. Given its strategic importance, traffic congestion on Jawahar Marg has been a persistent issue, particularly during peak hours. The road sees significant traffic volumes due to its proximity to key locations such as shopping areas, educational institutions, and office complexes. Traffic congestion is directly correlated with population growth. Widening the road segment on Jawahar Marg is used in this study in an effort to identify a solution for reducing traffic congestion in Indore. In the research, a traffic analysis is conducted on the current state of the roads. The current traffic conditions on the road determine its PCU and capacity.

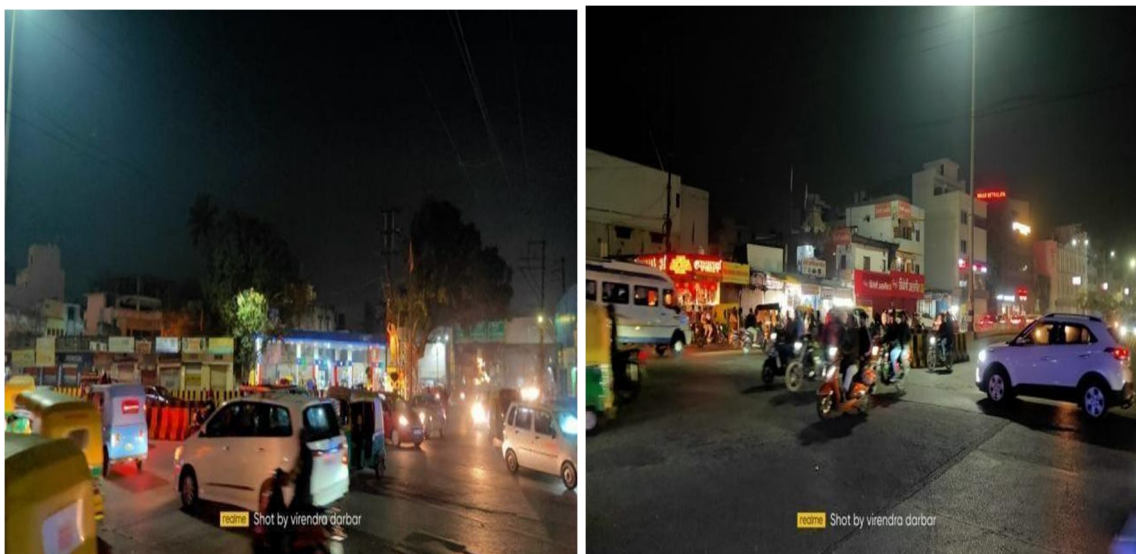


Figure.1:- Snapshots of traffic from Jawahar Marg

II. OBJECTIVES OF THE STUDY

- 1) Traffic volume: Measure the number of vehicles passing through by points in the study area.
- 2) To study the traffic composition, vehicle classification (types of vehicles-cars, buses, two-wheeler s, etc.)
- 3) To identify specific locations along jawahr marg, such as intersection, market areas, and narrow sections of the road, where traffic bottlenecks occur and lead to congestion.
- 4) Traffic speed analysis: To identify traffic average speed and the congestion levels.

III. LITERATURE REVIEW

- 1) Zainab et al. (2024): In urban road networks, this paper meets the requirements for accurate and affordable congestion detection. The aim of this study is to compare the filed traffic states using sets of rules and use fuzzy logic to identify the traffic conditions states. Another method that makes it possible to learn from successful and efficient techniques to identify traffic congestion. Index speed reduction, speed ratio, and congestion detection based on traffic speed index measures are the primary tactics used in this work.[6]
- 2) Abdellah Bousouf et al (2024): In this paper, analyzing traffic congestion using real-time big data. The goal of this is to determine a real-time traffic performance index for one week. The morning peak hour on weekday occurs between 7:00 am and 9:00 am, which precedes the weekend morning peak hour. Specifically, the morning peak hour on weekends occurs between 9:00 am and 12:00 pm. TTI values are higher on weekdays during both morning and evening traffic congestion peak hours compared to weekend. Our findings indicate that land use factors significantly contribute to increase traffic congestion. Traffic congestion is primarily caused residential, industrial, and commercial areas, as well as trams.[1]
- 3) . Prateek bansal et al (2023): This paper uses causal statistical modeling to analyze congestion technology in road networks in 24 cities worldwide. Building more roads is a common policy intervention to alleviate congestion. This strategy, however, is controversial because, under certain conditions, road capacity expansions may result in increased traffic volumes. Estimating congestion technology based on traffic variables is challenging due to statistical biases caused by complex interactions between traffic flow, controls, and capacity. Based on our findings, it appears that expanding network capacity is generally not a good way to deal with congestion because it does not significantly improve the average network travel speed. This finding has significant ramifications for the best urban transportation plans, as do our estimates of congestion technology.[2]
- 4) Khalid Mohammed Almatar et al (2022): This study aims to identify the most congested areas of the road network and their relationship with driver demand. This study employs the Floating Car Data method to identify traffic congestion and determine whether observed clusters accurately reflect congestion patterns across a larger urban road network. Statistical calculations were performed to determine cluster correlation and draw conclusions. This approach successfully identifies traffic congestion patterns in urban roads. Research indicates that traffic congestion is more severe and widespread in the evenings compared to the mornings. The findings can inform a framework for identifying potential traffic issues and predicting congestion.[3]
- 5) Pengjun zhao et al (2019): The aim of this paper is to help fill this gap in the literature by applying a big data analytic approach to a sample of 10.16 million records of traffic congestion indexes for 233 roads in the Beijing area a six month period. This study outlines an approach for analysis traffic congestion patterns in Beijing. Congestion on working days had the highest spatial dependence, with regular and agglomerated patterns. Weekend congestion exhibited spatial dependence, with the evening peak exceeding the morning peak. The spatial relationship between traffic congestion and holidays was weak, random, and scattered.[5]
- 6) Yung Liu et al (2016): In this paper evaluate the speed performance index, to find the traffic congestion. The speed performance starts to rapidly decrease at 7:00 during the morning peak and reaches its lowest point at 8:00. However, the low speed permanence continues until roughly 10:00. The speed performance is superior on weekends compared to week days, with peak hours occurring at around 12:00 morning are preferable to afternoon. Congestion delays occurs during the morning peak, causing road network congestion to persist until approximately 10:00. The Beijing express network experiences congestion in both segment and network levels. Morning peak is more efficient than evening peak, and season plays a significant role in urban road network congestion.
- 7) Yang Yue et al (2013): In this paper, As floating car data grows, it's important to identify traffic patterns congestion, from the historical data set. This paper proposes a novel floating car data analysis method using data cubes to explore congestion patterns. This method differs from traditional methods that rely solely on numerical traffic statistics. The view of the event or spatial-temporal progress is modified. Model and measure traffic congestion. Evaluated our methods using a one-week historical traffic data set from 12000 taxi-based floating cars in a large urban area. The results show that the method can effectively identify and summarize the congestion pattern using efficient computation and Reduce.

IV. STUDY AREA DETAILS

The midblock area between shree vashnav acadmey (rajmohalla) and chhotigwaltoli mein road (patel bridge) in indore is the focus of the current investigation. the road is 3.20 kilometres long overall. for the current study, a road segment of approximately 1.7 km from shree vashnav acadmey to nandlalpora chouraha and 1.1 km from nandlalpora to chhotigwaltoli Patel bridge has been chosen. the two sections are taken on the road for the study on between shree vashnav acadmey (rajmohalla) to nandlalpora chouraha to chhotigwaltoli main road Patel bridge Indore. the section of road is shown below in figure no.2

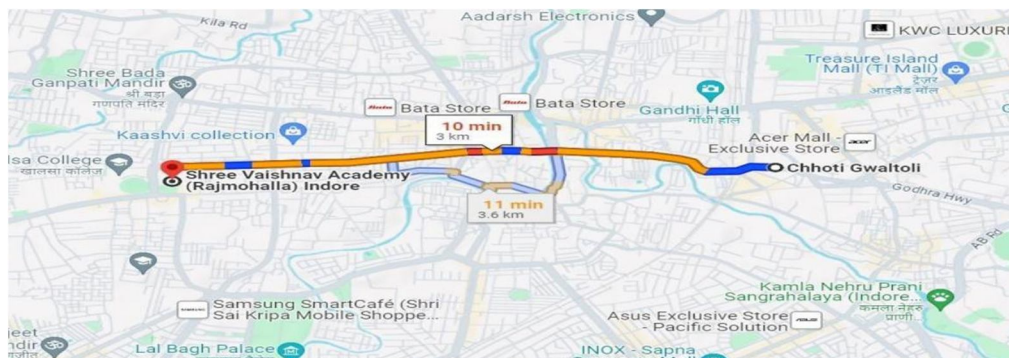


Figure.2:- Location of study area and surrounding city.

V. METHODOLOGY

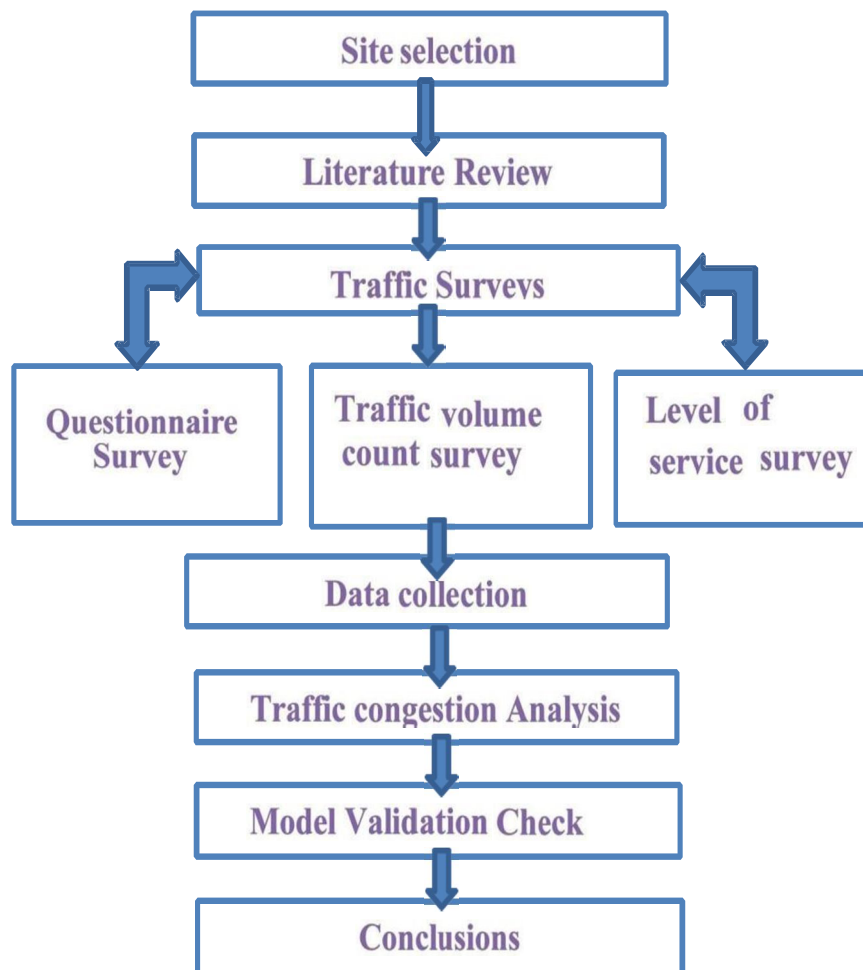


Figure3:- Flow Chart With Study Methodology

VI. DATA COLLECTION AND ANALYSIS

A. Data Collection

A real time traffic dataset was used .daily and weakly analysis of congestion were performed for a road segment fro the daily analysis,a similar peak congestion period was observed.The purpose of this survey is to comprehend the traffic dynamics,including averagedaily ,traffic, traffic composition, peak hour traffic, and directional split at specific survey locations.Based upon analysis of this data, peak hours timing was identified at the measurement loation stretch.afterward,due to several unavailable constraints,data were collected during peak hours (9:30AM to 11:30AM and 5:30PM to 7:30PM).Traffic vehicles are divided into seven categories by their dimmentions Car/van/jeep,two wheeler,three-wheeler,bus,light commercial vehicle,truck and bicycle.figure.4showing below morning peak hour volume.

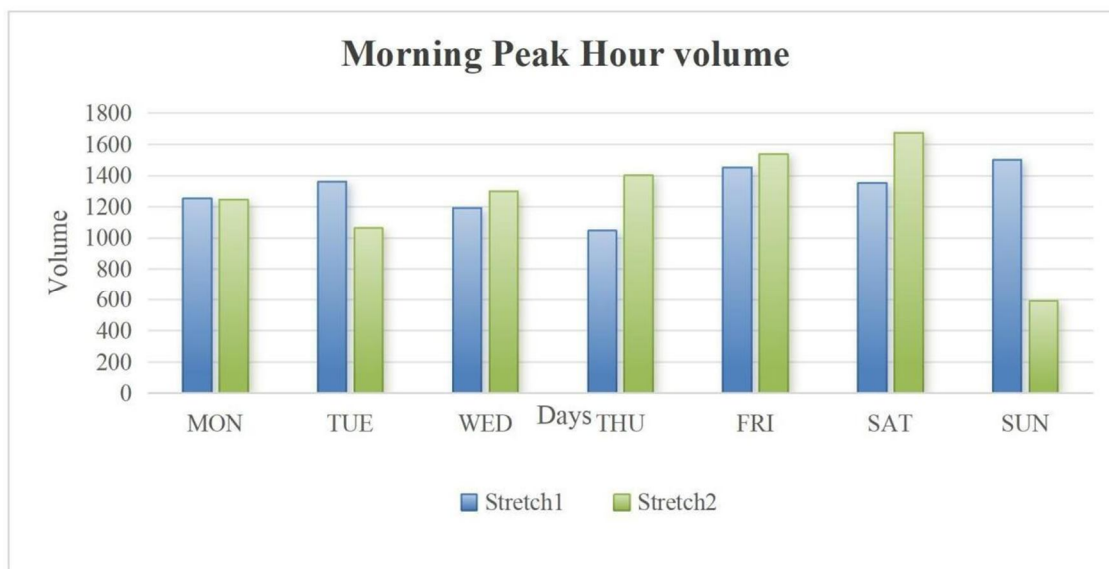


Figure4:- Morning Peak Hour

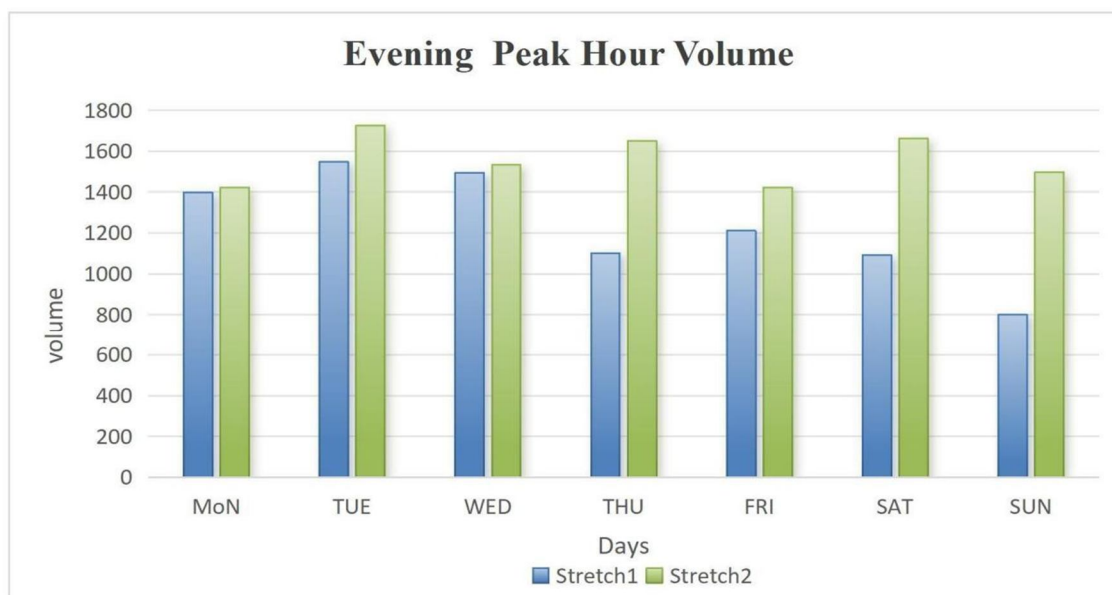


Figure:-5 Evening Peak Hour

Figure:-5 Evening Peak Hour

B. Data Analysis

1) Vehicle Composition

Vehicle classification is performed to understand the composition of traffic, using PCU (passenger car unit) values from guidelines like IRC 106:1990. This allows for conversion of various vehicle types into equivalent passenger cars to better understand their impact on the road.

Vehicle Composition								
Shreevshnav Acadmey to Nandlalpuora chouraha								
In Out								
CAR/ VAN/ JEEP (Pvt)	Auto	Two wheeler	HCV	Bus	LCV	Cycles	Others	
27%	4.63%	64.99%	0.86%	0.66%	1%	1%	0%	

Vehicle Composition							
Nandlalpura chhouraha to shree vashnav acadmey							
In out							
CAR/ VAN/ JEEP (Pvt)	Auto	Two wheeler	Bus	HCV	LCV	Cycles	Others
29%	5%	51%	2%	2%	4%	1%	1%

Vehicle Composition							
Nandlalpura chourah To Chhotigwaltoli main road (patel Bridge)							
In out							
CAR/ VAN/ JEEP (Pvt)	Auto	Two wheeler	Bus	HCV	LCV	Cycles	Others
33%	5.00%	49.00%	3%	1.00%	5%	1%	2%

Vehicle Composition							
Chhotigwaltoli main road to Nandlalpura chouraha							
In out							
CAR/ VAN/ JEEP (Pvt)	Auto	Two wheeler	Bus	HCV	LCV	Cycles	Others
32%	5.00%	51.00%	4%	2.00%	4%	1%	1%

2) Hourly vehicle traffic

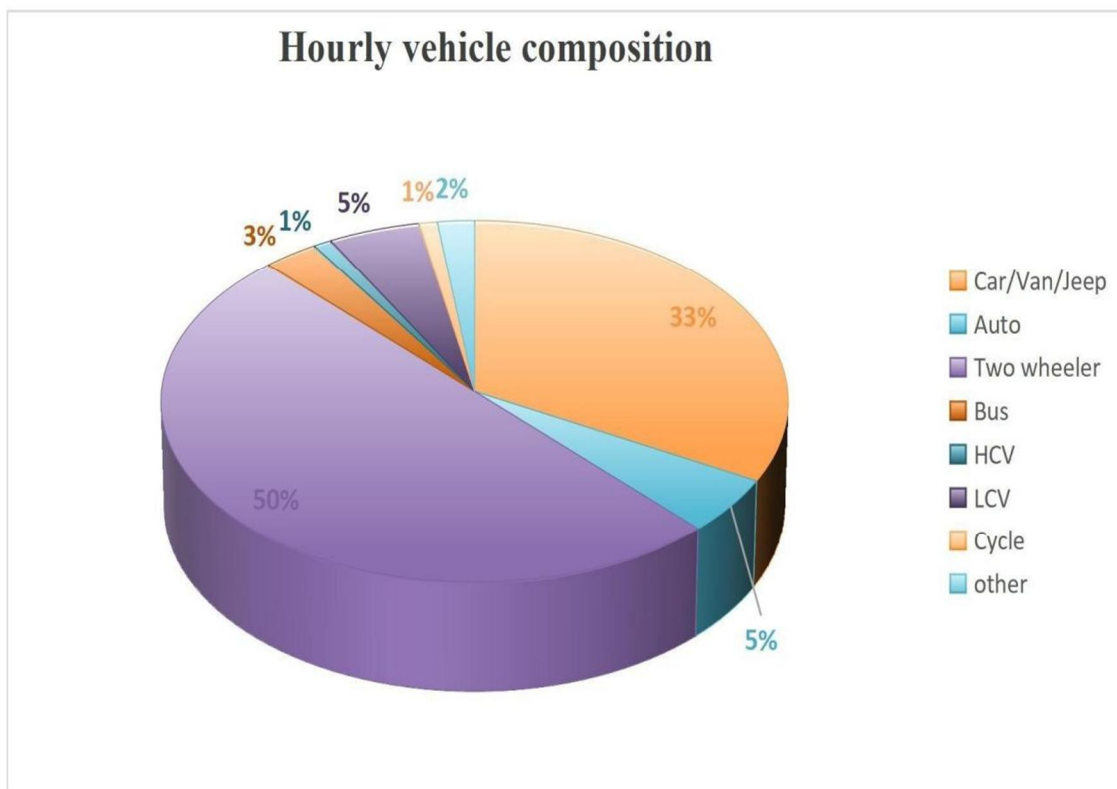


Figure6:- Hourly vehicular traffic

3) Volume variation of vehicles

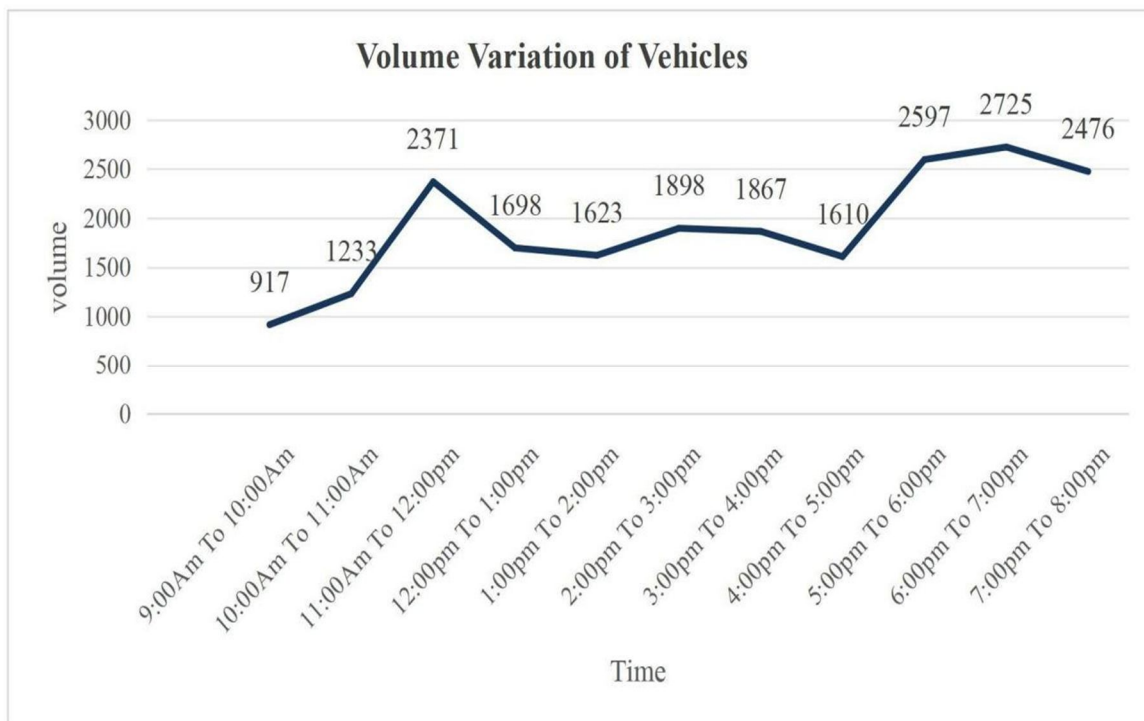


Figure:-7 Volume variation of vehicle

4) Capacity and the level of service of each road section

Location	direction	Time	PCU/Hr	Width of road as per (IRC)	Design Volume@PCU/Hr	Service V/C	LOS
Jawahar Marg	Shree Vashnav Acadmey to Nandlalpoura chouraha	Morning Peak Hour 9:30AM to 10:30AM	2370	3.5m	2400	0.81	E
		Evening Peak Hour 6:30PM to 7:30PM	2937	3.5m	2400	1.32	F

Location	direction	Time	PCU/Hr	Width of road as per (IRC)	Design Volume@PCU/Hr	Service V/C	LOS
Jawahar Marg	Nandlalpoura chouraha To shree vashnav acadmey	Morning Peak Hour 9:30AM to 10:30AM	1604	3.5m	2400	0.49	B
		Evening Peak Hour 6:30PM to 7:30PM	2465	3.5m	2400	1.16	F

VII. CONCLUSION

A. Conclusions

Discussion on vehicle composition

From the survey we can see that most vehicles in the area are motorcycles and three-wheelers. this distribution indicates a heavy reliance on two-wheeler for commuting between rajmohalla chowk chhotigwaltoli road. buses, though fewer in number, are usually municipal buses or school buses etc.

1) Discussion on survey data of traffic

a) From Shreevashnav acadmey to Nandlalpoura chouraha

- In this section shows levels of traffic throughout the day, with peaks during the 7:00AM to 8PM time slot.
- The total number of vehicles recorded

b) Nandlalpoura chouraha to patel bridge

- In this section experiences peaks during the 7:00AM to 8PM time slot.

- The total number of vehicles recorded is

2) Discussion on hourly share of vehicles

The survey indicates that the data is gathered between 9AM and 8PM, with the 6 to 7PM time slot seeing the most vehicles, closely followed by the 7 to 8PM time slot. Throughout the day, two-wheeler predominate in traffic, with evening rush hours seeing the highest concentration of these vehicles.

3) Discussion on volume variation of traffic

a) Shree vashnav acadmey (Rajmohalla chowk) section

- This direction experiences varying levels of traffic throughout the day, with peaks during the 11AM to 12PM and 6 to 7PM time slots
- The total number of vehicles recorded in this direction is

b) Nandlalpoura chowk section

- This direction also shows fluctuations in traffic volume, with peaks during the 10AM to 12PM and 6 to 7PM time slots.
- The total number of vehicles recorded in this direction is

When the overall traffic volume in both directions is compared the rajmohalla chowk section has a larger total number of vehicles recorded (25133) than the nandlalpoura chowk section (21015). As a result, the rajmohalla and nandlalpoura chowk directions may see higher traffic and congestion levels, which could more issues for the main road the nandlalpoura chowk section.

4) Discussion on hourly flow of vehicles

a) Rajmohallah road section

- This direction experiences varying levels of traffic throughout the day, with peaks during the morning and evening rush hours.
- The total hourly flow of vehicles arise between 903.0 PCU and 1398 PCU.
- The peak hour for this section is 9:30AM to 11:30PM.
- The total volume of vehicles recorded in this direction is 25133.

b) Nandlalpoura chowk section

- This direction also shows fluctuation in traffic volume, with peaks during the morning and evening rush hours.
- The total hourly flow of vehicles varies between 974.5 PCU and 2212 PCU.
- The peak hour for this section is 6:00PM to 8:00PM.

5) Recommendations

- a) Flyovers or underpasses: Construct flyovers or underpasses at key intersections like Rajmohalla or sanjay setu, to minimize delays.
- b) Public Transportation: Expand bus rapid transit (BRTS) routes or metro networks with stops at key points on jawahar marg.
- c) Rope way systems: Explore elevated rope way solutions for specific high-traffic zones where road expansion isn't suitable.
- d) Dedicated Parking Zones: Develop structured parking areas to reduce on street parking.
- e) Pedestrian Facilities: Build footpaths and dedicated pedestrian crossing to separate pedestrian traffic from vehicular flow.

REFERENCES

- [1] Abdellah Bousouf, et al. "A spatiotemporal analysis of traffic congestion patterns using clustering algorithms. A case study of casablanca" issue 22 jan (2024) 2772-6622. <https://doi.org/10.1016/j.dajour.2024.100404>.
- [2] Prateek bansal et al. "Congestion in cities; can road capacity expansion provide a solution" (2023) 0965-8564. <https://doi.org/10.1016/j.tra.2023.03726>.
- [3] Abbas Rammalet al. "Traffic congestion prediction based on multivariate modelling and neural networks regressions" (2023) 1877-0509. <https://creativecommons.org/licenses/by-nc-nd/4.0/>.
- [4] Khalid mohamed almatar "Traffic congestion patterns in the urban road network". (2022) 2090-4479. <https://doi.org/10.1016/j.asej.2022.101886>.
- [5] Pengjun zhao et al "Geographical patterns of traffic congestion in growing megacities: Big data analytics from beijing". issue 30 march (2019) 0264-2751. <https://doi.org/10.1016/j.ciyies.2021.03.022>.
- [6] Zainab Ahmed Alkaissi et al. "Traffic congestion evaluation of urban streets based on fuzzy inference system and GIS application" issue 19 feb (2024), 2090-4479 <https://doi.org/10.1016/j.asej.2024.102725>.
- [7] Yang yue et al. "identifying urban traffic congestion pattern from historical floating car data" (2013) 1877-0428 CC BY-NC-ND license.
- [8] Yang Liu et al. "A traffic congestion Assessment method for urban road network based on speed performance index" (2016) 1877-7058 (<http://creativecommons.org/licenses/by-ncnd/4.0/>).



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)