



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 13    Issue: III    Month of publication: March 2025**

**DOI: <https://doi.org/10.22214/ijraset.2025.67221>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# The Computational Study on the Aerodynamics Behaviour of the Hypersonic Vehicles

Isha Verma<sup>1</sup>, Prince Chauhan<sup>2</sup>, Jenifer Beg<sup>3</sup>

Department of Aerospace Engineering , IIMT University ,Meerut , Uttar Pradesh 240001

**Abstract:** *Current air-breathing hypersonic flight (AHF) technology programs are primarily concentrated on developing flight test vehicles and functional prototypes that incorporate airframe- integrated scramjet machines. A pivotal aspect of making AHF feasible and effective falsehoods in the design of its control systems. still, the unique dynamic characteristics of air- breathing hypersonic flight vehicles (AHFVs), combined with the aerodynamic complications at hypersonic pets, pose significant challenges for system modeling and regulator development. also, the expansive speed variations during operation and the limited vacuity of a comprehensive flight dynamics database introduce substantial misgivings and factory parameter variations, further complicating the AHF modeling and control process. In this exploration paper we will study about the Basic dynamic characteristics of AHFVs, colorful fine models developed for the flight dynamics of AHFVs and about the hypersonic aerodynamics. The important part of computational fluid dynamics in ultramodern hypersonic exploration is underlined. We'll also banded about the computational study on the AHFVs with different anaylsis which include inflow separation, shock commerce and etc.*

**Keywords:** *Air- breathing hypersonic vehicles (AHFVs) , hypersonic aerodynamics , flow separation, shock interaction, computational fluid dynamics , flow regime, Mach number*

## I. INTRODUCTION

We see that aerodynamic research is dominated by the high Mach number regime generally described as hypersonic .all aspects of hypersonic flow are under intensive investigation, ranging from the highly viscous flow associated with re- entry at high altitudes to inviscid flow applicable at lower altitude . Many of these considerations are dominated by chemical reactions and thermal radiations associated with the high temperature shock layer around hypersonic vehicle. Major analytical study of flow at high speed is dominated by the CFD .

Applications include missiles, launch vehicles and entry bodies. A huge effort has been made developing hypersonic aerodynamics methods and configurations. This began with missiles, including the intercontinental ballistic missile (ICBM) effort of the 1950s, followed by development work for the Mercury, Gemini and Apollo manned space flight programs. The next major effort was devoted to the Space Shuttle. Work on hypersonic for future entry vehicles and landing of vehicles on other planets continues. Finally, there is a perennial effort to develop atmospheric hypersonic vehicles. In this research we limit our discussion to the key things to know from a configuration aerodynamics viewpoint. Despite the effort to develop hypersonic configurations, there is no exact definition defining the start of the hypersonic flow regime.

Possibilities include:

- 1) Mach numbers at which supersonic linear theory fails
- 2) Where  $\gamma$  is no longer constant, and we must consider temperature effects on fluid properties.
- 3) Mach numbers from 3 - 5, where Mach 3 might be required for blunt bodies causing large disturbances to the flow, and Mach 5 might be the starting point for more highly streamlined bodies.

### A. Hypersonic Flow

As a general rule, flows with a Mach number (M) greater than 5 are considered to be in hypersonic aerodynamics. However, this is only a general guideline; a flow does not "instantly turn from green to red" or experience a "clash of thunder" when it is accelerated from  $M = 4.99$  to  $M = 5.01$ . Instead, the best way to characterise hypersonic flow is as the region where specific physical flow phenomena become increasingly significant as the Mach Number rises. One or more of these phenomena might become significant at Mach 3 in some situations, while they might not be persuasive until Mach 7 or higher in others. . The purpose of this section is to briefly describe these physical phenomena .

### 1) Thin Shock Layer

For a given inflow deviation angle, the viscosity increase across a shock surge becomes precipitously larger as the Mach number is increased. At advanced viscosity, the mass inflow behind the shock can more fluently “squeeze through” lower areas. For inflow over a hypersonic body, this means that the distance between the body and the shock surge can be small. The flow field between the shock surge and the body is defined as the shock subcaste and for hypersonic pets this shock subcaste can be relatively thin. For illustration, consider the Mach 3.6 inflow of a calorically perfect gas with a rate of specific heats,  $\gamma = c_p / c_v = 1.4$ , over a wedge of  $15^\circ$  half angle. From standard oblique shock proposition the shock surge angle will be only  $18^\circ$ . still, chemically replying goods are included, the shock surge angle will be lower, If high- temperature. easily, this shock subcaste is thin. It's a introductory characteristics of hypersonic overflows that shock swells lie near to the body and that the shock subcaste is thin. In turn, this can produce some physical complications, similar as the coupling of the shock surge itself with a thick, thick boundary subcaste growing from the body face – a problem which becomes important at low Reynolds figures. still, at high Reynolds figures, where the shock subcaste is basically inviscid, its predictability can be used to theoretical advantage, leading to a general logical approach called this shock- subcaste proposition. In the extreme, a thin shock subcaste approach the fluid dynamic model supposed by Isaac Newton in 1687; similar Newtonian proposition is simple and straightforward, and is constantly used in hypersonic aerodynamics for approximate computations.

### 2) Entropy Layer

Consider the wedge shown in figure except now with a blunt nose as shown in figure. At hypersonic Mach number, the shock subcaste over the blunt nose is also veritably thin, with a small shock detachment distance,  $d$ . In the nose region, the shock surge is largely twisted. The entropy of the inflow increases across a shock surge, and stronger the shock, the larger the entropy increase. A Streamline passing through the stronger the shock, the larger the entropy increase. A streamline passing through the strong, nearly normal portion of the twisted shock near the centerline of the inflow will witness a larger entropy increase than a neighboring streamline which passes through a weaker portion of the shock further down from the centerline. Hence, there are strong entropy slants generated in the nose region; this entropy subcaste flows downstream and basically wets the body for larger distances from the nose as shown in figure 2. The boundary subcaste along the face grows inside this entropy subcaste and is affected by it. Since the entropy subcaste is also a region of strong vorticity, this commerce is occasionally called a vorticity commerce. The entropy subcaste causes logical problems when we wish to perform a standard boundary subcaste computation on the face, because there's a question as to what the proper conditions should be at the external edge of the boundary subcaste.

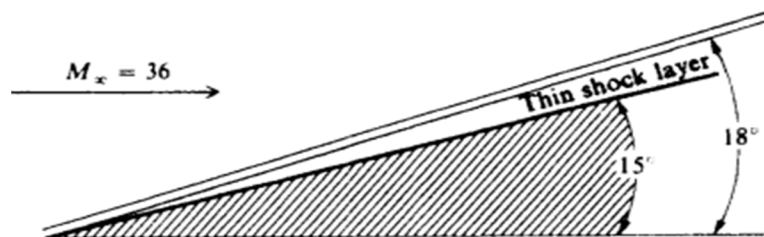


Figure 1: thin hypersonic shock layer (Ref. from hypersonic flow  
By John D. Anderson)

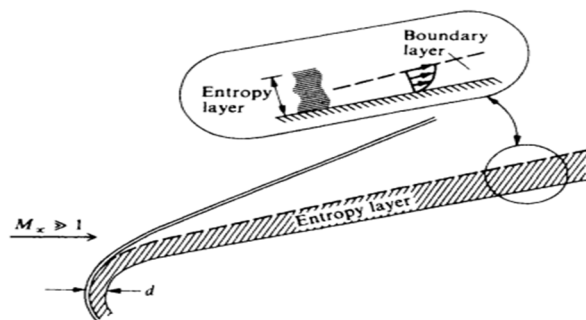


Figure2: The entropy layer (Ref. from hypersonic flow  
By John D. Anderson)

### 3) Surface Pressure Estimation

In numerous cases face pressures are fairly easy to estimate at hypersonic speeds. At supersonic speed we've a original relation for two- dimensional overflows relating face pitch and pressure, where  $\theta$  is the face inclination relative to the freestream

$$C_p = \frac{2\theta}{\sqrt{M^2 - 1}}$$

still, this relation is not particularly useful for utmost cases in factual aircraft configurations. In comparison, hypersonic rules are useful. The most notorious relation is grounded on the generalities of Newton. Although Newton was wrong for low- speed inflow, his idea does apply at hypersonic speeds. The idea is that the forthcoming inflow can be allowed of as a sluice of patches, that lose all their instigation normal to a face when they “hit” the face. This leads to the relation

$$C_p = 2 \sin^2 \theta$$

where  $\theta$  is the angle between the inflow vector and the face. therefore you only need to know the figure of the body locally to estimate the original face pressure. Also, patches impact only the portion of the body facing the inflow, as shown in Figure 11- 2. The rest of the body is in a “ shadow ”, and the  $C_p$  is assumed to be zero. \* See Bertin and Cummings1 or Anderson2 for the derivate of this and other pressure- pitch rules.

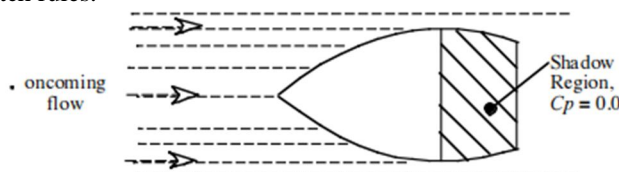


Figure 3. Shadow sketch , showing region where  $C_p$  is Zero (from. Hypersonic Aerodynamic )

Two key observations come from the Newtonian pressure rule. First, the Mach number does not appear! Second, the pressure is related to the square of the inclination angle and not linearly as it is in the supersonic formula. This illustrates how the situation in hypersonic flow is significantly different than the linear flow models at lower speeds.

The Newtonian flow model can be refined to improve agreement with data. This form is known as the Modified Newtonian flow formula,

$$C_p = C_{p_{\max}} \sin^2 \theta$$

where the stagnation  $C_{p_{\max}}$  is a function of Mach and  $\gamma$

$$C_{p_{\max}} = \frac{P_{02} - P_{\infty}}{\frac{1}{2} \rho_{\infty} V_{\infty}^2}$$

and  $P_{02}$  is the recession or total pressure behind a normal shock. This expression gets both the Mach number and rate of specific heats back into the problem. The classical Newtonian proposition is actually the limit as  $M \rightarrow \infty$ , and  $\gamma \rightarrow 1$ . These formulas are only valid when  $\theta$  is positive. There are lots of other original rules, and Anderson’s book2 should be consulted for a more complete discussion. These are known as face inclination rules. The styles typically heard in hypersonic conversations include the tangent cone, digression wedge and shock expansion styles. There’s also a revision to the Newtonian pressure rule to include face curve goods. This is known as the Newtonian- Busemann rule.

## II. THE COMPUTATIONL STUDY

Here, we study the computational data of the hypersonic vehicle at the mach number 5 . In this the flow speed is at mach 5 and the vehicle remain stationary .We observe parameter across the vehicle that change by doing the simulation on the solidworks.

### A. Inputs

#### INPUT DATA

#### Mesh

Global Mesh Settings Automatic initial mesh: On Result resolution level: 4

Advanced narrow channel refinement: Off



### B. Geometry Resolution

Evaluation of minimum gap size: Automatic  
Evaluation of minimum wall thickness: Automatic  
Computational Domain  
Size

X min	-0.050 m
X max	0.047 m
Y min	-0.032 m
Y max	0.031 m
Z min	-0.275 m
Z max	0.113 m
X size	0.096 m
Y size	0.063 m
Z size	0.388 m

### C. Boundary Conditions

2D plane flow	None
At X min	Default
At X max	Default
At Y min	Default
At Y max	Default
At Z min	Default
At Z max	Default

Physical Features

Fluid Flow: On Conduction: Off

Structural: Off

Electromagnetics: Off Time dependent: Off Gravitational effects: On Rotation: Off

Flow type: Turbulent only High Mach number flow: Off Humidity: Off

Free surface: Off

Default roughness: 0 micrometer

### D. Gravitational Settings

X component	0 m/s <sup>2</sup>
Y component	-9.81 m/s <sup>2</sup>
Z component	0 m/s <sup>2</sup>

Default wall conditions: Adiabatic wall

### E. Ambient Conditions

Thermodynamic parameters	Static Pressure: 101325.00 Pa Temperature: 293.20 K
Velocity parameters	Velocity vector Velocity in X direction: 0 m/s Velocity in Y direction: 0 m/s Velocity in Z direction: -1715.000 m/s

## F. Material Settings

### Fluids

#### [Air](#)

#### Goals

#### Global Goals

##### GG Average Total Pressure 1

Type	Global Goal
Goal type	Total Pressure
Calculate	Average value
Coordinate system	Global Coordinate System
Use in convergence	On

##### GG Average Temperature (Fluid) 2

Type	Global Goal
Goal type	Temperature (Fluid)
Calculate	Average value
Coordinate system	Global Coordinate System
Use in convergence	On

##### GG Average Total Temperature 3

Type	Global Goal
Goal type	Total Temperature
Calculate	Average value
Coordinate system	Global Coordinate System
Use in convergence	On

##### GG Average Mach Number 4

Type	Global Goal
Goal type	Mach Number
Calculate	Average value
Coordinate system	Global Coordinate System
Use in convergence	On

##### GG Average Turbulent Energy 5

Type	Global Goal
Goal type	Turbulent Energy
Calculate	Average value
Coordinate system	Global Coordinate System
Use in convergence	On

##### GG Average Heat Flux 6

Type	Global Goal
Goal type	Heat Flux
Calculate	Average value
Coordinate system	Global Coordinate System
Use in convergence	On

#### GG Heat Transfer Rate 7

Type	Global Goal
Goal type	Heat Transfer Rate
Coordinate system	Global Coordinate System
Use in convergence	On

#### GG Friction Force 8

Type	Global Goal
Goal type	Friction Force
Coordinate system	Global Coordinate System
Use in convergence	On

#### GG Average Shear Stress 9

Type	Global Goal
Goal type	Shear Stress
Calculate	Average value
Coordinate system	Global Coordinate System
Use in convergence	On

#### G. Calculation Control Options

##### Finish Conditions

Finish Conditions	If one is satisfied
Maximum travels	4.000
Goals convergence	Analysis interval: 0.500

##### Solver Refinement

Refinement: Disabled

Save before refinement	On
------------------------	----

Solving

##### Results Saving

##### Advanced Control Options

##### Flow Freezing


Flow freezing strategy	Disabled
------------------------	----------

#### H. Engineering Database


Gases

Air


Path: Gases Pre-Defined

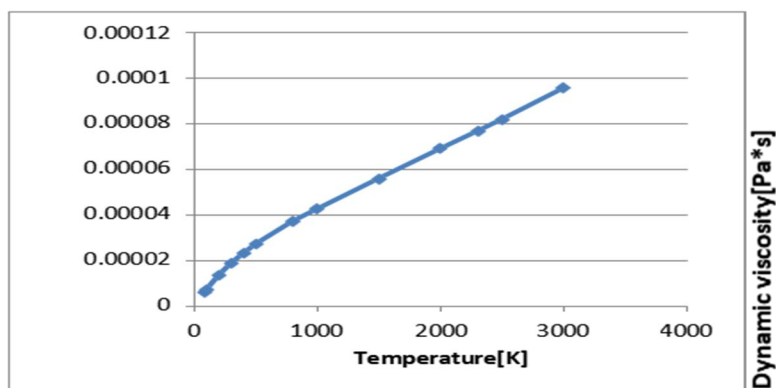

Specific heat ratio ( $C_p/C_v$ ): 1.399 Molecular mass: 0.0290 kg/mol Dynamic viscosity

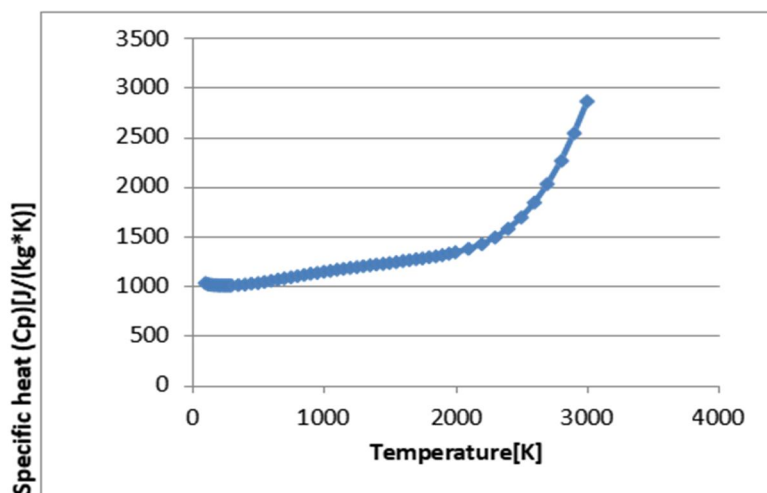

Specific heat( $C_p$ )

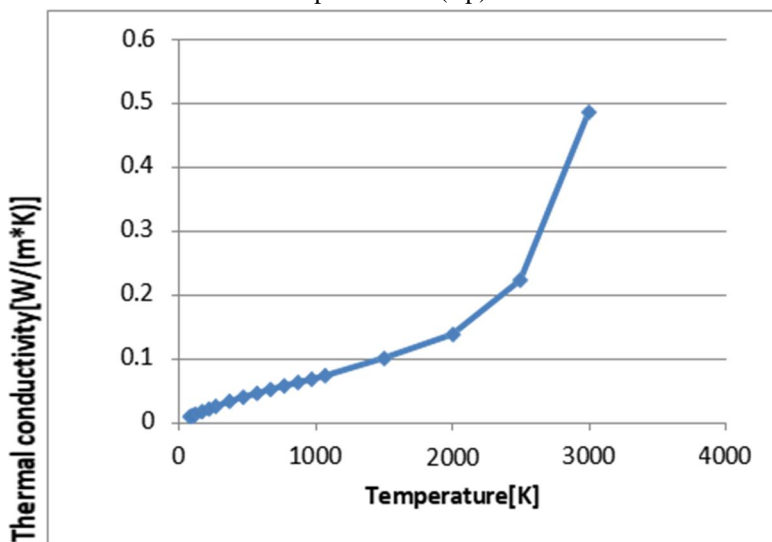

Thermal conductivity

### III. RESULTS

#### A. Pressure Variation

At the beginning the pressure of the airflow is high as it flow over the surface of the aircraft it first decrease and increases as shown in fig 3. And fig4.

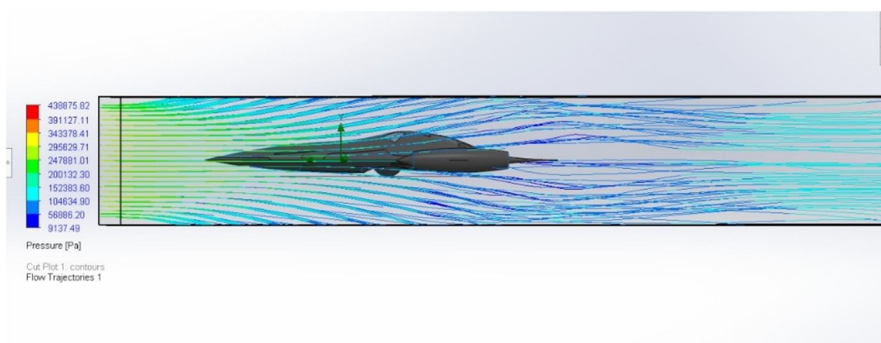


Figure3 . Pressure variation of flow



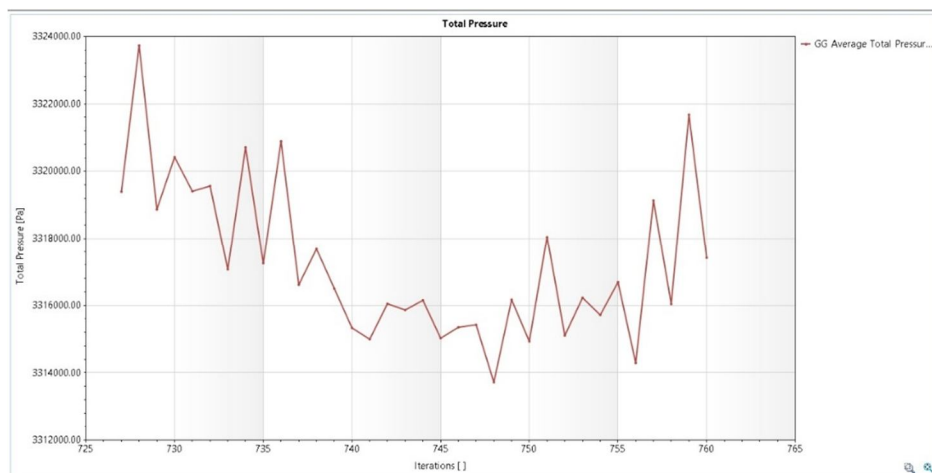


Figure4. Pressure variation

### B. Mach Number

The mach number is decreases as the airflow passes through the aircraft .It is shown in figure 5.

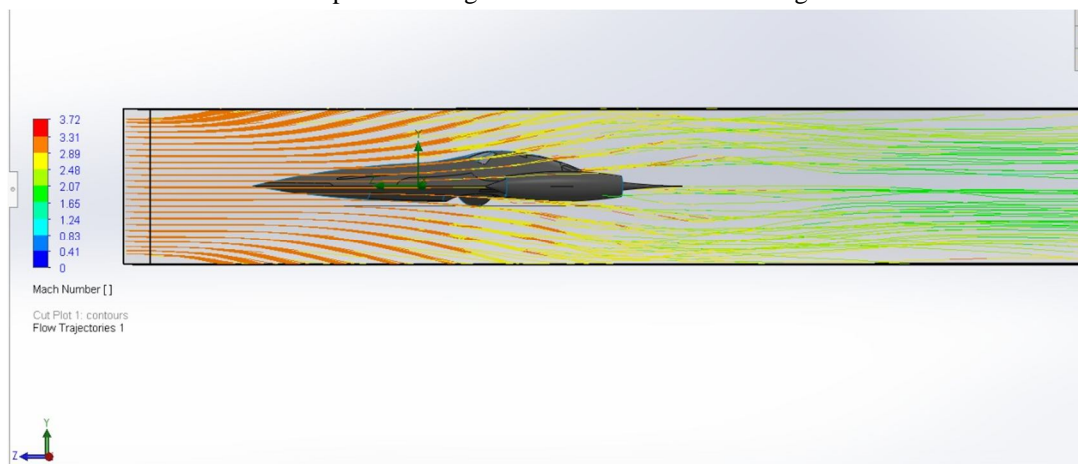


Figure 5. Mach number variation

### C. Velocity

The change in velocity is shown by figure 6.

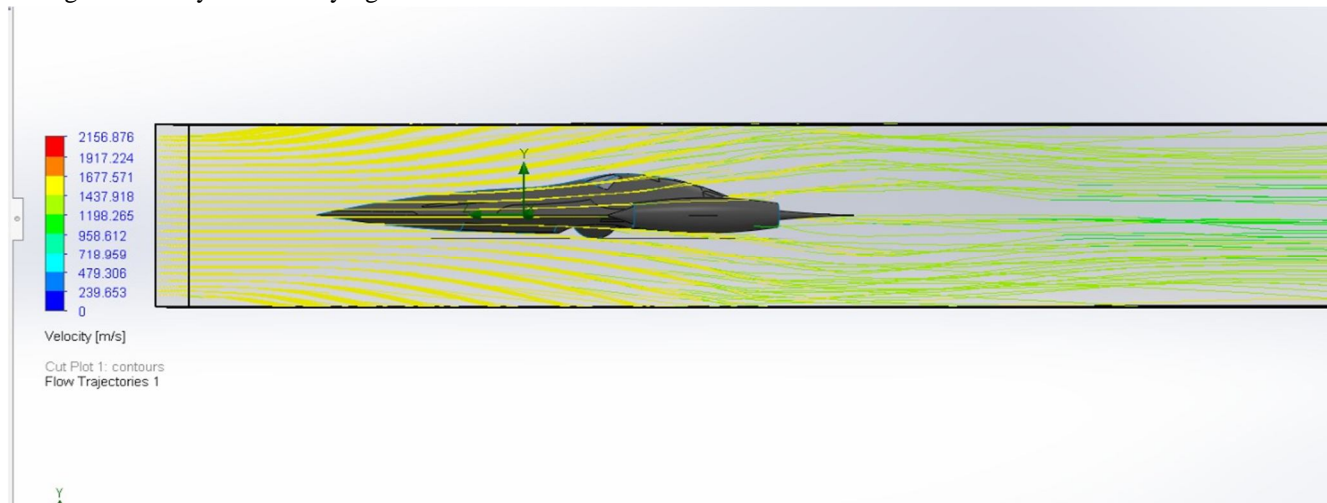


Figure 6. Change in velocity

#### D. Temperature

As shown in figure 7 and figure 8. The temperature of the airflow is low as it contact with aircraft it rises.

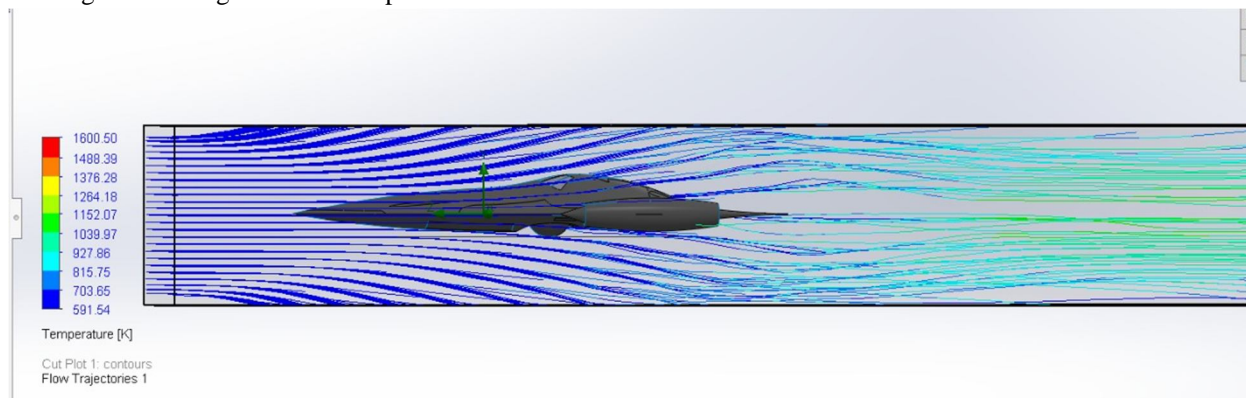


Figure 7. Temperature variation

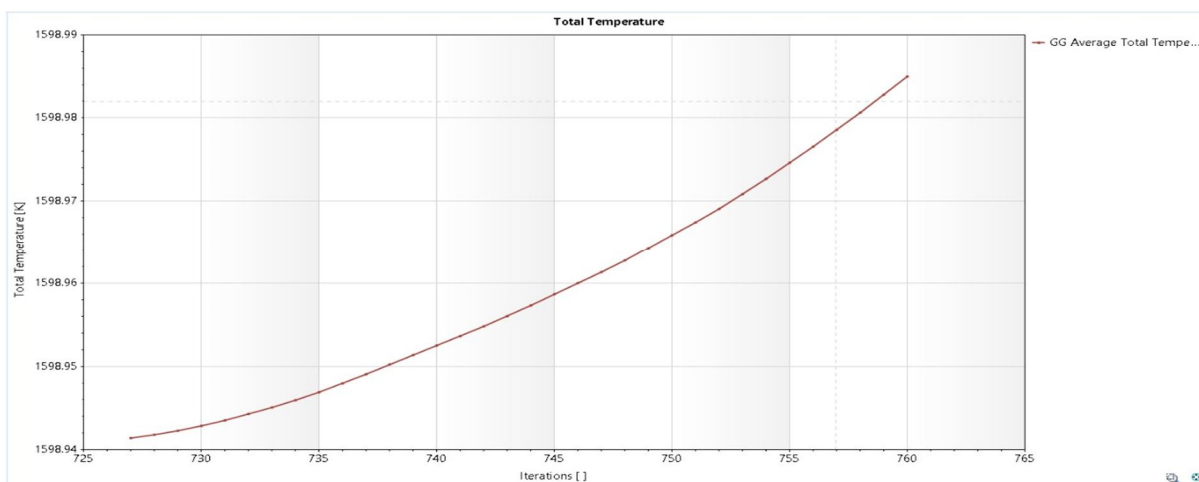


Figure 8 . Graph of the temperature changes

#### IV. CONCLUSION

This computational study on the aerodynamics of hypersonic vehicles provides insight into key flow characteristics at Mach 5, including pressure variations, velocity changes, and temperature distributions. The results demonstrate the significance of computational fluid dynamics in understanding flow separation, shock interactions, and boundary layer behavior. The findings also highlight the role of factors such as entropy layers and thin shock layers in the aerodynamic performance of hypersonic vehicles. Future studies can further refine the computational model by incorporating more complex turbulence models and experimental validation to enhance accuracy in predicting hypersonic flow behavior.

#### REFERENCES

- [1] AIAA -84-1518, A survey of Modern Research in Hypersonic Aerodynamic by Department of Aerospace Engineering , University of Maryland Park, Maryland 20742.
- [2] Truitt, R.W , Hypersonic Aerodynamic , Ronald Press, New York , 1959.
- [3] Anderson, J.D (2007). Hypersonic Flow , Handbook of fluid dynamics and fluid machinery , 629-670.
- [4] Hypersonic Flow – John Anderson , JR University of Maryland College Park , MD.
- [5] Hypersonic Aerodynamic – Configuration Aerodynamic CH-11 [7131/16]
- [6] Journal of Fluid and structure 19(2004)681-712- Aeroelastic analysis of hypersonic vehicles by P.P Friedmann , J.J Mc Namara, B.J Thuruthimattam , I. Nydick.
- [7] The Aeronautical Journey- A cae study on the aerodynamic heating of a hypersonic vehicle – volume 116 NO 1183.
- [8] 12<sup>th</sup> AIAA International Space planes and hypersonic systems and technologies 15-19 December 2003 , Norfolk , Virginia. Flight Dynamics and Control of air-breathing Hypersonic Vehicles: Review and New Directions by Baris Fidan, Maj Mirmirani and Petros A. Iannou.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)