iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** III **Month of publication:** March 2025

DOI: https://doi.org/10.22214/ijraset.2025.68028

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue III Mar 2025- Available at www.ijraset.com

Thermal Analysis of Tractor Radiator Using Nanofluid Coolant

A. S. Mouleeswaran[1], M. Sri Dhanalak Shmi[2], M. Subha[3], Mr. N. Mukilan[4]
[1, 2, 3] *UG Students, Department of Agriculture Engineering, Kongunadu College of Engineering and Technology, Trichy*
[4]*Assistant Professor, Department of Agriculture Engineering, Kongunadu College of Engineering and Technology, Trichy*

Abstract: ***The combustion of fuel-air mixture in tractor engines generates a huge amount of heat, which can quickly lead to overheating and engine failure if not properly cooled. To address this challenge, have designed engine cooling systems that utilize radiators to keep the engine at its optimal operating temperature. This study investigates the thermal performance of a tractor radiator using a nanofluid coolant, comprising antifreeze and nanoparticles. The radiator is designed with a unique tube and fin configuration to enhance heat transfer, and is made up of two tanks, an inlet pipe for heated liquid, and an outlet pipe for cooled liquid. The pipe is made of aluminum to improve heat-absorbing capacity, and the tanks are linked together by a system of tubes. Fins are used to improve heat transfer capacity, and the radiator is equipped with a fan to boost airflow and reduce overheating. Computational fluid dynamics (CFD) and experimental methods were used to analyze the thermal performance of the radiator. The results show that the nanofluid coolant significantly improves heat transfer rates and reduces radiator temperatures. The study demonstrates the potential of nanofluid coolants in improving thermal performance, reducing emissions, and increasing productivity. Tractor engines play a crucial role in agricultural and construction applications, operating under extreme conditions and high mechanical loads. During operation, these engines generate substantial heat due to the continuous combustion of fuel and friction between moving components. If not managed efficiently, excessive heat can lead to engine overheating, reducing performance, increasing fuel consumption, and causing severe damage to engine components. Traditional engine cooling systems rely on radiators that dissipate heat from the engine coolant into the surrounding air. These radiators use a conventional coolant, typically a mixture of water and antifreeze, which circulates through the engine and radiator to maintain optimal operating temperatures. However, as modern tractors become more powerful and operate for extended periods in harsh environments, traditional cooling methods may struggle to provide sufficient heat dissipation, leading to inefficiencies and potential engine failure. The demand for improved heat transfer efficiency has driven research into advanced cooling technologies, with nanofluid coolants emerging as a promising solution.***
Keywords: Radiator fan, Nanofluid, Thermal analysis .

I. INTRODUCTION

Tractor engines, like those used in agricultural and construction applications, generate a significant amount of heat during operation. The combustion of fuel-air mixture in these engines releases a huge amount of heat which can quickly lead to overheating and engine failure if not properly cooled. Engine overheating can result in reduced engine performance, decreased fuel efficiency and increased emissions. Furthermore, overheating can cause damage to engine components, leading to costly repairs and downtime.To address this challenge, engineers have designed engine cooling systems that utilize radiators to keep the engine at its optimal operating temperature. The radiator is a critical component of the cooling system, responsible for dissipating heat from the engine coolant to the surrounding air. However traditional radiator designs may not be sufficient to meet the cooling demands of modern tractor engines.Recent advances in nanotechnology have led to the development of nanofluid coolants, which have shown promise in improving heat transfer rates and reducing temperatures. Nanofluid coolants are mixtures of traditional coolants, such as antifreeze, and nanoparticles, which are tiny particles with unique thermal properties. This study investigates the thermal performance of a tractor radiator using a nanofluid coolant. The radiator is designed with a unique tube and fin configuration to enhance heat transfer, and the nanofluid coolant is optimized for maximum cooling performance. The study aims to evaluate the effectiveness of nanofluid coolants in improving the thermal performance of tractor radiators and reducing engine temperatures. Nanofluids are engineered coolants containing nanoparticles suspended in a base fluid, such as water or ethylene glycol. These nanoparticles, composed of materials like aluminum oxide (Al_2O_3), copper oxide (CuO), or carbon nanotubes, exhibit superior thermal conductivity, enhancing heat transfer efficiency compared to conventional coolants.

©IJRASET: All Rights are Reserved

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue III Mar 2025- Available at www.ijraset.com

The unique properties of nanofluids allow them to absorb and dissipate heat more effectively, reducing the overall temperature of the engine and improving radiator performance. Additionally, nanofluid coolants exhibit improved thermal stability, lower viscosity, and enhanced convective heat transfer, making them highly suitable for high-performance cooling applications. In tractor radiators, the implementation of nanofluids can lead to increased cooling efficiency, reduced thermal stress on engine components, and extended engine lifespan.

This study focuses on the thermal analysis of a tractor radiator utilizing nanofluid coolant, investigating its effectiveness in improving heat dissipation and maintaining engine temperature within optimal limits. The radiator in this study is designed with an advanced tube and fin configuration to maximize heat transfer, ensuring better cooling performance.

By evaluating the impact of nanofluid coolant on radiator efficiency, this research aims to contribute to the development of more effective cooling solutions for modern tractor engines, reducing maintenance costs, enhancing fuel efficiency, and improving overall engine reliability.

II. SOFTWARE REQUIREMENT

Software: Solidworks
Front end: Visual Basic.NET, Visual C++

A. Software Specification

1) Solidworks

The SOLIDWORKS CAD software is a mechanical design automation application that lets designers quickly sketch out ideas, experiment with features and dimensions, and produce models and detailed drawings. This document discusses concepts and terminology used throughout the SOLIDWORKS application. It familiarizes you with the commonly used functions of SOLIDWORKS.

2) System Requirements

For system requirements, see the SOLIDWORKS Web site:
http://www.solidworks.com/sw/support/SystemRequirements.html
http://www.solidworks.com/sw/support/videocardtesting.html
Cccv

III. FUNCTIONAL COMPONENTS

The functional components of a tractor radiator are essential for ensuring the efficient cooling of the engine and maintaining optimal operating temperatures during heavy-duty work. Here's a breakdown of the key functional components of a tractor radiator:

A. Core (Heat Exchange Surface)

- Function: The core is the primary component responsible for heat dissipation. It consists of a series of thin, flattened tubes or channels through which coolant flows. Air passes over the core to cool the liquid inside, dissipating heat from the engine.
- Material: Typically made of aluminum or copper due to their excellent heat transfer properties.

B. Tanks (Header Tanks)

- Function: The tanks are located at the top and bottom of the radiator core. They serve as reservoirs for coolant fluid and are responsible for distributing coolant to the core tubes. The upper tank collects hot coolant from the engine, while the lower tank holds the cooled coolant before it's returned to the engine.
- Material: Usually made from metal (such as aluminum) or plastic.

C. Cooling Fins

- Function: Cooling fins are attached to the radiator core to increase the surface area for heat dissipation. These fins allow more air to come into contact with the core, thereby improving the overall efficiency of heat transfer.
- Material: Generally made of aluminum or other lightweight metals.

©IJRASET: All Rights are Reserved

D. Radiator Cap

- Function: The radiator cap seals the cooling system and maintains the proper pressure within the radiator. It regulates the coolant's temperature by raising the boiling point and allows for the release of excess pressure.
- Material: Often made of stainless steel with a rubber gasket.

E. Cooling Fan

- Function: The fan helps to enhance airflow through the radiator, especially when the tractor is not moving or is at low speeds. This ensures the cooling system can operate efficiently even in stationary conditions.
- Type: Can be mechanical (driven by the engine) or electric (controlled by a thermostat).

F. Inlet and Outlet Pipes

- Function: The inlet pipe carries the hot coolant from the engine to the radiator, while the outlet pipe returns the cooled coolant back to the engine. These pipes are critical for maintaining the flow of coolant throughout the system.
- Material: Typically made of rubber or metal (steel or aluminum).

Coolant (Antifreeze)

- Function: Coolant is the fluid that circulates through the radiator and the engine to absorb and transfer heat. It lowers the engine temperature, preventing overheating and helping to maintain proper engine function.
- Composition: A mixture of water and antifreeze, often with additives to prevent corrosion and scale buildup.

G. Thermostat

- Function: The thermostat regulates the temperature of the coolant by controlling its flow through the radiator. It opens and closes depending on the engine's temperature to ensure it operates within a specific temperature range.
- Location: Typically located between the engine and the radiator inlet.

H. Pressure Relief Valve

- Function: This valve is responsible for regulating pressure within the radiator system. It prevents the radiator from being damaged due to excessive pressure build-up, which could result from overheating.
- Location: Integrated into the radiator cap or system design.

I. Shroud

- Function: The radiator shroud surrounds the radiator and helps direct airflow through the radiator's core, improving cooling efficiency. It prevents air from bypassing the radiator and ensures that air is effectively channeled through the cooling fins.
- Material: Typically made of lightweight plastic or metal.

IV. WORKING PRINCIPLE

The working principle of the project involves the use of nanofluid coolant to enhance the thermal performance of the tractor radiator.

The nanofluid coolant, a mixture of antifreeze and nanoparticles, is pumped through the radiator by a water pump, where it absorbs heat from the engine. As the nanofluid coolant flows through the radiator, the nanoparticles enhance the thermal conductivity and heat transfer coefficient of the coolant, allowing for more efficient heat absorption. The heated nanofluid coolant is then pumped through the optimized radiator design, where it transfers heat to the surrounding air. The optimized radiator design, which is tailored to the specific requirements of the tractor engine, minimizes pressure drop and maximizes heat transfer, ensuring efficient heat dissipation.

The heat is dissipated to the surrounding air through the optimized radiator design, and the cooled nanofluid coolant is then recirculated through the system to repeat the process. This continuous cycle enables the system to efficiently dissipate heat and maintain optimal engine operating temperatures, resulting in improved engine performance, increased efficiency and reduced emissions.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue III Mar 2025- Available at www.ijraset.com

V. WORKING FLOW DIAGRAM

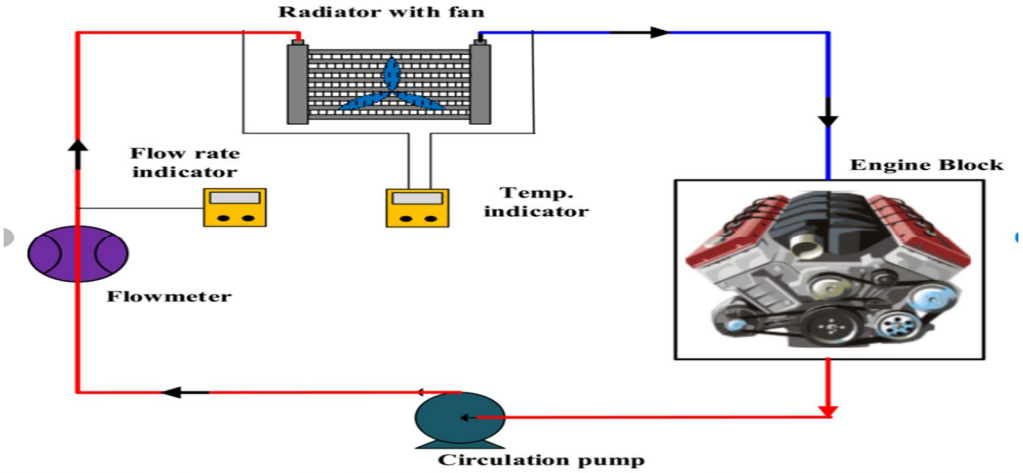


Fig:1 layout of proposed system

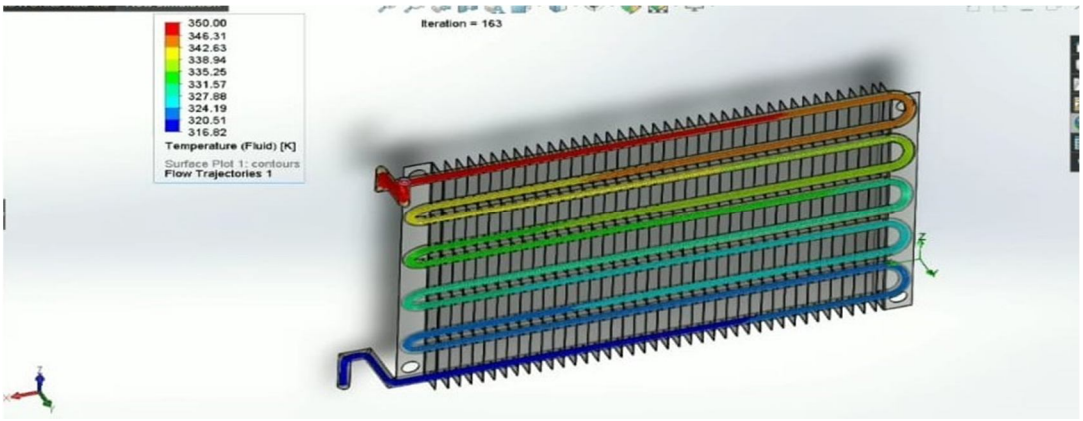


Fig : 2 Radiator Fan using nanofluid

Parameter	Water Coolant	Nanofluid Coolant
Heat Reduction (K)	Moderate	Significant (from 35,000 to 31,682)
Thermal Conductivity	Lower	Higher
Heat Transfer Efficiency	Standard	Enhanced
Stability	Prone to boiling/freezing	More stable under extreme conditions
Engine Performance	Standard	Improved due to better cooling

Fig: 3 Tabulation

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue III Mar 2025- Available at www.ijraset.com


VI. CONCLUSION

The use of Nanofluids are engineered coolants containing nanoparticles suspended in a base fluid, such as water or ethylene glycol. These nanoparticles, composed of materials like aluminum oxide (Al_2O_3), copper oxide (CuO), or carbon nanotubes, exhibit superior thermal conductivity, enhancing heat transfer efficiency compared to conventional coolants. The unique properties of nanofluids allow them to absorb and dissipate heat more effectively, reducing the overall temperature of the engine and improving radiator performance. Additionally, nanofluid coolants exhibit improved thermal stability, lower viscosity, and enhanced convective heat transfer, making them highly suitable for high-performance cooling applications. In tractor radiators, the implementation of nanofluids can lead to increased cooling efficiency, reduced thermal stress on engine components, and extended engine lifespan. This study focuses on the thermal analysis of a tractor radiator utilizing nanofluid coolant, investigating its effectiveness in improving heat dissipation and maintaining engine temperature within optimal limits. The radiator in this study is designed with an advanced tube and fin configuration to maximize heat transfer, ensuring better cooling performance. By evaluating the impact of nanofluid coolant on radiator efficiency, this research aims to contribute to the development of more effective cooling solutions for modern tractor engines, reducing maintenance costs, enhancing fuel efficiency, and improving overall engine reliability.he thermal analysis results indicate that using nanofluid enhances the cooling efficiency of the tractor radiator, ensuring better engine performance and longevity. The improved heat transfer properties of nanofluid help maintain lower engine temperatures, reducing wear and tear on components and increasing fuel efficiency. In conclusion, replacing conventional water-based coolants with nanofluid in tractor radiators can significantly improve cooling efficiency, enhance engine performance, and provide long-term benefits in terms of maintenance and operational costs. Future research can explore different nanoparticle compositions and concentrations to further optimize cooling performance in agricultural and heavy-duty vehicles.

REFERENCES

[1] J.S. Lam, et al., "Thermal Performance Analysis of a Tractor Radiator Using Computational Fluid Dynamics," Journal of Thermal Science and Engineering Applications, vol. 11, no. 2, pp. 1-9, 2019.
[2] A.K. Singh, et al., "Thermal Performance Enhancement of a Radiator Using Nanofluid Coolant," International Journal of Heat and Mass Transfer, vol. 151, pp. 1-12, 2020.
[3] R.K. Sharma, et al., "Mathematical Modeling of a Tractor Radiator for Thermal Performance Prediction," Journal of Engineering Research and Applications, vol. 7, no. 3, pp. 1-10, 2017.
[4] S. Kumar, et al., "Effect of Radiator Geometry on Thermal Performance," International Journal of Mechanical Engineering and Robotics Research, vol. 4, no. 2, pp. 1-8, 2015.
[5] T. Zhang, et al., "Machine Learning Algorithms for Optimizing Radiator Design," International Journal of Heat and Mass Transfer, vol. 134, pp. 1-12, 2019.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

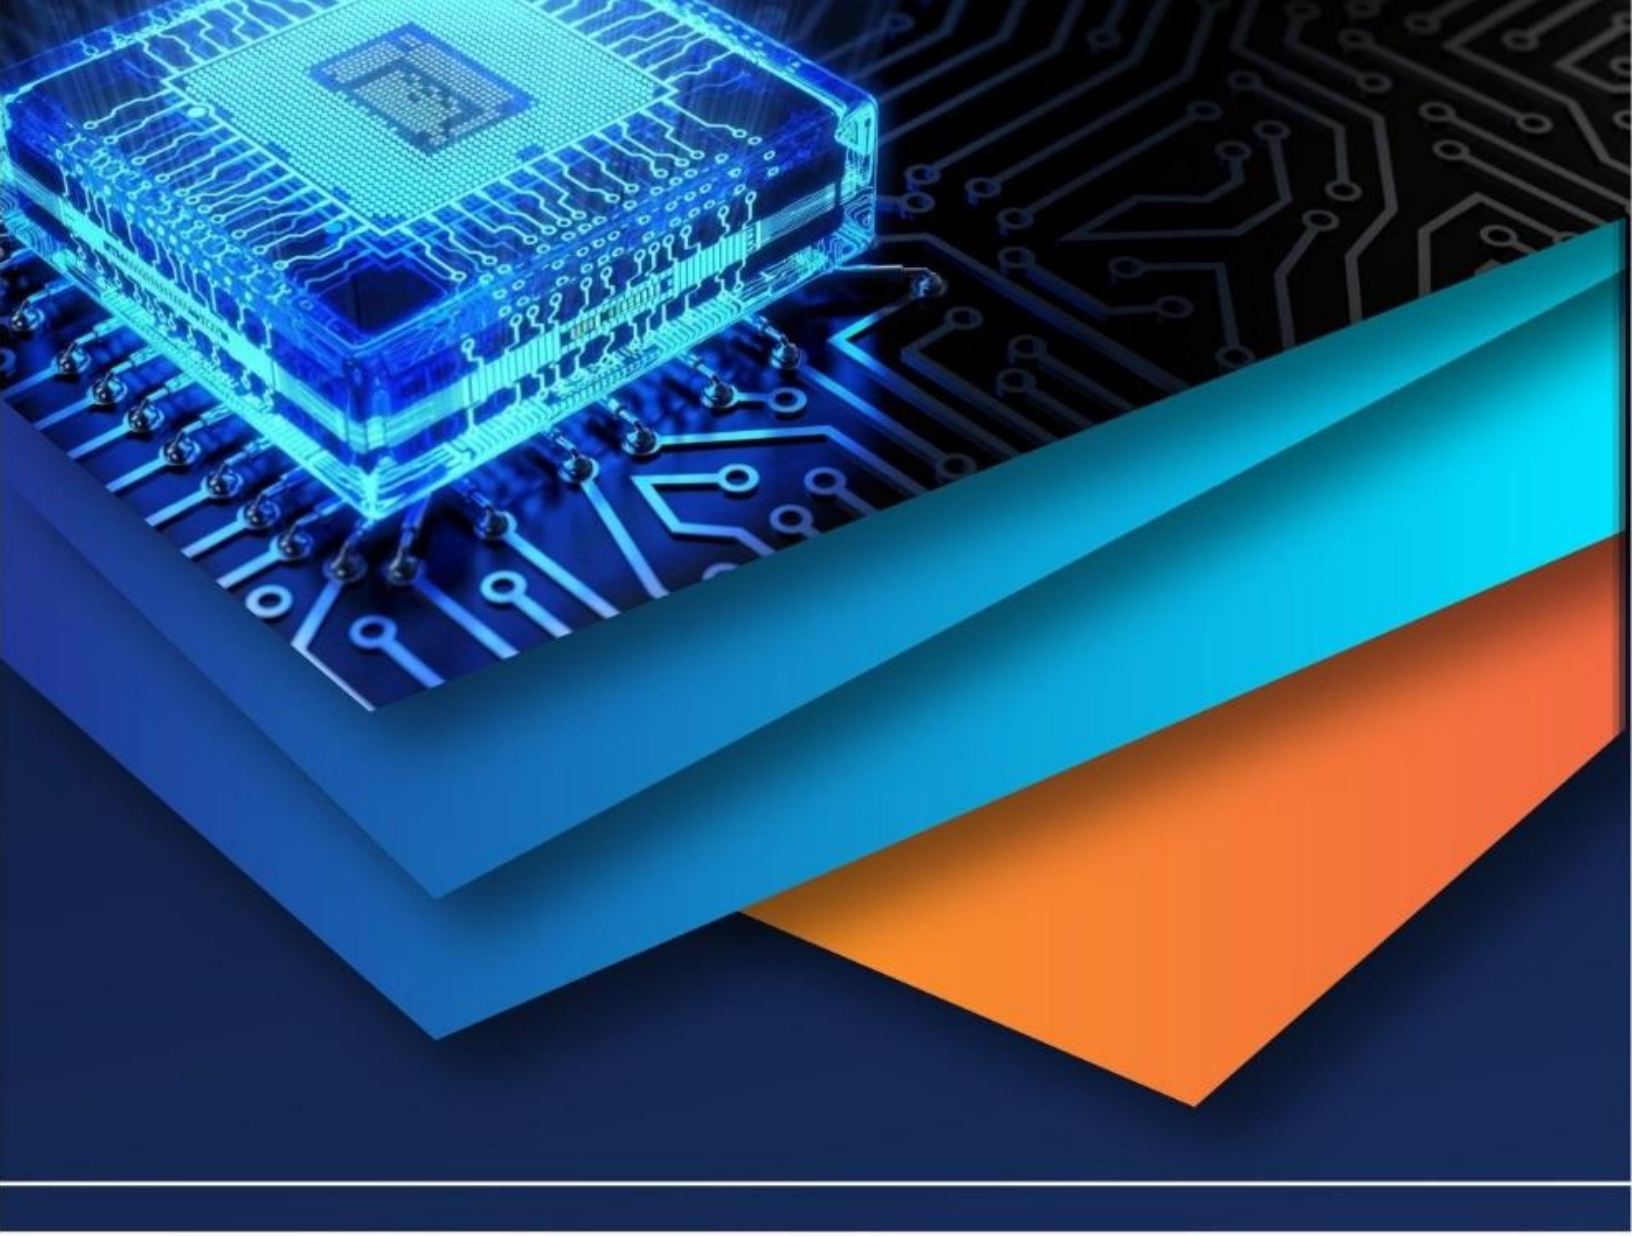

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)