iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** XI **Month of publication:** November 2025

DOI: https://doi.org/10.22214/ijraset.2025.75944

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538
Volume 13 Issue XI Nov 2025- Available at www.ijraset.com

Understanding Structural Differences Between Bulk $Mn_2CoFeGe_2$ Double Half-Heusler Alloy and Deposited Thin Films

T. Naaraayanan[1], M. Saroja[2], M. Venkatachalam[3]
Department of Electronics, Research and Development Centre, Erode Arts and Science College (Autonomous), Erode-638009, India.

Abstract: ***We report preliminary findings from our study on a new alloy and its thin film form. A double half-Heusler $Mn_2CoFeGe_2$ alloy was prepared in an arc furnace, and a thin film was deposited on silicon (100) and glass substrates via thermal evaporation. The films were characterized to evaluate their surface morphology and crystal structure using scanning electron microscopy and diffraction analysis. Elemental composition was determined through X-ray spectroscopy. These results highlight the importance of maintaining precise stoichiometry to obtain the intended material properties.***
Keywords: $Mn_2CoFeGe_2$, Double Half-Heusler Alloy, Thin films, Magnetism

I. INTRODUCTION

Heusler alloys form a broad family of materials, generally classified as Half Heusler (X_1Y_1Z), Full Heusler ($X_2Y_1Z_1$), Inverse Heusler, Binary, and Quaternary Heusler types. In these compositions, Z acts as the primary element, while X and Y are typically transition metals. What began as a topic of fundamental research has now evolved into a material class with meaningful technological relevance [1]. Today, Heusler alloys are gaining attention for use in sensors, energy conversion devices, magnetic shape-memory actuators, thermoelectric generators, and magnetic refrigeration systems**,** among other applications. Both Full and Half Heusler compounds have been widely explored, supported by extensive theoretical investigations as well as significant experimental studies[2]**.** The discovery of new functional materials remains a key focus in condensed matter physics, with manganese-based (Mn-based) Heusler alloys standing out for their remarkable physical properties and tunable structure. Their electronic and magnetic behavior can be tailored through doping, stoichiometry control, and structural adjustments. Notably, these alloys often exhibit strong ferromagnetism with high magnetic moments, making them suitable for applications such as magnetic sensors, permanent magnets, data storage, and advanced spintronic devices[3,4].

In this work, we focus on a newly synthesized material, $Mn_2CoFeGe_2$, and explore its fundamental characteristics. Early observations suggest that this alloy could be highly promising for magnetic applications. Classified as a double half-Heusler compound, it belongs to the wider Heusler family, well recognized for its flexible magnetic behavior and technological relevance. Changes in its crystal structure, driven by the substitution of Mn, Co, and Fe, are expected to strongly influence both its magnetic and structural properties. At the same time, the presence of Ge alters the bonding and coordination environment within the alley, further shaping its overall behavior [5].

II. EXPERIMENTAL TECHNIQUE.

Initially 1-gram $Mn_2CoFeGe_2$ alloy was synthesized using an arc furnace. High-purity elemental Manganese (Mn), Iron (Fe), Cobalt (Co), and Germanium (Ge) (≥99.99%) were weighed in stoichiometric amounts and melted together under a high-purity argon atmosphere. Since manganese is volatile, an extra 3% Mn was added to compensate for weight loss during melting. To ensure homogeneity, the resulting ingot was remelted several times, flipping it between melts. The total weight loss after the process was kept below 1%. For further compositional uniformity, the ingot was sealed in a quartz ampoule and annealed at 1000 °C for six hours in a tube furnace. Finally, the sample was allowed to cool naturally to room temperature before subsequent characterization.

For thin-film deposition, the $Mn_2CoFeGe_2$ ingot was first broken into smaller pieces and placed in a tungsten boat for thermal evaporation using an Advanced Processing Technologies (APT) system. The films were deposited onto silicon (Si (100)) and glass substrates, with the chamber pressure maintained at 5×10^{-6} Torr throughout the process.

©IJRASET: All Rights are Reserved

After deposition, all samples underwent post-annealing at temperatures ranging from 100 °C to 400 °C for 30 minutes in a vacuum environment at a pressure of 5×10^{-3} Torr to improve structural uniformity and film quality[6].

Powder and Thin film samples were exposed to Cu-Kα radiation (1.54 Å) to obtain X-ray diffraction (XRD) patterns at room temperature using a Rigaku Smart Lab system (Japan). The composition of the sample was analyzed using a JEOL JIB-4700 FIB-SEM in energy-dispersive X-ray spectroscopy (EDS) mode, with EDS data acquired via scanning electron microscopy (SEM).

III. RESULTS AND DISCUSSION

A. X-ray Diffraction Studies

The structural characteristics of the alloy and films were examined using a high-resolution X-ray diffractometer with a Cu-Kα radiation source. The diffraction patterns were recorded in the 2θ range of 5º to 80º, as illustrated in Figure 1(a) for the powder sample and Figure 1(b) for the thin film samples. However, the thin films on the glass substrate did not exhibit any XRD peaks, likely due to the limitations of the thermal evaporation method. The XRD pattern of the synthesized $Mn_2CoFeGe_2$ powder confirms its crystallinity and shows a crystalline phase. This crystalline phase influences the properties of the material, potentially offering a combination of properties of the orthorhombic and cubic phases[7,8].

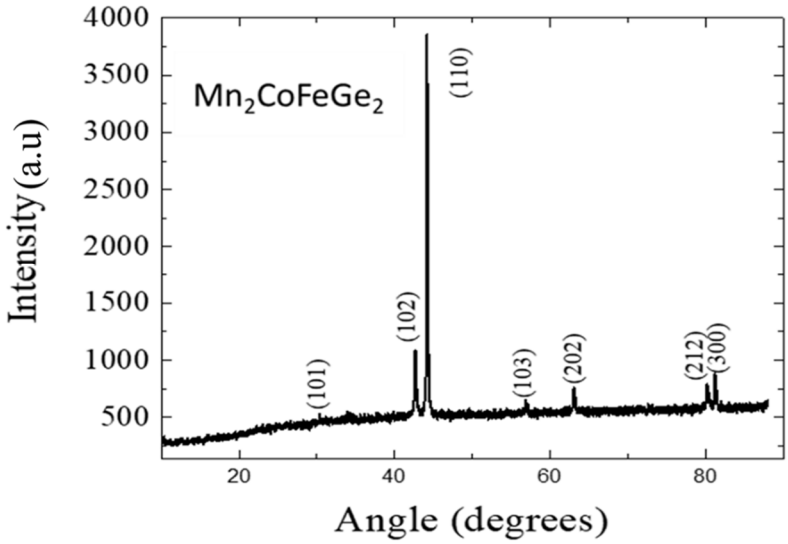


Figure 1(a). XRD patterns of powder sample of $Mn_2CoFeGe_2$

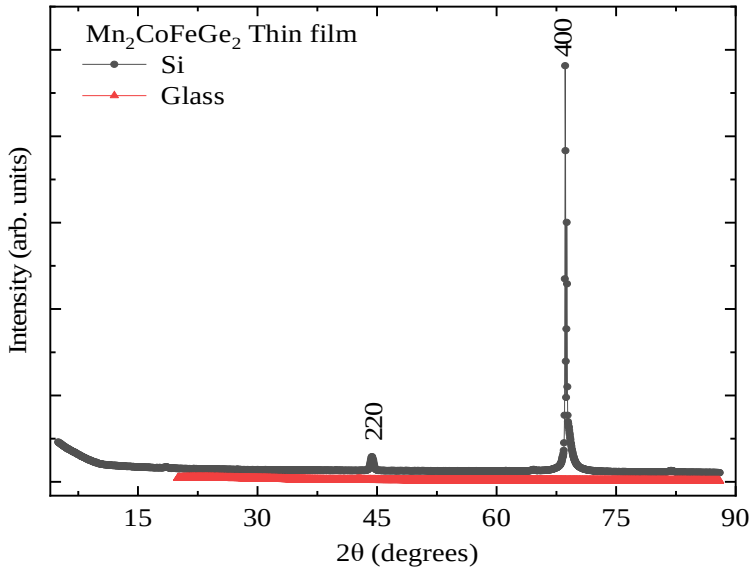


Figure 1(b). XRD patterns of thermally evaporated $Mn_2CoFeGe_2$ thin films

B. Morphological Analysis

The surface microstructure was examined by FESEM images in Figure 3(a) for alloy samples and Figure 3(b) shows for thin film samples, and the EDS image is shown in Figure 4, thin film elemental distribution in the images, which are at the same scale of 0.1 µm. The film surface evolves into a continuous one. Figure 5, thin film elemental distribution in the images, on the Si (100) substrate. The film surface evolves into a continuous one.


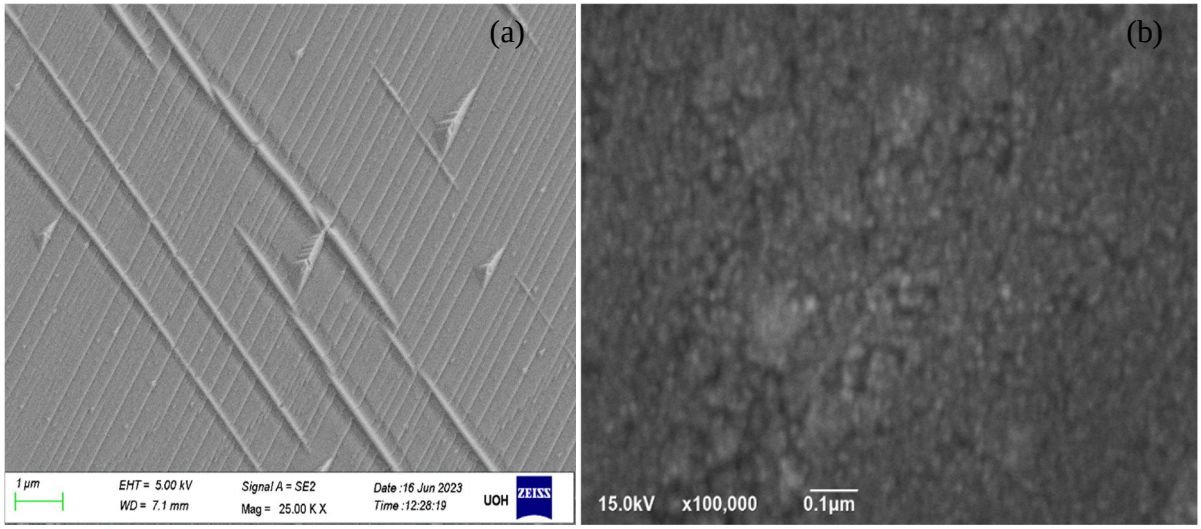


Figure 3(a). Surface morphology of $Mn_2CoFeGe_2$ alloy and Figure 3(b) Thin films on Si (100) captured using FESEM

The surface grains or granules could be because, as we grow film for less time, but cannot get enough time to form a continuous surface, and small grains can be seen all over the surface. With the increase in the deposition time, the merging of islands starts and creates a continuous type of surface structure[9].

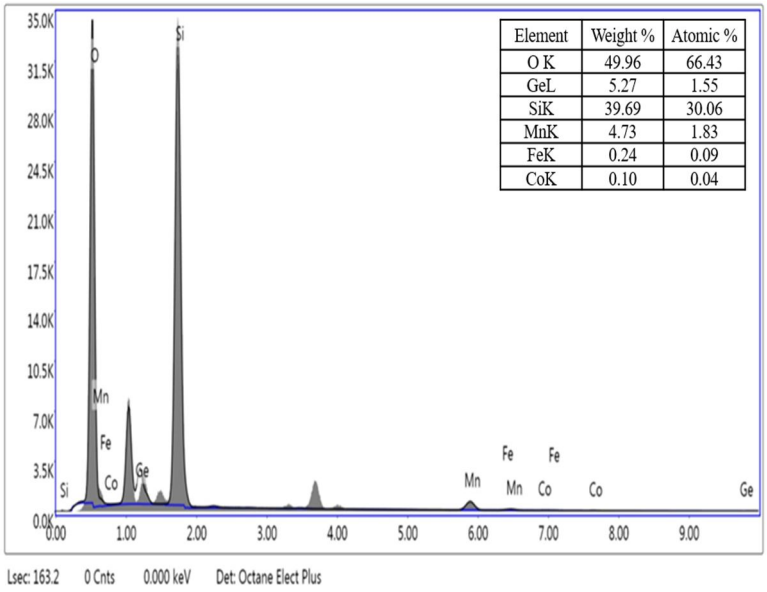

Element	Weight %	Atomic %
O K	49.96	66.43
GeL	5.27	1.55
SiK	39.69	30.06
MnK	4.73	1.83
FeK	0.24	0.09
CoK	0.10	0.04

Figure. 4. EDS spectrum showing the elemental composition (Fe, Co, Mn, and Ge) of the $Mn_2CoFeGe_2$ thin film on a glass substrate.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

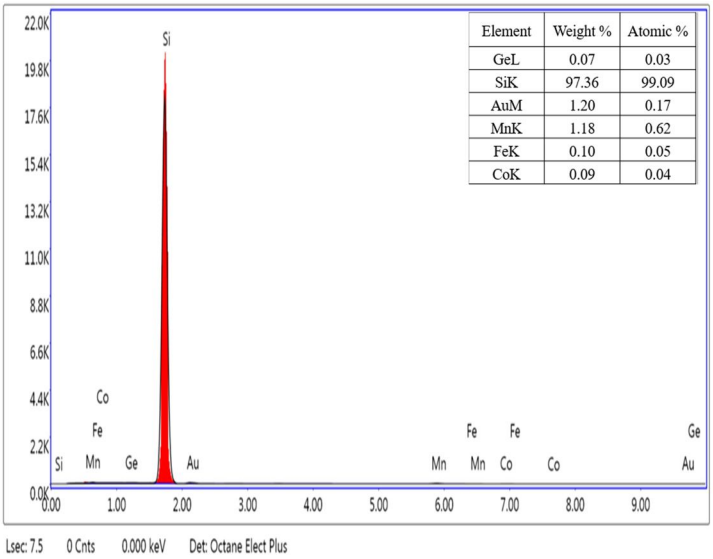


Figure 5. EDS spectrum showing the elemental composition (Fe, Co, Mn, and Ge) of the $Mn_2CoFeGe_2$ thin film on the Si (100) substrate.

Energy-dispersive X-ray spectroscopy (EDS) was used to determine the chemical composition of $Mn_2CoFeGe_2$, and the results presented in Figure 6. match the nominal composition. which was discovered to fit the nominal composition. The volume particles homogeneous of Mn, Fe, Co, and Ge were discovered through X-ray element mapping; no obvious inhomogeneities were discovered.

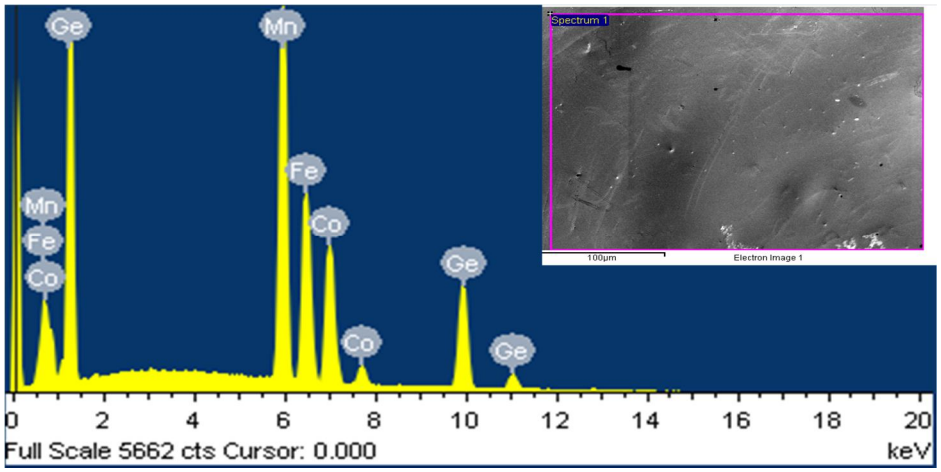


Figure. 6. EDS spectrum showing the elemental composition (Fe, Co, Mn, and Ge) of the $Mn_2CoFeGe$ alloy.

In Table 1. The atomic percentage ratio of 2:1:1:2 agrees with the values anticipated from the findings.

DHH alloy ($Mn_2CoFeGe_2$)	Manganese (Mn)		Cobalt (Co)		Iron (Fe)		Germanium (Ge)	
	Weight (%)	Atomic (%)	Weight (%)	Atomic (%)	Weight (%)	Atomic (%)	Weight (%)	Atomic (%)
Spectrum 1	29.23	32.77	16.14	16.87	15.71	17.33	38.92	33.03
Composition Ratio	2 : 1 : 1 : 2							

Table 1. Composition ratio for $Mn_2CoFeGe_2$ double half-Heusler alloy.

IV. CONCLUSION

In this study, we focused on the $Mn_2CoFeGe_2$ Heusler alloy and examined it in both bulk and thin-film forms. The bulk sample was prepared by arc melting, with repeated melting steps to ensure proper mixing and uniformity. Thin films of the same material were grown on Si (100) and glass substrates using a thermal evaporation process. To understand the structure and composition of the samples, we used X-ray diffraction (XRD) and energy-dispersive spectroscopy (EDS). These techniques helped us confirm the phase formation, crystal structure, and elemental distribution in both the powdered alloy and the thin films. XRD results gave us clear information about the crystalline behavior of $Mn_2CoFeGe_2$, while EDS confirmed the stoichiometry and elemental uniformity across the material. Using both techniques together allowed us to gain a better understanding of how the material's structure relates to its properties. This is particularly important for Heusler alloys, as their tunable magnetic and electronic behavior makes them promising for applications in areas such as spintronics, magnetocaloric devices, and thermoelectric systems.

A. Declaration of Competing Interest

The authors declare that there is no conflict of interest regarding the publication of this article.


V. ACKNOWLEDGEMENTS

The authors would like to express their gratitude to the *Departments* of Electronics, Research and Development Centre, Erode Arts and Science College (Autonomous) for providing all resources required for the completion of this work.

REFERENCES

[1] Anand S, Wood M, Xia Y, Wolverton C and Snyder G J 2019 Double Half-Heuslers Joule **3** 1226–38
[2] Fan L, Chen F, Li C, Hou X, Zhu X, Luo J and Chen Z-Q 2020 Promising spintronics: Mn-based Heusler alloys Mn3Ga, Mn2YGa (Y = V, Nb, Ta), ScMnVGa Journal of Magnetism and Magnetic Materials **497** 166060
[3] Ram M, Saxena A, Aly A E and Shankar A 2020 Half-metallicity in new Heusler alloys Mn_2 ScZ (Z = Si, Ge, Sn) RSC Adv. **10** 7661–70
[4] Aryal A, Dubenko I, Zamora J, Sánchez Llamazares J L, Sánchez-Valdés C F, Mazumdar D, Talapatra S, Stadler S and Ali N 2021 Synthesis, structural, and magnetic properties of Heusler-type Mn2-Fe1+Ge ($0.0 \leq x \leq 1.0$) alloys Journal of Magnetism and Magnetic Materials **538** 168307
[5] Bainsla L, Suresh K G, Nigam A K, Manivel Raja M, Varaprasad B S D Ch S, Takahashi Y K and Hono K 2014 High spin polarization in CoFeMnGe equiatomic quaternary Heusler alloy Journal of Applied Physics **116** 203902
[6] Geiersbach U, Bergmann A and Westerholt K 2003 Preparation and structural properties of thin films and multilayers of the Heusler compounds Cu2MnAl, Co2MnSn, Co2MnSi and Co2MnGe Thin Solid Films **425** 225–32
[7] Levin E M, Jensen B A, Barua R, Lejeune B, Howard A, McCallum R W, Kramer M J and Lewis L H 2018 Effects of Al content and annealing on the phases formation, lattice parameters, and magnetization of A l x F e 2 B 2 (x = 1.0 , 1.1 , 1.2) alloys Phys. Rev. Materials **2** 034403
[8] Wang X-Y, Li M and Wen Z-X 2020 The Effect of the Cooling Rates on the Microstructure and High-Temperature Mechanical Properties of a Nickel-Based Single Crystal Superalloy Materials **13** 4256
[9] Tajiri H, Kumara L S R, Sakuraba Y, Chen Z, Wang J, Zhou W, Varun K, Ueda K, Yamada S, Hamaya K and Hono K 2022 Structural insight using anomalous XRD into Mn2CoAl Heusler alloy films grown by magnetron sputtering, IBAS, and MBE techniques Acta Materialia **235** 118063

©IJRASET: All Rights are Reserved

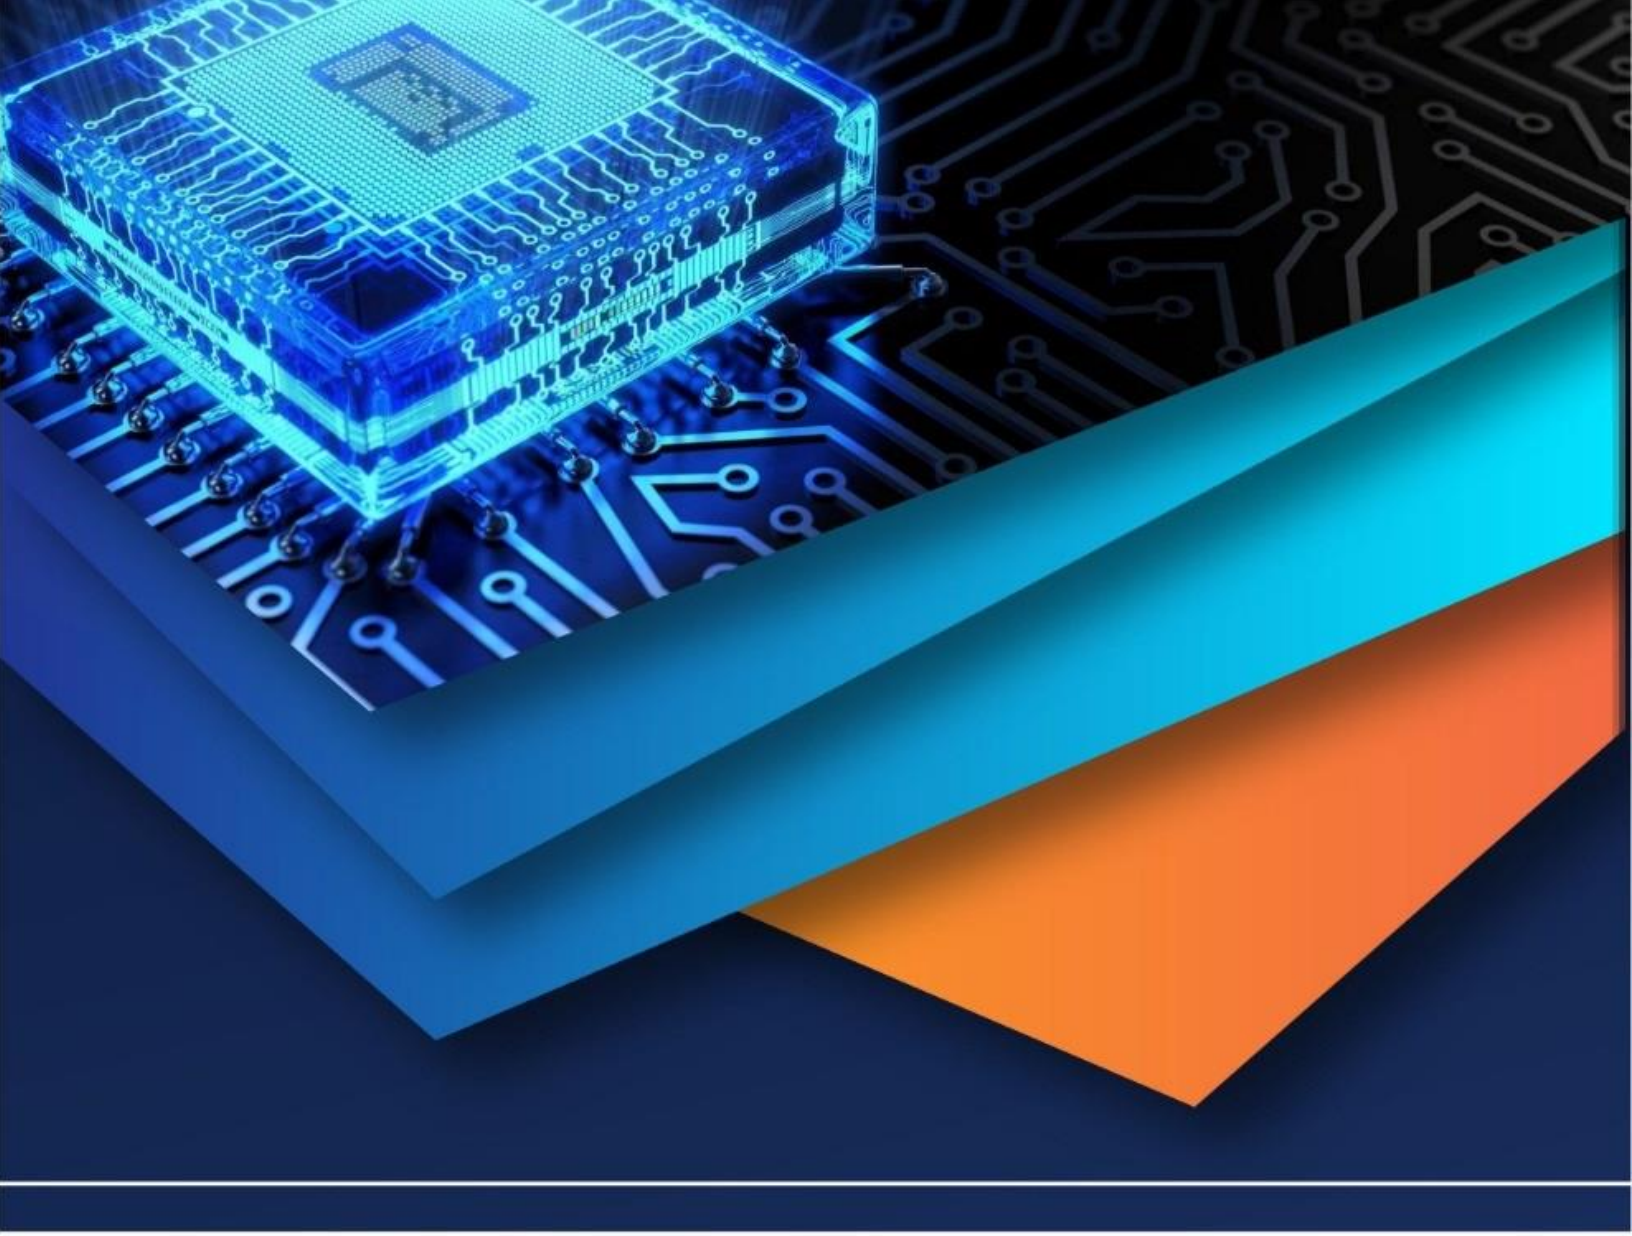

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)