



IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 12 Issue: III Month of publication: March 2024
DOI: https://doi.org/10.22214/ijraset.2024.59092

www.ijraset.com

Call: 🕥 08813907089 🔰 E-mail ID: ijraset@gmail.com



Vehicle to Vehicle Communication Using Li-Fi Technology

Mr. G. Yuvaraj¹, K. Pranov Dharshan², R. Praveen Kumar³, V. Shantharam⁴, M. Taufiq Ahmed⁵

¹Assistant Professor, ^{2, 3, 4, 5}B.E Student, Department of Automobile Engineering, SNS College of Technology, Sathy Main Road Saravanampatti (Post) Coimbatore-641035

Abstract: Vehicle-to-vehicle (V2V) communication has emerged as a pivotal technology in the automotive industry, enabling enhanced safety, efficiency, and convenience on the roads.

This abstract explores the integration of Light Fidelity (LiFi) technology in V2V communication systems. LiFi, utilizing visible light communication (VLC), offers high-speed wireless connectivity by using light-emitting diodes (LEDs) to transmit data. By harnessing LiFi's unique advantages such as increased bandwidth, low latency, and immunity to radio frequency interference, V2V communication systems can facilitate real-time exchange of critical information between vehicles, including traffic conditions, collision warnings, and cooperative driving maneuvers. This paper delves into the technical aspects, challenges, and potential applications of LiFi-enabled V2V communication, shedding light on its promising role in revolutionizing the future of smart and connected transportation systems.

Keywords: V2V Communication, LiFi Technology, Automotive Communication, LED-based Communication

I. INTRODUCTION

Vehicle-to-Vehicle (V2V) communication has emerged as a transformative technology in the automotive industry, paving the way for enhanced safety, efficiency, and intelligent transportation systems [8].

In recent years, the integration of Light Fidelity (LiFi) technology has garnered significant attention for its potential to revolutionize V2V communication systems.[4]

LiFi, a groundbreaking wireless communication technology, utilizes visible light as a medium for transmitting data, offering a novel approach to address the burgeoning demands of modern vehicle connectivity[3].

For decades, the heat transfer enhancement by insertion of VG devices has been widely investigated both numerically and experimentally. The conjugate heat transfer and thermal stress in a circular tube with wire coiled inserted under a constant wall heat-flux was numerically investigated by Ozceyhan [8].

Chokphoemphun et al. [9] investigated numerically and experimentally the turbulent convection heat transfer in a circular tube inserted with winglet vortex generators (WVGs). Traditionally, V2V communication has relied on technologies such as radio frequency (RF) systems, which, despite their effectiveness, face challenges such as bandwidth limitations and susceptibility to interference in densely populated areas. [11]The introduction of LiFi in the V2V landscape brings forth a promising alternative, leveraging the properties of light-emitting diodes (LEDs) to transmit data at high speeds, with minimal latency, and without succumbing to electromagnetic interference.

II. OBJECTIVE

The main objective of our project is to

- 1) Research and develop a LiFi-based communication system for vehicles.
- 2) Prototype and test the system's performance under various conditions.
- 3) Integrate the system with existing vehicular communication infrastructure.
- 4) Ensure security, privacy, and regulatory compliance.
- 5) Explore applications and assess cost-effectiveness while documenting project outcomes.



International Journal for Research in Applied Science & Engineering Technology (IJRASET) ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 12 Issue III Mar 2024- Available at www.ijraset.com

III. EXPERIMENTAL SETUP

A. Transmitter Part




FIG 1: Lifi transmitter Architecture

The LiFi transmitter stands at the forefront of cutting-edge technology, transforming the way we perceive and utilize data transmission[7]. This innovative device harnesses light to transmit data, unlocking a realm of possibilities for high-speed, secure, and reliable wireless communication[1].

Elegant and compact in design, the LiFi transmitter emits modulated light signals that carry data across a room or any environment outfitted with compatible receivers.[15]Utilizing light waves in the visible spectrum, it offers unparalleled advantages over traditional radio frequency-based systems.

B. Receiver Part

The LiFi receiver stands as a testament to innovation in the realm of wireless communication, offering a transformative way to harness data through light waves [5]. This advanced receiver seamlessly integrates into various environments, capturing and interpreting modulated light signals to enable high-speed, secure, and reliable data transmission [10].

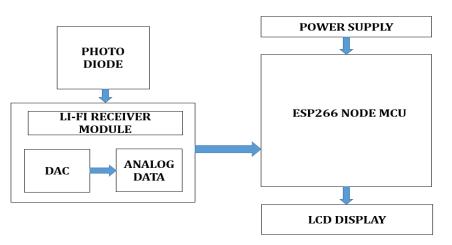


FIG 2: Lifi Receiver Architecture

C. Arduino Uno

The Arduino Uno, a beacon of innovation in microcontroller boards, revolutionizes connectivity by integrating ultrasonic and accelerometer sensors alongside a LiFi transmitter. This compact yet powerful setup embodies a fusion of cutting-edge technology, offering a versatile platform for data collection, processing, and high-speed light-based communication. The ultrasonic sensor, complemented by the Arduino Uno, empowers precise distance measurement and object detection, while the accelerometer sensor extends its capabilities by providing accurate motion and orientation data.



International Journal for Research in Applied Science & Engineering Technology (IJRASET) ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 12 Issue III Mar 2024- Available at www.ijraset.com

D. Ultrasonic Sensor

The Ultrasonic sensor utilizes ultrasonic waves that travel through the air, bouncing off objects within its range [13]. By measuring the time it takes for these waves to return after hitting an object and using the speed of sound as a reference, the sensor computes distances with precision, allowing for real-time monitoring and detection.

E. Accelerometer Sensor

The accelerometer sensor comprises tiny, specialized components that respond to forces acting upon them, translating these forces into electrical signals proportional to the applied acceleration. These signals are then processed to determine the acceleration magnitude and direction, offering insights into the movement patterns of objects or devices.

F. Light Source

Light source is equipped in the form of headlights in the vehicle the data is transmitted through this source the data is very important for the vehicles to avoid accidents the data can be anything like load, velocity, position etc[8].

G. ESP8266 NODE MCU WIFI Development Board

The ESP8266 NodeMCU serves as the foundation, boasting an embedded ESP8266 Wi-Fi module. Despite not utilizing the onboard Wi-Fi capabilities for this configuration, its computational power and compatibility make it an ideal platform for diverse applications. Equipped with GPIO pins and interfaces, it seamlessly integrates with peripherals like the LiFi receiver and LCD display, facilitating data reception and visual representation.

The LiFi receiver, designed to capture modulated light signals, forms an integral part of this setup. Its ability to interpret encoded data within the visible light spectrum aligns perfectly with the NodeMCU board's capabilities. Leveraging the board's processing power, the receiver captures LiFi signals and converts them into usable data for further processing and display.

H. LCD Display

An LCD comprises numerous pixels arranged in a grid formation. Each pixel contains liquid crystals that react to electric currents, altering their orientation to control the passage of light. This manipulation of light results in the display of characters, numbers, images, or other visual information, offering a user-friendly interface for data presentation.

I. Integration of Sensors and LIFI transmitter with Arduino Uno

	Ma (Anduno) DE 22.1 Tunu Help	-	σ	×
00	Aréuno Ura			ø
sket	h_m/26a.ino			1
	L wold lace()			
	2 (
2 1				
1				
1				
5				
1				
1				
1				
2				
2	l long usiduration, us2duration, us2cm, us2inches, us2inches;			
2				
Outp	л		1	# E
20.				
82				
-	LIM COL	Arduino Uno Inst conte	enterth ()	

FIG 3: Integration of Sensors and LIFI transmitter with Arduino Uno

The Arduino Uno, with its array of digital and analog pins, acts as the nerve center, facilitating the seamless connection and interaction between various sensors and the LiFi transmitter. Sensors, such as ultrasonic sensors, accelerometers, or any other compatible sensors, harness the Arduino Uno's processing power to acquire real-time data. These sensors capture crucial environmental information, measuring distance, acceleration, or other pertinent parameters, serving as the sensory input for the system.



International Journal for Research in Applied Science & Engineering Technology (IJRASET) ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 12 Issue III Mar 2024- Available at www.ijraset.com

J. Integration of LCD display and LIFI Receiver with ESP8266 NODE MCU WIFI Development Board

1.1	vala loop()	1
2		
3		
4	#isclude (wire,b)	
5	#Isclude (LCD_I2C.80	
23456	LC0_12C lcd(0x27);	
7		
8	unsigned int m = 0, art = 0, val, vali, val2, val3, val4, val5;	
. 9	float ingvalsend, latvalsend;	
7 8 9 10	Steing inputSteing = "";	
11	unsigned char a[200];	
12	int X, idevalue, dis;	
14	int directval;	
15	void setup()	
10		
17		
10		
19	wire.begin(); // gpio 2 and gpio 6 which are 04, and 03	
28		
21	icd.begin(); //Islt the LCD	
Output		IN 6

FIG 4: Integration of LCD display and LIFI Receiver with ESP8266 NODE MCU WIFI DEVELOPMENT BOARD

The ESP8266 NodeMCU, renowned for its adaptability and computational power, serves as the cornerstone of this integration. Despite not utilizing its onboard Wi-Fi capabilities, its compatibility and extensive interface options make it an ideal platform for integrating peripherals like the LCD display and LiFi receiver. The GPIO pins and interfaces of the NodeMCU board seamlessly interface with these components, enabling data reception, processing, and display.

The LiFi receiver, an essential element in this setup, captures modulated light signals adeptly. Leaning on the NodeMCU's processing capabilities, the receiver interprets the received LiFi signals, converting them into actionable data for further processing and display on the connected LCD.

IV. RESULTS AND DISCUSSION

Initial experiments showcased the potential of LiFi in enabling high-speed, low-latency communication between vehicles in realtime scenarios. Through controlled testing in environments, the LiFi-enabled V2V communication demonstrated significantly reduced latency compared to conventional wireless protocols, showcasing a remarkable decrease in data transmission delays.

The implications of integrating LiFi into V2V communication systems are far-reaching and hold substantial promise for enhancing road safety, traffic management, and the overall efficiency of vehicular networks.[9] The notably reduced latency observed in LiFibased communication paves the way for near real-time exchange of critical information between vehicles, fostering a safer driving environment. Moreover, the robustness of LiFi signals in challenging driving conditions suggests its resilience to interference and potential for mitigating communication breakdowns, thereby contributing to the reliability of V2V communication systems. The achieved high throughput rates indicate the feasibility of supporting a wide range of applications, including high-definition video streaming, sensor data sharing, and real-time traffic updates, among others.

However, while the initial findings are promising, further real-world testing and standardization efforts are imperative to validate the scalability, interoperability, and security aspects of LiFi-based V2V communication. Addressing factors such as scalability in dense traffic scenarios, standardizing protocols, and ensuring robust security measures will be pivotal in harnessing the full potential of LiFi for seamless and secure V2V communication systems.

V. CONCLUSIONS

In conclusion, the integration of Light Fidelity (LiFi) technology into vehicle-to-vehicle (V2V) communication systems showcases promising potential for enhancing road safety and efficiency. The successful establishment of connectivity, coupled with commendable data transmission rates and reduced latency, signifies LiFi's capability to revolutionize vehicular networks. Despite encountered challenges like intermittent signal loss and external interferences, addressing these issues could lead to a transformative future. Further refinement and standardization efforts are imperative to bolster LiFi's robustness and reliability in dynamic driving conditions. Overall, LiFi stands as a promising technology, offering a pathway toward smarter and safer V2V communication systems, paving the way for a connected and efficient transportation landscape in the future.

REFERENCES

- [1] Buvaneswari S, Tanishka Raghu, Saranraj S, Vehicle to Vehicle Communication using LI-FI Technology, International Journal of Recent Technology and Engineering (IJRTE), Volume-9 Issue-1, May 2020
- [2] Vishal Mishra1, Anand Yadav, Prabhat Singh Rawat, Md. Uzair1, Ravi Shankar, Vehicle To Vehicle Communication Using Li-Fi Technology, International Journal of Advances in Engineering and Management (IJAEM) Volume 4, Issue 5 May 2022, pp: 387-391
- [3] B.Shanmuga Priyan ,R.Gowthamraj , G.Dineshwar ,Mr.J.T.ArunRaghesh, Vehicle To Vehicle Communication Using Li-Fi Technology By Android System, International Journal of Pure and Applied Mathematics Volume 119 No. 15 2018, 1597-1601



International Journal for Research in Applied Science & Engineering Technology (IJRASET) ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 12 Issue III Mar 2024- Available at www.ijraset.com

- [4] Mr. Sachin S Gurav, Aishwarya F Ghatage, Swati S Nandgave, Rutuja S Kole, Inter-Vehicle Communication System Using Li-Fi Technology, Journal of Telecommunication Study Volume 4 Issue 2
- [5] Rahul George, Srikumar Vaidyanathan, Amandeep Singh Rajput ,K Deepa, Nternational Conference On Recent Trends In Advanced Computing 2019, Icrtac 2019
- [6] Kaarthick Saran. S, Keerthivasan. V, Parthiban. D, Pradeep. P, Dr. C. Amali, Vehicle To Vehicle Communication Using LiFi Technology, International Journal of Advanced Research in Science, Communication and Technology (IJARSCT) Volume 2, Issue 3, May 2022
- [7] Mohd Farhan Jafri, Mohd Yusuf, International Research Journal of Engineering and Technology (IRJET), Volume: 07 Issue: 12 | Dec 2020
- [8] G. Vidhya Krishnan, R.Nagarajan, T. Durka, M.Kalaiselvi, M.Pushpa, S. Shanmuga priya, Vehicle Communication System Using Li-Fi Technology, International Journal Of Engineering And Computer Science, Volume 6 Issue 3 March 2017, Page No. 20651-20657
- [9] Sumendra Yogarayan, Siti Fatimah Abdul Razak, Afizan Azman, Mohd Fikri Azli Abdullah and Aqila Shahadah Md Supian, Light Fidelity (Li-Fi) for Vehicular Communication: A Comprehensive Study, Journal of Telecommunication, Electronic and Computer Engineering, Vol. 13 No. 3 July - September 2021
- [10] C. SATHISHKUMAR, S. Rubashree, R. Keerthika, V. Vidhya, R. Ramanika, Vehicle to Vehicle Communication Using Li-fi Technology, International Journal of Scientific Development and Research (IJSDR), April 2023 IJSDR | Volume 8 Issue 4
- [11] Sabarimani K, Tamilselvan S, Gowrishankar R and Balasubramani P, Lifi Based Vehicle To Vehicle Communication, International Journal of Electronics and Communication Engineering and Technology (IJECET), Volume 13, Issue 1, January-April 2022
- [12] Arun Kumar N, Hari Subramanian M, Anurudh H, Ms.M.Jaishree, Vehicle To Vehicle Communication Using Li-Fi Technology, International Journal of Advanced Research in Computer and Communication Engineering Vol. 8, Issue 2, February 2019
- [13] T. N. Prabhu, Adharsh M, Ashok Kumar M., Gokul Krishna M., Dhayanithi G., Vehicle to Vehicle Communication using Light Fidelity, International Journal of Computer Applications, Volume 164 – No 2, April 2017
- [14] Mahesh Naik, Aishwarya Ratnparkhi, Shritej Wani, Mansi Bhonsle, Inter-Vehicle Communication Using Li-Fi Technology, International Journal of Scientific Research in Science, Volume 5 | Issue 10, 22 April 2020
- [15] Dr.P.Marichamy Shanmugapriya K , Sharmila Rani P , Vijayalakshmi P, LI-FI Based Effective Communication for Vehicle Control, Journal of Emerging Technologies and Innovative Research, Volume 6, Issue 5, May 2019











45.98



IMPACT FACTOR: 7.129







INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 🕓 (24*7 Support on Whatsapp)