



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 5      Issue: X      Month of publication:      October 2017**

**DOI:      <http://doi.org/10.22214/ijraset.2017.10237>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Strength Study on Activated Fly ASH Concrete with Glass Fiber

Jayashree.V<sup>1</sup>, L. Lavanya<sup>2</sup>

<sup>1</sup>PG Student, <sup>2</sup>Associate Professor, Dept of Civil Engineering, JCT College of Engineering and Technology, Tamil Nadu, India.

**Abstract:** Concrete has become an indispensable construction material and it is now used in greater quantities than any other material. In the current era, the concept of durability and the sustainable development are the key issues for the development. The replacement of cement with fly ash benefits cost saving, energy saving environmental protection and conservation of resources. The replacement of cement with fly ash decreases the early strength and increases setting time. But chemical activation is simple and economical. The chemical activators destroy the crystalline structure and produces calcium silicate hydrate which enhances the strength and durability of concrete. In this study fly ash is activated using chemicals like calcium oxide (CaO) and sodium silicate (Na<sub>2</sub>SiO<sub>3</sub>) in the ratio of 1:8 for the effective inclusion of fly ash as replacement to cement. The percentages of replacement of activated fly ash (AFC) are 30%. The hardened concrete properties are studied and compared with control mix with PPC and fly ash concrete without activation. In general the concrete is weak in tension to increase the tension nature in the concrete addition of fiber is taken place. So we are using glass polymer fiber to gain such tensile strength. The proportion of the fiber we are used 0.5% and 1% from the weight of cement.

**Keywords:** Fly Ash, Activated Fly Ash, Glass fiber, workability, strength

## I. INTRODUCTION

Fly ash is being increasingly used in concrete to lower the costs and improve the properties of concrete. However the replacement of Portland cement with fly ash especially in high volume decreases the earlier strength of the concrete.

A. Fly ash contributes the strength of concrete in three ways,

- 1) By reduction of water requirement for a given slump.
- 2) By increasing the volume of paste there by improvement of workability.
- 3) By pozzolanic reaction between fly ash and CaO.

Containing fly ash is attributed to the slow pozzolanic reaction between fly ash and CaO.

Little work has been done on the chemical activation of the reactivity of fly ash. Earlier studies have indicated that the addition of chemical activators can effectively accelerate or improve the pozzolanic reaction of natural pozzolans. In a primary study, it was found that the reactivity of fly ash could be significantly increased by addition of CaO and Na<sub>2</sub>SiO<sub>3</sub>. This study examines the effect of chemical activators CaO and Na<sub>2</sub>SiO<sub>3</sub> on early microstructure development of lime fly ash pastes and the strength of concrete compared to ordinary Portland cement and inactivated fly ash. The M<sub>20</sub> grade of concrete was used with mix proportion of 1:1.28:2.78 kg/m<sup>3</sup> at 0.50 water binder ratio. The mechanical properties such as cube compressive strength, split tensile strength & flexural strength were studied at 7 and 14 days.

## II. MATERIALS AND METHODS

A. fly ash

Fly ash is one of the residues generated in the combustion of coal. Fly ash is generally captured from the chimneys of power generation facilities, whereas bottom ash is, as the name suggests, removed from the bottom of the furnace. In the past, fly ash was generally released into the atmosphere via the smoke stack, but pollution control equipment mandated in recent decades now require that it be captured prior to release. It is generally stored on site at most US electric power generation facilities. Depending upon the source and makeup of the coal being burned, the components of the fly ash produced vary considerably, but all fly ash includes substantial amounts of silica (silicon dioxide, SiO<sub>2</sub>) (both amorphous and crystalline) and lime (calcium oxide, CaO). Fly ash is commonly used to supplement Portland cement in concrete production, where it can bring both technological and economic benefits, and is increasingly finding use in synthesis of geopolymers and zeolites.

Fly ash is a residue left after burning of coal in thermal power plants and need suitable disposal systems so that it does not become hazardous and injurious to human life, ecology and environment. Beside the use of fly ash as partial cement replacement materials, its use as aggregate in concrete can pave the way for large-scale use of fly ash.

Fly ash is a powdery pozzolana capable of utilizing both heat and calcium hydroxide generated during cement hydration of Portland cement. Hence, it has become a partial replacement material, as already explicitly in IS 456-2000. Annual production of fly ash in India is expected to reach 120 million tonne by 2020. Only about 15% of fly ash produced is utilized at present India. Attempts to use fly ash in production of Portland pozzolana and also as cement replacement material on site, as construction activities have been able to utilize only small fraction of the available fly ash in the country.

Due to lower thermal conductivity of fly ash, there will be enhanced comfort in the building and also energy saving when the buildings are air-conditioned to house important commercial utility and production facilities. Fly ash varies in colour from light to dark grey. This grey colour of fly ash is due to its carbon content. Generally Indian fly ash consists of relatively high silica content, high alumina content, high unburnt carbon and low CaO content.

### B. Activated Fly Ash

The utilization of fly ash as construction material largely depends on its mineral structure and pozzolanic property. These two properties of fly ash can be enhanced by different methods of activation. The chemical activators destroy the crystalline structure and produce calcium silicate hydrate, which enhances the strength and tolerance capacity of the concrete against corrosive atmosphere

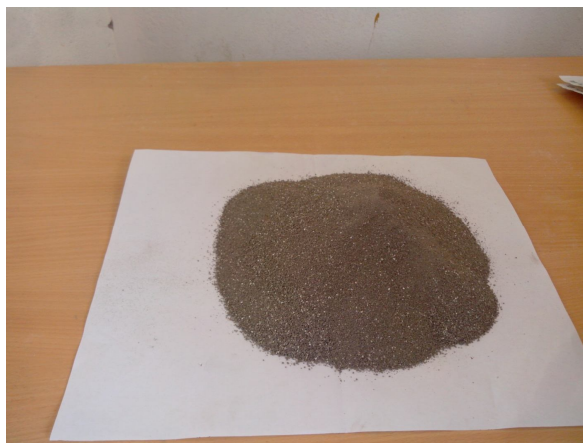


Fig1. Powdered form of Activated Flyash

This project highlights the chemical activation of fly ash by using CaO and Na<sub>2</sub>SiO<sub>3</sub> in the ratio 1:8 and inclusion of activated fly ash as replacement material in PPC at various levels 10%, 20% and 30%.

thermal and chemical activation methods have been effected and their performance characteristics tested by aggressive macro cell corrosion technique. Earlier studies show that the physical and thermal activation of fly ash proves to be difficult which needs special methods and costly machinery whereas the chemical activation is simple and cheap.

GLASS FIBER: Glass fiber also called fiber glass it is made from extremely fine fiber of glass of fiber glass is a lightweight extremely strong and robust material. Its bulk strength and weight properties are also very favourable when compared to metals and it can be easily formed using moulding process.

### C. Laboratory work and Test Procedure

- 1) Fly ash in dry powder form obtained from Thermal power plant. It was used for the entire study
- 2) Activation of fly ash was carried out using Calcium Oxide and Sodium Silicate in the ratio 1:8
- 3) The required quantity of sodium silicate in gel form and calcium oxide in paste form are mixed in a vessel and heated at a temperature of 103°C to ensure proper mixing
- 4) Then finally paste like appearance occurs, then it gets cooled and grinded into fine powder form
- 5) This powder form activated fly ash is replaced as 30% in ordinary cement.

- 6) In general the concrete is weak in tension to increase the tension nature in the concrete addition of fiber is taken place. So we are using glass polymer fiber to gain such tensile strength.
- 7) Fly ash in dry powder form obtained from Thermal power plant. It was used for the entire study
- 8) Activation of fly ash was carried out using Calcium Oxide and Sodium Silicate in the ratio 1:8
- 9) The required quantity of sodium silicate in gel form and calcium oxide in paste form are mixed in a vessel and heated at a temperature of 103°C to ensure proper mixing
- 10) Then finally paste like appearance occurs, then it gets cooled and grinded in to fine powder form
- 11) This powder form activated fly ash is replaced as 30% in ordinary cement.
- 12) In general the concrete is weak in tension to increase the tension nature in the concrete addition of fiber is taken place. So we are using glass polymer fiber to gain such tensile strength.
- 13) The proportion of the fiber we are used 0.5% and 1% from the weight of cement.

Sl.no	Physical properties	Values in %
1	Fineness(passing through 45µm)	78.7
2	Specific gravity	2.3

Table: 1 PHYSICAL PROPERTIES OF FLY ASH

Sl.no	Chemical properties	Values in %
1	Silica	59.62
2	Alumina	26.43
3	Iron oxide	6.61
4	Calcium oxide	1.2
5	Magnesium oxide	0.76
6	Sulphur trioxide	0.58
7	Tin oxide	1.56
8	Loss on ignition	1.76

Table: 2 CHEMICAL PROPERTIES OF FLY ASH

Water	Cement	Fine Aggregate	Course Aggregate
191.6	383	546	1187
0.50	1	1.28	2.87

Table: 3 MIX PROPORTION

### III. RESULTS AND OBSERVATIONS

#### A. Compressive Strength( Cube)

Compressive strength of concrete was determined at 7 and 14 days of curing. Tests were carried out on 150mm x 150mm x 150mm size cubes. A 2000 KN capacity standard compression testing machine was used to conduct the test.

The results of AFC concrete are compared with that of conventional concrete.



Mix	Replacement	7 Days (Mpa)	14 Days (Mpa)
Control (PPC)	-	17.33	18.55
0.5 % FIBRE	30%	16.90	19.55
1.0 % FIBRE	30%	18.22	20.88

Fig 2: COMPRESSIVE STRENGTH VALUES

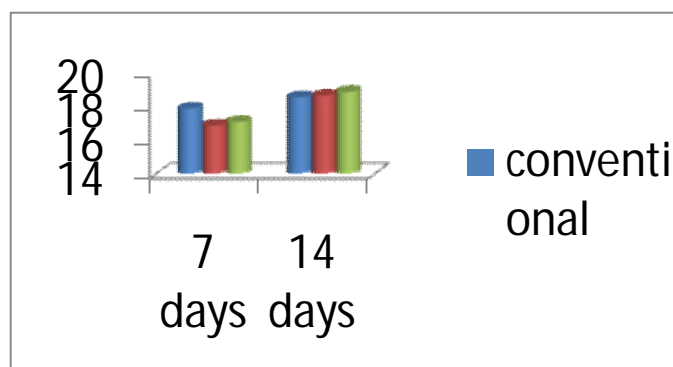


CHART 1: COMPRESSIVE STRENGTH

### B. Split Tensile Strength

Split tensile strength was determined for 28 days. The test was carried out on cylindrical specimens of 150mm diameter and length 300 mm using 2000kN capacity compression testing machine.

Mix	Replacement	7 Days (Mpa)	14 Days (Mpa)
Control (PPC)	-	1.2	1.97
0.5 % FIBRE	30%	1.45	2.12
1.0 % FIBRE	30%	1.74	2.44

Table: 5 Split Tensile Strength Values

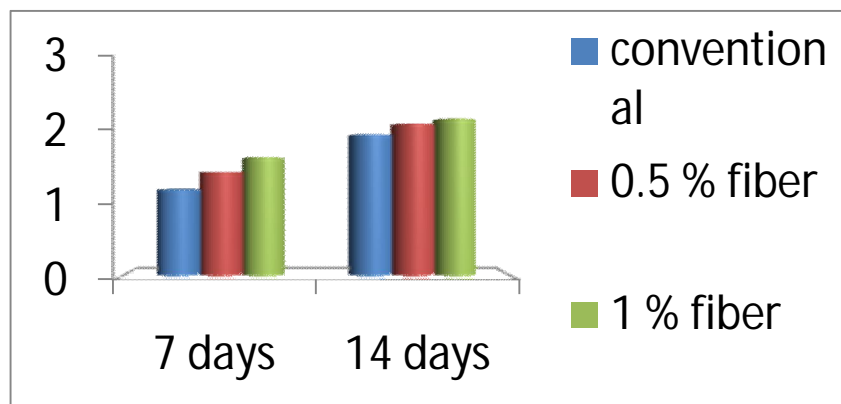


Fig 3: SPLIT TENSILE STRENGTH

### C. Result

#### 7<sup>th</sup> DAY STRENGTH

From the result of 7<sup>th</sup> day compressive strength, PPC is more than AFFC with 1.22 %.

For the result of 7<sup>th</sup> day split tensile strength, conventional concrete is less than AFFC 1.92 %.

For the flexural strength of 7<sup>th</sup> day is conventional is less than compare to AFFC 3.14%.

#### 14<sup>th</sup> DAY STRENGTH

From the result of 14<sup>th</sup> day compressive strength, AFFC with 10.60% is more than PPC and that of AFFC.

From the result of 14<sup>th</sup> day tensile strength, AFFC with 1.22% is more than PPC and that of AFFC.

From the result of 14<sup>th</sup> day flexural strength, AFFC with 1.60% is more than PPC.

## IV. CONCLUSIONS

- A. Since fly ash is very tiny particle it reduces corrosion in reinforcement.
- B. It reduces heat of hydration when compare to concrete.
- C. It does not emit any carbon-di-oxide and protect global warming.
- D. The replacement of activated (calcium oxide and sodium silicate) fly ash 30% in the volume of cement the required strength get obtained in 28 days.
- E. To increase the tensile nature in the concrete the fiber are used, that fiber will also attain proper strength in 14 days itself.
- F. Further replacement of 50% activated fly ash with cement has been carried out by different chemicals.
- G. And also the replacement of fiber up to 2-3% may get increased tensile strength of concrete.

## REFERENCES

- [1] P.Arjunan,M.R.Silpsee,D.M.Roy , “Chemical activation of low calcium fly ash Part I&II effect of mineralogical composition on alkali action”
- [2] V.Saraswathy,S.Muralidharan,K.Thangavel and S.Srinivasan, “Activated fly ash cements:Tolerable limit of replacement for durable steel reinforced concrete”.
- [3] Ferna' ndez-jime' nez,A.Palomo,M.Criado, “Microstructure development of alkali-activated fly ash cementra descriptive model”
- [4] Ana M.Ferna' ndez-Jime' nez,Angel Palomo,and Cecilio Lo'pez-Hombrados, “experimental research on certain engineering properties of a new(Portland cement ee) concrete made with alkali-activated fly ash”.
- [5] Malhotra V.M. , “Making concrete greener with fly ash”
- [6] Prabir C.Bassu and Subhagit Saraswati, “High volume fly ash concrete with Indian ingredients”
- [7] V.M.Malhotra., “Global warming role of supplementary cementing Materials and Super Plasticizers in reducing Green house gas emissions from the manufacturing of Portland cement”,
- [8] B.S.Krishnamurthy,Rose Sherin Jose, K.B.Prakash, An Experimental Investigation on The Properties of Concrete Containing Ternary Blends,Fly Ash
- [9] K.Ganesan,K.Rajagopal,K.Thangavel,R.Selavaraj and V.Saraswathy, “Rice husk ash- A versatile supplementary Cementitious material”
- [10] A.K Prashar,D Venkateswaran , proving efficiency of ashes from power plants-technological options”.
- [11] Quan Jueshi,shi Caijun and Wang Zhi, “Activation of blended cements incorporating fly ash”
- [12] Shi.C and Day.R.L, “Pozzolanic reactions in the presence of chemical activation,part I, reaction kinetics”,
- [13] J.K.Dattatreya,M.Neelamegam & N.P.Rajamane, “A comparison of effects of ultra fine fly ash and silica fume in concrete”.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)