



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 2

Issue: IX

Month of publication: September 2014

DOI:

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Analysis of Spatial domain and Frequency domain Techniques for Car plate detection

G.P.S.Manideep¹, Prof.G. K. Rajini², A.Sharmila³

School of Electrical Engineering, VIT University

Vellore - 632014, India

Abstract : In last couple of decades, the number of automobiles has increased drastically. With this increase, it is difficult to keep track of each automobile for purpose of law enforcement and traffic management. License Plate Recognition is used increasingly nowadays for automatic toll collection, maintaining traffic activities and law enforcement. Many techniques have been proposed for plate detection, each having its own advantages and disadvantages. The basic step in License Plate Detection is localization of number plate. The approaches mentioned in this work are a Spatial domain(Histogram Based Approach(HBA)) and transform domain(Steerable wavelet) for car license plate detection analysis is done for both approaches by performance measures like Peak signal to noise ratio(PSNR), Mean square error(MSE) and success ratio, consumption time. The transform domain technique using steerable wavelets seems to be promising for this application.

I. INTRODUCTION

With increasing number of automobiles on roads, it is difficult to manually enforce laws and traffic rules for smooth traffic process. Toll-booths are constructed on freeways and parking structures, where the car has to stop to pay the toll or parking fees. Also, Traffic Management systems are installed on freeways to check for automobiles moving at speeds not permitted by law. In order to automate these processes and make them more effective, a system is required to easily identify an individual automobile. The important question here is how to identify a particular automobile? The obvious answer to this question is by using the automobile's number plate. Automobiles in each country have a unique license number, which is written on its license plate. This number distinguishes one automobile from the other, which is useful especially when both are of same make and model. An automated system can be implemented to identify the license plate of an automobile and extract the characters from the region containing a license plate. The license plate number can be used to retrieve more information about the automobile and its owner, which can be used for further processing. Such an automated system should be small in size, portable and be able to process data at sufficient rate. Various license plate detection algorithms have been developed in past few years. Each of these algorithms has their own advantages and disadvantages. As multiple detections are available for single license plate, post-processing methods are applied to merge all detected regions. In addition, trackers are used to limit the search region to certain areas in an image. Kwasnicka et al. [1] suggests a different approach of detection using binarization and elimination of unnecessary regions from an image. In this approach, initial image processing and binarization of an image is carried out based on the contrast between characters and background in license plate. After binarizing the image, it is divided into different black and white regions. These regions are passed through elimination stage to get the final region having most probability of containing a number plate.

II. EDGE DETECTION

Edges characterize object boundaries and are therefore useful for segmentation, registration and identification of the objects in scenes. Edge points can be thought of as pixel locations of abrupt gray-level change [12]. For example, it is reasonable to define edge points in binary images as black pixels with at least one white nearest neighbour, that is, pixel locations (m,n) such that $u(m, n)=0$ and $g(m,n)=1$, where

$$g(m, n) \triangleq [u(m, n)u(m \pm 1, n)] \text{OR} [u(m, n)u(m, n \pm 1)] \dots \text{Eq 2.1}$$

III. SPATIAL DOMAIN APPROACH

Spatial domain image processing is manipulating or changing an image representing an object in space to enhance the image for a given application. One way in which images are processed is to look at the neighbourhood around the pixel that you wish to manipulate. The neighbourhood around your pixel/ is made up of the surrounding pixels/s depending on how you define your neighbourhood. The value of a pixel, with a sum of all is given by

International Journal for Research in Applied Science & Engineering Technology(IJRASET)

$$g(x_i) = \sum_j \alpha_j x_j \quad \dots \text{Eq3.1}$$

IV. TRANSFORM DOMAIN APPROACH

The selection of the transform for the first implementation is governed by prior knowledge about image spectra in the transform domain, Accuracy of empirical spectrum estimation, Transform energy compaction capability, and computational complexity of the filtering in the transform domain. Some of these feasible transforms are DFT, DCT, DST, Haar, Walsh, Wavelets.

A. Wavelet Transform

The fundamental idea of wavelet transforms is that the transformation should allow only changes in time extension, but not shape. This is affected by choosing suitable basis functions that allow for this. Changes in the time extension are expected to conform to the corresponding analysis frequency of the basis. Multi resolution features time frequency domain information can be obtained simultaneously.

1) DWT

The DWT of a signal x is calculated by passing it through a series of filters. First the samples are passed through a low pass filter with impulse response g resulting in a convolution of the two:

$$y[n] = (x * g)[n] = \sum_k x[k]g[n-k] \dots \text{Eq4.1}$$

The signal is also decomposed simultaneously using a high pass filter h . The outputs giving the detail coefficients (from the high-pass filter) and approximation coefficients (from the low pass). It is important that the two filters are related to each other and they are known as a quadrature mirror filter.

However, since half the frequencies of the signal have now been removed, half the samples can be discarded according to Nyquist's rule. The filter outputs are then subsampled by 2 (Mallat's and the common notation is the opposite, g - high pass and h - low pass):

$$y_{low}[n] = \sum_k x[k]h[2n-k] \dots \text{Eq4.2}$$

$$y_{high}[n] = \sum_k x[k]g[2n-k] \dots \text{Eq4.3}$$

2) CWT

Continuous wavelet transform (CWT) is used to divide a continuous-time function into wavelets. Unlike Fourier transform, the continuous wavelet transform possesses the ability to construct a time-frequency representation of a signal that offers very good time and frequency localization. The continuous wavelet transform of a continuous, square-integral function.

$$x_w(a, b) = \frac{1}{\sqrt{|a|}} \int_{-\infty}^{\infty} x(t) \varphi\left(\frac{t-b}{a}\right) dt \dots \text{Eq4.4}$$

B. Steerable wavelets

Oriented filters are used in many vision and image processing tasks, such as texture analysis, edge detection, image data compression, and motion analysis and image enhancement. In many of these tasks, it is useful to apply filters of arbitrary orientation under adaption control, and to examine the filter output as a function of both orientation and phase. There are techniques that allow synthesis of a filter at arbitrary orientation and phase, and will develop methods to analyse the filter outputs. We will also describe efficient architectures for such processing, develop flexible design methods for filter in two and three dimensions, and apply the filters to several tasks in image analysis. One approach to finding the response of a filter at many orientations is to apply many versions of the same filter each different from the others by some small rotation in angle. A more efficient approach is to apply a few filters corresponding to a few angles and interpolate between the responses. With the correct filter set and the correct interpolation rule, it is possible to determine the response of a filter of arbitrary orientation without explicitly applying that filter. We will show that two and three dimensional functions are steerable, and will show how many basis filters are needed to steer a given filter.

C. Steerable Wavelet Properties

By using the fact that the polar representation of the Fourier transform of $Rn\psi(x)$ is $e^{in\theta}h(\omega)$ we can readily show that the Fourier transform of a generic steerable wavelet is polar-separable

International Journal for Research in Applied Science & Engineering Technology(IJRASET)

$$\psi_{\text{Gen}}(\mathbf{x}) = \sum_{n=-N}^N u_n R^n \psi(\mathbf{x}) \xleftrightarrow{F} \hat{\psi}_{\text{Gen}}(\omega) = h(\omega) \hat{u}(\theta) \dots 4.5$$

where $\hat{u}(\theta) = \sum_{n=-N}^N u_n e^{in\theta}$ is 2π -periodic. Conversely, we have the guarantee that the proposed representation provides a full parameterization of the wavelets whose Fourier transform is polar-separable because the complex exponentials $\{e^{in\theta}\}_{n \in \mathbb{Z}}$ form a basis of $L_2([-\pi, \pi])$. The steerable wavelet $\psi_{\text{Gen}}(\mathbf{x})$ is real-valued if and only if its Fourier transform is Hermitian-symmetric (i.e., $\hat{\psi}_{\text{Gen}}(-\omega) = \hat{\psi}_{\text{Gen}}^*(\omega)$). Since the real term $h(\omega)$ can be factored out, this gets translated into the angular condition $\hat{u}(\theta + \pi) = \hat{u}^*(\theta)$. Additionally, we can impose symmetry by considering Fourier series with even or odd harmonic terms.

V. MATLAB SIMULATION

The Flow chart used for license plate detection using spatial domain approach is shown in Fig5.1

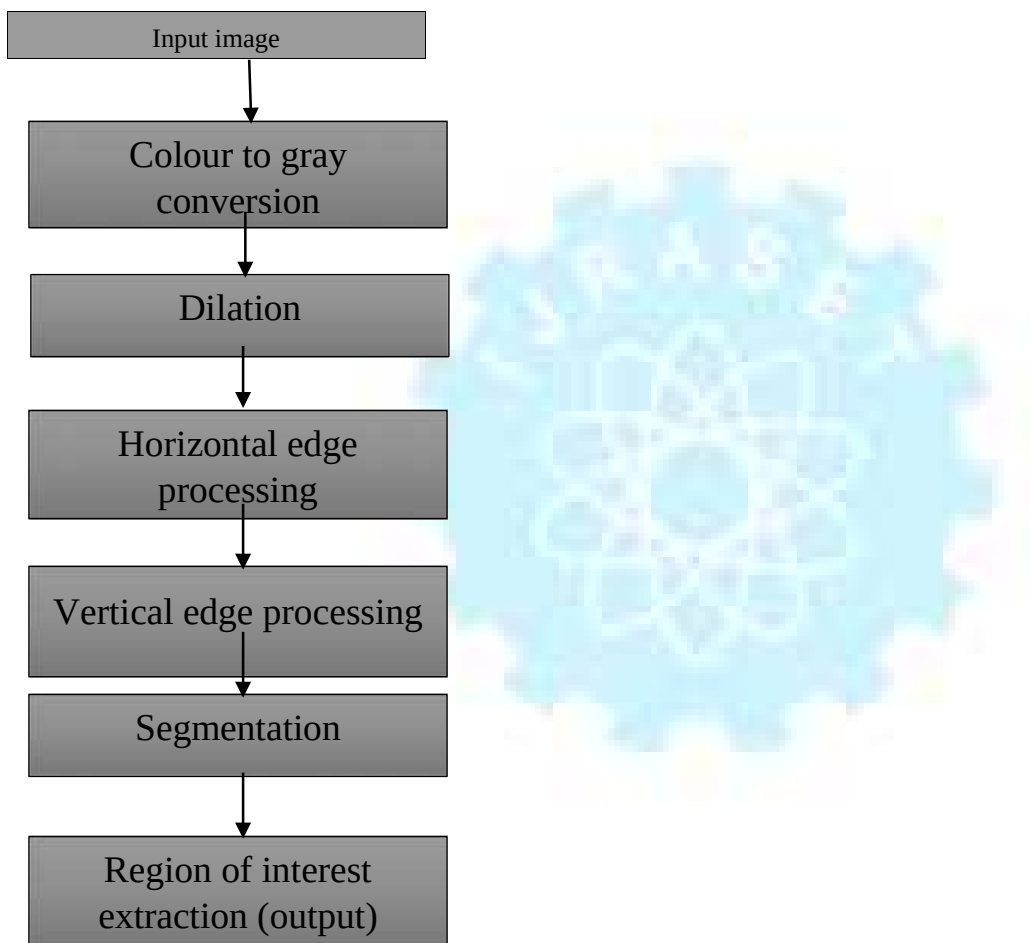


Fig.5.1 Flowchart of license plate detection using spatial domain approach

A. Convert a Coloured Image into Gray Image



International Journal for Research in Applied Science & Engineering Technology(IJRASET)

Fig 5.2 Original image

Fig 5.3 Gray image

The algorithm described here is independent of the type of colours in image and relies mainly on the gray level of an image for processing and extracting the required information. Colour components like Red, Green and Blue value are not used throughout this algorithm. So, if the input image is a coloured image represented by 3-dimensional array in MATLAB, it is converted to a 2-dimensional gray image before further processing. The sample of original input image is shown in Fig 5.2 and a gray image is shown in Fig 5.3

B. Dilate an Image

Dilation is a process of improving a given image by filling holes in an image, sharpen the edges of objects in an image, and join the broken lines and increase the brightness of an image. Using dilation, the noise with-in an image can also be removed. By making the edges sharper, the difference of gray value between neighbouring pixels at the edge of an object can be increased which enhances the edge detection. In Number Plate Detection, the image of a car plate may not always contain the same brightness and shades. Therefore, the given image has to be converted from RGB to gray form. The process of dilation will help to nullify such losses. The image below shows such figure in Fig 5.4



Fig 5.4 Dilated image

C. Horizontal and Vertical Edge Processing of an Image

Histogram is a graph representing the values of a variable quantity over a given range. These histograms represent the sum of differences of gray values between neighbouring pixels of an image, column-wise and row-wise. In the above step, first the horizontal histogram is calculated. To find a horizontal histogram, the algorithm traverses through each column of an image. In each column, the algorithm starts with the second pixel from the top. The difference between second and first pixel is calculated. If the difference exceeds certain threshold, it is added to total sum of differences. Then, algorithm will move downwards to calculate the difference between the third and second pixels. So on, it moves until the end of a column and calculate the total sum of differences between neighbouring pixels. At the end, an array containing the column-wise sum is created. The same process is carried out to find the vertical histogram. In this case, rows are processed instead of columns.

D. Passing Histograms through a Low Pass Digital Filter

Referring to the figures shown below, one can see that the histogram values changes drastically between consecutive columns and rows. Therefore, to prevent loss of important information in upcoming steps, it is advisable to smooth out such drastic changes in values of histogram. For the same, the histogram is passed through a low-pass digital filter. While performing this step, each histogram value is averaged out considering the values on its right-hand side and left-hand side. This step is performed on both the horizontal histogram as well as the vertical histogram. Below are the figures showing the histogram before passing through a low-pass digital filter and after passing through a low-pass digital filter in Fig 5.5 and Fig 5.6 respectively.

International Journal for Research in Applied Science & Engineering Technology(IJRASET)

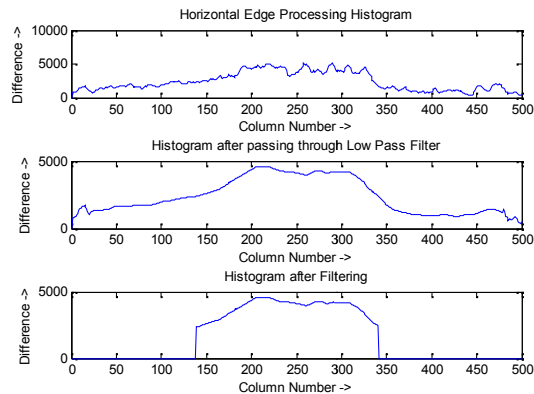


Fig 5.5 Horizontal image processing

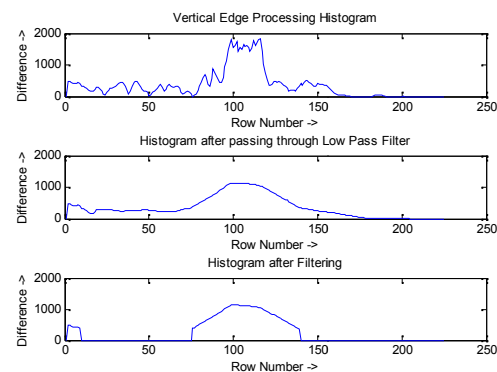


Fig 5.6 Vertical image processing

E. Filtering out Unwanted Regions in an Image

Once the histograms are passed through a low-pass digital filter, a filter is applied to remove unwanted areas from an image. In this case, the unwanted areas are the rows and columns with low histogram values. A low histogram value indicates that the part of image contains very little variations among neighbouring pixels. Since a region with a license plate contains a plain background with alphanumeric characters in it, the difference in the neighbouring pixels, especially at the edges of characters and number plate, will be very high. This results in a high histogram value for such part of an image.

Therefore, a region with probable license plate has a high horizontal and vertical histogram values. Areas with less value are thus not required anymore. Such areas are removed from an image by applying a dynamic threshold. In this algorithm, the dynamic threshold is equal to the average value of a histogram. Both horizontal and vertical histograms are passed through a filter with this dynamic threshold. The output of this process is histogram showing regions having high probability of containing a number plate. The filtered histograms are shown in fig 5.5 and 5.6

F. Segmentation

The next step is to find all the regions in an image that has high probability of containing a license plate using segmentation process. Co-ordinates of all such probable regions are stored



Fig 5.7 Segmentation

Fig 5.8 output image

in an array. The Segmented image displaying these regions is shown in Fig 5.7.

International Journal for Research in Applied Science & Engineering Technology(IJRASET)

G. Region of Interest Extraction

The output of segmentation process is all the regions that have maximum probability of containing a license plate. Out of these regions, the one with the maximum histogram value is considered as the most probable candidate for number plate. All the regions are processed rowwise and column-wise to find a common region having maximum horizontal and vertical histogram value. This is the region having highest probability of containing a license plate. The image detected license plate is shown in Fig 5.8. This algorithm was verified using several input images having resolution varying from 680 * 480 to 1600 * 1200. The images contained automobiles of different colours and varying intensity of light. With all such images, the algorithm correctly recognized the number plate. This algorithm was also tried on images having number plate aligned at certain angle (approximately 8-10 degree) to horizontal axis. Even with such images, the number plates were detected successfully.

1) Detection of license plate using frequency domain

The flow chart used for license plate detection using frequency domain approach is shown in the Fig 5.9

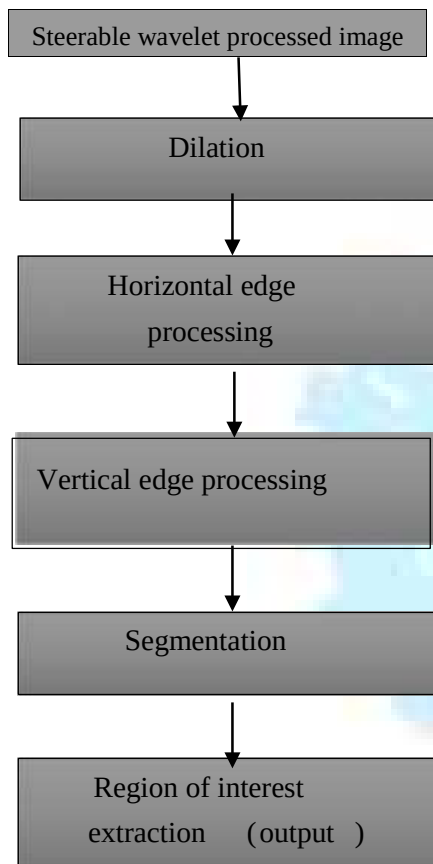


Fig 5.9 Flowchart of license plate detection using frequency domain approach

2) Detection of the plate after applying Steerable filter

A Steerable filter is applied to the original image of the auto mobile to be able to get an image with increased edge detection which makes the detection of license plate increase. The Steerable image of original image of auto mobile is shown in the Fig 5.10.



Fig 5.10 Image after applying steerable filter.



Fig5.11 Dilated image of steerable image.

International Journal for Research in Applied Science & Engineering Technology(IJRASET)

Once the steerable image of the original image is obtained the same steps are followed for detection of license plate as the steps mentioned in 5.1. The dilated image of the steerable image is shown in Fig 5.11.

After the dilation of the image it will be horizontally processed and a filter is applied for image by high pass filter filtering the sum that are less than that of the preferred sum. And omitting these out of the image, an image is acquired where the plate lies. The Horizontal edge processing is shown in Fig 5.12.

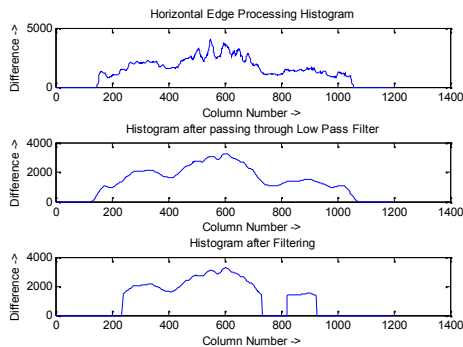


Fig5.12 Horizontal edge processing
of steerable image

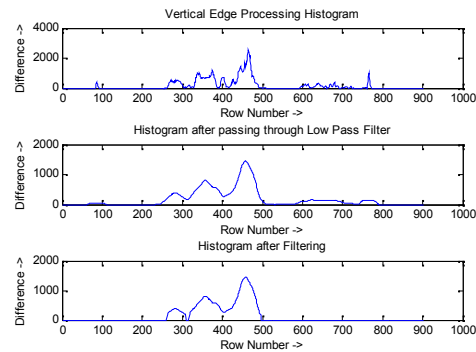


Fig 5.13 Vertical edge processing
of steerable image

Once the horizontal edge processing is done, the image is processed vertically for sum that is needed to be omitted. By applying a vertical processing filter to omit the regions with sum that is greater than that of the preferred sum is omitted and a image with areas of image with most possible chance for maintaining the image. After which the image processed for the areas with most possibility for containing the license plate. The image of vertical along with applying filter is shown in Fig 5.13. After applying both Horizontal and Vertical image processing a image areas with most possibility of containing the license plate would available. And image with highest histogram value will take as final output. The segmentation image is shown in image Fig 5.14.



Fig5.14 Segmentation
of steerable image



Fig5.15Output image
of steerable image

After segmentation the areas with most possibility for containing the output image are obtained which are later compared with each other for area most possibility for containing the image which is shown in Fig 5.15.

VI. RESULT ANALYSIS

The table below shows the type and number of plates and success ratio for detection of plates using MATLAB(R2009b).

License plate conditions	Success ratio	PSNR	MSE
Sunlight	100%	30.4951	228.7034
Cloudy weather	100%	28.219	245.8026
Shade	100%	29.746	233.9214

International Journal for Research in Applied Science & Engineering Technology(IJRASET)

A. Peak signal to noise ratio:-

Peak signal to noise ratio, often abbreviated PSNR, is an engineering term for the ratio between the maximum possible power of a signal and the power of corrupting noise that affects the fidelity of its representation. Because many signals have a very wide dynamic range, PSNR is usually expressed in terms of the logarithmic decibel scale.

B. Mean squared error:-

In statistics, the mean squared error (MSE) of an estimator measures the average of the squares of the "errors", that is, the difference between the estimator and what is estimated. MSE is a risk function, corresponding to the expected value of the squared error loss or quadratic loss. The difference occurs because of randomness or because the estimator doesn't account for information that could produce a more accurate estimate

PSNR and MSE equations and definitions

$$PSNR = 10 \log_{10} \frac{255^2}{MSE} \quad \dots\dots\dots \text{Eq5.1}$$

$$MSE = \frac{1}{M \times N} \sum_{m=0}^{M-1} \sum_{n=0}^{N-1} (f(m, n) - g(m, n))^2 \quad \dots\dots\dots \text{Eq5.2}$$

Average time taken for execution is 0.0547

PSNR and MSE for original colour image

PSNR	Original image		Gray image		Dilated image		segmentation		Region of interest extraction	
	PSNR	MSE	PSNR	MSE	PSNR	MSE	PSNR	MSE	PSNR	MSE
Original image	23.43	253.21	24.53	295.23	25.64	241.37	23.67	273.85	26.39	225.29
Gray image	21.57	289.14	22.84	276.91	23.09	193.51	33.12	269.31	28.19	183.32
Dilated image	19.15	270.62	20.51	303.78	21.59	295.29	31.48	252.83	26.71	214.34
Segmentation	28.14	234.83	29.38	319.29	31.23	283.15	27.38	281.38	29.05	371.83
Region of interest extraction	26.75	215.29	27.59	321.42	25.48	247.91	29.46	324.61	34.03	334.29

Table 5.2 PSNR and MSE for original images

International Journal for Research in Applied Science & Engineering Technology(IJRASET)

PSNR and MSE for Steerable image

PSNR	Steerable image		Dilated image		segmentation		Region of interest extraction	
	PSNR	MSE	PSNR	MSE	PSNR	MSE	PSNR	MSE
Steerable image	29.05	225.29	18.25	274.29	26.75	303.78	22.84	276.91
Dilated image	29.46	269.31	26.72	193.51	28.14	214.34	27.59	247.91
Segmentation	31.23	283.84	26.94	295.23	23.67	334.29	27.59	324.61
Region of interest extraction	27.59	232.49	32.63	295.29	23.09	371.83	23.09	321.42


Fig 5.3 PSNR and MSE for steerable images

VII. CONCLUSION

This project deals with the analysis of spatial domain and frequency techniques for license plate detection. We found the performance factors such as PSNR (Peak Signal to Noise Ratio), MSE (Mean Squared Error) for the different types of automobile images with normal colour format. Steerable filter are applied to an image with high possibility for edge detection. Theoretically the images obtained by using steerable filter have a high success ratio for edge detection than that of spatial domain techniques which is evident from the result obtained by us. We also analysed the performance factor when the input image is blurred and tilted. Steerable wavelets provided promising results for blurred and tilted images. With this type of high PSNR and MSE of the Steerable images have high success ratio than normal colour image in every type image such as for a tilted image or a highly blurred image.

REFERENCES

- [1] HalinaKwasnicka and BartoszWawrzyniak, "License plate localization and Recognition in camera pictures", AI-METH 2002, November 13-15, 2002.
- [2] Manisha Shirvoikar , "Effective method of license plate localisation and segmentation of vehicles", May 2013.
- [3] P.Sandhya Rani "License plate character segmentation based on distribution density" IJESAT, Sep-Oct 2012
- [4] Khalid W. MagladA "Automobile License Plate Detection and Recognition System" Journal of Computer Science, 2012.
- [5] PratishthaGupta , "Number Plate Extraction using Template Matching Technique", February 2014
- [6] SheetalMithunKawade , "A Real Time Vehicle's License Plate Recognition System International Journal of Science and Engineering", 2013 .
- [7] ManishaRathore , Tracking number plate from vehicle using matlab, "International Journal in Foundations of Computer Science & Technology" , May 2014.
- [8] I-Chen Tsai, "Recognition of Vehicle License Plates from a Video Sequence" International Journal of Computer Science, 17 February 2009
- [9] Jun Wei et al , "Morphology-based license plate detection in image of Differently illuminated and oriented Car" , Journal of electronic imaging, October 15, 2002
- [10] William T. Freeman, Edward H. Adelson, "The Design and use of steerable filters", 1991.
- [11] Anil .K. Jain "Fundamentals of Digital image processing" University of California, Davis PHI learning private limited, 2009.

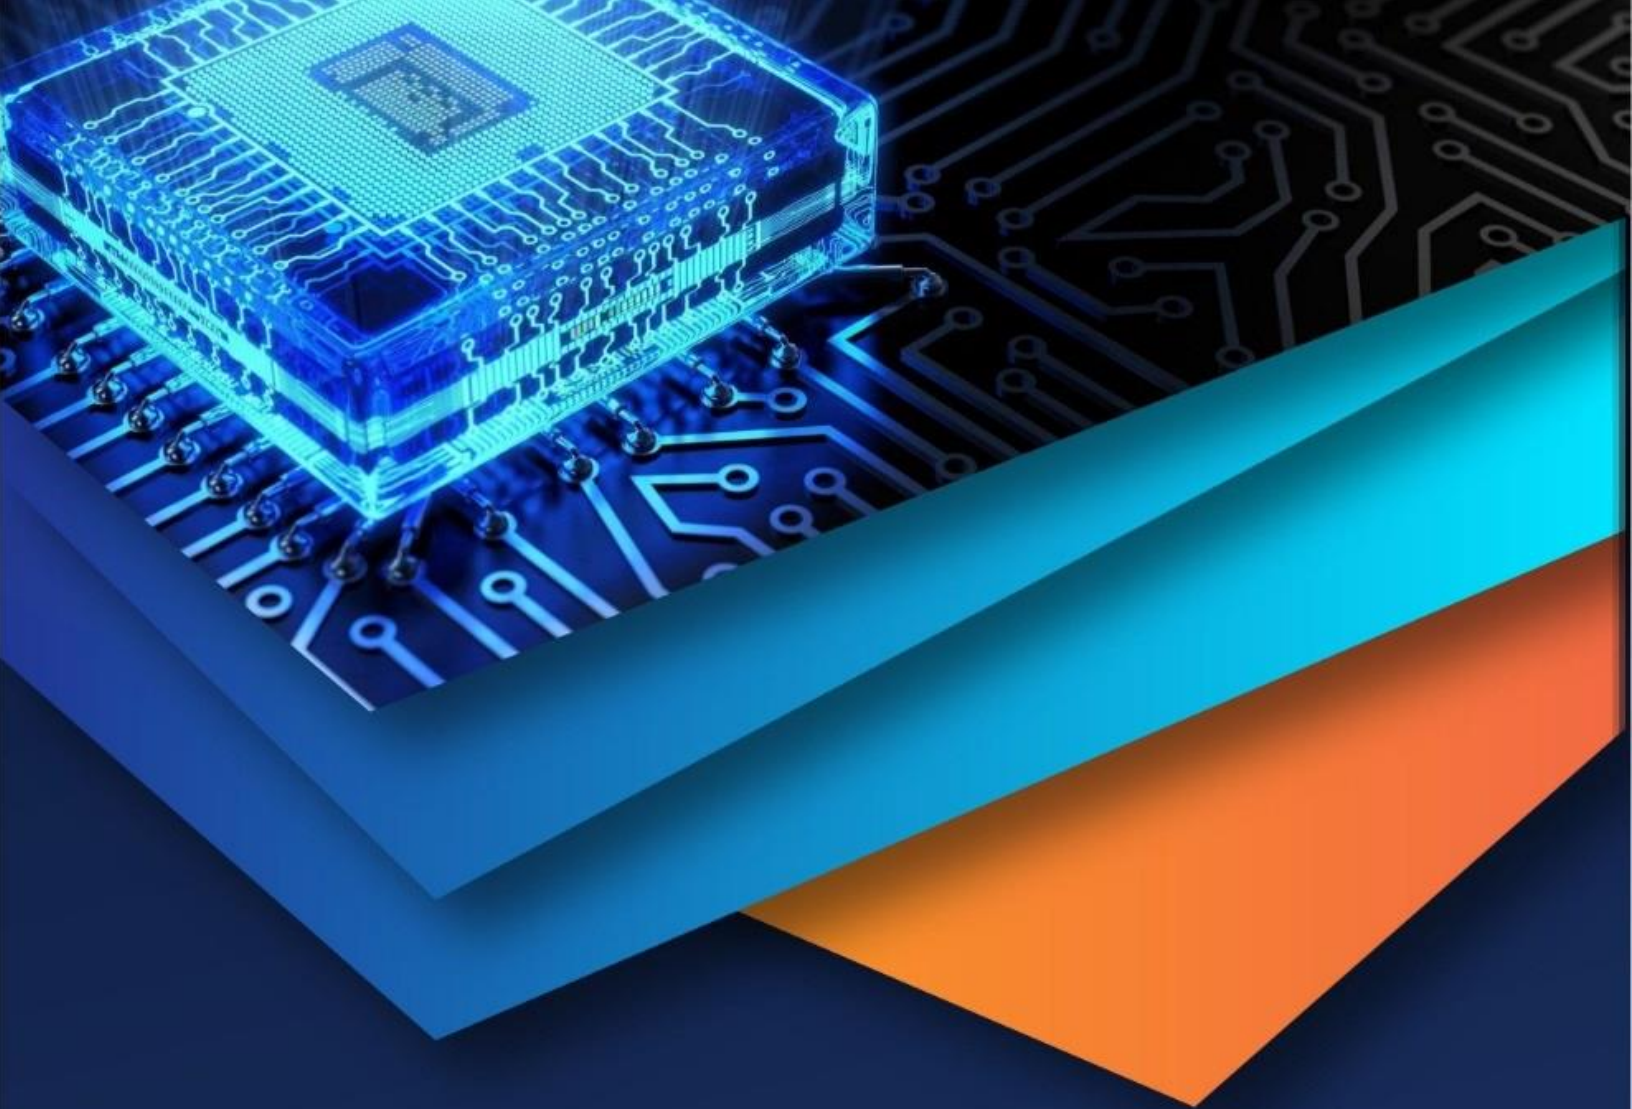

10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)