iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 **Issue:** I **Month of publication:** January 2018

DOI: http://doi.org/10.22214/ijraset.2018.1490

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor :6.887
Volume 6 Issue I, January 2018- Available at www.ijraset.com

Effect of Earthquake Load on Column Forces in Concrete Frame Structures with Different Type of RC Shear Walls under Different Type of Soil Condition

Mahdi Hosseini[1], Prof.N.V.Ramana Rao[2]
[1]*Ph.D. scholar student in Structural Engineering, Dept. of Civil Engineering, Jawaharlal Nehru Technological University Hyderabad (JNTUH), Hyderabad, Telangana , India*
[2]*Professor, Dept. of Civil Engineering, Jawaharlal Nehru Technological University Hyderabad (JNTUH), Hyderabad, & Director of National Institute of Technology Warangal ,Telangana, India*

Abstract: ***Shear Wall is A Structural Element Used to Resist Lateral, Horizontal, Shear Forces Parallel to the Plane of the Wall by Cantilever Action For Slender Walls Where The Bending Deformation Is Dominant .Truss Action For Squat/Short Walls Where The Shear Deformation is Dominant.Shear walls are analyzed to resist two types of forces: shear forces and uplift forces. Shear forces are created throughout the height of the wall between the top and bottom shear wall connections. Uplift forces exist on shear walls because the horizontal forces are applied to the top of the wall. These uplift forces try to lift up one end of the wall and push the other end down. In some cases, the uplift force is large enough to tip the wall over. Shear walls are analyzed to the provide necessary lateral strength to resist horizontal forces. Shear walls are strong enough, to transfer these horizontal forces to the next element in the load path below them. The seismic motion that reaches a structure on the surface of the earth is influenced by local soil conditions. The subsurface soil layers underlying the building foundation may amplify the response of the building to earthquake motions originating in the bedrock. Three types soil are considered here:Hard soil ,Medium soil,soft soil. In the present work thirty story building with C Shape,Box shape,E Shape,I shape and Plus shape RC Shear wall at the center in Concrete Frame Structure with fixed support conditions under different type of soil for earthquake zone V as per IS 1893 (part 1) : 2002 in India are analyzed using software ETABS by Dynamic analysis. All the analyses has been carried out as per the Indian Standard code books. This paper aims to Study the effect of Seismic load on Column Forces in Different Type of RC Shear Walls in Concrete Frame Structures under Different Type of Soil Condition. Estimation of Column Forces such as; Column Axial Force , Column moment, Column shear Force , Column Torsion, Time period and frequency and Modal Load Participation Ratios is carried out. In dynamic analysis; Response Spectrum method is used.***

Keywords:- Dynamic Analysis ,Column Forces , Soft ,Medium &Hard Soil, Time period , frequency and Modal Load Participation Ratios, C,Box,E,I and Plus shapes RC Sher wall, software ETABS

I. INTRODUCTION

A. Shear Wall Structure

The usefulness of shear walls in framing of buildings has long been recognized. Walls situated in advantageous positions in a building can form an efficient lateral-force-resisting system, simultaneously fulfilling other functional requirements. When a permanent and similar subdivision of floor areas in all stories is required as in the case of hotels or apartment buildings, numerous shear walls can be utilized not only for lateral force resistance but also to carry gravity loads. In such case, the floor by floor repetitive planning allows the walls to be vertically continuous which may serve simultaneously as excellent acoustic and fire insulators between the apartments. Shear walls may be planar but are often of L-, T-, I-, or E,C,Box shaped section to better suit the planning and to increase their flexural stiffness.

The positions of shear walls within a building are usually dictated by functional requirements. These may or may not suit structural planning. The purpose of a building and consequent allocation of floor space may dictate required arrangements of walls that can often be readily utilized for lateral force resistance. Building sites, architectural interests or client's desire may lead the positions of walls that are undesirable from a structural point of view. However, structural designers are often in the position to advice as to the

©IJRASET (UGC Approved Journal): All Rights are Reserved

most desirable locations for shear walls in order to optimize seismic resistance. The major structural considerations for individual shear walls will be aspects of symmetry in stiffness, torsional stability and available overturning capacity of the foundations (Paulay and Priestley, 1992).

B. Earthquake Load

The seismic weight of building is the sum of seismic weight of all the floors. The seismic weight of each floor is its full dead load plus appropriate amount of imposed load, the latter being that part of the imposed loads that may reasonably be expected to be attached to the structure at the time of earthquake shaking. It includes the weight of permanent and movable partitions, permanent equipment, a part of the live load, etc. While computing the seismic weight of columns and walls in any storey shall be equally distributed to the floors above and below the storey. Earthquake forces experienced by a building result from ground motions (accelerations) which are also fluctuating or dynamic in nature, in fact they reverse direction some what chaotically. The magnitude of an earthquake force depends on the magnitude of an earthquake, distance from the earthquake source(epicenter), local ground conditions that may amplify ground shaking (or dampen it), the weight(or mass) of the structure, and the type of structural system and its ability to with stand abusive cyclic loading. In theory and practice, the lateral force that a building experiences from an earthquake increases in direct proportion with the acceleration of ground motion at the building site and the mass of the building (i.e., a doubling in ground motion acceleration or building mass will double the load).This theory rests on the simplicity and validity of Newton's law of physics: F = m x a, where 'F' represents force, 'm' represents mass or weight, and 'a' represents acceleration. For example, as a car accelerates forward, a force is imparted to the driver through the seat to push him forward with the car(this force is equivalent to the weight of the driver multiplied by the acceleration or rate of change in speed of the car). As the brake is applied, the car is decelerated and a force is imparted to the driver by the seat-belt to push him back toward the seat.Similarly, as the ground accelerates back and forth during an earthquake it imparts back-and-forth(cyclic) forces to a building through its foundation which is forced to move with the ground. One can imagine a very light structure such as fabric tent that will be undamaged in almost any earthquake but it will not survive high wind. The reason is the low mass (weight) of the tent. Therefore, residential buildings generally perform reasonably well in earthquakes but are more vulnerable in high-wind load prone areas. Regardless, the proper amount of bracing is required in both cases.

C. Shear Wall Components

Reinforced concrete and reinforced masonry shear walls are seldom-simple walls. Whenever a wall has doors, windows, or other openings, the wall must be considered as an assemblage of relatively flexible components like column segments and wall piers and relatively stiff elements like wall segments

1) *Column segments:* A column segment is a vertical member whose height exceeds three times its thickness and whose width is less than two and one-half times its thickness. Its load is usually predominantly axial. Although it may contribute little to the lateral force resistance of the shear wall is rigidity must be considered. When a column is built integral with a wall, the portion of the column that project from the face the wall is called a pilaster. Column segments shall be designed according to ACI 318 for concrete.
2) *Wall piers:* A wall pier is a segment of a wall whose horizontal length is between two and one-half and six times its thickness whose clear height is at least two times its horizontal length.
3) *Wall segments:* Wall segments are components that are longer than wall piers. They are the primary resisting components in the shear wall.

D. Importance Of Seismic Design Codes

Such forces and deformations. Seismic codes help to improve the behavior of structures so that may withstand the earthquake effect without significant loss of life and property. Countries around the world have procedures outlined in seismic code to help design engineers in the planning, designing, detailing and constructing of structures.

E. An Earthquake Resistant Has Four Virtues In it, Namely

1) *Good Structural Configuration:* its size, shape and structural system carrying loads are such that they ensure a direct and smooth flow of inertia forces to the ground.
2) *Lateral Strength:* The maximum lateral (horizontal) force that it can resist is such that the damage induced in it does not result in collapse.

©IJRASET (UGC Approved Journal): All Rights are Reserved

3) *Adequate Stiffness:* Its lateral load resisting system is such that the earthquake – indeed deformations in it do not damage its contents under low-to- moderate shaking.
4) *Good Ductility*: Its capacity to undergo large deformations under severe earthquake shaking even after yielding is improved by favorable design and detailing strategies.

E. Indian Seismic Codes

Seismic codes are unique to a particular region or country. They take into account the local seismology, accepted level of seismic risk, buildings typologies, and materials and methods used in construction.

The Bureau of Indian Standards (BIS) the following Seismic Codes:

IS 4326, 1993, Indian Standard Code of practice for Earthquake Resistant Design and Construction of Buildings. (2nd revision).

IS 13827, 1993, Indian Standard Guidelines for improving Earthquake Resistant of Earthen buildings.

IS 13828, 1993 Indian Standard Guidelines for improving Earthquake Resistant of Low Strength Masonry Buildings.

IS 13920, 1993, Indian Standard Code for practice for Ductile Detailing of Reinforced Concrete Structures Subjected to Seismic Forces.

The regulations in these standards do not ensure that structures suffer no damage during earthquake of all magnitude. But, to the extent possible, they ensure that structures are able to respond to earthquake shaking of moderate intensities without structural damage and of heavy intensities wit out total collapse.

F. Site Selection

The seismic motion that reaches a structure on the surface of the earth is influenced by local soil conditions. The subsurface soil layers underlying the building foundation may amplify the response of the building to earthquake motions originating in the bedrock.

For soft soils the earthquake vibrations can be significantly amplified and hence the shaking of structures sited on soft soils can be much greater than for structures sited on hard soils. Hence the appropriate soil investigation should be carried out to establish the allowable bearing capacity and nature of soil. The choice of a site for a building from the failure prevention point of view is mainly concerned with the stability of the ground. The very loose sands or sensitive clays are liable to be destroyed by the earthquake, so much as to lose their original structure and thereby undergo compaction. This would result in large unequal settlements and damage the building. If the loose cohesion less soils are saturated with water they are likely to lose their shear resistance altogether during ground shaking. This leads to liquefaction. Although such soils can be compacted, for small buildings the operation may be too costly and the sites having these soils are better avoided.

For large building complexes, such as housing developments, new colonies, etc. this factor should be thoroughly investigated and the site has to be selected appropriately. Therefore a site with sufficient bearing capacity and free from the above defects should be chosen and its drainage condition improved so that no water accumulates and saturates the ground especially close to the footing level.

G. Bearing capacity of foundation soil

Three soil types are considered here:

with IS: 1888-1982 load test (Revision 1992). It is a common practice to increase the allowable bearing pressure by one-third, i.e. 33%, while performing seismic analysis of the materials like massive crystalline bedrock sedimentary rock, dense to very dense soil and heavily over

consolidated cohesive soils, such as a stiff to hard clays. For the structure to react to the motion, it needs to overcome its own inertia, which results in an interaction between the structure and the soil. The extent to which the structural response may alter the characteristics of earthquake motions observed at the foundation level depends on the relative mass and stiffness properties of the soil and the structure. Thus the physical property of the foundation medium is an important factor in the earthquake response of structures supported on it. There are two aspects of building foundation interaction during earthquakes, which are of primary importance to earthquake engineering. First, the response to earthquake motion of a structure founded on a deformable soil can be significantly different from that would occur if the structure is supported on a rigid foundation. Second, the motion recorded at the base of a structure or in the immediate vicinity can be different from that which would have been recorded had there been no building. Observations of the response of the buildings during earthquakes have shown that the response of typical structures can be markedly influenced by the soil properties if the soils are sufficiently soft. Furthermore, for relatively rigid structures such as

©IJRASET (UGC Approved Journal): All Rights are Reserved

nuclear reactor containment structures, interaction effects can be important, even for relatively firm soils because the important parameter apparently is not the stiffness of the soil, but the relative stiffness of the building and its foundation. In terms of the dynamic properties of the building foundation system, past studies have shown that the interaction will, in general, reduce the fundamental frequency of the system from that of the structure on a rigid base, dissipate part of the vibrational energy of the building by wave radiation into the foundation medium and modify the base motion of the structure in comparison to the free- field motion. Although all these effects may be present in some degree for every structure, the important point is to establish under what conditions the effects are of practical significance.

II. METHODOLOGY

Earthquake motion causes vibration of the structure leading to inertia forces. Thus a structure must be able to safely transmit the horizontal and the vertical inertia forces generated in the super structure through the foundation to the ground. Hence, for most of the ordinary structures, earthquake-resistant design requires ensuring that the structure has adequate lateral load carrying capacity. Seismic codes will guide a designer to safely design the structure for its intended purpose.

Quite a few methods are available for the earthquake analysis of buildings; two of them are presented here:

A. Equivalent Static Lateral Force Method (pseudo static method).
B. Dynamic analysis
C. Response spectrum method
D. Time history method.

E. Equivalent lateral Force (Seismic Coefficient) Method

This method of finding lateral forces is also known as the static method or the equivalent static method or the seismic coefficient method. The static method is the simplest one and it requires less computational effort and is based on formulae given in the code of practice.

In all the methods of analyzing a multi storey buildings recommended in the code, the structure is treated as discrete system having concentrated masses at floor levels which include the weight of columns and walls in any storey should be equally distributed to the floors above and below the storey. In addition, the appropriate amount of imposed load at this floor is also lumped with it. It is also assumed that the structure flexible and will deflect with respect to the position of foundation the lumped mass system reduces to the solution of a system of second order differential equations. These equations are formed by distribution, of mass and stiffness in a structure, together with its damping characteristics of the ground motion.

F. Dynamic Analysis

Dynamic analysis shall be performed to obtain the design seismic force, and its distribution in different levels along the height of the building, and in the various lateral load resisting element, for the following buildings:

Regular buildings: Those greater than 40m in height in zones IV and V, those greater than 90m in height in zone II and III.

Irregular buildings**:** All framed buildings higher than 12m in zones IV and V, and those greater than 40m in height in zones II and II

The analysis of model for dynamic analysis of buildings with unusual configuration should be such that it adequately models the types of irregularities present in the building configuration. Buildings with plan irregularities, as defined in Table 4 of IS code: 1893-2002 cannot be modeled for dynamic analysis.

Dynamic analysis may be performed either by the TIME HISTORY METHOD or by the RESPONSE SPECTRUM METHOD

G. Time History Method

The usage of this method shall be on an appropriate ground motion and shall be performed using accepted principles of dynamics. In this method, the mathematical model of the building is subjected to accelerations from earthquake records that represent the expected earthquake at the base of the structure.

H. Response Spectrum Method

The word spectrum in engineering conveys the idea that the response of buildings having a broad range of periods is summarized in a single graph. This method shall be performed using the design spectrum specified in code or by a site-specific design spectrum for a structure prepared at a project site. The values of damping for building may be taken as 2 and 5 percent of the critical, for the purposes of dynamic of steel and reinforce concrete buildings, respectively. For most buildings, inelastic response can be expected

©IJRASET (UGC Approved Journal): All Rights are Reserved

to occur during a major earthquake, implying that an inelastic analysis is more proper for design. However, in spite of the availability of nonlinear inelastic programs, they are not used in typical design practice because:
Their proper use requires knowledge of their inner workings and theories. design criteria, and
Result produced are difficult to interpret and apply to traditional design criteria , and
The necessary computations are expensive.
Therefore, analysis in practice typically use linear elastic procedures based on the response spectrum method. The response spectrum analysis is the preferred method because it is easier to use.

III. LITERATURE REVIEW

Generally, the building configuration which is conceived by architects and then accepted by developer or owner may provide a narrow range of options for lateral-load resistant systems that can be utilized by structural engineers. By observing the following fundamental principles relevant to seismic responses, more suitable structural systems may be adopted (Paulay and Priestley, 1992):
To perform well in an earthquake, a building should possess simple and regular configurations. Buildings with articulated plans such as T and L shapes should be avoided.
Symmetry in plans should be provided, wherever possible. Lack of symmetry in plan may lead to significant torsional response, the reliable prediction of which is often difficult.
An integrated foundation system should tie together all vertical structural elements in both principal directions. Foundation resting on different soil condition should preferably be avoided.
Lateral force resisting systems with significantly different stiffness such as shear walls and frames within one building should be arranged in such a way that at every level of the building, symmetry in lateral stiffness is not grossly violated. Thus, undesirable torsional effects will be minimized.
Regularity in elevation should prevail in both the geometry and the variation of story stiffness.
hat S.M. et al., (2013) carried out study on Eathquake behaviour of buildings with and without shear walls. Parameters like Lateral isplacement, story drift etc were found and compared with the bare frame model.
Sagar K.et al., (2012) carried out linear dynamic analysis on two sixteen storey high buildings.It was concluded that shear walls are one of the most effective building elements in resisting lateral forces during earthquake. Providing shear walls in proper position minimizes effect and damages due to earthquake and winds.
Kumbhare P.S. et al., (2012) carried out a study on shear wall frame interaction systems and member forces. It was found that shear wall frame interaction systems are very effective in resisting lateral forces induced by earthquake. Placing shear wall away from center of gravity resulted in increase in the most of the members forces. It follows that shear walls should be coinciding with the centroid of the building.
Based on the literature review, the salient objective of the present study have been identified as
follows:

A. behaviour of high rise structure with dual system with Different Type of RC Shear Walls (C, E,I,Boxand Plus shapes) with seismic loading.
B. To examine the effect of different types of soil (Hard, medium and Soft) on the overall interactive behaviour of the shear wall foundation soil system.
C. The variation of maximum Column Axial Force , Column moment, Column shear Force and Column Torsion of the models has been studied.
D. The variation of Time period and frequency has been studied.
E. The variation of Modal Load Participation Ratios has been studied.

IV. MODELING OF BUILDING

A. Details of The Building

A symmetrical building of plan 38.5m X 35.5m located with location in zone V, India is considered. Four bays of length 7.5m& one bays of length 8.5m along X - direction and Four bays of length 7.5m& one bays of length 5.5m along Y - direction are provided. Shear Wall is provided at the center core of building model.

1) *Structure 1:* In this model building with 30 storey is modeled as a (Dual frame system with shear wall (Plus Shape) at the center of building, The shear wall acts as vertical cantilever.

©IJRASET (UGC Approved Journal): All Rights are Reserved

2) *Structure 2* : In this model building with 30 storey is modeled as (Dual frame system with shear wall (Box Shape) at the center of building ,The shear wall acts as vertical cantilever.
3) *Structure 3 :* In this model building with 30 storey is modeled as (Dual frame system with shear wall (C- Shape) at the center of building, The shear wall acts as vertical cantilever.
4) *Structure 4 :* In this model building with 30 storey is modeled as (Dual frame system with shear wall (E- Shape) at the center of building ,The shear wall acts as vertical cantilever.
5) *Structure 5 :* In this model building with 30 storey is modeled as (Dual frame system with shear wall (I- Shape) at the center of building, The shear wall acts as vertical cantilever.

B. Load Combinations

As per IS 1893 (Part 1): 2002 Clause no. 6.3.1.2, the following load cases have to be considered for analysis:
1.5 (DL + IL)
1.2 (DL + IL ± EL)
1.5 (DL ± EL)
0.9 DL ± 1.5 EL
Earthquake load must be considered for +X, -X, +Y and –Y directions.

Table 1 : Details of The Building

Building Parameters	Details
Type of frame	Special RC moment resisting frame fixed at the base
Building plan	38.5m X 35.5m
Number of storeys	30
Floor height	3.5 m
Depth of Slab	225 mm
Size of beam	(300 × 600) mm
Size of column (exterior)	(1250×1250) mm up to story five
Size of column (exterior)	(900×900) mm Above story five
Size of column (interior)	(1250×1250) mm up to story ten
Size of column (interior)	(900×900) mm Above story ten
Spacing between frames	7.5-8.5 m along x - direction 7.5-5.5 m along y - direction
Live load on floor	4 KN/m2
Floor finish	2.5 KN/m2
Wall load	25 KN/m
Grade of Concrete	M 50 concrete
Grade of Steel	Fe 500
Thickness of shear wall	450 mm
Seismic zone	V

©IJRASET (UGC Approved Journal): All Rights are Reserved

Important Factor	1.5
Density of concrete	25 KN/m3
Type of soil	Soft,Medium,Hard Soil Type I=Soft Soil Soil Type II=Medium Soil Soil Type III= Hard Soil
Response spectra	As per IS 1893(Part-1):2002
Damping of structure	5 percent

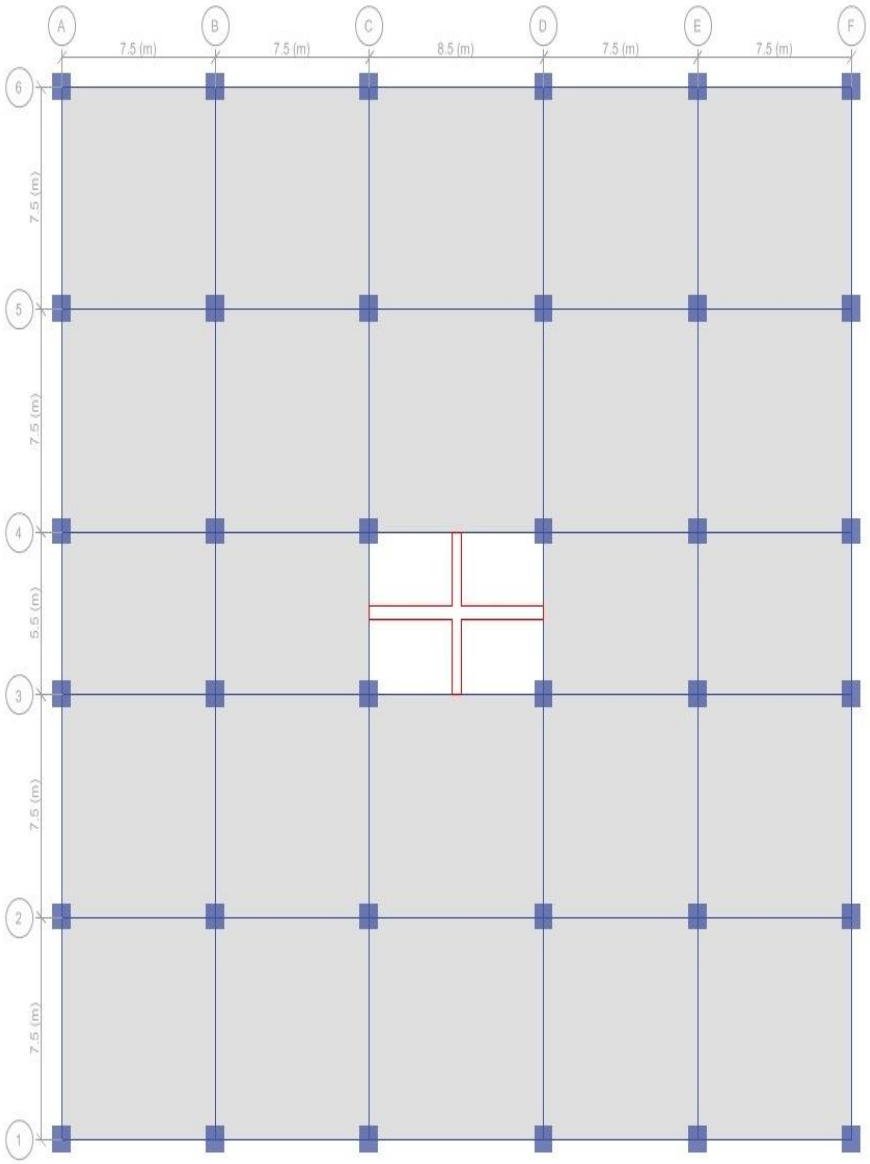


Figure 1. Plan of the Structure 1

©IJRASET (UGC Approved Journal): All Rights are Reserved

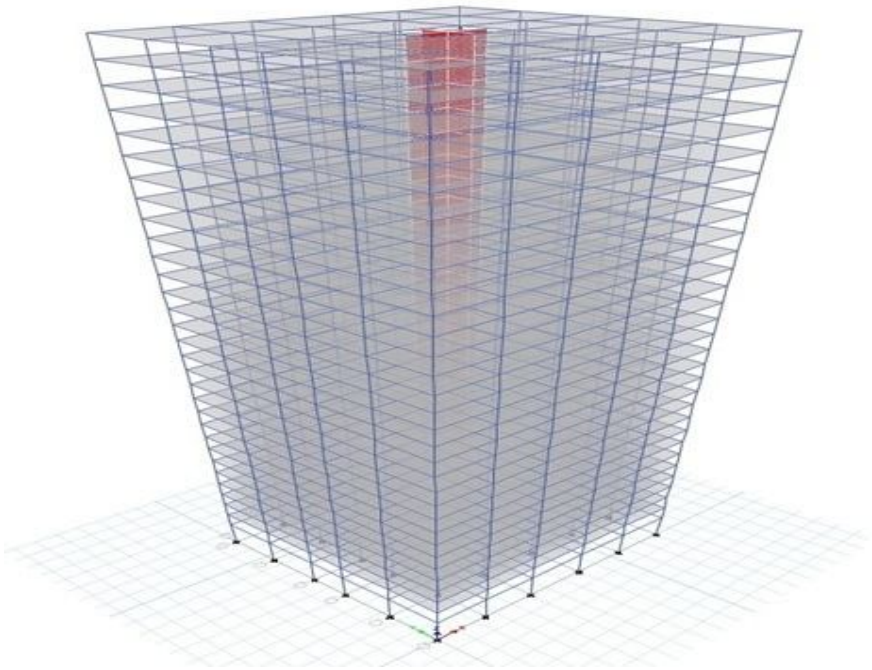


Figure 2. 3D view showing shear wall location for Structure 1

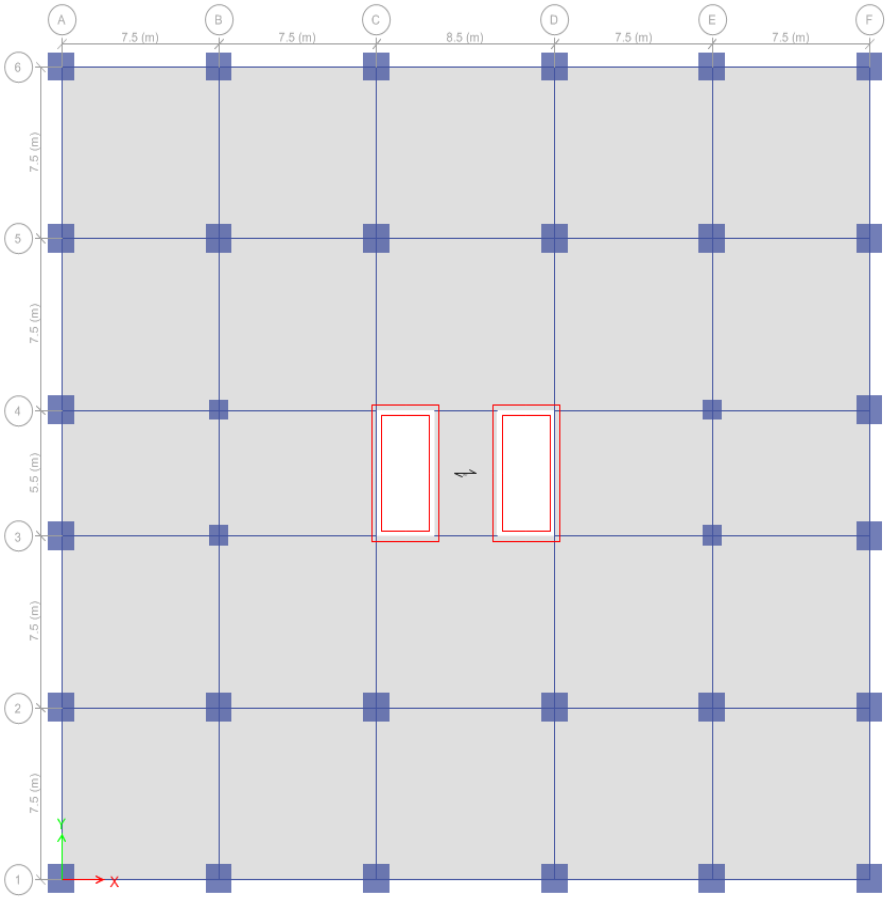


Figure3. Plan of the Structure 2

©IJRASET (UGC Approved Journal): All Rights are Reserved

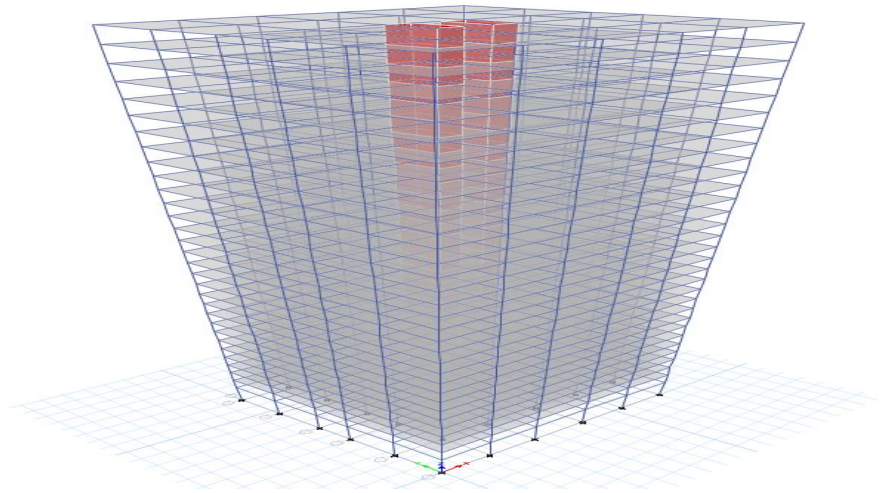


Figure 4. 3D view showing shear wall location for Structure2

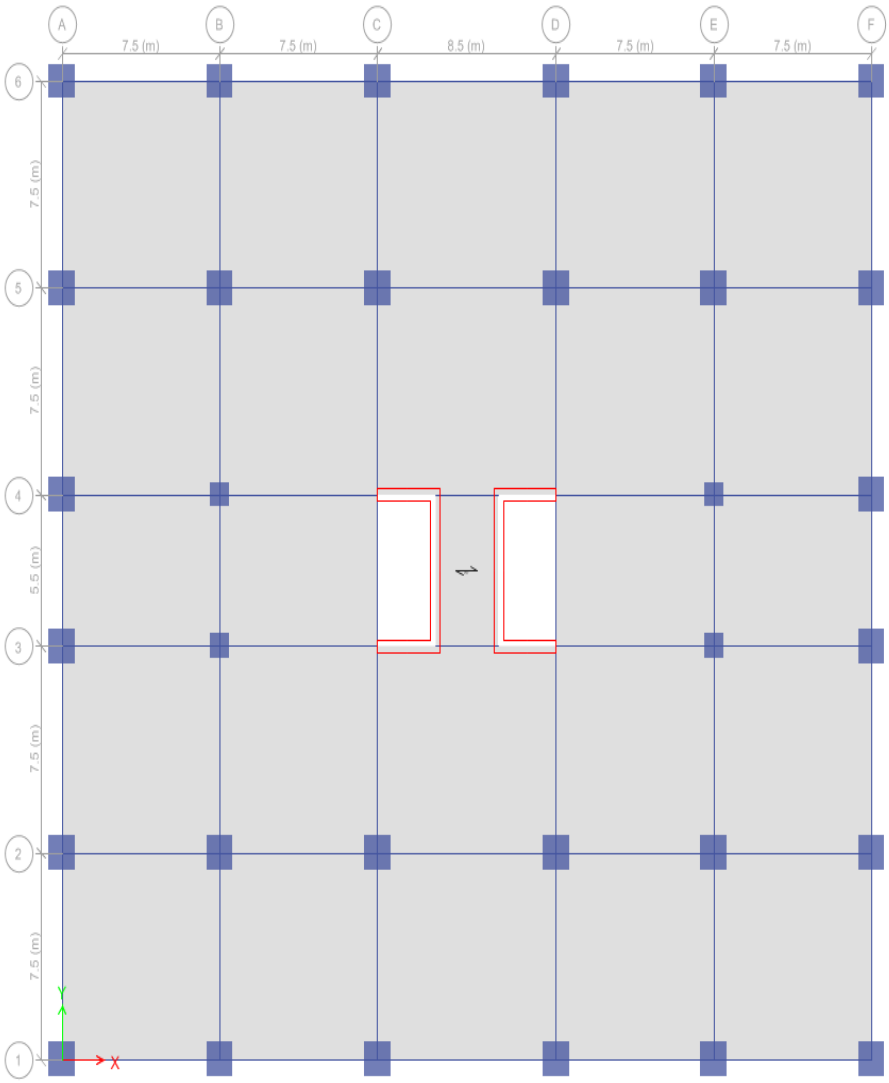


Figure 5. Plan of the Structure 3

©IJRASET (UGC Approved Journal): All Rights are Reserved

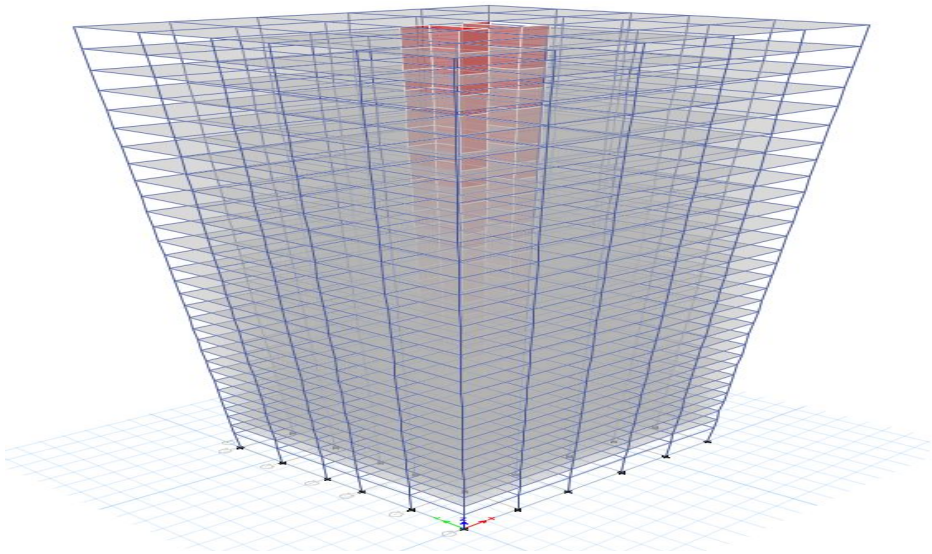


Figure 6. 3D view showing shear wall location for Structure 3

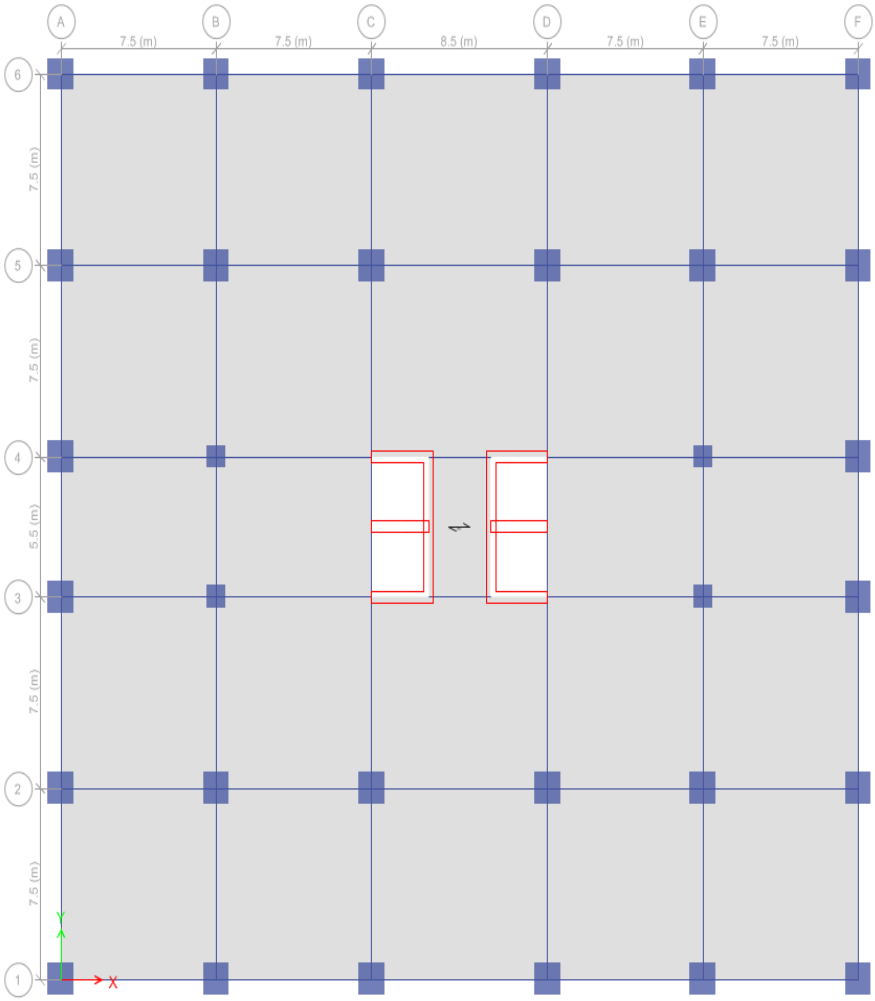


Figure 7. Plan of the Structure 4

©IJRASET (UGC Approved Journal): All Rights are Reserved

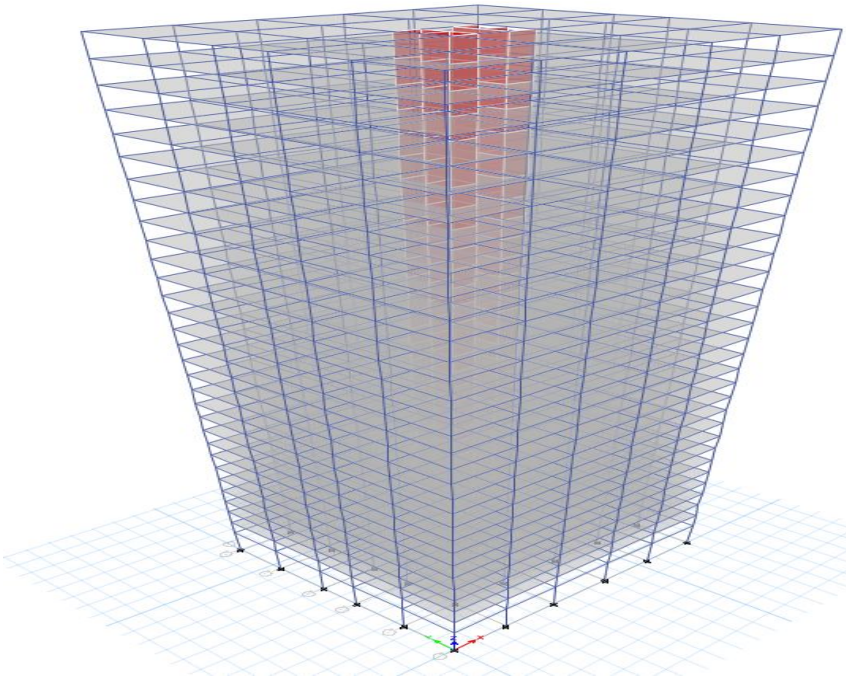


Figure 8. 3D view showing shear wall location for Structure 4

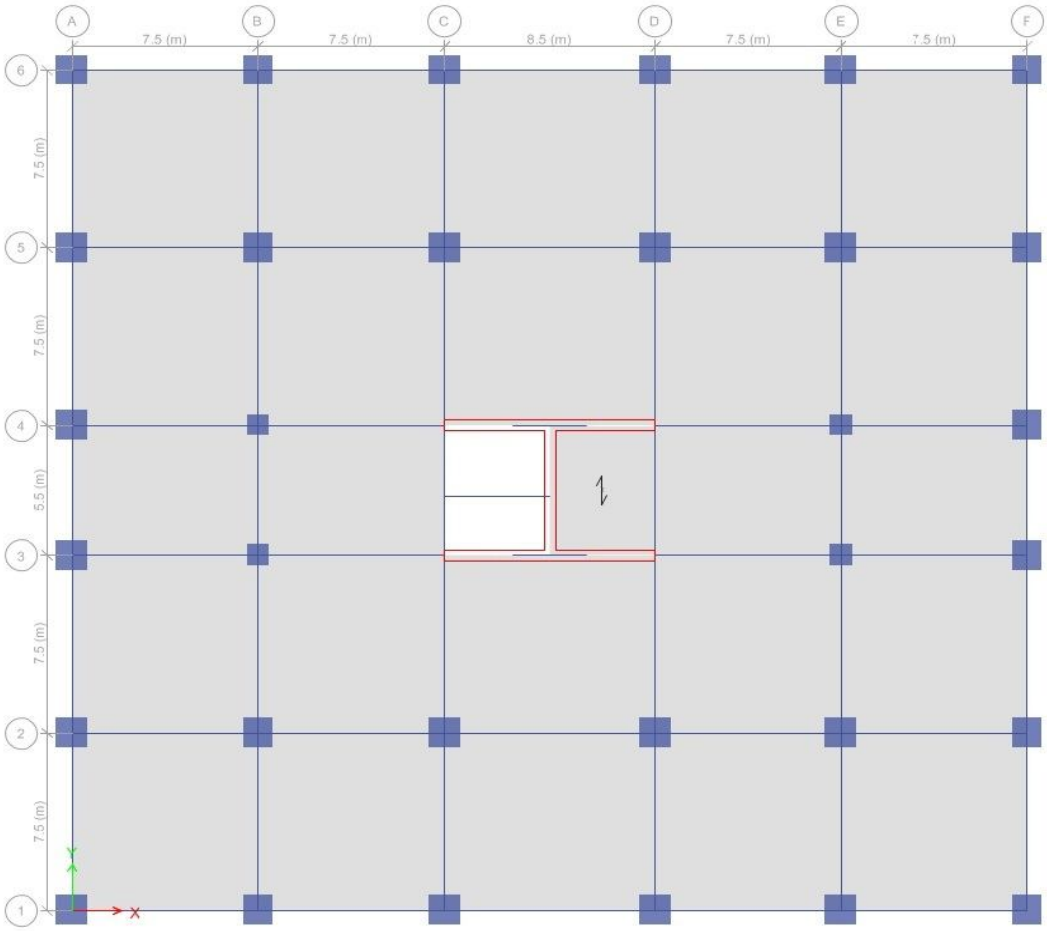


Figure 9. Plan of the Structure 5

©IJRASET (UGC Approved Journal): All Rights are Reserved

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor :6.887
Volume 6 Issue I, January 2018- Available at www.ijraset.com

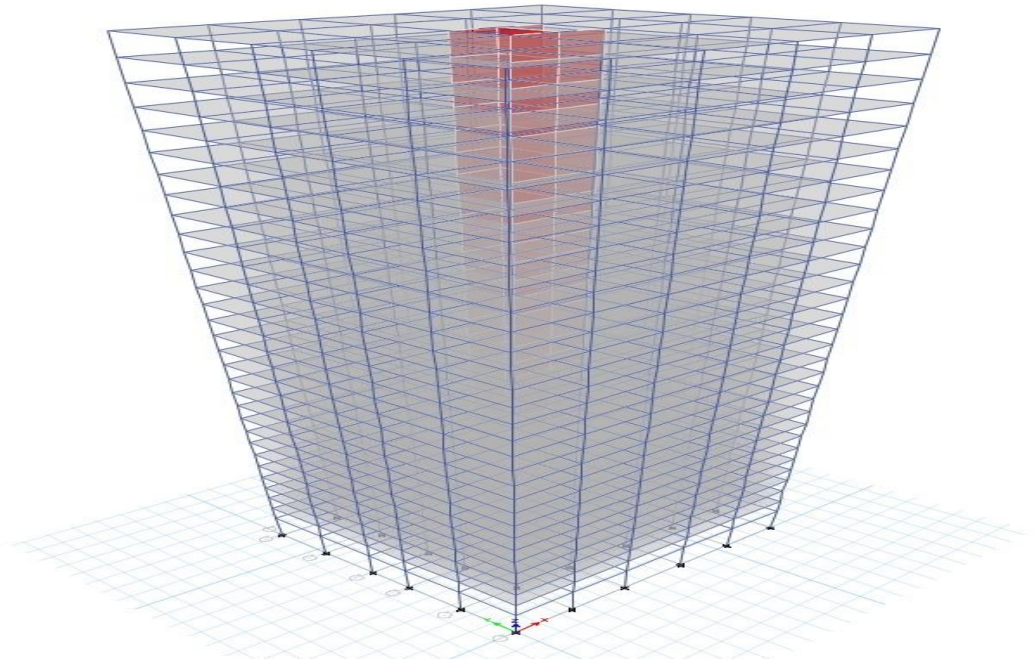


Figure 10. 3D view showing shear wall location for Structure 5

V. RESULTS AND DISCUSSIONS

A. Column Forces

Table 2: column axial force, P for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP) in soft soil

TABLE: Column Forces					Structure -1	Structure -2	Structure -3	Structure -4	Structure -5
Story	Column	Unique Name	Load Case/Combo	Station	P	P	P	P	P
				m	kN	kN	kN	kN	kN
1ST	C34	67	12DLRLLEQXP	0	-24171.0618	-24285.0493	-24629.8602	-24381.5444	-24398.1773
1ST	C34	67	12DLRLLEQXP	1.45	-24103.093	-24217.0806	-24561.8915	-24313.5757	-24330.2086
1ST	C34	67	12DLRLLEQXP	2.9	-24035.1243	-24149.1118	-24493.9227	-24245.6069	-24262.2398
1ST	C34	67	12DLRLLEQYP	0	-23630.6382	-23276.1711	-23447.6424	-23345.1752	-23441.1649
1ST	C34	67	12DLRLLEQYP	1.45	-23562.6694	-23208.2023	-23379.6736	-23277.2065	-23373.1961
1ST	C34	67	12DLRLLEQYP	2.9	-23494.7007	-23140.2336	-23311.7049	-23209.2377	-23305.2274

©IJRASET (UGC Approved Journal): All Rights are Reserved

Table 3: column axial force, P for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP) in medium soil

TABLE: Column Forces					Structure -1	Structure -2	Structure -3	Structure -4	Structure -5
Story	Column	Unique Name	Load Case/Combo	Station	P	P	P	P	P
				m	kN	kN	kN	kN	kN
1ST	C34	67	12DLRLLEQXP	0	-24937.4993	-25121.0698	-25571.6279	-25446.3503	-25240.6514
1ST	C34	67	12DLRLLEQXP	1.45	-24869.5305	-25053.1011	-25503.6591	-25378.3816	-25172.6826
1ST	C34	67	12DLRLLEQXP	2.9	-24801.5618	-24985.1323	-25435.6904	-25310.4128	-25104.7139
1ST	C34	67	12DLRLLEQYP	0	-24202.5232	-23748.9954	-23963.8116	-23949.6572	-23939.1144
1ST	C34	67	12DLRLLEQYP	1.45	-24134.5545	-23681.0267	-23895.8428	-23881.6884	-23871.1456
1ST	C34	67	12DLRLLEQYP	2.9	-24066.5857	-23613.0579	-23827.8741	-23813.7197	-23803.1769

Table 4: column axial force, P for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP) in hard soil

TABLE: Column Forces					Structure - 1	Structure - 2	Structure - 3	Structure - 4	Structure - 5
Story	Column	Unique Name	Load Case/Combo	Station	P	P	P	P	P
				m	kN	kN	kN	kN	kN
1ST	C34	67	12DLRLLEQXP	0	-25597.4871	-25840.9764	-26382.5944	-26235.5482	-25966.1151
1ST	C34	67	12DLRLLEQXP	1.45	-25529.5184	-25773.0076	-26314.6257	-26167.5794	-25898.1464
1ST	C34	67	12DLRLLEQXP	2.9	-25461.5496	-25705.0389	-26246.6569	-26099.6107	-25830.1776
1ST	C34	67	12DLRLLEQYP	0	-24694.9798	-24156.1497	-24408.2906	-24397.697	-24367.9043
1ST	C34	67	12DLRLLEQYP	1.45	-24627.011	-24088.181	-24340.3219	-24329.7283	-24299.9355
1ST	C34	67	12DLRLLEQYP	2.9	-24559.0423	-24020.2122	-24272.3531	-24261.7595	-24231.9668

©IJRASET (UGC Approved Journal): All Rights are Reserved

Table 5:column Moment, M for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP) in soft soil

TABLE: Column Forces					Structure -1	Structure -1	Structure -2	Structure -2	Structure -3	Structure -3	Structure -4	Structure -4	Structure -5	Structure -5
Story	Column	Unique Name	Load Case/Combo	Station	M2	M3	M2	M3	M2	M3	M2	M3	M2	M3
				m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m
1ST	C34	67	12DLRLLEQXP	0	-244.0118	979.4715	-171.6774	1061.1112	-251.8641	1421.2435	-239.9922	1271.7973	-249.7758	971.7283
1ST	C34	67	12DLRLLEQXP	1.45	-146.2684	805.6993	-84.4168	912.7196	-151.3927	1219.8181	-142.186	1095.4925	-150.8748	826.9906
1ST	C34	67	12DLRLLEQXP	2.9	-48.5251	631.9271	2.8438	764.328	-50.9213	1018.3927	-44.3799	919.1878	-51.9738	682.2529
1ST	C34	67	12DLRLLEQYP	0	1727.5733	-24.7075	1026.407	-134.6353	1218.6199	-173.1854	1153.6344	-157.4043	1174.9664	-74.8523
1ST	C34	67	12DLRLLEQYP	1.45	1393.6416	-70.5194	893.9723	-94.628	1027.4053	-112.2758	974.8851	-107.0072	954.7475	-81.4083
1ST	C34	67	12DLRLLEQYP	2.9	1059.71	-116.3313	761.5375	-54.6207	836.1907	-51.3663	796.1358	-56.6101	734.5287	-87.9644

Table 6: column Moment, M for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP)in medium soil

TABLE: Column Forces					Structure -1	Structure -1	Structure -2	Structure -2	Structure -3	Structure -3	Structure -4	Structure -4	Structure -5	Structure -5
Story	Column	Unique Name	Load Case/Combo	Station	M2	M3	M2	M3	M2	M3	M2	M3	M2	M3
				m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m
1ST	C34	67	12DLRLLEQXP	0	-312.5242	1329.5266	-216.79	1461.8423	-325.8538	1958.0803	-325.927	1862.7469	-322.5699	1328.7543
1ST	C34	67	12DLRLLEQXP	1.45	-197.6708	1112.7719	-115.9939	1264.1942	-207.082	1683.6228	-206.7527	1610.877	-205.9796	1142.9081
1ST	C34	67	12DLRLLEQXP	2.9	-82.8175	896.0172	-15.1978	1066.5461	-88.3102	1409.1652	-87.5785	1359.0072	-89.3893	957.0619
1ST	C34	67	12DLRLLEQYP	0	2368.8316	-36.1568	1412.6049	-164.3729	1674.0045	-210.3429	1686.2828	-200.7817	1615.0795	-94.5952
1ST	C34	67	12DLRLLEQYP	1.45	1896.6069	-78.8855	1214.6153	-105.7985	1396.0833	-128.025	1406.1652	-125.3418	1297.6668	-92.5144
1ST	C34	67	12DLRLLEQYP	2.9	1424.3822	-121.6142	1016.6256	-47.2242	1118.1621	-45.707	1126.0477	-49.9019	980.2541	-90.4336

Table 7: Column Moment, M for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP) in hard soil

TABLE: Column Forces					Structure -1	Structure -1	Structure -2	Structure -2	Structure -3	Structure -3	Structure -4	Structure -4	Structure -5	Structure -5
Story	Column	Unique Name	Load Case/Combo	Station	M2	M3	M2	M3	M2	M3	M2	M3	M2	M3
				m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m	kN-m
1ST	C34	67	12DLRLLEQXP	0	-371.5209	1630.9629	-255.6369	1806.9164	-389.5671	2420.3565	-389.6526	2300.9465	-385.2537	1636.1935
1ST	C34	67	12DLRLLEQXP	1.45	-241.934	1377.1956	-143.1853	1566.8529	-255.0367	2083.0102	-254.632	1993.0377	-253.431	1414.9482
1ST	C34	67	12DLRLLEQXP	2.9	-112.3471	1123.4282	-30.7336	1326.7894	-120.5062	1745.6638	-119.6113	1685.1289	-121.6082	1193.703
1ST	C34	67	12DLRLLEQYP	0	2921.0262	-46.0159	1745.1642	-189.9802	2066.1412	-242.3397	2081.2226	-232.9453	1994.0659	-111.5961
1ST	C34	67	12DLRLLEQYP	1.45	2329.7158	-86.0897	1490.7245	-115.4176	1713.556	-141.5867	1725.9364	-138.9369	1592.9584	-102.078
1ST	C34	67	12DLRLLEQYP	2.9	1738.4055	-126.1634	1236.2848	-40.855	1360.9708	-40.8338	1370.6502	-44.9285	1191.851	-92.5599

©IJRASET (UGC Approved Journal): All Rights are Reserved

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor :6.887
Volume 6 Issue I, January 2018- Available at www.ijraset.com

Table 8:column Shear, V for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP)in soft soil

TABLE: Column Forces					Structure -1	Structure -1	Structure -2	Structure -2	Structure - 3	Structure - 3	Structure -4	Structure -4	Structure - 5	Structure - 5
Story	Column	Unique Name	Load Case/Combo	Station	V2	V3	V2	V3	V2	V3	V2	V3	V2	V3
				m	kN	kN	kN	kN	kN	kN	kN	kN	kN	kN
1ST	C34	67	12DLRLLEQXP	0	119.8429	-67.4092	102.339	-60.1798	138.9141	-69.2906	121.5895	-67.4525	99.8191	-68.2076
1ST	C34	67	12DLRLLEQXP	1.45	119.8429	-67.4092	102.339	-60.1798	138.9141	-69.2906	121.5895	-67.4525	99.8191	-68.2076
1ST	C34	67	12DLRLLEQXP	2.9	119.8429	-67.4092	102.339	-60.1798	138.9141	-69.2906	121.5895	-67.4525	99.8191	-68.2076
1ST	C34	67	12DLRLLEQYP	0	31.5944	230.2977	-27.5912	91.3343	-42.0066	131.8722	-34.7566	123.2754	4.5214	151.8751
1ST	C34	67	12DLRLLEQYP	1.45	31.5944	230.2977	-27.5912	91.3343	-42.0066	131.8722	-34.7566	123.2754	4.5214	151.8751
1ST	C34	67	12DLRLLEQYP	2.9	31.5944	230.2977	-27.5912	91.3343	-42.0066	131.8722	-34.7566	123.2754	4.5214	151.8751

Table 9: column Shear, V for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP)in medium soil

TABLE: Column Forces					Structure - 1	Structure - 1	Structure - 2	Structure - 2	Structure - 3	Structure - 3	Structure - 4	Structure - 4	Structure - 5	Structure - 5
Story	Column	Unique Name	Load Case/Combo	Station	V2	V3	V2	V3	V2	V3	V2	V3	V2	V3
				m	kN	kN	kN	kN	kN	kN	kN	kN	kN	kN
1ST	C34	67	12DLRLLEQXP	0	149.486	-79.2092	136.3091	-69.5145	189.2811	-81.9116	173.7034	-82.1892	128.1698	-80.4071
1ST	C34	67	12DLRLLEQXP	1.45	149.486	-79.2092	136.3091	-69.5145	189.2811	-81.9116	173.7034	-82.1892	128.1698	-80.4071
1ST	C34	67	12DLRLLEQXP	2.9	149.486	-79.2092	136.3091	-69.5145	189.2811	-81.9116	173.7034	-82.1892	128.1698	-80.4071
1ST	C34	67	12DLRLLEQYP	0	29.4681	325.6722	-40.3961	136.5446	-56.771	191.6698	-52.0275	193.1845	-1.435	218.9053
1ST	C34	67	12DLRLLEQYP	1.45	29.4681	325.6722	-40.3961	136.5446	-56.771	191.6698	-52.0275	193.1845	-1.435	218.9053
1ST	C34	67	12DLRLLEQYP	2.9	29.4681	325.6722	-40.3961	136.5446	-56.771	191.6698	-52.0275	193.1845	-1.435	218.9053

Table 10:column Shear, V for structurse with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP) in hard soil

TABLE: Column Forces					Structure -1	Structure -1	Structure -2	Structure -2	Structure - 3	Structure - 3	Structure - 4	Structure -4	Structure - 5	Structure - 5
Story	Column	Unique Name	Load Case/Combo	Station	V2	V3	V2	V3	V2	V3	V2	V3	V2	V3
				m	kN	kN	kN	kN	kN	kN	kN	kN	kN	kN
1ST	C34	67	12DLRLLEQXP	0	175.012	-89.3703	165.561	-77.5528	232.6527	-92.7796	212.3509	-93.1177	152.5829	-90.9122
1ST	C34	67	12DLRLLEQXP	1.45	175.012	-89.3703	165.561	-77.5528	232.6527	-92.7796	212.3509	-93.1177	152.5829	-90.9122
1ST	C34	67	12DLRLLEQXP	2.9	175.012	-89.3703	165.561	-77.5528	232.6527	-92.7796	212.3509	-93.1177	152.5829	-90.9122
1ST	C34	67	12DLRLLEQYP	0	27.6371	407.8002	-51.4225	175.4757	-69.4848	243.1622	-64.8334	245.025	-6.5642	276.6258
1ST	C34	67	12DLRLLEQYP	1.45	27.6371	407.8002	-51.4225	175.4757	-69.4848	243.1622	-64.8334	245.025	-6.5642	276.6258
1ST	C34	67	12DLRLLEQYP	2.9	27.6371	407.8002	-51.4225	175.4757	-69.4848	243.1622	-64.8334	245.025	-6.5642	276.6258

Table 11:column Torsion, T for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP) in soft soil

TABLE: Column Forces					Structure -1	Structure -2	Structure -3	Structure -4	Structure -5
Story	Column	Unique Name	Load Case/Combo	Station	T	T	T	T	T
				m	kN-m	kN-m	kN-m	kN-m	kN-m
1ST	C34	67	12DLRLLEQXP	0	-41.6175	-29.3334	-44.901	-42.3525	-43.8436
1ST	C34	67	12DLRLLEQXP	1.45	-41.6175	-29.3334	-44.901	-42.3525	-43.8436
1ST	C34	67	12DLRLLEQXP	2.9	-41.6175	-29.3334	-44.901	-42.3525	-43.8436
1ST	C34	67	12DLRLLEQYP	0	45.3145	31.9525	48.8724	46.1375	48.5638
1ST	C34	67	12DLRLLEQYP	1.45	45.3145	31.9525	48.8724	46.1375	48.5638
1ST	C34	67	12DLRLLEQYP	2.9	45.3145	31.9525	48.8724	46.1375	48.5638

©IJRASET (UGC Approved Journal): All Rights are Reserved

Table 12: column Torsion, T for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP)in medium soil

TABLE: Column Forces					Structure -1	Structure -2	Structure -3	Structure -4	Structure -5
Story	Column	Unique Name	Load Case/Combo	Station	T	T	T	T	T
				m	kN-m	kN-m	kN-m	kN-m	kN-m
1ST	C34	67	12DLRLLEQXP	0	-56.5981	-39.8539	-61.0208	-61.1008	-59.584
1ST	C34	67	12DLRLLEQXP	1.45	-56.5981	-39.8539	-61.0208	-61.1008	-59.584
1ST	C34	67	12DLRLLEQXP	2.9	-56.5981	-39.8539	-61.0208	-61.1008	-59.584
1ST	C34	67	12DLRLLEQYP	0	61.6294	43.4949	66.5111	66.66	66.09
1ST	C34	67	12DLRLLEQYP	1.45	61.6294	43.4949	66.5111	66.66	66.09
1ST	C34	67	12DLRLLEQYP	2.9	61.6294	43.4949	66.5111	66.66	66.09

Table 13:column Torsion, T for structures with the load combination 1.2 (DL+LL+EQXP) &1.2 (DL+LL+EQYP)in hard soil


TABLE: Column Forces					Structure -1	Structure -2	Structure -3	Structure -4	Structure -5
Story	Column	Unique Name	Load Case/Combo	Station	T	T	T	T	T
				m	kN-m	kN-m	kN-m	kN-m	kN-m
1ST	C34	67	12DLRLLEQXP	0	-69.4981	-48.9132	-74.9017	-75.004	-73.1383
1ST	C34	67	12DLRLLEQXP	1.45	-69.4981	-48.9132	-74.9017	-75.004	-73.1383
1ST	C34	67	12DLRLLEQXP	2.9	-69.4981	-48.9132	-74.9017	-75.004	-73.1383
1ST	C34	67	12DLRLLEQYP	0	75.6784	53.4342	81.6999	81.8788	81.182
1ST	C34	67	12DLRLLEQYP	1.45	75.6784	53.4342	81.6999	81.8788	81.182
1ST	C34	67	12DLRLLEQYP	2.9	75.6784	53.4342	81.6999	81.8788	81.182

TABLE 14: Modal Load Participation Ratios

TABLE: Modal Load Participation Ratios			structure 1	Structure 1	Structure 2	Structure 2	Structure 3	Structure 3	Structure 4	Structure 4	Structure 5	Structure 5
Case	Item Type	Item	Static	Dynamic	Static	Dynamic	Static	Dynamic	Static	Dynamic	Static	Dynamic
			%	%	%	%	%	%	%	%	%	%
Modal	Acceleration	UX	99.82	86.71	99.99	94.7	99.98	94.59	99.99	94.54	99.97	91.54
Modal	Acceleration	UY	99.79	87.46	99.98	91.46	99.97	91.85	99.97	91.83	99.97	92.51
Modal	Acceleration	UZ	0	0	0	0	0	0	0	0	0	0

©IJRASET (UGC Approved Journal): All Rights are Reserved

A plot for Modal Load Participation Ratios of Structures in Soft Soil, Medium Soil and Hard Soil has been shown here

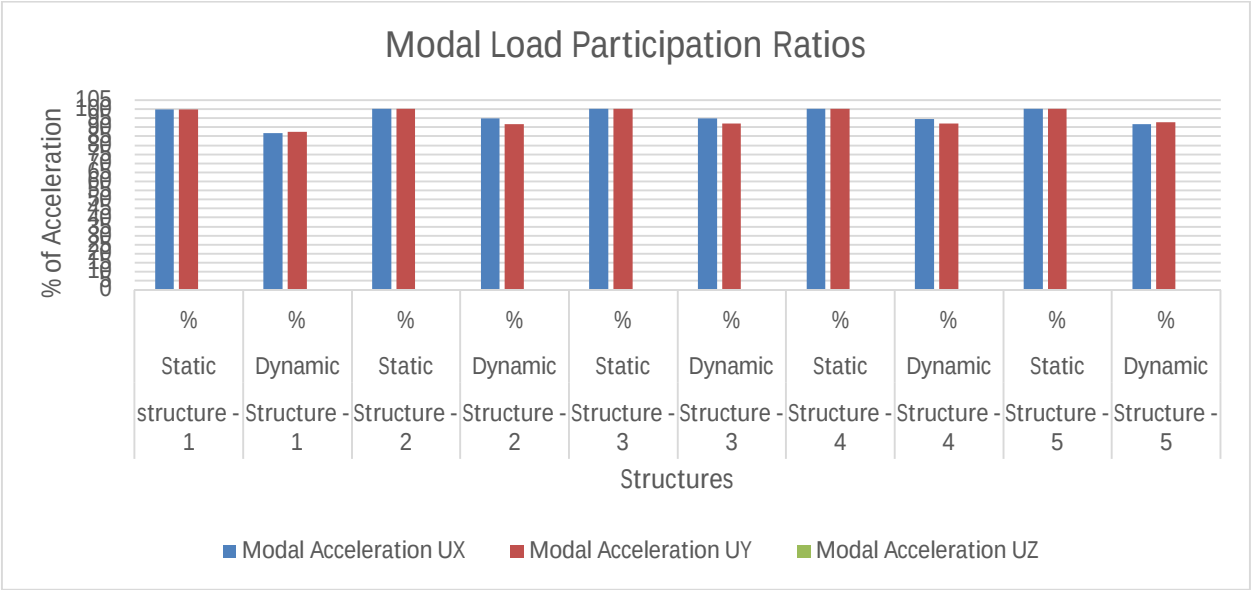

Graph 1: Modal Load Participation Ratios of Structures in Soft Soil , Medium Soil and Hard Soil

Table 15: Modal Periods and Frequencies

		Structure -1		Structure -2		Structure -3		Structure -3		Structure -4		Structure -5	
Case	Mode	Period	Frequency	Period	Frequency	Period	Frequency	Period	Frequency	Period	Frequency	Period	Frequency
		sec	cyc/sec	sec	cyc/sec	sec	cyc/sec	sec	cyc/sec	sec	cyc/sec	sec	cyc/sec
Modal	1	6.298	0.159	5.785	0.173	6.415	0.156	6.375	0.157	6.382	0.157		
Modal	2	6.248	0.16	5.606	0.178	6.32	0.158	6.21	0.161	5.694	0.176		
Modal	3	5.545	0.18	4.684	0.213	5.767	0.173	5.792	0.173	5.642	0.177		
Modal	4	2.062	0.485	1.701	0.588	2.114	0.473	2.102	0.476	2.088	0.479		
Modal	5	1.952	0.512	1.547	0.646	1.958	0.511	1.901	0.526	1.565	0.639		
Modal	6	1.603	0.624	1.475	0.678	1.568	0.638	1.575	0.635	1.524	0.656		
Modal	7	1.191	0.84	0.9	1.112	1.219	0.82	1.212	0.825	1.19	0.84		
Modal	8	1.027	0.974	0.838	1.193	1.028	0.972	0.983	1.017	0.791	1.264		
Modal	9	0.803	1.245	0.645	1.551	0.82	1.22	0.815	1.226	0.711	1.406		
Modal	10	0.782	1.279	0.613	1.632	0.711	1.406	0.714	1.401	0.703	1.423		
Modal	11	0.645	1.55	0.5	2.002	0.641	1.56	0.604	1.656	0.565	1.769		

©IJRASET (UGC Approved Journal): All Rights are Reserved

Modal	12	0.581	1.72	0.45	2.222	0.592	1.689	0.589	1.697	0.423	2.363

IV. DISCUSSION ON RESULTS

When a structure is subjected to earthquake, it responds by vibrating. An example force can be resolved into three mutually perpendicular directions- two horizontal directions (X and Y directions) and the vertical direction (Z). This motion causes the structure to vibrate or shake in all three directions; the predominant direction of shaking is horizontal. All the structures are primarily designed for gravity loads-force equal to mass time's gravity in the vertical direction. Because of the inherent factor used in the design specifications, most structures tend to be adequately protected against vertical shaking. Vertical acceleration should also be considered in structures with large spans those in which stability for design, or for overall stability analysis of structures. The basic intent of design theory for earthquake resistant structures is that buildings should be able to resist minor earthquakes without damage, resist moderate earthquakes without structural damage but with some non-structural damage. To avoid collapse during a major earthquake, Members must be ductile enough to absorb and dissipate energy by post elastic deformation. Redundancy in the structural system permits redistribution of internal forces in the event of the failure of key elements. When the primary element or system yields or fails, the lateral force can be redistributed to a secondary system to prevent progressive failure.

The structures are supported on soil, most of the designers do not consider the soil structure interaction and its subsequent effect on structures during an earthquake. When a structure is subjected to an earthquake excitation, it interacts with the foundation and the soil, and thus changes the motion of the ground. This means that the movement of the whole ground-structure system is influenced by the type of soil as well as by the type of structure. Understanding of soil structure interaction will enable the designer to design structures that will behave better during an earthquake. The Axial force and Moment in the column increases when the type of soil changes from hard to medium and medium to soft. Since the column moment increase as the soil type changes, soil structure interaction must be suitably considered while designing frames for seismic force.

The result obtained from the analysis models will be discussed and compared as follows:

A. It Is Observed That

1) The Time Period is 6.298 Sec for structure1 and it is same for different type of soil.
2) The Frequency is 0.159 cyc/sec for structure1 and it is same for different type of soil.
3) The Time Period is 5.785 Sec for structure2 and it is same for different type of soil.
4) The Frequency is 0.173 cyc/sec for structure2 and it is same for different type of soil.
5) The Time Period is 6.415 Sec for structure3 and it is same for different type of soil.
6) The Frequency is 0.156 cyc/sec for structure3 and it is same for different type of soil.
7) The Time Period is 6.375Sec for structure4 and it is same for different type of soil.
8) The Frequency is 0.157 cyc/sec for structure4 and it is same for different type of soil.
9) The Time Period is 6.382 Sec for structure5 and it is same for different type of soil.
10) The Frequency is 0.157 cyc/sec for structure5 and it is same for different type of soil.

B. It Is Observed That Column Forces For Structure 1

The maximum column axial force is various with type of soil and placing of the shear wall. The Value of column axial force in soft soil>medium soil>hard soil.

The maximum column moment in Y-direction is influenced by the type of soil and placing of shear wall.

The Value of maximum column moment M2 in X-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column moment M3 in X-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column moment M2 in Y-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column moment M3in Y-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Shear V2 in X-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column Shear V3 in X-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Shear V2 in Y-direction for soft Soil>Medium soil > Hard soil.
The Value of maximum column Shear V3 in Y-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column Torsion , T in X-direction for soft Soil >Medium soil > Hard soil.

©IJRASET (UGC Approved Journal): All Rights are Reserved

The Value of maximum column Torsion , T in Y-direction for soft Soil <Medium soil < Hard soil.

C. It Is Observed That Column Forces For Structure 2

The maximum column axial force is various with type of soil and placing of the shear wall. The Value of Column axial force in soft soil>medium soil>hard soil.
The maximum column moment in Y-direction is influenced by the type of soil and placing of shear wall.
The Value of maximum column moment M2 in X-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column moment M3 in X-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column moment M2 in Y-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column moment M3in Y-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Shear V2 in X-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column Shear V3 in X-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Shear V2 in Y-direction for soft Soil>Medium soil > Hard soil.
The Value of maximum column Shear V3 in Y-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column Torsion , T in X-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Torsion , T in Y-direction for soft Soil <Medium soil < Hard soil.

D. It Is Observed That Column Forces For Structure 3

The maximum column axial force is various with type of soil and placing of the shear wall. The Value of Column axial force in soft soil>medium soil>hard soil.
The maximum column moment in Y-direction is influenced by the type of soil and placing of shear wall.
The Value of maximum column moment M2 in X-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column moment M3 in X-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column moment M2 in Y-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column moment M3in Y-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Shear V2 in X-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column Shear V3 in X-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Torsion , T in X-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Torsion , T in Y-direction for soft Soil <Medium soil < Hard soil.

E. It Is Observed That Column Forces For Structure 4

The column axial force is various with type of soil and placing of the shear wall. The Value of column axial force in soft soil>medium soil>hard soil.
The column moment in Y-direction is influenced by the type of soil and placing of shear wall.
The Value of column moment M2 in X-direction for soft Soil >Medium soil > Hard soil.
The Value of column moment M3 in X-direction for soft Soil <Medium soil < Hard soil.
The Value of column moment M2 in Y-direction for soft Soil <Medium soil < Hard soil.
The Value of column moment M3in Y-direction for soft Soil >Medium soil > Hard soil.
The Value of column Shear V2 in X-direction for soft Soil <Medium soil < Hard soil.
The Value of column Shear V3 in X-direction for soft Soil >Medium soil > Hard soil.
The Value of column Shear V2 in Y-direction for soft Soil >Medium soil > Hard soil.
The Value of column Shear V3 inY-direction for soft Soil <Medium soil <Hard soil.
The Value of column Torsion T, in X-direction for soft Soil >Medium soil > Hard soil.
The Value of column Torsion T, in Y-direction for soft Soil <Medium soil < Hard soil.

F. It Is Observed That Column Forces For Structure 5

The maximum column axial force is various with type of soil and placing of the shear wall. The Value of column axial force in soft soil>medium soil>hard soil.
The maximum column moment in Y-direction is influenced by the type of soil and placing of shear wall.
The Value of maximum column moment M2 in X direction for soft Soil >Medium soil > Hard soil.

©IJRASET (UGC Approved Journal): All Rights are Reserved

The Value of maximum column moment M3 in X direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column moment M2 in Y direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column moment M3in Y direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Shear V2 in X-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column Shear V3 in X-direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Shear V2 in Y-direction for soft Soil>Medium soil > Hard soil.
The Value of maximum column Shear V3 in Y-direction for soft Soil <Medium soil < Hard soil.
The Value of maximum column Torsion , T in X direction for soft Soil >Medium soil > Hard soil.
The Value of maximum column Torsion , T in Ydirection for soft Soil <Medium soil < Hard soil.

VI. CONCLUSIONS

In this paper, reinforced concrete shear wall buildings were analyzed with the procedures laid out in IS codes. Seismic performance of building model is evaluated.

From the above results and discussions, following conclusions can be drawn:

A. The shear wall and it is position has a significant influenced on the time period. The time period is not influenced by the type of soil.

B. It is observed that the maximum column axial force is various with type of soil and placing of the shear wall.

C. It is observed that the maximum column shear force in x-direction is influenced by the type of soil and placing of the shear wall.

D. It is observed that the maximum column shear force in y-direction has no influence on the type of soil and placing shear wall.

E. It is observed that the maximum column torsion is same for all columns in a structure, but is influenced by the type of soil and placing shear wall.

F. It is observed that the maximum column moment in x-direction has no influence on the type of soil and placing shear wall.

G. It is observed that the maximum column moment in y-direction is influenced by the type of soil and placing of shear wall.

H. The Axial force and Moment in the column increases when the type of soil changes from hard to medium and medium to soft. Since the column moment increase as the soil type changes, soil structure interaction must be suitably considered while designing frames for seismic force.

I. The moment resisting frame with shear walls are very good in lateral force such as earthquake and wind force. The shear walls provide lateral load distribution by transferring the wind and earthquake loads to the foundation. And also impact on the lateral stiffness of the system and also carries gravity loads.

J. It is evident that shear walls which are provided from the foundation to the rooftop, are one of the excellent mean for providing earthquake resistant to multistory reinforced building with different type of soil.

K. The vertical reinforcement that is uniformly distributed in the shear wall shall not be less than the horizontal reinforcement .This provision is particularly for squat walls (i.e. Height-to-width ratio is about 1.0).However ,for walls whit height-to-width ratio less than 1.0, a major part of the shear force is resisted by the vertical reinforcement. Hence ,adequate vertical reinforcement should be provided for such walls.

L. Based on the analysis and discussion ,shear wall are very much suitable for resisting earthquake induced lateral forces in multistoried structural systems when compared to multistoried structural systems whit out shear walls. They can be made to behave in a ductile manner by adopting proper detailing techniques.

M. According to IS-1893:2002 the number of modes to be used in the analysis should be such that the total sum of modal masses of all modes considered is at least 90 percent of the total seismic mass. Here the maximum mass for structure 2 is 94.7 percent and minimum mass for structure 1 is 86.71 percent.


REFERENCES

[1] Duggal, S.K., "Earthquake Resistant Design of Structures" Oxford University Press, New Delhi 2010
[2] Chopra, A.K., "Dynamics of Structures: Theory and Application to Earthquake Engineering", Pearson Education, 4th edition, 2012.
[3] Bureau of Indian Standars, IS 456 : 2000, "Plain and Reinforced Concrete-Code of practice", New Delhi, India.
[4] Bureau of Indian Standards: IS 13920 : 1993, "Ductile detailing of reinforced concrete structures subjected to seismic forces— Code of Practice", New Delhi, India.

©IJRASET (UGC Approved Journal): All Rights are Reserved

[5] Bureau of Indian Standards: IS 875(part 1) : 1987, “Dead loads on buildings and Structures”, New Delhi, India.
[6] Bureau of Indian Standards: IS 875(part 2) : 1987, “Live loads on buildings and Structures”,New Delhi, India.
[7] Bureau of Indian Standards: IS 1893 (part 1) : 2002, “Criteria for earthquake resistant design of structures: Part 1 General provisions and buildings”, New Delhi, India.
[8] Berkeley “ETABS Integrated Building Design Software”, Computers and Structure, Inc., California, USA, February 2003.
[9] Gary R.scarer and Sigmund A.Freeman " Design drifts requirement for long period structures ", 1 3 ' World conference on earth quake engineering Vancouver,B.C, anada ,Aug 2004 paper no-3292 .
[10] J.L.Humar and S.Yavari "Design of concrete shear wall buildings for earthquake induced torsion". 4'1" structural conference of the Canadian society for civil engineering June-2002.
[11] Mo and Jost ,**“**the seismic response of multistory reinforced concrete framed shear walls using a nonlinear model**”** , Volume 15, Structure Engineering , Issue 3, 1993, Pages 155–166
[12] Paulay,T., and Priestley, M.J.N., ‘Seismic design of reinforced concrete and masonry buildings’, 1992.
[13] Anand, N. , Mightraj, C. and Prince Arulraj, G. “Seismic behaviour of RCC shear wall under different soil conditions” Indian geotechnical conference, Dec – 2010, pp 119-120
[14] Anshuman, S., Dipendu Bhunia, Bhavin Ramjiyani,“Solution of shear wall location in multistory building”, International journal of civil and structural engineering, Vol. 4, Issue 5, pp. 22-32 ,2011.
[15] Chandiwala, A., “Earthquake Analysis of Building Configuration with Different Position of Shear Wall”, International Journal of Emerging Technology and Advanced Engineering ISSN 2250-2459, ISO 9001:2008 Certified Journal, Volume 2, Issue 12, December 2012
[16] Chandurkar, P.P., Dr. Pajgade, P.S., “Seismic analysis of RCC building with and without shear wall”, International Journal of Modern Engineering Research. Vol. 3, Issue 3, pp. 1805-1810, 2013.
[17] Rahangdale, H., Satone, S.R., “Design and analysis of multi-storied building with effect of shear wall”, International journal of engineering research and application", Vol. 3, Issue 3, pp. 223-232, 2013.

©IJRASET (UGC Approved Journal): All Rights are Reserved

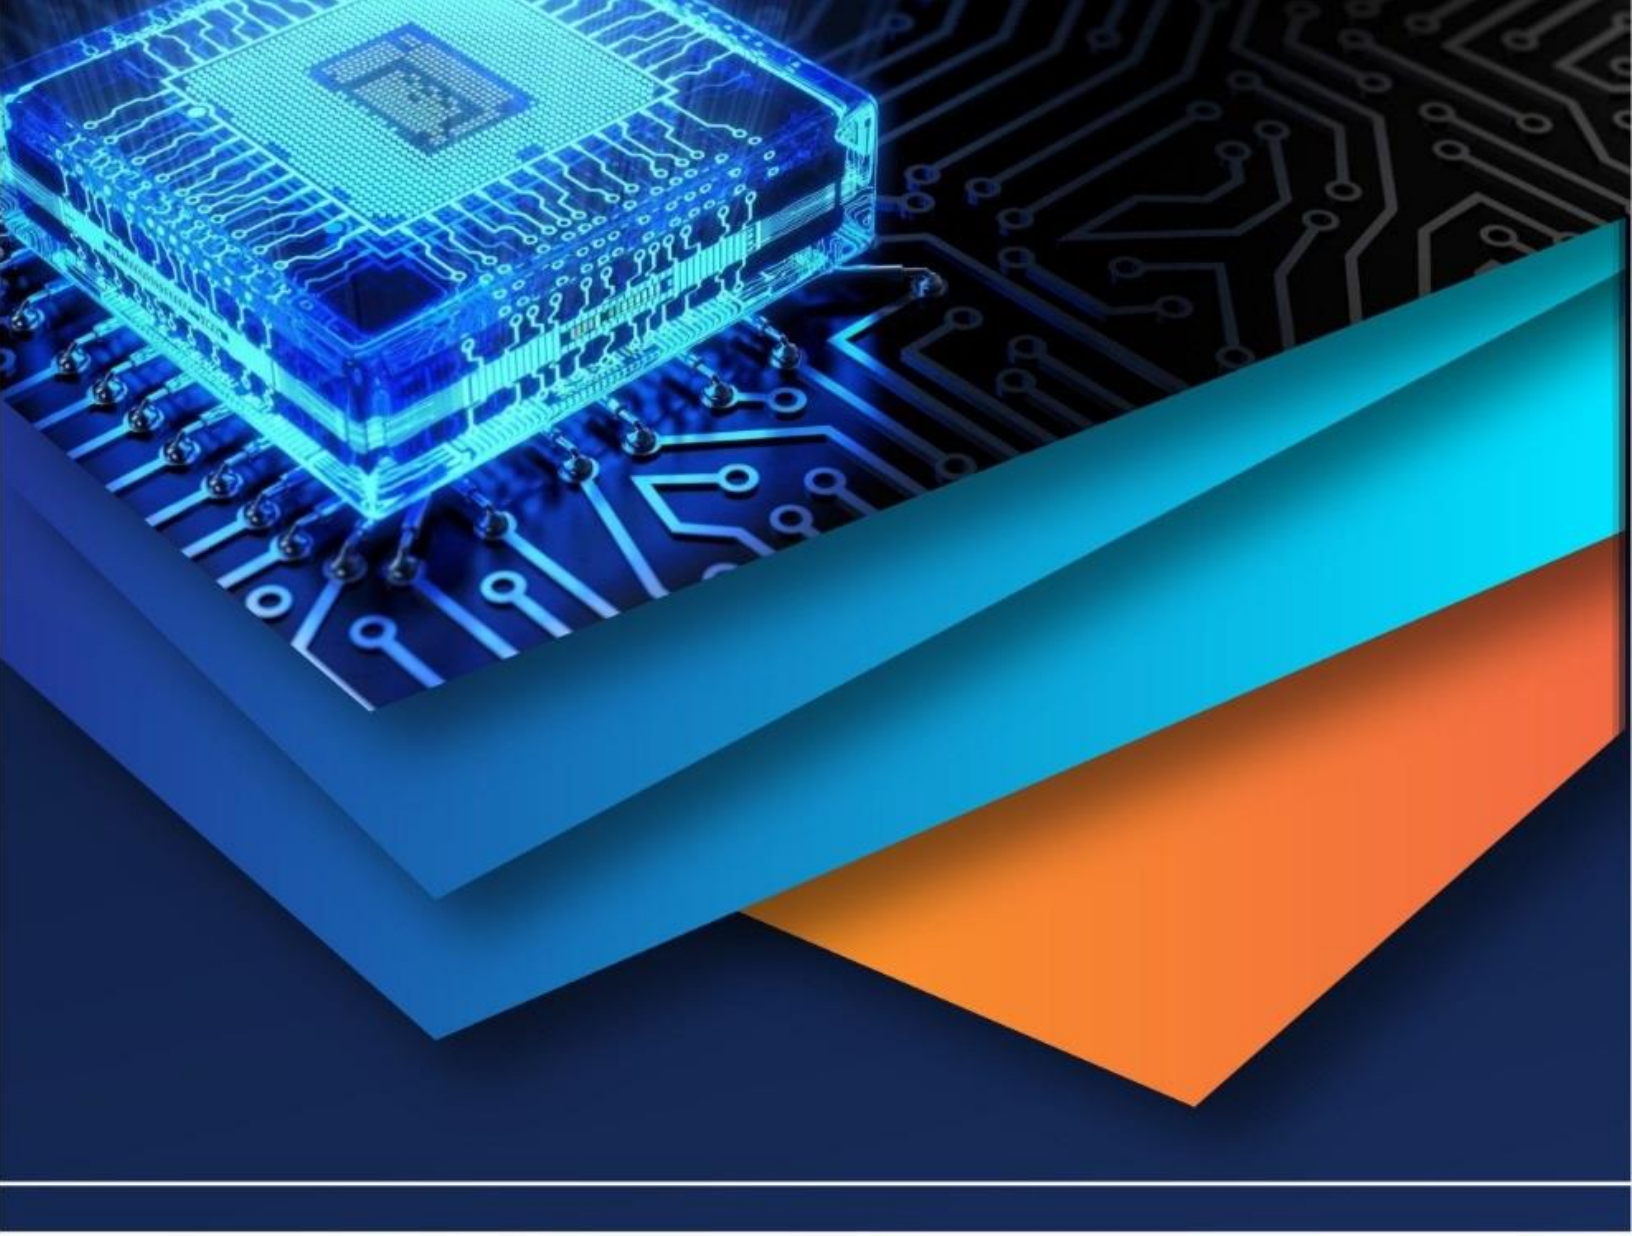

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)