



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 3

Issue: I

Month of publication: January 2015

DOI:

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Efficiency Improvement of Three Phase Induction Motor Using WCCA Method

Banti khan¹, Ashita Goyal²

¹PG Scholar, School of Energy and Environmental Studies, DAVV, India

²PG Scholar, School of Computer Science and IT, DAVV, India

Abstract— In this paper, the effect of Water Cooling Capillaries Action (WCCA) on the efficiency of 1.1 kW, 50 Hz, three phase squirrel cage induction motor is presented. This method is used to lower down the temperature of stator windings. So, resistance also decreases as a result of which efficiency of motor increases. Efficiency analysis of a three phase induction motor was done by means of load test. Based on the result obtained from this test, the efficiency of three phase induction motor using WCCA method was increased by 4.30% when compared to the efficiency of motor without using this method.

Keywords —Capillaries, Efficiency Analysis, Load Test, Three Phase Induction Motor, Stator Windings

I. INTRODUCTION

Three phase induction motors consume approximately 60% of industrial electricity. Just 1% increase in efficiency of all the motors in India will save 500 MW powers which needs the initial generation cost of 2000 crores [1]. Three phase induction motors are widely used in heavy and medium industrial load applications and agriculture purposes. Globally around 40% of the electricity supplied to the industrial load is consumed by induction motorized system [2]. It is therefore important to improve the efficiency of this type of electric motorized system. Efficiency is mainly depends on the properties of enamel used for coating of windings of motor and its operating temperature [3]. It is a well known fact that the operating temperature of induction motor has a very strong relationship with the resistance of stator windings. When temperature increased stator resistance also increases but motor efficiency decreases [2]. Most commonly used motors are Totally Enclosed Fan Cooled (TEFC) type which is provided with an external forced air cooling fan mounted on Non-Driven End (NDE) of shaft, with cooling ribs running axially along the outer surface of motor frame [4]. TEFC type air cooling method has some limitations as cooling is effective only along the axis of rotor but it cannot remove the motor's surrounding heat and the heat transfer coefficient of air is too low to reduce excessive heat from stator's fin [5]. With increase in motor's power rating, dimension of system increases by lowering the stator temperature. For this a highly effective cooling and ventilation system is required which can ensure sufficient heat removal from the inner side of motor [6]. Substantial improvement can be achieved by adopting direct water cooling method, which can ensure relatively low temperature of stator. In this paper, the efficiency of three phase induction motor is increased by using Water Cooling Capillary Action (WCCA) method; it is a low cost method which does not require big external heat exchanger as well as external energy for cooling. Water absorbed by capillaries creates natural ventilation system which lower down the stator temperature as well as resistance which in turn increases the efficiency. Materials and methods adopted are described in section IV and experimental result by load test on 1.1 kW, 50 Hz, three phase squirrel cage induction motor is discussed in section V.

II. MECHANISMS OF HEAT GENERATION INSIDE AN INDUCTION MOTOR

As a result of electrical and mechanical losses inside the machines, all rotating electrical machines dissipate heat. Losses are higher during the process of starting of motor and dynamic braking and are increases with loading [7]. The mechanism of heat generation in induction motors are classified into four groups, mainly related to the places where losses occur. These are joule losses, iron losses, stray losses and mechanical losses [8].

A. Joule losses

This mechanism corresponds to the conversion of electrical energy into thermal energy. These types of losses are directly related to electric resistance of the conductor and changes proportionally to the square of the current which is represented by equation as [9]:

$$P_j = I^2 * R$$

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Energy conversion by joule effect in squirrel cage induction electric motors occurs in the stator (copper windings) and in the squirrel cage (aluminium bars).

B. Iron losses

These losses are due to the conversion of electric energy into thermal energy in the iron. They are divided in the hysteresis and Foucault (eddy currents) losses. The eddy current losses are joule losses that occur in the flow of an induced electric current. The hysteresis losses are due to the energy expended to align the iron magnetic poles to the applied magnetic field [10].

C. Stray load losses

The stray load losses are minor losses in the electric motor operation and their quantification is very difficult [11]. This includes the losses due to the skin effect, high frequency among others that are unknown or not easily quantified.

D. Mechanical losses

These losses comprise the conversion of the mechanical energy into thermal energy due to mechanical friction. Here includes mainly the losses due to rolling bearings (ball/ring interface) and the cooling fan losses.

III. EFFECT OF HEAT ON EFFICIENCY OF INDUCTION MOTOR

In industrial terms efficiency is the ratio of shaft output power to the input power or in other words, it represents the success of machine in converting electrical power to mechanical power [12]. This can be expressed by the following equation:

$$\text{Efficiency} = \frac{P_{\text{mech}}}{P_{\text{mech}} + \Sigma \text{Losses}}$$

The difference between the electrical (input) and mechanical (output) power is the sum of motor losses and these losses are directly related with the heat generated inside the motor as described in section. Section winding resistance is directly related to the motor's temperature and it is proved that with increase in temperature due to heat and losses, the efficiency of motor degrades [13]. When the stator and core temperature of three phase induction motor is increased, stator resistance also increases as a result of which efficiency decreases [14]. So, it is required to maintain the stator temperature by adopting cooling method in order to improve the efficiency.

IV. MATERIALS AND METHOD

This section provides an overview of experimental setup of WWCC method. For this purpose a three phase squirrel cage induction motor is selected and its specifications are given in table I.

Most of the losses occur in the stator part of motor and this is the major source of heat dissipation. By the conduction, convection and radiation modes of heat transfer, heat reaches to the outer casing of motor and is uniformly distributed which results in rise in temperature of surrounding. WCCA method is used to reduce this temperature and acts as a safeguard for the protection of insulation material, to increase the thermal withstanding capacity as well as efficiency of motor. In this method, a capillary jacket is used which is placed above the casing of motor. Figure 1 shows the structure of capillary jacket which is a hollow cylindrical structure; its inner layer is made by porous mat of tatties matrix (used in evaporative coolers). Capillary jacket is comprised of three layers. First layer is of Tatties matrix which has a property of high temperature withstanding capability. So, its main function is to protect the jacket's capillaries from overheating of motor and also provide structural support. Middle layer of jacket is made of cotton material which is wrapped on the layer of tatties matrix. Main function of middle layer is to provide uniformity to capillary effect. Top most layer of jacket is of capillary structure. Capillaries are made by jute and cotton materials which are attached on the outer surface of jacket. Percentage wise categorization of different chemical composition of jute fibre is shown in table II [15]. When water flows through these capillaries, water molecules are absorbed by cotton and jute material, due to their structure and chemical nature. When motor was running for 30 minutes, capillary jacket consumes 516 ml of water. It is experimentally proved that for 2 hour operation of motor approximately 1.7 litre of water will be required for cooling operation. In order to reduce the surrounding air temperature of working motor, the quantity of water absorbed by the capillaries differs with time which is shown in table III. Figure 2 shows the working of WCCA method applied on three phase induction motor. Funnel is used to transfer water from storage tank which can be managed through tap arrangement. Funnel is joined with a bunch of capillary tubes and same capillaries are attached to the outer surface of jacket. Inlet water from capillary tube is uniformly distributed in the capillaries of jacket through absorption process. Water is further absorbed by the layer of cotton which cools the passage of air in between motor casing and jacket. Natural

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

cooling phenomenon takes place when passage air molecules come in contact with the wet layer of jacket; simultaneously there is reduction of surrounding temperature. This heat removal process is beneficial for improving the efficiency of motor.

V. RESULT AND DISCUSSION

A. Load Test

This test was conducted on 1.1 kW three phase induction motor as per circuit diagram shown in figure 3. Current, voltage, input power and spring balance readings were observed in order to measure the torque, output power and efficiency of the motor [12]. Net torque (Newton-metre) produced by three phase induction motor is obtained by using following formula:

$$T = (F_2 - F_1) * R * 9.81$$

Where R is the radius of brake drum and its measured value is 0.040 metre. F_1 , F_2 are the spring balance reading in Kg. Output power in Watts is calculated as:

$$P_{output} = \frac{2\pi N_r T}{60}$$

Where, N_r is rotor speed in rpm, measured by a non-contact type digital tachometer. Percentage efficiency of motor is calculated by using formula:

$$\% \text{ Efficiency} = \frac{P_{output}}{P_{input}}$$

Table IV shows the experimental outcome of load test on three phase induction motor without using WCCA method. With increase in loading on motor, its efficiency increases up to a certain point and maximum efficiency calculated 78.4%. Load test done on the same three phase induction motor using WCCA method, its maximum efficiency calculated 82.7%. Variation in efficiency with loading is shown in table V. Figure 4 shows the comparison of percentage efficiency, when load test done on three phase induction motor with and without using WCCA method separately. Result clearly shows that the efficiency of induction motor is comparatively higher for WCCA method with variations in current.

VI. FIGURES AND TABLES

TABLE I: SPECIFICATION OF THREE PHASE INDUCTION MOTOR

Parameters	Ratings
Power	1.1 kW
Speed	1475 rpm
Current	3.75 A
Voltage	415 V
Frequency	50 Hz

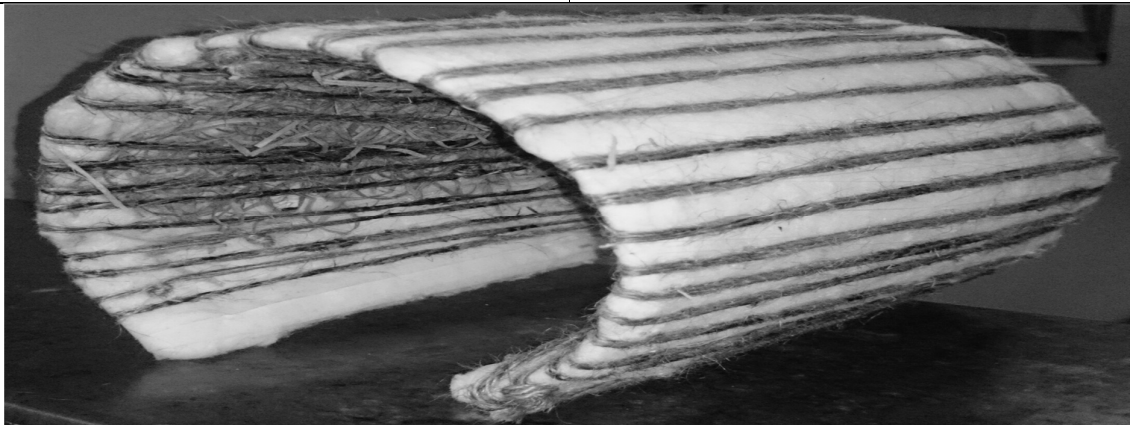


Fig. 1: Structure of capillary jacket with tube.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

TABLE II: COMPOSITION OF JUTE FIBRE

Composition	Weight in Percentage (%)
Lignin	12-14
α - cellulose	58-63
Hemicelluloses	21-24
Minor constituents	2-4

TABLE III: QUANTITY OF WATER ABSORBED BY THE CAPILLARIES WITH RESPECT TO TIME

Time of operation of three phase induction motor (minutes)	Quantity of water absorbed by capillaries (ml)
30	516
60	930
90	1348
120	1785

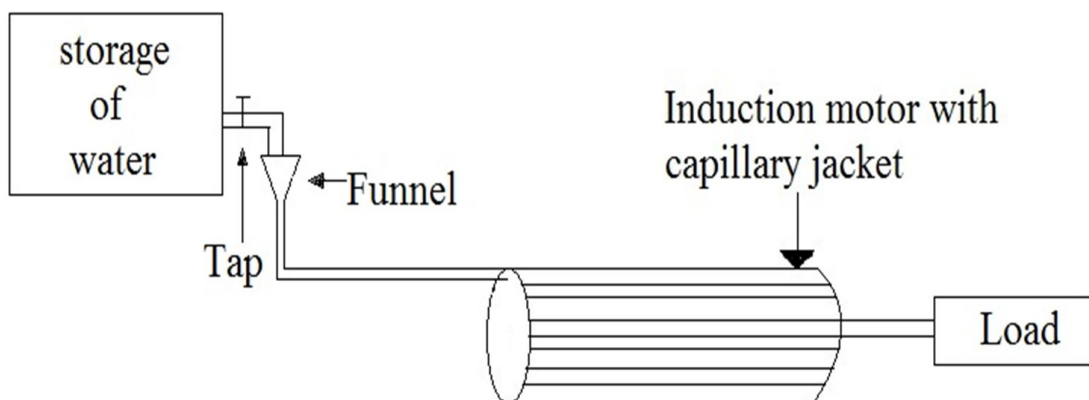


Fig. 2: working of WCCA method.

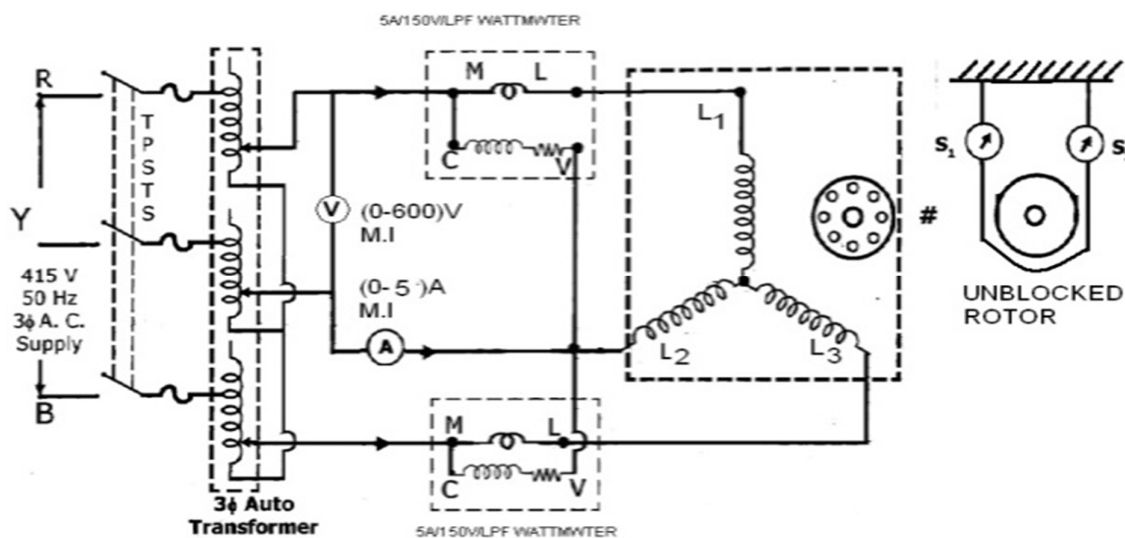


Fig. 3: circuit diagram for load test on three phase induction motor.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

TABLE IV: EFFICIENCY OF THREE PHASE INDUCTION MOTOR WITHOUT USING WCCA METHOD FROM LOAD TEST.

S.No.	Current in A	Efficiency in %
1	3.30	64.4
2	3.35	65.7
3	3.40	67.1
4	3.45	69.2
5	3.50	70.6
6	3.55	72.5
7	3.60	73.2
8	3.65	75.4
9	3.70	76.1
10	3.75	78.4

TABLE V: EFFICIENCY OF THREE PHASE INDUCTION MOTOR WITH WCCA METHOD FROM LOAD TESTS

S.No.	Current in A	Efficiency in %
1	3.30	65.1
2	3.35	67.3
3	3.40	69.7
4	3.45	72.4
5	3.50	74
6	3.55	75.5
7	3.60	76.7
8	3.65	78.6
9	3.70	79.5
10	3.75	82.7

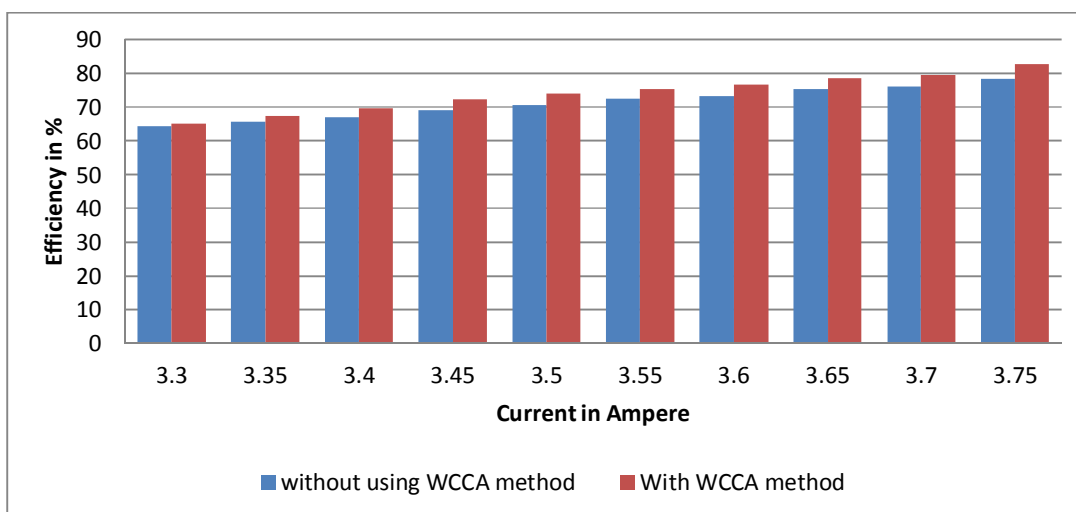


Fig.4: Comparison of efficiency of three phase induction motor for different current values with and without applying WCCA method.

VII. CONCLUSION


In this paper, the stator and core temperature of a 1.1 kW three phase induction motor is lowered by means of WCCA method.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Experimental results included an efficiency analysis and the effect of cooling by WCCA method on efficiency of motor was presented. When stator and core temperatures was decreased by WCCA method, the stator resistance decreases which in turn increased the efficiency of three phase induction motor results from load test shows that the maximum efficiency increased from 78.4% under normal operating condition to 82.7% under cooled operating condition by means of WCCA method. The efficiency of specific induction motor was therefore increased by 4.30%. It should be noted that the method used in this paper is of low cost and consumes less water. It does not require any external energy for cooling. Materials used to prepare apparatus for this method are easily available and of low cost. WCCA method is highly effective due to high specific heat capacity of water and high heat transfer coefficient.

REFERENCES

- [1] D.E. Selvaraj, C.P. Sugumaran and B. Guruprakash, "Analysis of efficiency, thermal withstanding capacity and electromagnetic interference of three phase squirrel cage induction motor coated with SiO₂ and TiO₂ nanocomposite filled enamel", *International Journal of Science and Engineering Applications*, vol.1(1), pp. 17-21, 2012.
- [2] R. Gouws and H.V. Jaarsveldt, "Impact of thermoelectric cooling modules on the efficiency of a single-phase asynchronous machine", *Journal of Energy in Southern Africa*, vol. 25(1), pp. 13-18, 2014.
- [3] E.L. Brancato, "Estimating the lifetime expectancies of motors", *IEEE Electrical Insulation Magazine*, vol. 8(3), pp. 5-13, 1992.
- [4] K.G. Bante, S.G. Tamekar and D.R. Tutakane, "AC motor cooling system analysis based on application case study", *International Journal of Engineering Inventions*, vol. 2(8), 9-15, 2013.
- [5] M. Sikora, R. Vlach and P. Navratil, "The unusual water cooling applied on small asynchronous motor", *Engineering Mechanics*, vol. 18(2), 143-153, 2011.
- [6] S.C. Mukhopadhyay, "Prediction of thermal condition of cage-rotor induction motors under non-standard supply systems", *International Journal On Smart Sensing and Intelligent System*, vol. 2(3), 381-395, 2009.
- [7] S.L. Ho and W.N. Fu, "Analysis of indirect temperature rise test of induction machine using time stepping FEM", *IEEE Trans. on Energy Conversions*, vol. 16(1), 55-60, 2001.
- [8] S.C. Mukhopadhyay and S.K. Pal, "Temperature analysis of induction motors using a hybrid thermal model with distributed heat sources", *Journal of Applied Physics*, vol. 83(11), 6368-6370, 1998.
- [9] R. Findlay, N. Stranges and D.K. Mackay, "Losses due to rotational flux in three phase induction motor", *IEEE Transactions on Energy Conversions*, vol. 99(2), 543-549, 1994.
- [10] C. A. Hernandez-Aramburo, T. C. Green and A.C. Smith, "Estimating rotational iron losses in an induction machine", *IEEE Transactions on Magnetics*, vol. 39(6), 3527-3533, 2009.
- [11] C. A. Hernandez-Aramburo, T. C. Green, and A. C. Smith, "Assessment of power losses of an inverter-driven induction machine with its experimental validation", *IEEE Transaction on Industrial Applications*, vol. 39(8), 994-1004, 2003.
- [12] P.S. Bhimbhra, "Electrical machinery", 7th ed., Khanna Publishers, India, 2007.
- [13] H. Oraee, "A quantitative approach to estimate the life expectancy of electric motors", *IEEE Transactions on Dielectrics and Electrical Insulation*, vol. 7(6), 790-796, 2000.
- [14] A. Mihalcea, B. Szabados, J. Hoolboom, "Determining total losses and temperature rise in induction motors using equivalent loading methods", *IEEE Transactions on Energy Conversions*, vol. 16(3), 214-219, 2001.
- [15] R.Masoodi and K.M. Pillai, "A study on moisture absorption and swelling in bio-based jute-epoxy composites", *Journal of Reinforced Plastics and Composites*, vol. 31, (5) 285-292, 2012.

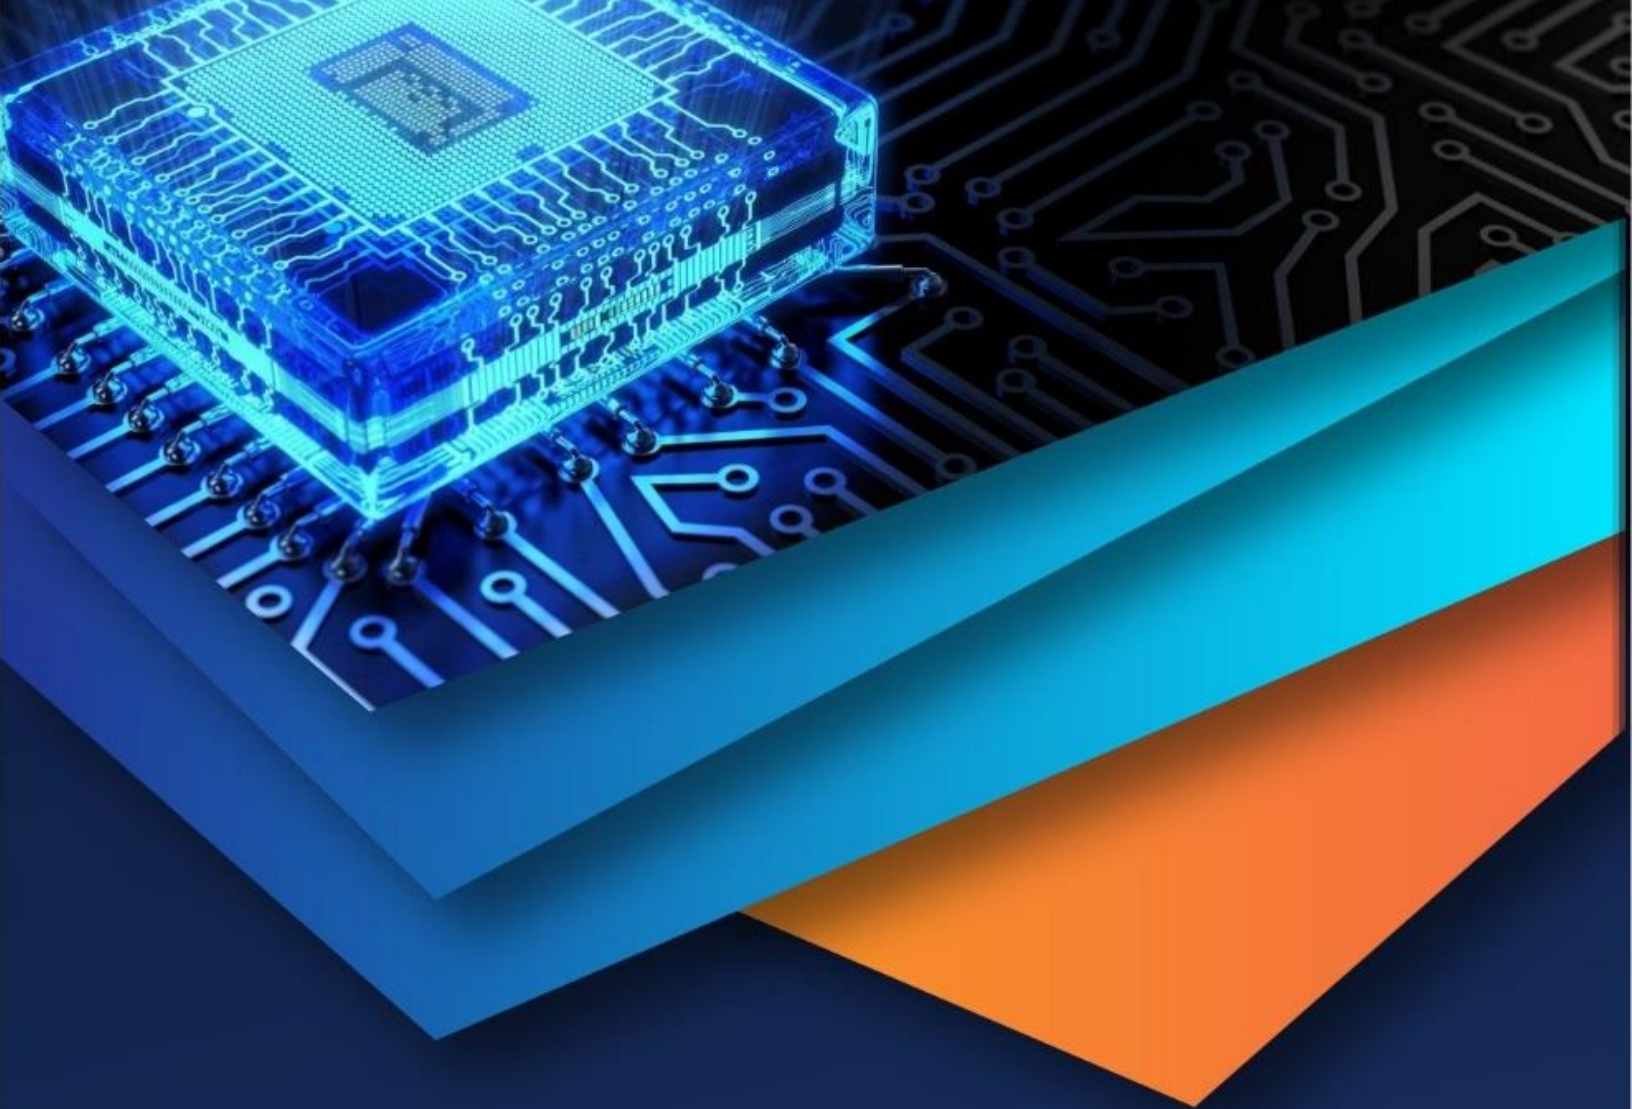

10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)