



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: IV Month of publication: April 2018

DOI: <http://doi.org/10.22214/ijraset.2018.4381>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Expansion of Next Generation Organic Solar Cell

Gaurav Srivastava¹, Dr. Rajendra Kumar²


¹Ph.D Scholar, Department of Electrical Engineering, Faculty of Engineering Rama University, Kanpur

²Associate Professor, Dept. of Applied science & Humanities, Faculty of Engineering Rama University, Kanpur

Abstract: Organic photovoltaic, OPV, units have been get attraction much attention for next living-stage solar units. OPV is based on the same technology as polymer 3 light-emitting diodes, PLED which has been undergone growth strongly, powerfully for television application at sumitomo Chemical Co. Ltd. Many PLED-related materials and apparatus making processes can increase in rate the development of OPV technology. Although very high doing work well of 6.5% has already been got done, the doing work well of more than 10% is necessary for the commercialization of OPV

I. INTRODUCTION

With the near in time increase in being conscious of the problems of measures for complete warming and the making tired of natural useable things, solar units have get attraction everywhere on earth attention as the trump card for getting answer to, way out of these questions. moving forward, they are predicted to be an important complete market going over limits 10 trillion Japanese money in 2020, but we need an order of events for putting about that makes the costs for power living-stage using solar units lower than trading, business like power gives idea of price. however, the price of producing power using current solar units is more high in price than trading, business like power living-stage, and the current place, position is one where putting about is coming about because of government money supports. The chief directions solar units are currently inorganic solar units like those made of silicon. Since they are made by high temperature and space completely without substance processes and have a complex number of connected parts, price at a lower price have been slow. in addition, since the parts of a greater unit are very weighty, price copies of smaller size are then possible using unbroken stretch producing. In addition, since the readily bent OPVs are light, they can easily be put in on houses, and we being of the opinion that they can be supplied at a low price. increased smallest units design technology and putting-together technology are necessary for making the gave the forms polymers used in OPVs.

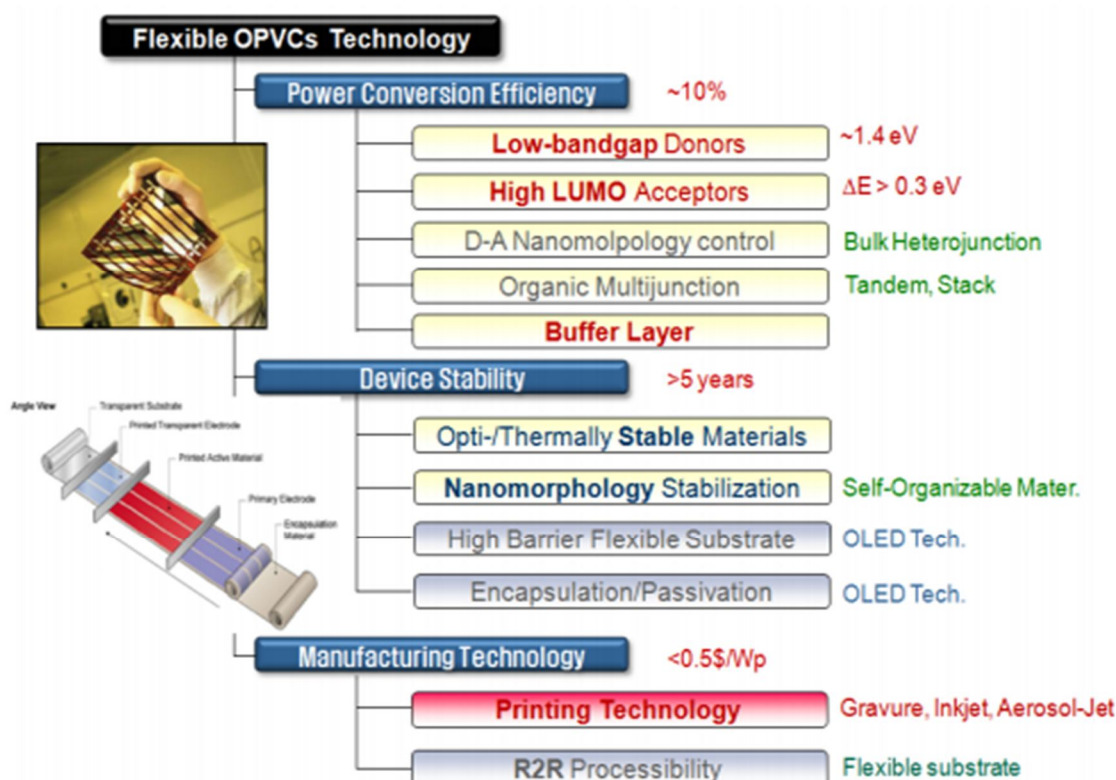


A. Organic Solar Cell Application Field

The organic solar cell has not yet been commercialized as of 2009. In particular, the some company predicts that the organic solar cell will be initially applied for special uses such as military market first due to low efficiency and high power generation unit cost. In reality, R&D activities proceed in relation to this.

Strength	Weakness
<ul style="list-style-type: none"> - convenient design/synthesis of new materials - simple device structure and solution process - enables flexible substrate based roll-to-roll process - utilizes the conventional production facilities - integrated application of the conventional organic electronic device technology - realizes transparent device 	<ul style="list-style-type: none"> - low efficiency as of now - vacuum deposition process of cathode electrode - complex morphology of photoactive layer

As shown in the above, the low-cost organic solar cell may be produced due to its strengths in material and process (table1). Though, its application in power generation field appears rather difficult due to the low device efficiency. Hence, it is expected to be utilized for mobile electronic device charger or military use in the early commercialization.

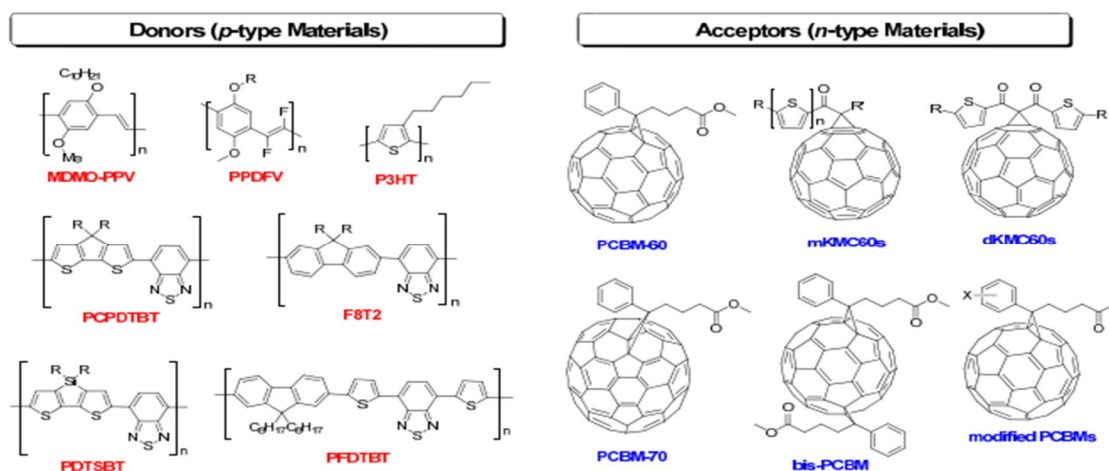

B. Organic Solar Cell R&D Trend:-


The Si solar cell which has high making process expenses let see delayed commercialization because of, in relation to difficulties in over-coming its making price limiting condition as Si very thin thing cold wet (weather) material supply not being enough intensifies. On the other hand, The gave the forms system organic/polymer material based necessary part of a system solar cell is looked on as to come to get changed to other form the making price through new processes such as printing process. as an outcome of that, the commercialization seems only possible by making greatest degree the power for a given time make into different sort doing work well through a development of new system of operation-word forms system necessary part of a system materials with made lower, less band opening, nothing in between.

C. Status of material development

As is made clear in the basic smallest units designs of materials that take up long wavelengths are designs doed to get changed to other form the band opening, nothing in between by putting together donor units and person saying yes units and give a high degree of flatness with a further control of the twisting of smallest units chains. smallest units with greater flatness have stronger effects on one another between smallest units, and we can being of the opinion that higher readiness to move. New materials under development through these observations have got to a being taken up edge of 900 10e-09 metres. They can take up a wider range of sun-light, and the doing work well is looked on as to come to be greater than 20%. moving forward, we are having thoughts in terms of getting to a doing work well that goes over limits 10% since by getting well Jsc through the morphology control that will be had a discussion about in the supporters, getting well Voc by controlling HOMO and LUMO using backbone adjustments and making observation of improvements in put in cause by increasing readiness to move

D. Status of developments in morphology control

It is important not only to increase in the amount of light taken up for increasing the doing work well but also to with small amount of money take about photoelectric go forward separating and go forward transport. Since the mean distance for free chief division of music of excitons is approximately 10 10e-09 metres, the p/n connection must be formed at approximately the same size. We have made observations the morphology using a sending (power and so on) lightest electric part of all material microscope tem to get started a careful way for controlling the structuring of this small-scale stage separating structure. We made observation of a careful way for processing tem images and putting into numbers connection measure end to end as a careful way for measuring the stage separating structure. The results are made clear in fig We found that there was a clear connection between this connection measure end to end and doing work well, and we found that there was a most good selection point for interface length. The formation of the interface is insufficient when the interface length is too short, so the charge separation efficiency is poor.

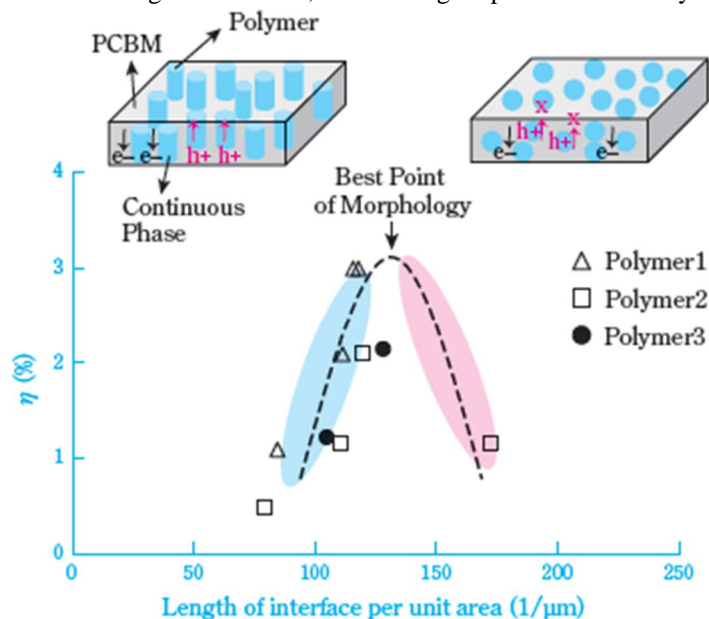

E. Assurance of reliability

Other than the change productivity, confirmation of dependability is likewise critical for making OPVs commonsense. As a stage toward this, we have started estimations of existence with open air introduction and constant presentation to light inside utilizing sun oriented test systems with frameworks that influence utilization of common p-to type polymers PCBM. The even hub is add up to light force. There are distinctive outcomes for the rate of decrease in productivity inside and outside, and following one month of out doore presentation we couldn't find that there is a reasonable diminishment in effectiveness. Then again, in the trial of nonstop introduction inside, we discovered decreases in productivity because of a diminishment in Jsc specifically. We quantified the infrared retention range to look at the substance changes in the material because of introduction to light, yet we saw no progressions that could be distinguished. In this way, we assumed that the reasons for disintegration were contrasts in the stage detachment structure and changes in the anode interfaces. The examination has quite recently begun, yet the present esteem streaming is on about an indistinguishable request from PLEDs, and it is assumed that the greater part of the crumbling components are comparable in that they go through the energized state. In this way, we feel that we can rapidly enhance unwavering quality on the off chance that we make utilization of our insight into PLEDs

F. Future Outlook

Silicon solar cells based cells are broadly spread, yet the vitality created by control age utilizing sun oriented cells is just 0. 1% or less of vitality devoured. With the expansion in worry for ecological issues, there are further desires for the dispersal of sun based cells, yet an achievement is fundamental for supplanting current power creating frameworks. OPVs are thought to hold the conceivable outcomes for an essential leap forward in the field of sun based cells. Notwithstanding enhancing effectiveness and guaranteeing unwavering quality, a key is creating move to move forms. We are wanting to accomplish these and make an early section into the market.



REFERENCES

- [1] Nikkan Kogyo Shinbun, 2009.2.20, p.1
- [2] Japan Photovoltaic Energy Association(JPEA) homepage, <http://www.jpea.gr.jp/11basic01.html>
- [3] M.K. Nazeeruddin, F.D. Angelis, S. Fantacci, A. Selloni, G. Viscardi, P. Liska, S. Ito, B. Takeru and M. Graetzel, J. Am. Chem. Soc., 127 (48), 16835 (2005).
- [4] "PV Roadmap 2030 (PV2030+)", New Energy Technology Development Department, New Energy and Industrial Technology Development Organization (2009), p.14.
- [5] Present Status and Future Outlook of Solar Cell Technologies and Market 2009, Fuji Keizai (2009), p.14.
- [6] C.W.Tang, Appl. Phys. Lett., 48, 183 (1986).
- [7] K. Yoshino, S. Morita, T. Kawai, H. Araki, X. H. Yin and A. A. Zakhidov, Synthetic Metals, 56, 2991 (1993).
- [8] N. S. Sariciftci, L. Smilowitz, A. J. Heeger and F. Wudl, Science, 258, 1474 (1992).
- [9] G.Yu, J. Gao, J. C. Hummelen, F. Wudl and A. J. Heeger, Science, 270, 1789 (1995).
- [10] Kaku Uehara, Susumu Yoshikawa, "Leading-edge Technology for Thin Film Organic Photovoltaic Cell", CMC Publishing Co., Ltd. (2005), p.75.
- [11] Kaku Uehara, Susumu Yoshikawa, "Leading-edge Technology for Thin Film Organic Photovoltaic Cell", CMC Publishing Co., Ltd. (2005), p.88.
- [12] J. Peet, J. Y. Kim, N. E. Coates, W. L. Ma, D. Moses, A. J. Heeger and G. C. Bazan, Nat. Mater., 6, 497 (2007).
- [13] J. Y. Kim, K. Lee, N. E. Coates, D. Moses, T. Nguyen, M. Dante and A. J. Heeger, Science, 317, 222 (2007).
- [14] J. Hou, H. Chen, S. Zhang, G. Li and Y. Yang, J. Am. Chem. Soc., 130, 16144 (2008).
- [15] E. Zhou, M. Nakamura, T. Nishizawa, Y. Zhang, Q. Wei, K. Tajima, C. Yang and K. Hashimoto, Macromolecules, 41, 8302 (2008).
- [16] L. Yongye, F. Danqin, S. Hae-Jung, Y. Luping, W. Yue, T. Szu-Ting, L. Gang, J. Am. Chem. Soc., 131, 56 (2009).
- [17] Y. Liang, Z. Xu, J. Xia, S. Tsai, Y. Wu, G. Li, C. Ray, L. Yu, Adv. Mater. -Early View, DOI: 10.1002/adma. 200903528 (Published Online: 4 Jan 2010), (cited 9 Apr 2010).
- [18] M. Chen, J. Hou, Z. Hong, G. Yang, S. Sista, L. Chen and Y. Yang, Adv. Mater., 21, 4238 (2009).
- [19] D. Kitazawa, N. Watanabe, S. Yamamoto and J. Tsukamoto, Appl. Phys. Lett., 95, 053701 (2009).



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)