



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: VI Month of publication: June 2018

DOI: <http://doi.org/10.22214/ijraset.2018.6122>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

The Study of Effect of Imbalance on Vibration of Rotor Bearing System

Santosh Kumar Yadav¹, Pink Raj², Shailendra Agrawal³

^{1,2,3}Assistant Professor, Department of Mechanical Engineering, Prasad Institute of Technology Jaunpur

Abstract: *The imbalance is the condition in which the centres of mass of rotor is not coincided with the centres of the rotation, therefore vibrations turn out. The current study is aimed to boost the responsiveness of fault diagnosing system. An exhaustive experimental study created to ascertain the results of imbalance on the rotor bearing system. In this study, effect of position of imbalance mass on rotor bearing vibration was calculated, while the two discs placed at different positions on the shaft. SCXI laboratory based system with accelerometer has been adopted for this study. It has been noticed that the imbalance is maximum when the disc is placed at Centre of the shaft, the amplitude of vibration increases with rise in speed.*

Keywords: *Imbalance, Rotor, Vibration, Fault diagnosing, Accelerometer.*

I. INTRODUCTION AND LITERATURE SURVEY

Rotor is an important element for dynamic mechanical system. The rotor-bearing system of contemporary rotating machines establishes an intricate dynamic system. The stimulating nature of rotor-dynamic problems has attracted investigations contributing to the remarkable progress in the study of rotating systems. Modern machinery is bound to fulfill the increasing economic demands for larger machines; higher quality, environmental acceptance in production, as well as inevitably growing end-user product requirements and expectations and the advances in vibration technology require exact and complete consideration of vibration characteristics of the Permanent Magnet Alternator (PMA) design in its basic conception and definition. Modern machinery now days have rotor bearing systems based on vibration technology and PMA design [1]. The vibrations in rotor bearings have been continuously examined since 1970. Several turbine rotors failures seem within their operating life.

Noise and vibration in machines or in the environment around them happen when dynamic forces stimulate these machines. This industrial noise creates direct and indirect effects on the fitness and protection of these operational them. They will even have effects on buildings, machinery, equipments and vehicles around them. These effects sometimes manifest themselves within the sort of reduced performance, wear and tear, faulty operation and irreversible injury within the sort of cracks. Vibration and noise have adverse impact on the human health and safety in addition as on the buildings, machinery, equipments and vehicles [2]. Numerous rotating machines, for example, control station turbo generators, might be considered as comprising of three noteworthy parts; Rotor, Bearings (regularly liquid course) and Foundations. In numerous advanced frameworks, the establishment structures are adaptable and impact the dynamic conduct of the entire machine. These rotating machines have a high capital cost and consequently the improvement of condition checking methods are imperative. Vibration based distinguishing proof of deficiencies, for example, rotor unbalance, rotor twists, breaks, rubs and misalignment and liquid actuated shakiness in view of the subjective comprehension of estimated information and widely used in practice. Vibration method utilized for distinguishing proof of shortcomings in rotating machines is well developed and widely used in practice [3]. The dynamic response of a rotating shaft subject to an axially, steady speed, moving and rotating load speaks to a group of dynamic issues, which are identified with future fast and high-exact mechanical components [4]. Rotary machines are perceived as critical hardware in control stations, petrochemical plants and car industry that require exact and proficient execution. Bearings are the most broadly utilized mechanical parts in rotational parts causes of breakdowns in machines. Such failures can lead to expensive shutdowns, delays in production and even human victims. To diminish machine downtimes, a delicate and healthy monitoring system is desirable to detect liabilities in their primary stages and to deliver warnings of probable malfunctions. Such a monitoring system can decrease maintenance charges, evade catastrophic letdowns and increase machine accessibility. To develop an reliable diagnostic and prognostic system, a inclusive understanding of the bearing behaviour is required [5]. gave a close review on the utilization of model primarily based identification of rotating machines. They mentioned totally different approaches for the derivation of foundation models from operational information and so model change. They additionally elaborate totally different models derived for the rotor faults and their application in fault identification. The rotor-bearing system of contemporary rotating machinery is advanced and desires correct and reliable prediction of its dynamic characteristics. Rotor bearing system in unbalanced condition effects crucial machine elements and develops faults

comparable to heat generation etc. [6]. The existence of an eccentric or unbalanced mass in a rotating disc causes vibration, which can be satisfactory up to a level. If the vibration originated by an unbalanced mass isn't acceptable, it may be removed either by eliminating the eccentric mass or by addition of equal mass in such an edge that it stops the result of unbalance. so as use this technique, we'd like to work out the quantity and also the setting of the eccentric mass by experimentation [7].

The main objectives of the paper are the study the impact of position of unbalanced mass and alter in speed of rotor on shaft vibration.

II. MODEL BASED FAULT IDENTIFICATION METHOD

A. Mathematical Description

The vibrations diagrammatical by the vector $x_0(t)$ at N DOF of the healthy rotor system because of the operational load $F(t)$ throughout traditional operation is delineated by the equation of motion

$$M\ddot{x}_0(t) + C\dot{x}_0(t) + Kx_0(t) = F(t) \quad \dots\dots\dots(2.1)$$

where, M, C and K are the mass, damping, and stiffness matrices of any complicated rotor system which has the result of bearings, foundations, rotating mechanism effects etc. and $\ddot{x}_0(t), \dot{x}_0(t)$ and $x_0(t)$ is that the vibrations delineated by the vector in sort of acceleration, velocity, and displacement severally of healthy rotor.

The prevalence of a fault within the system changes its dynamic behavior. The extent of the modification depends on the vector b, that describes the fault parameters appreciate location, magnitude etc. The fault-induced modification within the undulation behavior is drawn by the extra masses functioning on the healthy system:

$$M\ddot{x}(t) + C\dot{x}(t) + Kx(t) = F(t) + \Delta F(\beta, t) \quad \dots\dots\dots(2.2)$$

Where $F(t)$ initial operating load and $\Delta F(\beta, t)$ corresponding loads generated in the system due to the fault rotor.

The residual vibrations encouraged represent the distinction of antecedently measured traditional vibrations $x_0(t)$ of healthy system from presently measured vibrations $x(t)$ of faulty system. The residuals of vibration could so be written as

$$\Delta x(t) = x(t) - x_0(t); \Delta \dot{x}(t) = \dot{x}(t) - \dot{x}_0(t); \Delta \ddot{x}(t) = \ddot{x}(t) - \ddot{x}_0(t) \quad \dots\dots\dots(2.3)$$

Deduction of the equations of motion for the healthy system from that of defective system, the equation of motion for residual vibration can be depicted as

$$M\Delta \ddot{x}(t) + C\Delta \dot{x}(t) + K\Delta x(t) = \Delta F(\beta, t) \quad \dots\dots\dots (2.4)$$

The system matrices stay unchanged and therefore the rotor model remains linear. Individually the corresponding loads encourage the transformation in the dynamic performance of the healthy linear rotor model. To spot the fault parameters, the distinction of the theoretical fault model and therefore the measured equivalent load are reduced by some applied math rule like least sq. fitting.

To calculate the fault induced residual vibrations, there's a desire of measured vibration knowledge for each healthy and faulty rotor system at same operational and measuring conditions. Directly matching knowledge is typically not accessible for generating residual vibrations, therefore some signal process needs to be applied to attain identical conditions. For instance, completely different rotor speeds are compensated by adjusting the duration of the recorded traditional vibrations to the duration of presently measured vibrations. Phase shifts are evaded by recording a trigger signal throughout the measuring [7].

B. Scheme of Imbalance Diagnosis

To identify the imbalance in any system a model primarily based theme is established with the assistance of residual generation. The pre-requisite for this sort of imbalance designation is that the measured vibration signal information for the healthy rotor system within the sort of displacement which might be written as " $X_0(t)$ ". currently so as to search out the imbalance within the system, measured vibration signal information for the imbalance system are kept in the form of displacement which might be written as " $X(t)$ ". The residual vibration is analyzed from the amount of vibration displacement information for each the healthy system and also the imbalance system at same operational conditions. The residual displacement is given $\Delta X_0(t)$:

$$X_0(t) = X(t) - X_0(t) \quad \dots\dots\dots (2.5)$$

The above equation is used to measure imbalance in the rotor bearing system [7].

III. EXPERIMENTAL SETUP AND DATA COLLECTION


The experimental arrangement consists of motor (1-phase 4-pole induction motor), two balls bearing, base plate, rotor shaft, two rotor disks (having outer diameter 9 cm) and V-belt pulley with varying three speeds (1150 rpm, 2050 rpm and 3080rpm). The material of shaft is made of mild steel. An accelerometer “PCB (353) B34” has been used for data acquisition and analysis through Lab view based SCXI-1530 vibrational analyzer. The accelerometer is set on right side (bearing 2) block to quantify the acceleration amplitude in axial direction. Estimation information are gathered at rotor working speeds 1150 rpm, 2050 rpm and 3080 rpm at the five areas on shaft. The information is stored and planned through vibrational analyzer to decide the speed and removal amplitudes by computerized joining of estimated increasing speed information. Dislodging information are moved in MATLAB programming for information investigation.

The rotor discs are having mass 0.630 kg; diameter is 90 mm and thickness 15 mm. The disc is fixed on the rotor shaft by nut and bolt.

Fig 3.1: Rotor discs having 90 mm outer diameter & thickness 15 mm.



Fig 3.2: Rotor bearing test experiment

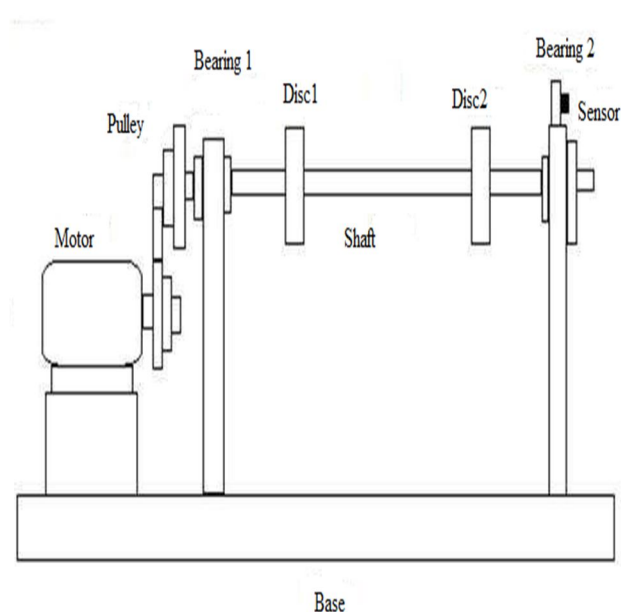

Schematic of experimental setup on which experiments were conducted is shown in Fig 3.2.

The typical acquired signals from SCXI based data acquisition system for two discs (having outer diameter 9 cm) when positioned at the different position on defect free shaft rotating at 1150 rpm, 2050 rpm and 3080 rpm respectively. Fig. 3.3, Fig. 3.4, Fig. 3.5 shows the respective signals when the two discs are mounted in the centre position and shaft rotate 1150 rpm, 2050 rpm, 3080 rpm respectively.

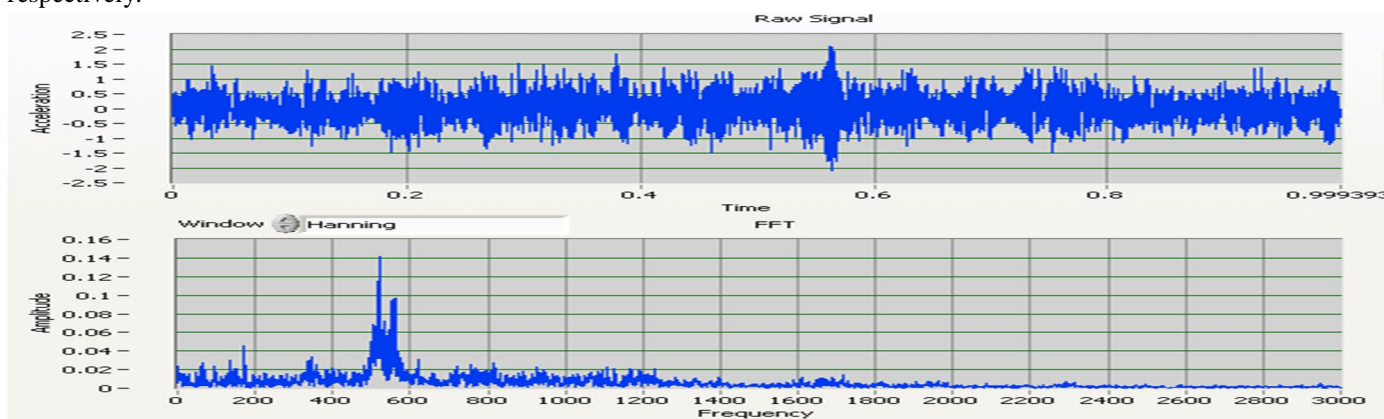


Fig. 3.3 Two discs mounted at centre position on defect free shaft rotating at 1150 rpm

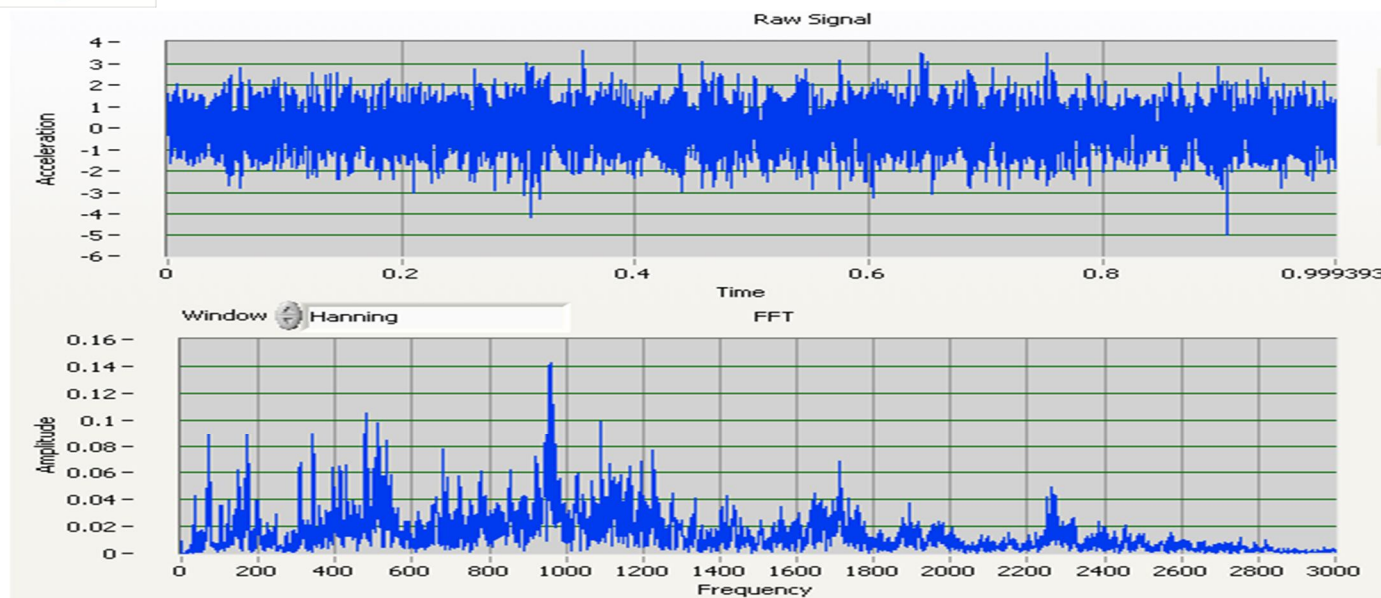


Fig. 3.4 Two discs mounted at centre position on defect free shaft rotating at 2050 rpm

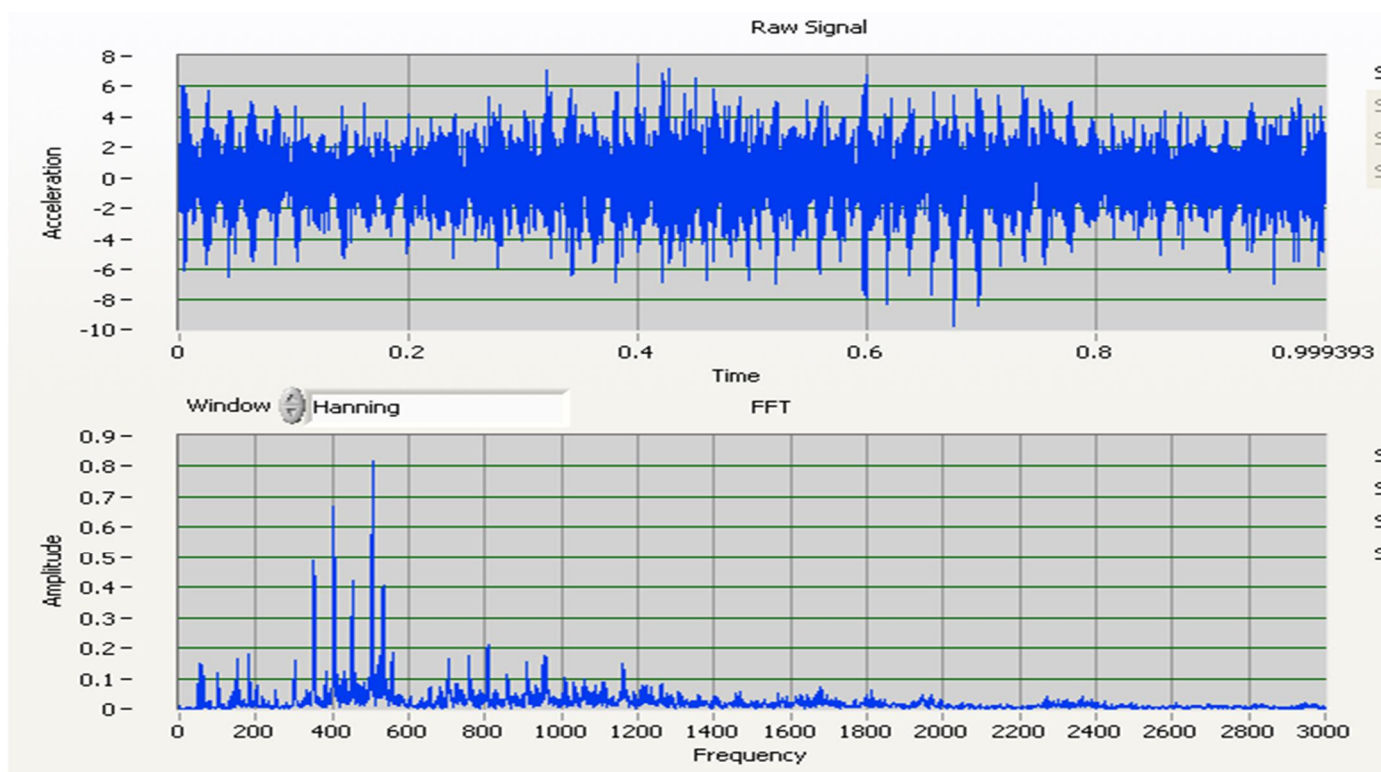


Fig. 3.5 Two discs mounted at centre position on defect free shaft rotating at 3080 rpm

IV. RESULT AND DISCUSSION

Vibration of shaft was measured by putting disc and shifting it on five different positions on the defect free shaft. The data at different speeds were collected. Set of data for two discs (having outer diameter 9 cm) is shown in Table 4.1. The same has been shown in terms of graph in Fig. 4.1 to 4.2.

Table 4.1: Vibration amplitude at different speeds for discs placed at five different positions on the shaft

Position of disc on shaft	Amplitude (mV) at 1150 rpm	Amplitude (mV) at 2050 rpm	Amplitude (mV) at 3080 rpm
1	0.4348	0.8749	1.4223
2	0.4261	0.8491	1.2287
3	0.4442	0.9508	1.6671
4	0.3937	0.9490	1.7107
5	0.4813	0.9995	2.1842

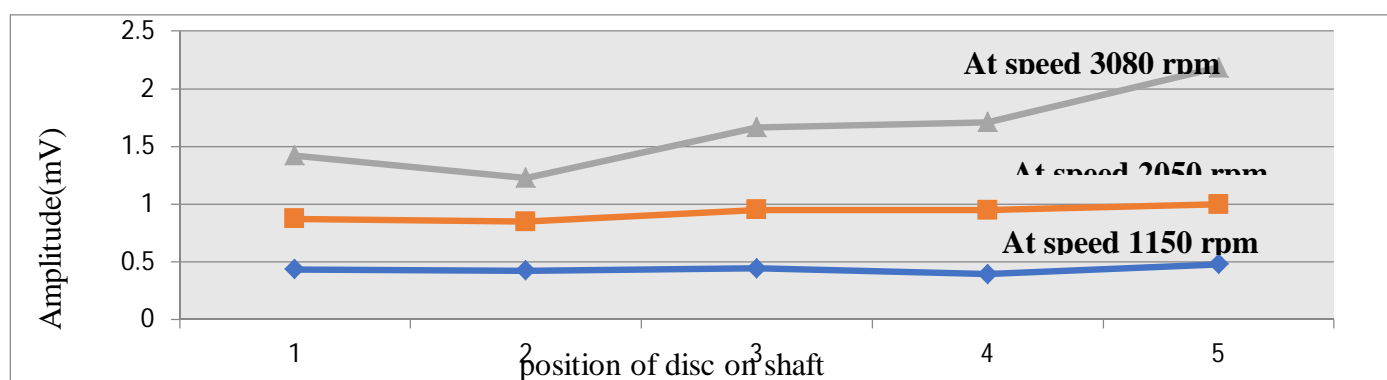


Fig. 4.1. Vibration amplitude versus Position of disc at different rpms (1150, 2050 and 3080 rpm)

Graph show that the imbalance is maximum at centre position on shaft. It is because the bending moment is maximum at centre position of shaft.

A. Effect of change in Speed of Rotors on Shaft Vibration

The effect of change in speed of rotors on shaft vibration of when discs are placed (having outer diameter 9 cm) at different positioned on shaft without crack are shown in Table 4.1 shows the imbalance increases with increase in speed.

The same has been shown in terms of graph in Fig. 4.2.

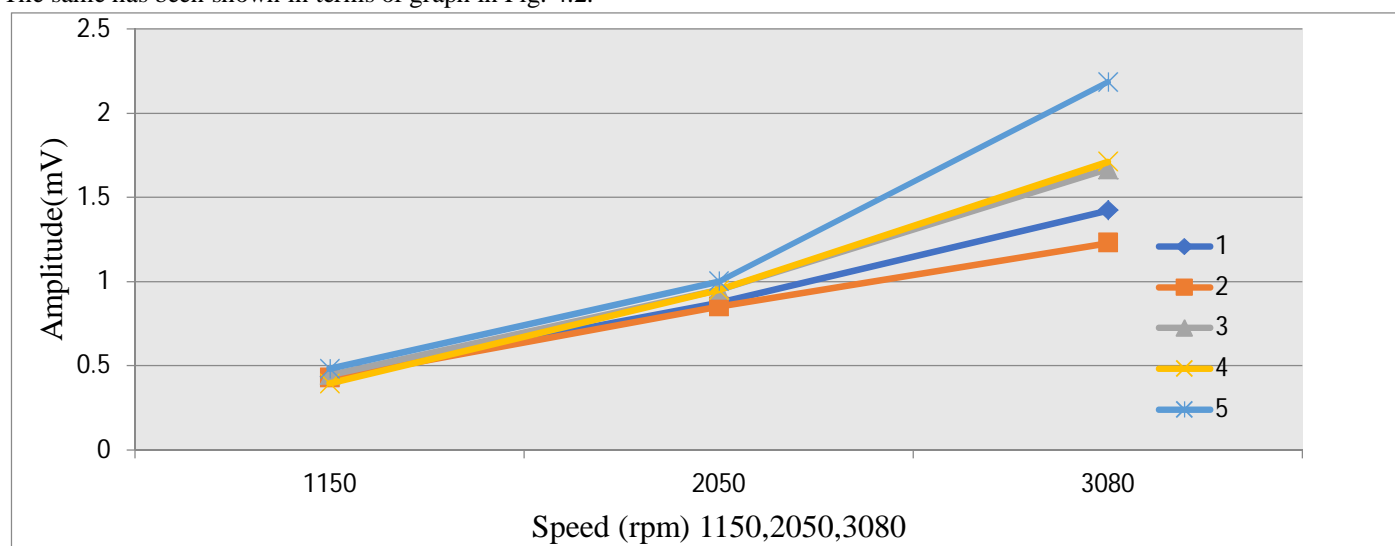


Fig 4.2. Vibration amplitude versus speed for five different positions on the defect free shaft

V. CONCLUSIONS

- A. When the two discs (having outer diameter 9 cm) were placed at first, second, third, fourth and fifth position of disc on shaft (i.e. 60 mm, 110 mm, 140 mm, 170 mm and 220 mm away from both sides of bearings), vibration amplitudes at speed 1150 rpm were 0.4348, 0.4261, 0.4442, 0.3937 and 0.4813 mV defect free shaft.
- B. At the speed 1150 rpm, 2050 rpm and 3080 rpm, when discs are placed at centre position of the defect free shaft, the vibration amplitude and imbalances increases with increase in rotor speed.
- C. Bending moment is maximum at centre of the shaft, imbalance is maximum when the discs placed at centre position of the shaft

REFERENCES

- [1]. Bachschmid, N., Pennacchi, P. and Vania, A., 2002. Identification of multiple faults in rotor systems. *Journal of sound and vibration*, 254(2), pp.327-366.
- [2]. Girdhar Paresh, "Practical Machinery Vibration Analysis and Predictive Maintenance", British Library Cataloguing in Publication Data, Newness, 2004.
- [3]. Sinha J. K., Lees A. W., and Friswell M. I., "Estimating unbalance and misalignment of a flexible rotating machine from a single run-down", *Journal of Sound and Vibration*, Volume 272 (3-5) (2004), pp. 967-989.
- [4]. Isermann R., "Model-based fault-detection and diagnosis—status and applications", *Annual Reviews in Control*, Volume 29 (1) (2005), pp. 71-85.
- [5]. Katz R., "The dynamic response of a rotating shaft subjected to an axially moving and rotating load", *Journal of Sound and Vibration*, Volume 246 (5) (2001), pp. 757-775.
- [6]. Lees A. W., Sinha J. K., and Friswell M. I., "Model-based identification of rotating machines", *Mechanical Systems and Signal Processing*, Volume 23 (6) (2009), pp. 1884-1893.
- [7]. Jalan Arun Kr., and Mohanty A. R., "Model based fault diagnosis of a rotor-bearing system for misalignment and unbalance under steady-state condition", *Journal of Sound and Vibration*, Volume 327 (3-5) (2009), pp. 604-622.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)