



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 6**

**Issue: X**

**Month of publication: October 2018**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Experimental Setup of Exhaust Gas Recirculation System on Engine Performance Work on Biodiesel Blend

Jagadish M. Sirase<sup>1</sup>, Dr. J.A. Hole<sup>2</sup>

<sup>1, 2</sup>Department of Mechanical Engineering, JSPM's RSCOE Pune-33

**Abstract:** Now days we use biodiesel is an alternative fuel which generate less carbon monoxide and hydrocarbon because high value of oxygen content. Also biodiesel is free from sulphur and get easily blend with diesel to form different biodiesel blends. Diesel engine has many advantages over petrol engine but on the other hand it creates adverse effects on emission control. The main aim of the present work is to reduce NOx emissions of diesel engine, for this exhaust gas recirculation is the effective way. Single cylinder four stroke water cooled diesel engine operated with byproduct of vegetable oil (Soybean Oil). With the diesel and EGR system setup we observed the performance of engine when it works with 5%EGR, 10%EGR and 15%EGR. The engine performance checked in terms of brake thermal efficiency, specific fuel consumption, and emission analysis such as oxides of nitrogen, carbon monoxide and hydrocarbon. The observations show that when biodiesel blend work with EGR NOx formation get reduced.

**Keywords:** By Product of vegetable oil (Soybean oil), Emission, EGR, NOx.

## I. INTRODUCTION

Now day's diesel engine is widely used in India for transportation and agricultural machines due to its higher fuel economy. As we see the cost of petrol increases, so people are largely depend on diesel engine. As the higher cost of petroleum based fuel researcher looking for alternative sources of fuel which is comparatively gives same results as diesel fuel. There are number of biodiesel having different properties and compatibility for biodiesel blend. List from them byproduct of vegetable Soybean Oil is one of the considerable alternative fuel source which have similar properties and combustion characteristics to the petroleum diesel. Many researchers report their study on vegetable oil, properties and the effect on engine performance and exhaust emission [5]. The biodiesel results reduction in unburned hydrocarbon, carbon monoxide and particulate matter. But according to analysis of heavy-duty engines only oxides of nitrogen are slightly increases [8]. The biodiesel thus produced in different blend with pure diesel at different percentage and tested in diesel engine.

A simple way to reduce NOx formation in diesel engine is to delay in injection of fuel in combustion chamber. This is effective technique but fuel consumption get slightly increases. To eliminate this problem we use Exhaust Gas Recirculation (EGR) system in which part of exhaust gas is recirculate from inlet port to combustion chamber which help in reducing NOx formation.

## II. LITERATURE REVIEW

Jinlin Xue, Tony E. Grift, Alan C. Hansel et al. [1] named as "Effect of biodiesel on engine performance and emission". The study shows effect of biodiesel on engine power, engine economy etc. The obtained results are specific fuel consumption increases due to lower heating value, particulate matter and CO reduces. The final conclusion of this study is only emission reduces rather improving economy

A. K. Agarwal et al. [3] present the report that diesel engine NOx formation is very much depending on combustion temperature. To reduce NOx formation in emission, it is necessary to control combustion temperature.

Sarvanan et al. [5] perform a test on single cylinder water cooled diesel engine with hydrogen fuel introducing EGR technique. They concluded increase in brake thermal efficiency and decrease other harmful gases including NOx.

M. K. Duraisamy et al. [4] under the title "Experimental analysis of EGR on DI diesel engine operating with biodiesel" performed test with jatropha biodiesel and found that, at 15% EGR NOx formation reduces but thermal efficiency increases.

H. Sharon, et al. [2012] study effect of palm oil as a biodiesel blends with diesel by different volume (25%, 50%, and 75%). Test is conducted on DI diesel engine at constant speed to analyze its performance. According to results B25 and B50 shows similar performance to diesel engine.

### III.EXHAUST GAS RECIRCULATION SYSTEM

EGR is widely used in heavy duty diesel engine. In EGR system fraction quantity of hot exhaust gases are recirculate to combustion chamber through inlet manifold which help to reduce the temperature in combustion process. In diesel engine if temperature rises beyond 1500°C, NO<sub>x</sub> are formed. EGR method is beneficial to maintain that temperature 5% to 15% exhaust gas recirculates to suction inlet before combustion. Due dilution of charge inside the cylinder overall temperature get mentioned. As per the review, use of biodiesel increases the temperature due to more availability of oxygen in the charge. So to reduce the temperature EGR is beneficial.

EGR is the one the best technique to reduce NO<sub>x</sub> formation and other harmful exhaust emission like CO, HC, PM etc. When small quantity of exhaust gases enters in the combustion chamber it acts like a diluting media to the combustion mixture by which concentration of oxygen decreases inside the cylinder. The specific heat of exhaust gases is slightly higher than the fresh air, thus heat capacity of fresh charge get increase, on the other hand it impacts the temperature increment for some heat release in combustion chamber. [3]

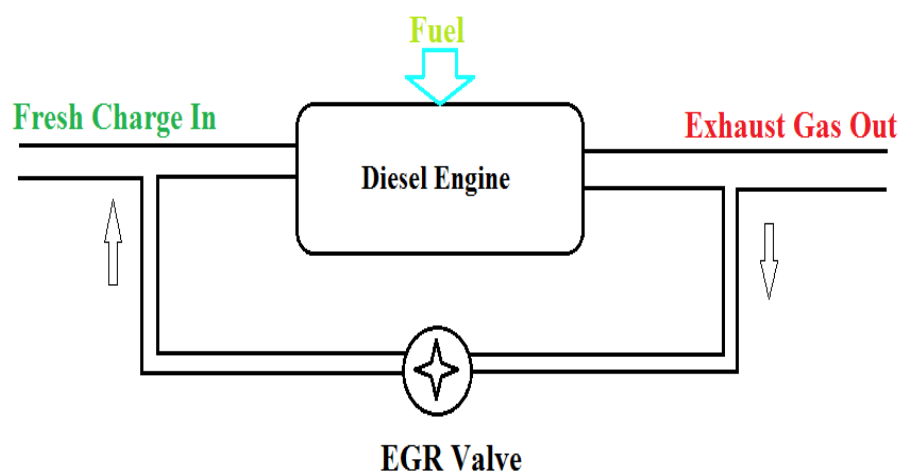


Fig.1 EGR System

### IV.ADVANTAGES OF BIODIESEL

Biodiesel are the best alternative fuel for diesel. Under clean air act it is certified that biodiesel are not harmful for health. Biodiesel can easily store at atmospheric temperature and pressure. Biodiesel have better lubrication property than diesel. Biodiesel have no sulfur content so the life of engine gets increases. It may produce less PM, CO as compared with pure diesel fuel. Also biodiesel have economical and quality benefits.

### V. EXPERIMENTAL SETUP

The effect of exhaust gas recirculation on engine performance and exhaust emission was check with the help of experimental setup of a diesel engine. For investigation computerized signal cylinder four stroke water cooled diesel engine was used. Table 1 shows the technical specification of diesel engine and schematic of experimental setup is shown by figure 2. The electrical dynamometer is used to measure the power output. At the end of exhaust pipe AVL gas analyzer is located to measure exhaust emission. All the data like torque, flow of water, temperature etc. was display on control panel. A manual operated control valve is used to control known quantity of exhaust gas with air enters in combustion chamber. This valve is called as exhaust gas recirculation valve shown in figure 1.

TABLE I Engine Specification

Make	Kirloskar Engine
Type	Water cooled
Number of cylinder	One
Bore	87.5mm
Stroke	110mm
Compression ratio	17:01
Rated power	3.5kW at 1500rpm

TABLE II  
Properties of Biodiesel

Parameter	Unit	Volume
Density	g/cm <sup>3</sup>	0.8694
Viscosity	40°C, mm <sup>2</sup> /s	4.63
Flash Point	°C	174
Fire Point	°C	185
Cloud Point	°C	5
Pour Point	°C	2
Acid Value	mg/g	0.35
Cetane Number	-	49
Oxidation Stability	110°C,h	2.8
Water Content	% by Vol.	0.001
Calorific Value	MJ/kg	40.5

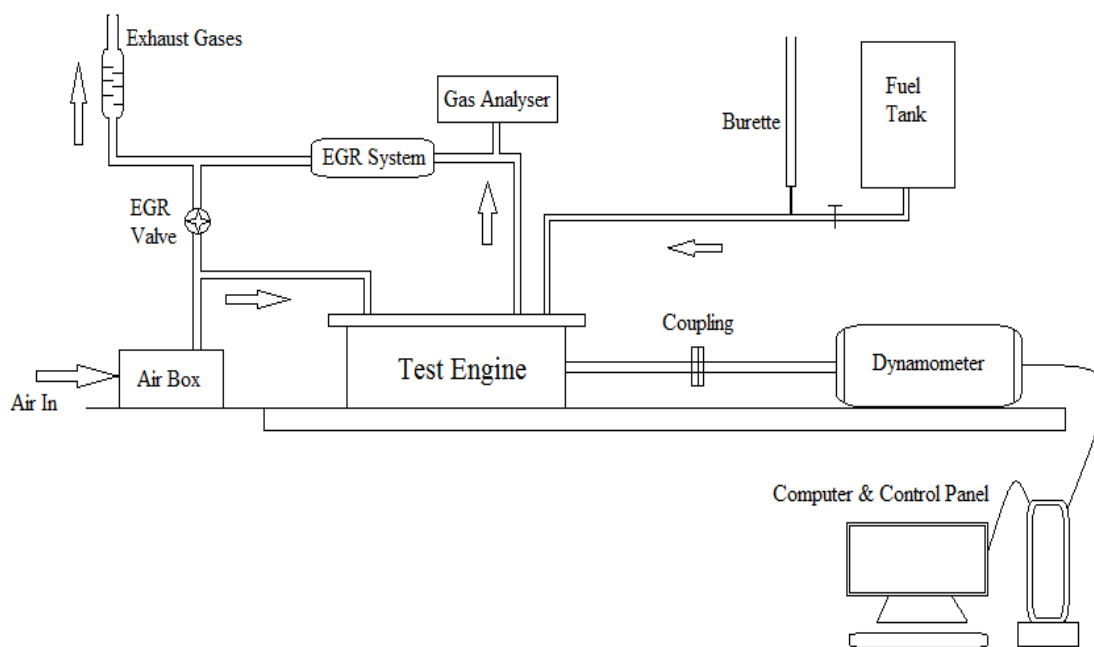


Fig. 2 Schematic of Experimental Setup

## VI. CALCULATION

$$\% EGR = \frac{\text{Mass of EGR}}{\text{Mass of Total intake in to Cylinder}} \times 100$$

$$EGR \text{ ratio} = \frac{(CO_2)_{\text{intake}} - (CO_2)_{\text{ambient}}}{(CO_2)_{\text{exhaust}} - (CO_2)_{\text{ambient}}}$$

## VII. RESULTS AND DISCUSSION

The experiment was carried out I computerized four stroke single cylinder water cooled diesel engine and blend with byproduct of vegetable soybean oil at constant speed and different volume of EGR to study engine performance and exhaust emission. During investigation, first engine test with diesel fuel then B20 biodiesel blend is used. Finley the setup run with 5%, 10% and 15% EGR is used with D80+B20.

### A. Brake Thermal Efficiency

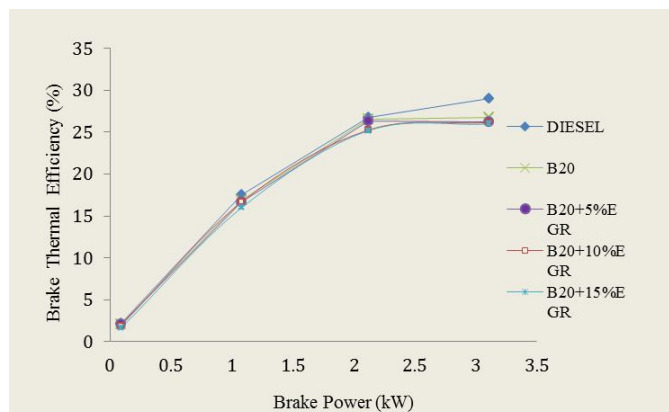


Fig.3 Brake Thermal Efficiency vs. Brake Power

Figure 3 shows the behaviour of brake thermal efficiency with different brake power of diesel, biodiesel and biodiesel with EGR. From figure it is observed that brake thermal efficiency is higher when run with only diesel. As rate of EGR increases, brake thermal efficiency decreases due to decrease in heating value of biodiesel with EGR.

### B. Specific Fuel Consumption

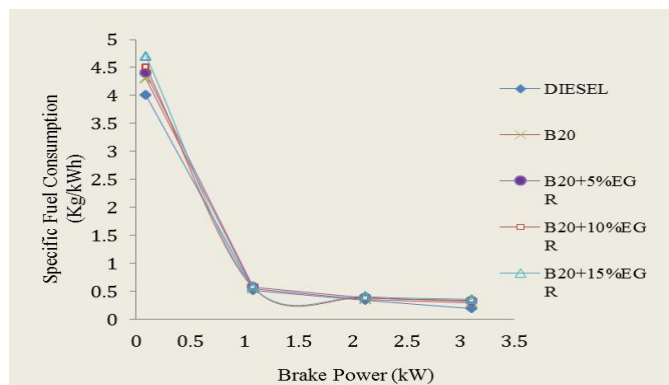


Fig.4: Specific Fuel Consumption vs. Brake Power

Figure 4 shows the variation of Specific fuel consumption with brake power. In all cases we observed that when engine operated with diesel, the specific fuel consumption is lower. In EGR system SFC is at higher point. However at highest load of the engine SFC with 5% and 10% EGR is almost same.

### C. NOx Formation

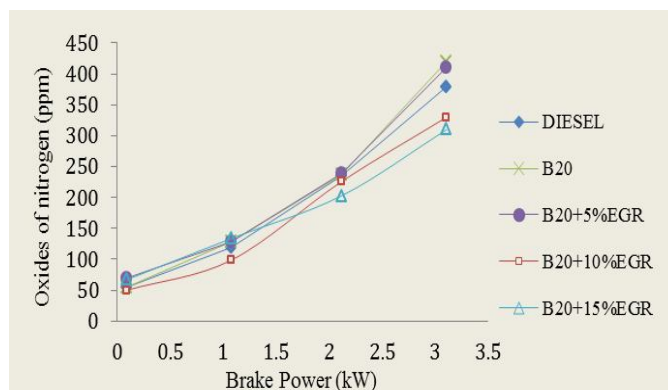


Fig.5: Oxides of Nitrogen vs. Brake Power



Nitrogen oxide is mainly depending on temperature inside the combustion chamber. Figure 5 shows the variation of NO<sub>x</sub> emission with brake power of diesel, biodiesel blend and different percent of EGR. It is observed that engine emits higher NO<sub>x</sub> with biodiesel due to higher oxygen content than the diesel.

On the other hand NO<sub>x</sub> decreases with increase the percent of EGR. At the full load NO<sub>x</sub> emission for diesel and B20 is 379 ppm and 420 ppm respectively where as it reduces 15% EGR up to 310 ppm.

#### D. Hydrocarbon Emission (HC)

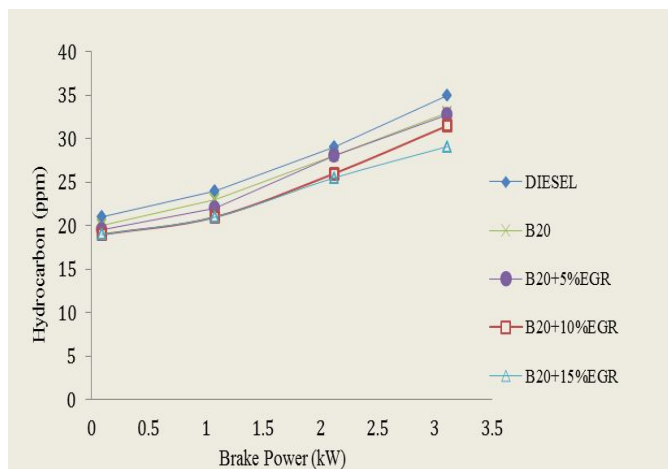


Fig.6: Hydrocarbon vs. Brake Power

Figure 6 shows the variation of hydrocarbon emission with various brake power with diesel, biodiesel blend and with EGR at constant speed. From figure it is observed that as load on engine increases hydrocarbon emission also increases simultaneously due to lack of oxygen content in combustion chamber.

HC emission of biodiesel is less than the diesel fuel. Finally at full load biodiesel with 15% EGR emits 7% less HC than diesel.

#### E. Combustion Analysis

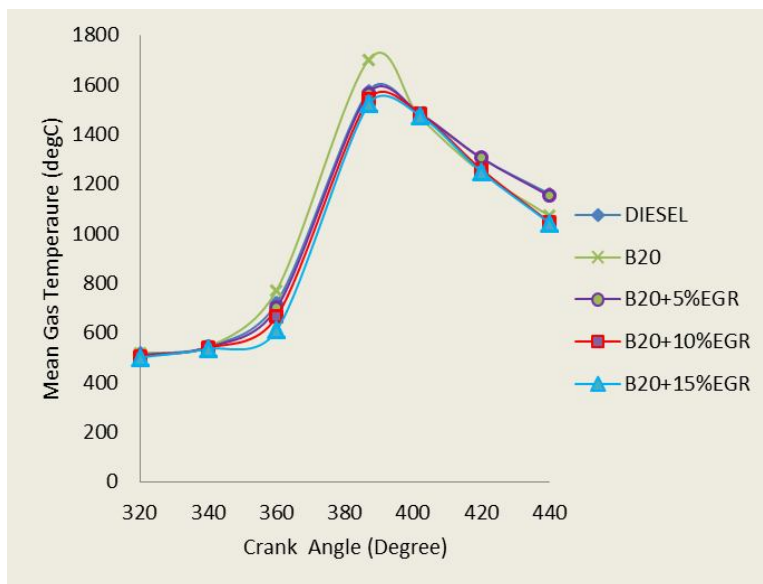


Fig.7: Gas Temperature vs. Crank Angle

Figure 7 shows the variation of mean gas temperature with respect to crank angle. It is observed that, mean gas temperature increases with increase in crank angle in all condition. As the rate of EGR increases the mean gas temperature decreases. The reason for the temperature drop is relatively lower availability of oxygen for the combustion process.

### VIII. CONCLUSION

Experimental investigation of EGR system performed on single cylinder, four stroke, water cooled diesel engine which operated with biodiesel fuel with different percent of EGR. For this investigation byproduct of vegetable soyabean oil is used as blend.

The final conclusion of experimental setup is given bellow

- 1) When engine was operated with B20 and EGR biodiesel, brake thermal efficiency decreases then diesel fuel due to decrease in heating value
- 2) It is observed that engine emits more NO<sub>x</sub> emission with biodiesel. But as we increase percent of EGR, the rate of NO<sub>x</sub> decreases due to decrease in temperature of combustion chamber.
- 3) Hydrocarbon emission rate is lower in biodiesel

### IX. ACKNOWLEDGMENT

The authors would like to extend sincere gratitude towards the entire faculty of the mechanical engineering department, JSPM's Rajarshi Shahu College of Engineering Pune.

### REFERENCES

- [1] Jinlin Xue, Tony E. Grift, Alan C. Hansen, "Effect of biodiesel on engine performances and emissions Renewable and Sustainable Energy Reviews 15 (2011) 1098–1116.
- [2] Atadashi IM, Aroua MK, Aziz AA. High quality biodiesel and its diesel engine application: A review. Renewable and Sustainable Energy Reviews. 2010;14:1999-2008.
- [3] Agrawal. A. K, Singh. S. Sinha. S. Shukla. M. K., Effect of EGR on the exhaust gas temperature and exhaust opacity in compression ignition engines. Sadhana, 29(3), (2004), 275-284.
- [4] Magin Lapuerta OA, Jose´ Rodriguez-Fernandez. Effect of biodiesel fuels on diesel engine emissions. Progress in Energy and Combustion Science 2007;34:198–223.
- [5] Shahid EM, Jamal Y. A review of biodiesel as vehicular fuel. Renewable and Sustainable Energy Reviews. 2008;12:2484- 94.
- [6] Agarwal.D, S. Sinha, A. K. Agarwal, Experimental investigation of control of NO<sub>x</sub> emissions in biodiesel – fuelled compression ignition engine, Renewable Energy, 31, (2006), 2356-2369.
- [7] Saravanan.N, G. Nagarajan, K.M. Kalaiselvan, C. Dhanasekaran, An experimental investigation on hydrogen as a dual fuel for diesel engine system with exhaust gas recirculation technique. Renewable Energy, 33, (2008), 422-427.
- [8] Agarwal.D, S. Sinha, A. K. Agarwal, Experimental investigation of control of NO<sub>x</sub> emissions in biodiesel – fuelled compression ignition engine, Renewable Energy, 31, (2006), 2356-2369.
- [9] Hardik B. Charola, C. D. Sankhavra, M.B.Charola, "Evaluate the Performance and Emission using EGR (Exhaust gas recirculation) in Compression-ignition engine fuelled with blend.", IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) e-ISSN: 2278-1684,p-ISSN: 2320-334X, Volume 10, Issue 5 (Jan. 2014), PP 16-21 [www.iosrjournals.org](http://www.iosrjournals.org).



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)