



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 6**

**Issue: X**

**Month of publication: October 2018**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Different Types of Noises in Digital Image Processing: A Review

Ashmita Gautam<sup>1</sup>, Dr. Krishna Raj<sup>2</sup>

<sup>1,2</sup>Department of Electronics Engineering, Harcourt Butler Technical University Kanpur, India

**Abstract:** As we know that the noise is introduced during image acquisition, transmission or during capturing of the picture. So it is solely important to remove the noise and to enhance the edges to improve the overall visual quality of an image. Before removing the noise, we must have an idea that how much the image is affected by the noise. This paper reviews the study and comparative analysis of various noises.

**Keywords:** Gaussian Noise, Salt and Pepper Noise, Erlang Noise, Speckle Noise, Exponential Noise, Poisson Noise, Rayleigh Noise, Uniform Noise, PSNR, SSIM, MSE.

## I. INTRODUCTION

Nowadays, digital image processing is among the rapidly increasing technologies [1]. Digital image processing plays a significant role in application areas such as intelligent transportation systems, remote sensing, biomedical imaging, weather forecasting, atmospheric study, etc. The major challenge in digital image processing is to remove the noise without losing the original features of an image. Noise gets added during the image acquisition, transmission of an image or at various processing steps. It is a random fluctuation in the intensity value (i.e., pixels) of the image. This undesirable addition of noise in an image degrades the quality of an image.

In image processing, various papers that had discussed different types of noise models are there, but we would like to mention some of them briefly. Ajay Kumar et al. [2] explained in his paper about the various types of noise models. He described the Gaussian noise model, White noise, Brownian noise, Periodic noise, etc. Simrat et al. [3] proposed a method for the removal of speckle noise from grayscale images using adaptive thresholding. Neha et al. [4] in the paper have applied many filtering techniques for the enhancement of the MRI Images. K.raj et al. [5] performed the application of an adaptive filter for error reduction and their paper also describes two algorithms such as Least Mean Square (LMS) and Normalized Least Mean Square (NLMS).

The rest of this paper is structured as follows: Section II briefly describes the types of noises. Comparative analysis of various noises presented in section III followed by the conclusion and future works in section IV.

## II. NOISES AND ITS TYPES

Noises can be of two types: substitutive noise and additive noise. Substitutive noise is also known as impulse noise. These types of noises include salt and pepper noise, random value impulse noise, etc. An example of additive noise is additive white Gaussian noise. In the digital image, noises are additive with constant power in the whole bandwidth along with the Gaussian probability distribution called an additive white Gaussian noise.

### A. Gaussian Noise

Gaussian noise is a statistical noise that has pdf, i.e., probability density function of the Gaussian distribution (also called Normal distribution). It is called as an amplifier noise (or electronic noise) because it arises in amplifiers [2] [6].

In Gaussian noise, values of the noise are Gaussian distributed except only the case of white Gaussian noise where the values always are statistically independent also called as an amplifier noise [7]. The pdf [4] of the Gaussian Noise is

$$P(z) = \frac{1}{\sqrt{2\pi}\sigma} e^{-\frac{(z-\mu)^2}{2\sigma^2}}$$

Here,  $z$  is the intensity value,  $\mu$  is the mean value of  $z$ ,  $\sigma$  is the standard deviation and  $\sigma^2$  is the variance.

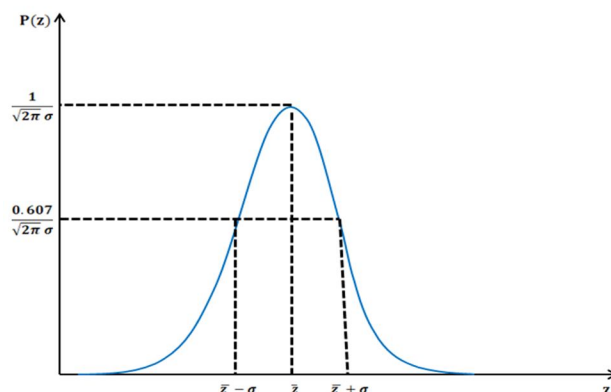


Figure 1: Probability density function of the Gaussian Noise.

The original image and the image corrupted (the Gaussian noise having zero mean and 0.01 variance) are shown below:



Figure 2: Original Image



Figure 3: Image Corrupted with Gaussian Noise

### B. Salt And Pepper Noise

Salt & Pepper noise in an image will have dark pixels in bright regions and bright pixels in dark region [6]. Salt & Pepper noise can be due to dead pixels, analog to digital converter errors, bit errors in transmission, etc. [8] It represents itself as randomly occurring white and black pixels. In Salt & Pepper noise model, there are two possible values “a” and “b”.

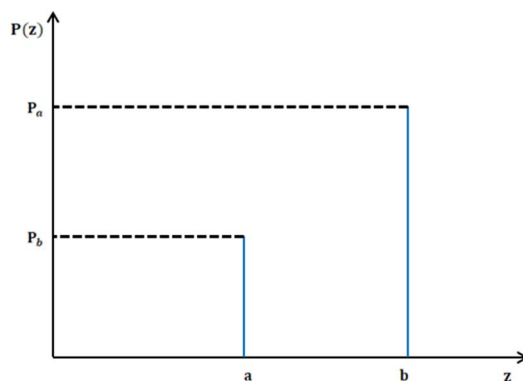


Figure 4: Probability density function of Salt and Pepper Noise.

The probability density function [4] of the salt and pepper noise is given below:

$$P(z) = \begin{cases} P_a, & \text{for } z = a \\ P_b, & \text{for } z = b \\ 0, & \text{otherwise} \end{cases}$$

The probability of getting  $P_a$  and  $P_b$  is less than 0.1. For eliminating the salt and pepper noise, we can use the median filter and morphological filter [9]. Salt & Pepper noise is seen in images where sudden transients such as faulty switching take place. Salt & Pepper noise can be caused by malfunctioning of analog to digital converter in cameras, bit errors in transmission, etc. The image corrupted with the Salt and Pepper noise (Figure 6) having a noise density of 0.08 is shown below:



Figure 5: Original Image



Figure 6: Image Corrupted with Salt and Pepper Noise

### C. Erlang Noise

The pdf [4] of Erlang noise is given by

$$P(z) = \begin{cases} \frac{a^b z^{b-1}}{(b-1)!} e^{-az}, & \text{for } z \geq 0 \\ 0, & \text{for } z < 0 \end{cases}$$

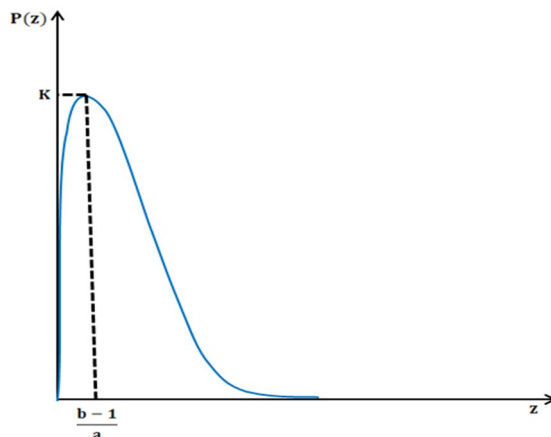


Figure 7: Probability density function of Gamma (Erlang) Noise.

The image corrupted with the Erlang (Gamma) noise is shown below:



Figure 8: Original Image



Figure 9: Image corrupted with Erlang Noise.

#### D. Exponential Noise

The pdf [4] of Exponential Noise is given below by the following equation:

$$P(z) = \begin{cases} ae^{-az} & \text{for } z \geq 0 \\ 0 & \text{for } z < 0 \end{cases}$$

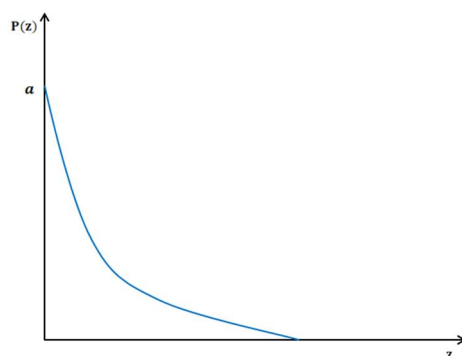


Figure 10: PDF of Exponential Noise.

Here  $a > 0$ . The special case of Exponential Noise is Erlang noise with  $b = 1$ . The mean and variance of this density function is  $\bar{z} = b/a$  and  $\sigma^2 = 1/a^2$  respectively

The image corrupted with the Exponential noise is shown below:



Figure 11: Original Image



Figure 12: Image Corrupted with Exponential Noise

### E. Rayleigh Noise

The pdf [4] of Rayleigh noise is given below:

$$P(z) = \begin{cases} \frac{z}{b} (z - a) e^{-\frac{(z-a)^2}{b}} & , \text{ for } z \geq a \\ 0 & , \text{ for } z < a \end{cases}$$

The mean and the variance is  $\bar{z} = a + \sqrt{\frac{\pi b}{4}}$  and  $\sigma^2 = \frac{b(4-\pi)}{4}$  respectively.

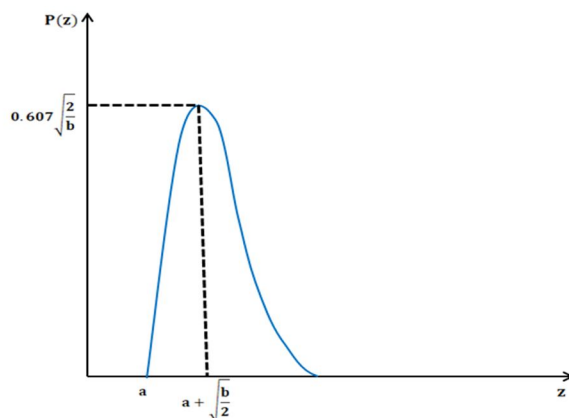


Figure 13: PDF of Rayleigh Noise.

The image corrupted with the Rayleigh noise (a=5 and b=40) is shown below:



Figure 14: Original Image



Figure 15: Image Corrupted with Rayleigh Noise

#### F. Uniform Noise

The following equation represents the pdf [4] of uniform noise.

$$P(z) = \begin{cases} \frac{1}{(b-a)} & , \quad \text{for } a \leq z \leq b \\ 0 & , \quad \text{otherwise} \end{cases}$$

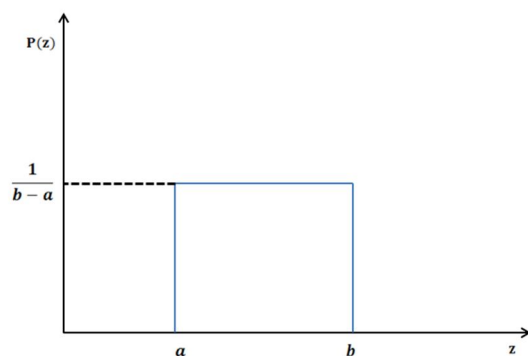


Figure 16: PDF of Uniform Noise.

Here, mean is  $\bar{z} = \frac{(a+b)}{2}$  and the variance is  $\sigma^2 = \frac{(b-a)^2}{12}$ .

The image corrupted with the Uniform noise having value ( $a = -20$  and  $b = 20$ ) is shown below:



Figure 17: Original Image



Figure 18: Image Corrupted with Uniform noise

#### G. Speckle Noise

- 1) Speckle noise is a type of granular noise that causes degradation in the quality of an image that is being acquired from the active radar as well as Synthetic Aperture Radar (SAR) images [3] [10].
- 2) Due to speckle noise, the mean gray level of a local area increases.
- 3) In case of conventional radar, speckle noise generally arises because of the random fluctuation in the signal that is returned from an object not big as single image processing element [11].
- 4) Speckle noise is a factor that limits the interpretation of the SAR images correctly and restricts edge extraction, image segmentation, target recognition.

Speckle noise was removed by applying the speckle noise reduction techniques by retaining as much detailed information as possible [12]. The two types of speckle noise reduction techniques are Multilook Processing and Spatial Filtering.

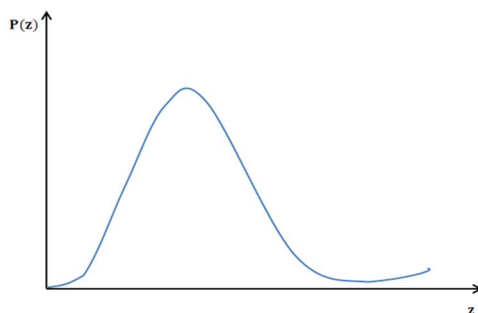


Figure 19: PDF of Speckle Noise



Figure 20: Original Image



Figure 21: Image Corrupted with Speckle-Noise

The pdf [4] of speckle noise is represented as follows:

$$P(z) = \frac{z^{\alpha-1}}{(\alpha-1)! a^{\alpha}} e^{-\frac{z}{a}}$$

Here,  $z$  is the grayscale and  $a^2$  is the variance.

The image corrupted with the Speckle noise is having 0 mean and 0.04 variance is shown in Figure 21.

#### H. Poisson Noise

Poisson noise is a type of electronic noise which occurs under the situations where there is a statistical fluctuation in the measurement caused either due to the finite number of particles like an electron in an electronic circuit that carry energy or by the photons in an optical device. The Poisson noise is also called as shot noise. Poisson noise follows a Poisson distribution which is denoted as follows:

$$P(z) = \frac{\mu^z}{z!} e^{-\mu}, \text{ where } z > 0$$

Here,  $z$  is the gray value and  $\mu$  is the mean value [4]. The original image and the image corrupted with the Poisson noise(Figure 22) is shown below:



Figure 22: Original Image



Figure 23: Image Corrupted with Poisson Noise

### III. COMPARATIVE ANALYSIS

We can calculate various parameters such as PSNR, MSE, and SSIM for measuring the quality of an image. By calculating the values of these parameters, we can find out how different noises can affect an image (i.e., how much distortion is present and how much the images are similar). The PSNR (in dB) is the peak signal to noise ratio between the two images. This can be expressed as follows:

$$PSNR = 10 \log \left[ \frac{R^2}{MSE} \right]$$

Here, R is the maximum variation in the input image and the value of R is 255, and MSE is Mean Squared Error [13][14]. The MSE represents the summation of the squared error between the original and the distorted image. Mathematically, we can write it as follows:

$$MSE = \sum_{M,N} \frac{[I_1(x,y)] - I_2(x,y)]^2}{M * N}$$

Here,  $[I_1(x,y)]$  is the original image,  $I_2(x,y)$  is the distorted or corrupted image, and M & N are the dimensions of the images, i.e. the number of rows and columns in an image [13][14].

SSIM stands for Structural Similarity Index. It is a method for determining the similarity between the two images. If the value of SSIM is one, then it means that the image is perfectly similar and if the value of SSIM is greater than 0.8, then it is of good quality. The value of PSNR, SSIM, and MSE for various noises is given below in the table. From the table below (Table 1), we can conclude that the PSNR of the image have more Poisson noise which means that it is not much affected by the noise and is similar to the original image.

Table 1: PSNR, SSIM, and MSE for various types of noises.

| S.No. | Type of Noises | PSNR in dB<br>(Peak to<br>Signal Noise<br>Ratio) | SSIM in dB<br>(Structural<br>Similarity Index) | MSE in dB<br>(Mean Squared<br>Error) |
|-------|----------------|--------------------------------------------------|------------------------------------------------|--------------------------------------|
| 1.    | Poisson        | 25.7151                                          | 0.6395                                         | 174.4089                             |

|    |               |          |         |            |
|----|---------------|----------|---------|------------|
| 2  | Gaussian      | 21.2135  | 0.4536  | 491.7348   |
| 3. | Speckle       | 16.3066  | 0.2714  | 1.5220e+03 |
| 4. | Salt & Pepper | 14.9277  | 0.2845  | 2.0908e+03 |
| 5. | Exponential   | 0.9151   | 0.1981  | 0.8100     |
| 6. | Rayleigh      | -30.8814 | 0.2462  | 1225       |
| 7. | Erlang        | -23.4637 | 0.0133  | 222.0100   |
| 8. | Uniform       | -32.0412 | -1.0000 | 1600       |

#### IV. CONCLUSION

Since image restoration is paramount, there has to be a deep knowledge of the various type of noise to eliminate noise to the possible extent. As it adds to the image during image acquisition, transmission and at other processing steps. Since this addition of the noise degrades the quality of an image, image denoising techniques must be applied to remove the noise from the noisy image. There are various filters that are used to remove the noise. So to remove the noise we must have necessary information of various types of noises and their effects on an image. This paper reviews various types of noises and their behavior on the basis of the pdf function. It also includes the comparative analysis of various parameters such as PSNR, SSIM and MSE of the images corrupted with the noise.

#### REFERENCES

- [1] Dr.Gholamreza Anbarjafari. (2014, September 29 to 2014, November 9). Digital Image Processing. Retrieved from <https://sisu.ut.ee/imageprocessing/avaleht>
- [2] Ajay Kumar Boyat, Brijendra Kumar Joshi " A Review Paper: Noise Models in Digital Image Processing, " Signal & Image Processing: An International Journal (SIPIJ) Vol.6, No.2, April 2015
- [3] Simrat, Anil Sagar, "Empirical Study of Various Speckle Noise Removal Methods," International Journal of Emerging Technologies in Computational and Applied Sciences, 8(6), March-May, 2014, pp. 513-516
- [4] Rafael C Gonzalez, Richard E. Woods, Digital Image Processing. Prentice Hall, 2006.
- [5] Ashish Chaturvedi, Dr. Krishna Raj and Amrish Kumar "A Comparative Analysis of LMS and NLMS Algorithms for Adaptive Filtration of Compressed ECG Signal," 2012 2nd International Conference on Power, Control and Embedded Systems, 29 April 2013,
- [6] Charles Bonchelet (2005), "Image Noise Models," in Alan C. Bovik. Handbook of Image and Video Processing.
- [7] Vipul Goel, Krishna Raj," Removal of Image Blurring and Mix Noises Using Gaussian Mixture and Variation Models," International Journal of Image, Graphics and Signal Processing(IJIGSP), Vol.10, No.1, pp. 47-55
- [8] Pawan Patidar, Sumit Srivastava, "Image De-noising by Various Filters for Different Noise," International Journal of Computer Applications, Volume 9– No.4, November 2010.
- [9] Neha Jain, D S Karaulia, "A Comparative Analysis of Filters on Brain MRI Images, " International Journal of Advanced Research in Computer Science and Software Engineering, Volume 4, Issue 11, November 2014
- [10] Kirti Ahlawat, Pooja Ahlawat," Implementation and comparison of filter based denoising algorithms," International Journal of Scientific Engineering and Applied Science (IJSEAS), Volume-1, Issue-4, July 2015.
- [11] Priyam Chatterjee and Peyman Milan far, "Patch-Based Near-Optimal Image Denoising," IEEE Transactions on Image Processing, Vol. 21, No. 4, April 2012.pp.1635-1649.
- [12] Fabrizio Berizzi, Marco Martorella, Elisa Giusti in Radar Imaging for Maritime Observation.
- [13] Wikipedia the free encyclopedia (2018 August 04). Peak signal to noise ratio. Retrieved from [https://en.wikipedia.org/wiki/Peak\\_signal-to-noise\\_ratio](https://en.wikipedia.org/wiki/Peak_signal-to-noise_ratio).
- [14] Mathworks R2018a. PSNR. Retrieved from <http://in.mathworks.com/help/vision/ref/psnr.html>.
- [15] Wikipedia the free encyclopedia (2018 August 04). Structural Similarity. Retrieved from [https://en.wikipedia.org/wiki/Structural\\_similarity](https://en.wikipedia.org/wiki/Structural_similarity).



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)