



IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 7 Issue: VII Month of publication: July 2019

DOI: http://doi.org/10.22214/ijraset.2019.7088

www.ijraset.com

Call: 🕥 08813907089 🔰 E-mail ID: ijraset@gmail.com



Design and Analysis of Progressive Die for an Industrial Component

Pratiksha Derle¹, Harshal Chavan²

^{1,2}Mechanical Department, MET's Institute of Engineering

Abstract: Dies had been used in industries from years, especially for sheet metal and other forming operations. Progressive dies are forming tool comprises of two or more stations performing different operations. The raw material travels from first station to last to be formed into the finished product. In sheet metal manufacturing, the process of design and development of different components is a highly intricate. It leads to various uncertainties. These uncertainties can cause heavy manufacturing losses. Identification of these risks and resolving them is a tough job for the designer. So in this paper authors have discussed about development of a computer-aided progressive die design for an industrial component with an analysis. Design and analysis of progressive die for the given component leads to precise path for various operations which results into maximum use of material. Previously the component has been made using simple dies for different operations. Use of progressive die is beneficial because of the ability to build precision tooling in less time and at a lower cost which also can reduce labour cost.

Keywords: Design complexity, progressive die, computer aided design and analysis, precision tooling, increased productivity etc.

I. INTRODUCTION

Press stampings are prime preference for mass production of various mechanical parts. Die design is an important discipline in the engineering field, specifically in tool engineering. To stamp and form various parts from sheet metals stamping dies are used. Various operations are performed using dies. Also this operations are important factors in mass production. The design of good die requires input from designers, knowledge, skill and experience [2]. Use of progressive dies for stamping operations are one of the advanced technologies.

They can be used for production of parts having complex shapes without the necessity of operator. So the progressive stamping dies need a high level of engineering design and manufacturing technology in order to get precise layout of large number of stamping stations in a limited and narrow shape [6].

In this paper authors have discussed about developing such progressive die which can use low cost standardized tools for production. It is aimed to develop a die which can reduce production time along with cost and accuracy of production must be maintained. So it implies the standard design, modelling and analysis of progressive die operations required for production of final part.

II. LITERATURE REVIEW

The authors B.T. Cheok, K.Y. Foong, A.Y.C. Nee, C. H. Teng discussed about various aspects of knowledge-based approach for progressive stamping die design. They examined some critical issues associated with modelling of progressive die design in knowledge-based expert system [1].

The authors T. Nagakawa, S. Futamura, T. Murata, discussed about the new concept in tooling system and the press machine for the widely used progressive stamping tooling. In their paper the conventional progressive die setup is been standardized [2].

The authors K. Shirai, H. Murakami discussed about the development of a CAD/CAM system for progressive dies. In response to the increasing demand for press tools, a compact and practical CAD/CAM system for progressive dies is developed [3].

The authors Z.Q. Sheng, R. Taylor, M. Strazzanti discussed about FEM analysis and design of bulb shield progressive die. Draw processes of a dome shape bulb shield are modeled and analyzed in this paper [4].

The authors K. Park and S. Choi discussed about Finite element analysis for the lamination process of a precision motor core using progressive stacking dies. Motor cores have been fabricated using progressive stacking dies with lamination in order to obtain better electro-magnetic properties [5].

J. Choi and C. Kim discussed about a compact and practical CAD/CAM system for the blanking or piercing of irregular shapedsheet metal products for progressive working. This paper describes research work into developing the computer-aided design and manufacturing of stator and rotor parts with blanking or piercing operations [6].

In this paper, the author Prakash H. Joshi ,given the design and construction of press tools in which various types dies viz. single stations dies, compound dies, combination dies, progressive dies etc. A stepwise design calculations are given for design of various dies [8].



International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.177 Volume 7 Issue VII, July 2019- Available at www.ijraset.com

III. PROBLEM STATEMENT

Initially, the component has been manufacturing from single station dies for different operations. The manufacturers are small scale manufacturers. The component to be develop has mass production. So they aims to develop a progressive die system for the same component with reduction in production time along with cost without affecting the accuracy.


IV.OBJECTIVES

To reduce production time along with cost. To achieve maximum accuracy. To reduce the labour cost. To improve quality of the product.

V. DESIGN

A. About the Component

The component to be designed is called as tailgate striker which is assembled with nut bolt in head/back light assembly of four wheeler. The diagram below shows 2D model of the component,

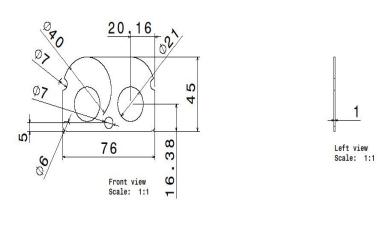

Top view Scale: 1:1

Fig. 1 2D model of component

B. Design Calculations

Operations on progressive die for development of the given component includes

- Blanking
- Piercing

According to the dimensions of the component and by using standard calculation methods for designing progressive die, we found results for required parameters. The table below shows the values obtained.

Material of the component is MS

Shear strength taken as 400N/m²



Parameters	Value	
Punch and die size for piercing holes	Ø7.12mm Ø21.12mm	
Punch and die size for blanking	Same as original blank	
Cutting force	15.06 ton	
Cutting force	15:00 ЮΠ	
A . 1 .	20	
Actual press tonnage	20 ton	
Top plate	45mm	
Bottom plate	45mm	
Guide pillars	4 in number	
Area of the component	3000mm ²	
-		
No. of blank per sheet	24	
The of orall per shoet		
Utilization of Sheet	70.24%	
Stillzation of Sheet	10.2470	
Dunch holden and Stainman al-t-	11mm	
Punch holder and Stripper plate	1 1 1 1 1 1 1 1 1	
~		
Stripper Plate	8 to 9mm	
VI. ANALYSIS		

TABLE I DESIGN PARAMETERS BY CALCULATIONS

Static and modal analysis are done on progressive die assembly. The progressive Die assembly is been mesh with first order 3D Hexa-element and Second order Tetra elements in Ansys Workbench. SOLID185 is used for 3-D modeling of solid structures. It is defined by eight nodes having three degrees of freedom at each node: translations in the nodal x, y, and z directions. The element has plasticity, hyper elasticity, stress stiffening, creep, large deflection, and large strain capabilities.

We have done modal analysis to find out frequencies so if resonance would occur or not. Also we have done static structural analysis to find out various stresses and whether are in limit or not.

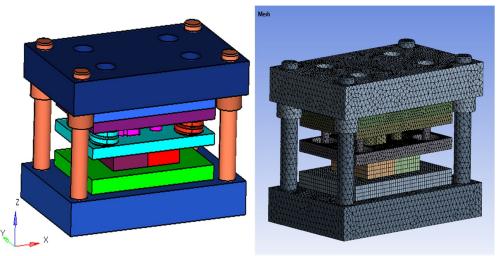



Fig. 2 Solid model of Progressive die

Fig. 3 Meshed model of Progressive die



A. Modal Analysis

We obtained first five frequencies of progressive die assembly in ANSYS.

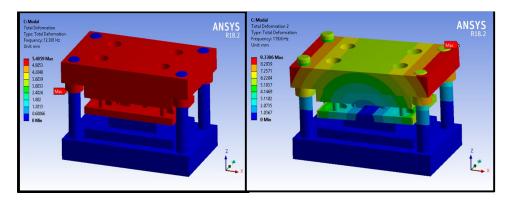




Fig. 05 2nd frequency

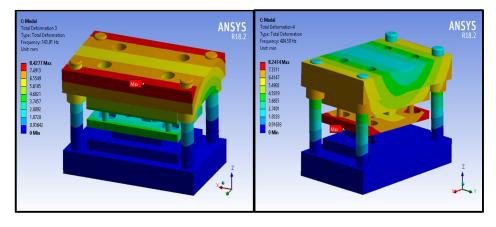


Fig. 06 3rd frequency

Fig. 07 4th frequency

Here the natural frequency of the progressive die assembly is 12Hz. All the five frequencies are not coincide with the natural frequency.




Fig. 08. 5th frequency

B. Static Structural Analysis

We have done static structural analysis to find displacements and various stresses acting on progressive die assembly



International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.177 Volume 7 Issue VII, July 2019- Available at www.ijraset.com

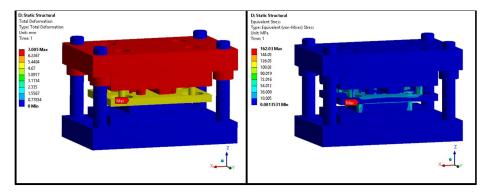


Fig. 09 Displacement of assembly

Fig. 10 Von Misses Stresses generated on assembly

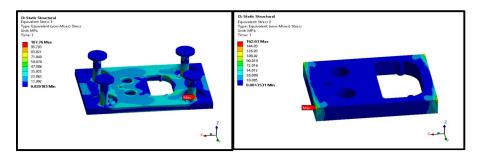


Fig. 11 Von Misses Stresses on stripper

Fig.12 Von Misses Stresses on die

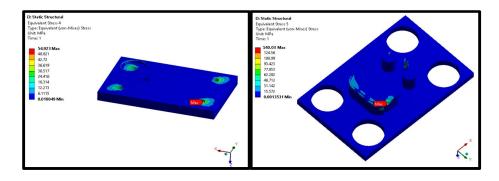



Fig. 13 Von Misses Stresses on bottom plate



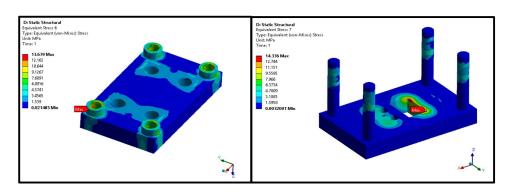


Fig. 15 Von Misses Stresses on bottom plate

Fig. 16 Von Misses Stresses on guide pillars



International Journal for Research in Applied Science & Engineering Technology (IJRASET) ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.177 Volume 7 Issue VII, July 2019- Available at www.ijraset.com

The max in the figures shows maximum displacement takes place during operations.

VII. OBSERVATIONS AND RESULTS

Following are the results obtained from modal and static analysis of progressive die assembly

Table II Observations From Modal Analysis		
Modes	Frequency	
1	12.38	
2	119.6	
3	143.91	
4	404.59	
5	497.07	

From the above modal analysis it is been observed that First natural frequency on the progressive die assembly is 12 Hz. The operating frequencies or external excitation frequencies should not coincide with the said above natural frequencies in order to avoid resonances.

Sr.No.	Parameters	Von Misses Stress(Mpa)	Yield Stress(Mpa)
1	DIE	162	827
2		107	370
3		55	370
4	PUNCH	140	827
5		13	370
6		14	370

Table IV Experimental Results

Parameters	Before	After
Total Time required	33 secs	12 secs
Utilization of sheet	61.33%	70.24%

From the above static structural analysis it is been observed that maximum von misses stresses are well below the yield stress. Also from experimental results we can clearly see that the difference in time and utilization of sheet.



International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.177 Volume 7 Issue VII, July 2019- Available at www.ijraset.com

VIII. CONCLUSION

Progressive die is economical way to form metal components, it keeps the strength, durability of metals. Also FEM analysis done for progressive die components. The calculations and FEM results are within limits. All results of stresses and frequencies obtained from analysis shows that they are in acceptable range. So the designed progressive die is safe for the production of given components under loading conditions.

ACKNOWLEDGMENT

The author would like to thank Mr. Kundan Singh (Design Head) from TRS Enterprises Pvt. Ltd., Ambad, Nashik for their guidence and support to complete the research work. Also thankful to Principal, Head of department and staff of Mechanical Engineering department of MET's Bhujbal Knowledge City, Nashik.

REFERENCES

- [1] A.Y.C. Nee, K.Y. Foong, "Some Considerations in the Design and Automatic Staging of Progressive Dies", in *Journal of Materials Processing Technology*, vol.29, January 1992, pp. 147-158
- [2] T. Nagakawa, S. Futamura, T. Murata, "Small-Lot-Stamping Production by Progressive Unit Dies", in CIRP Annals, vol. 42, issue 1,1993, pp. 313-317.
- [3] K. Shirai, H. Murakami, "Development of a CAD/CAM System for Progressive Dies", in CIRP Annals, vol. 34, issue 1, 1985, pp 187-190.
- [4] Z. Sheng, R. Taylor and M. Strazzanti, "FEM analysis and design bulb shield progressive draw die", *Journal of Materials Processing Technology*, vol. 189, no. 1-3, pp. 58-64, 2007.
- [5] K. Park and S. Choi, "Finite element analysis for the lamination process of a precision motor core using progressive stacking dies", Journal of Materials Processing Technology, vol. 130-131, pp. 477-481, 2002
- [6] J. Choi and C. Kim, "A compact and practical CAD/CAM system for the blanking or piercing of irregular shaped-sheet metal products for progressive working", *Journal of Materials Processing Technology*, vol. 110, no. 1, pp. 36-46, 2001.
- [7] P. Satish Reddy, M. Manoj and N. Guru Murthy, "Design and Analysis of Progressive Die for Chain Link Plate", *International Journal of Science Engineering and Advance Technology*, vol. 2, no. 11, p. 768, 2014.
- [8] P. H. Joshi, *Press tools Design & Constructions*. Delhi: Wheeler Publishing, 1999.
- [9] Raja Shakarappa, "Analysis and Simulation of Progressive Die", *International Journal of Research in Engineering and Technology*, vol. 3, no. 03, p. 654, 2014.
- [10] S-B. Sim, S-T. Lee, Y-S. Song, "A study on the development of practical and adaptive progressive die for very thick sheet metals", in Korean Soc. Manufact. Technol., KSMT 1 (1) (2003) 63–7.











45.98



IMPACT FACTOR: 7.129







INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 🕓 (24*7 Support on Whatsapp)