iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 7 **Issue:** VI **Month of publication:** June 2019

DOI: http://doi.org/10.22214/ijraset.2019.6383

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.177
Volume 7 Issue VI, June 2019- Available at www.ijraset.com

Dynamic Wireless Charging System for Electrical Vehicle

Shweta sanjay Pandharpure[1], Anjali A Yadav[2]
[1, 2]*VLSI and Embedded System (E&TC), Sinhgad Institute of Technology & science Narhe,Pune*

Abstract: ***Dynamic remote charging (DWC) is a rising innovation that empowers the batteries of electric vehicles (EVs) to charge naturally while the vehicles are in movement. The DWC-EV framework tends to the difficulties innate in battery innovation, for example, the short driving extent, long reviving time, and high cost. Contrasted and ordinary module EVs, the DWC-EV can charge a battery all the more every now and again on the grounds that it tends to be done while the EV is in movement from the charging foundation introduced out and about. A double circle essential controller is proposed to direct essential side power and current. The controller permits consecutive and auspicious enactment of portioned essential loops; it controls the essential curl current at the reference an incentive under no-heap and stacked conditions, makes up for power move decrease brought about by the vehicle sidelong misalignment, and anticipates essential over-burdening.***

Keywords: DWC, EV, Battery life, Wireless power transfer

I. INTRODUCTION

Enthusiasm for electric vehicles (EVs) has as of late become because of calls for eco-friendly transportation. Battery-controlled electric transports or module EV transports, which produce zero outflows, offer huge potential in improving maintainability and an eco-friendly situation in urban regions. EV-based travel transports require an enormous battery for a long administration time. For example, a long-go all-electric transport fabricated by BYD Auto Company has a 324-kWh lithium iron phosphate (LFP) battery. Lamentably, the huge limit of the batteries of current EV transports keeps them from picking up fame as a standard mass travel arrangement. The present issues of module EV transports are the long operational inactive during the battery charging time, the mind-boggling expense of the battery, and the incredible load of the battery.

Dynamic remote charging (DWC) frameworks have developed as a choice to address the difficulties brought about by the present battery innovation. DWC has been effectively connected in the charging of handheld gadgets, for example, electronic toothbrushes, telephones, and medicinal gadgets. It has additionally been broadly utilized for computerized material taking care of frameworks in semiconductor manufacture and LCD generation lines. As of late, the innovation has been connected to EVs. A DWC framework is a street coordinated EV framework that is made out of a roadway remote charger called a power track and EVs. The EVs get electric power from the power track with no contact, even while in movement. That is, the point at which an EV disregards the asphalt under which the power track is introduced, an electromagnetic field is created from the power track (control transmitter) upward to the EV. A pickup gadget (control collector) at the base of the EV gets the electromagnetic field and changes over it into electric capacity to work the footing engine or charge the battery.

II. FLOW CHART OF THE SYSTEM

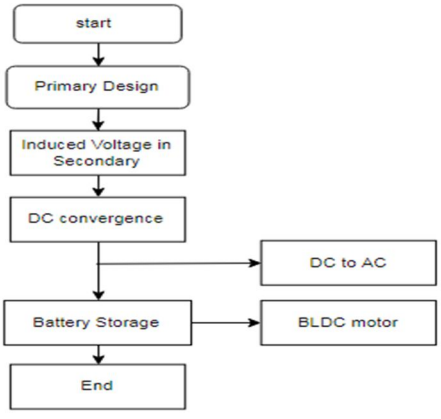


Figure.1 Flow Chart

©IJRASET: All Rights are Reserved

This the Flow chart of the system, in that first we configure the carrier frequency and the stop band range. Then it passes to the primary compensation tank ,it passes to the primary coil which is placed on the road emf is generated and AC current is passes to the secondary compensation tank it produces the DC voltage and then it gives to the rectifier circuit then that rectifier's output is stored in the battery

III. PROPOSED SYSTEM

The optimization model presented here concurrently minimizes the power track installation cost as an initial cost and the battery life cost as a long-term operation cost.

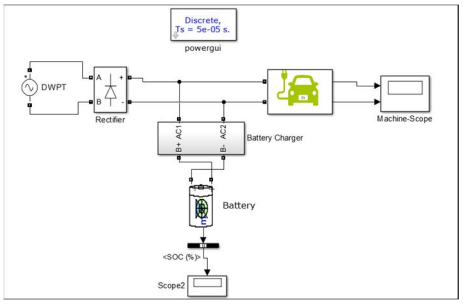


Figure.2 proposed system

An average DWPT framework with fragmented curl structure at the essential is appeared. On the essential side, the 60-Hz network voltage is changed over to a DC voltage and further to a high-recurrence current (20-100 kHz), which is conveyed to the essential loop. This power transformation is accomplished through a middle of the road DC interface, a stage move controlled full-connect inverter, and an appropriately chosen pay tank. On the optional side, there is another remuneration tank, which is associated with the auxiliary curl. These tanks supply the responsive power for the loops inductances and channel sounds infused by the inverter or the rectifier units. High-recurrence AC control at the optional side is amended and after that through a buck or lift converter conveyed to the vehicle battery. So as to distinguish the situation of a moving EV, some type of EV Detection System (EVDS) is normally connected.

Portrayal of each square of proposed framework is as per the following:

1) *DWPT:* A total arrangement of a DWPT comprises of AC-DC converter, inverter, thunderous remuneration circuit of the essential and auxiliary side, transmitter and beneficiary loop, rectifier, and post-controller organize if necessary. The AC-DC converter is important to change over the AC voltage from the utility AC network to the DWPT framework to fill in as the power factor corrector (PFC). The inverter gives the square AC voltage to the remuneration circuit and again reconverted to DC voltage by the rectifier, and now and again, it is associated with the post controller converter.
2) *Rectifier:* A rectifier is an electrical gadget made out of at least one diodes that changes over substituting flow (AC) to coordinate flow (DC). A diode resembles a single direction valve that enables an electrical flow to stream in just a single bearing. This procedure is called correction. A rectifier can take the state of a few distinctive physical structures, for example, strong state diodes, vacuum tube diodes, mercury circular segment valves, silicon-controlled rectifiers and different other silicon-based semiconductor switches.And the output of this is stored in the battery of the vehicle. If the vehicle on the hill station that time the energy is in the battery is used for the speed up of the vehicle.

IV. RESULT

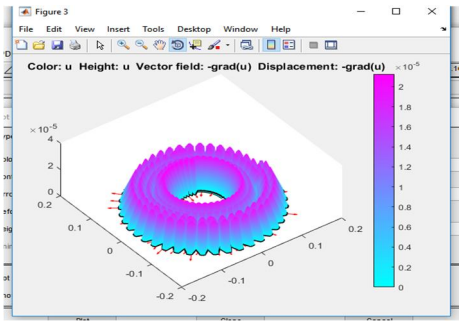


Figure 3. Simulation

©IJRASET: All Rights are Reserved

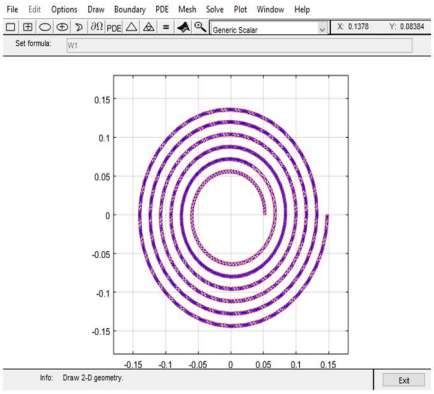


Figure 4. Spiral Winding

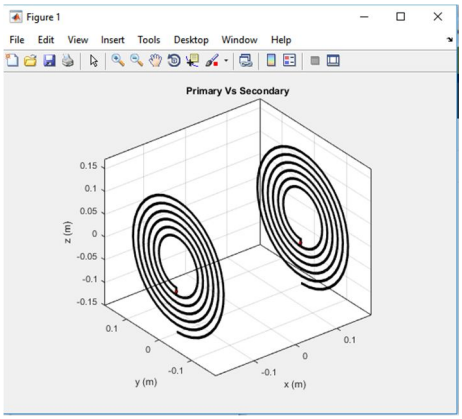


Figure.5.Primary Vs Secondary

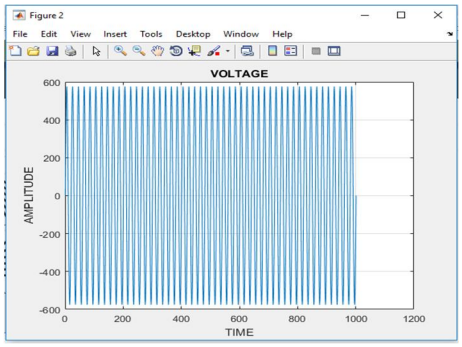


Figure.6. Generated Voltage

V. CONCLUSION

An extensive investigation of dynamic WPT is directed and the outcomes are actualized to the plan a 25-kW portioned loop dynamic charging framework for an electric transport. This investigation considers stochastic components of genuine driving that effect the normal estimation of conveyed vitality to the vehicles. The estimation of vitality effectiveness, as opposed to the power productivity, is acquainted with evaluate the presentation of the DWPT framework. The GSSA strategy is utilized to display the LCC remuneration tank and essential inverter and reproduction and exploratory tests were utilized to check the model. A double circle controller is intended to control the essential power and current. The vitality effectiveness of the framework is estimated as high as 86% when there is no horizontal misalignment, with the likelihood to be expanded over 90% with some alteration in loop empowering and de-stimulating calculations. A technique is suggested that uses the data from a misalignment recognition framework to make up for parallel misalignment and levels the measure of conveyed vitality to the vehicles.

©IJRASET: All Rights are Reserved

VI. ACKNOWLEDGEMENT

It is my utmost duty and desire to express my gratefulness to everybody who has provided their valuable guidance during my project stage-I preparation \newline

Firstly I express my deep sense of gratitude to Prof. A.A.Yadav for guiding me at every step in the project. She has most honestly guided us throughout, never leaving us unanswered for any of my doubts. It was her constant persuasion, encouragement, inspiration and valuable guidance that help me in my journey from concept to completion of my project. I also owe a great debt to our PG Co-ordinator & Head of Department Dr. V. M. Rohokale Madam for her help and support for allowing us to use the resources of the department. I am also very thankful to the Principal Dr. R.S. Prasad sir whose constant enthusiasm is the source of best inspiration for me and his support, Sinhgad Institute of Technology and Science, Narhe, Pune.

Finally I am grateful all those who have helped me in the endeavour of completing this project I would also like to thank my friends and family who really helped me directly or indirectly whenever I was in need.

REFERENCES

[1] Reza Tavakoli and Zeljko Pantic "Analysis, Design and Demonstration of a 25-kW Dynamic Wireless Charging System for Roadway Electric Vehicles", EEE Journal of Emerging and Selected Topics in Power Electronics 2168-6777 (c) 2017

[2] H. Liu and D. Z. W. Wang, "Locating multiple types of charging facilities for battery electric vehicles," Transp. Res. B, Methodol., vol. 103, pp. 30–35, Sep. 2017.

[3] Z. Chen, W. Liu, and Y. Yin, "Deployment of stationary and dynamic charging infrastructure for electric vehicles along traffic corridors," Transp. Res. C, Emerg. Technol., vol. 77, pp. 185–206, Apr. 2017.

[4] J. Kim, G. Yu, and Y. J. Jang, "Semiconductor FAB layout design analysis with 300-mm FAB data: 'Is minimum distance-based layout design best for semiconductor FAB design?"' Comput. Ind. Eng., vol. 99, pp. 330–346, Sep. 2016

[5] Y. J. Jang, E. S. Suh, and J. W. Kim, "System architecture and mathematical models of electric transit bus system utilizing wireless power transfer technology," IEEE Syst. J., vol. 10, no. 2, pp. 495–506, Jun. 2016.

[6] Z. Chen, F. He, and Y. Yin, "Optimal deployment of charging lanes for electric vehicles in transportation networks," Transp. Res. B, Methodol., vol. 91, pp. 344–365, Sep. 2016.


[7] I. Hwang, Y. J. Jang, Y. D. Ko, and M. S. Lee, "System optimization for dynamic wireless charging electric vehicles operating in a multiple-route environment," IEEE Trans. Intell. Transp. Syst., to be published.

[8] Y. J. Jang, S. Jeong, and M. S. Lee, "Initial energy logistics cost analysis for stationary, quasi-dynamic, and dynamic wireless charging public transportation systems," Energies, vol. 9, no. 7, p. 483, 2016.

[9] G. H. Jung, "Inverter and link road-embedded power with cable module," in The On-line Electric Vehicle. Cham, Switzerland: Springer, 2017, pp. 149–157.

[10] F. Martel, S. Kelouwani, Y. Dubé, and K. Agbossou, "Optimal economybased battery degradation management dynamics for fuel-cell plug-in hybrid electric vehicles," J. Power Sources, vol. 274, pp. 367–381, Jan. 2015.

©IJRASET: All Rights are Reserved

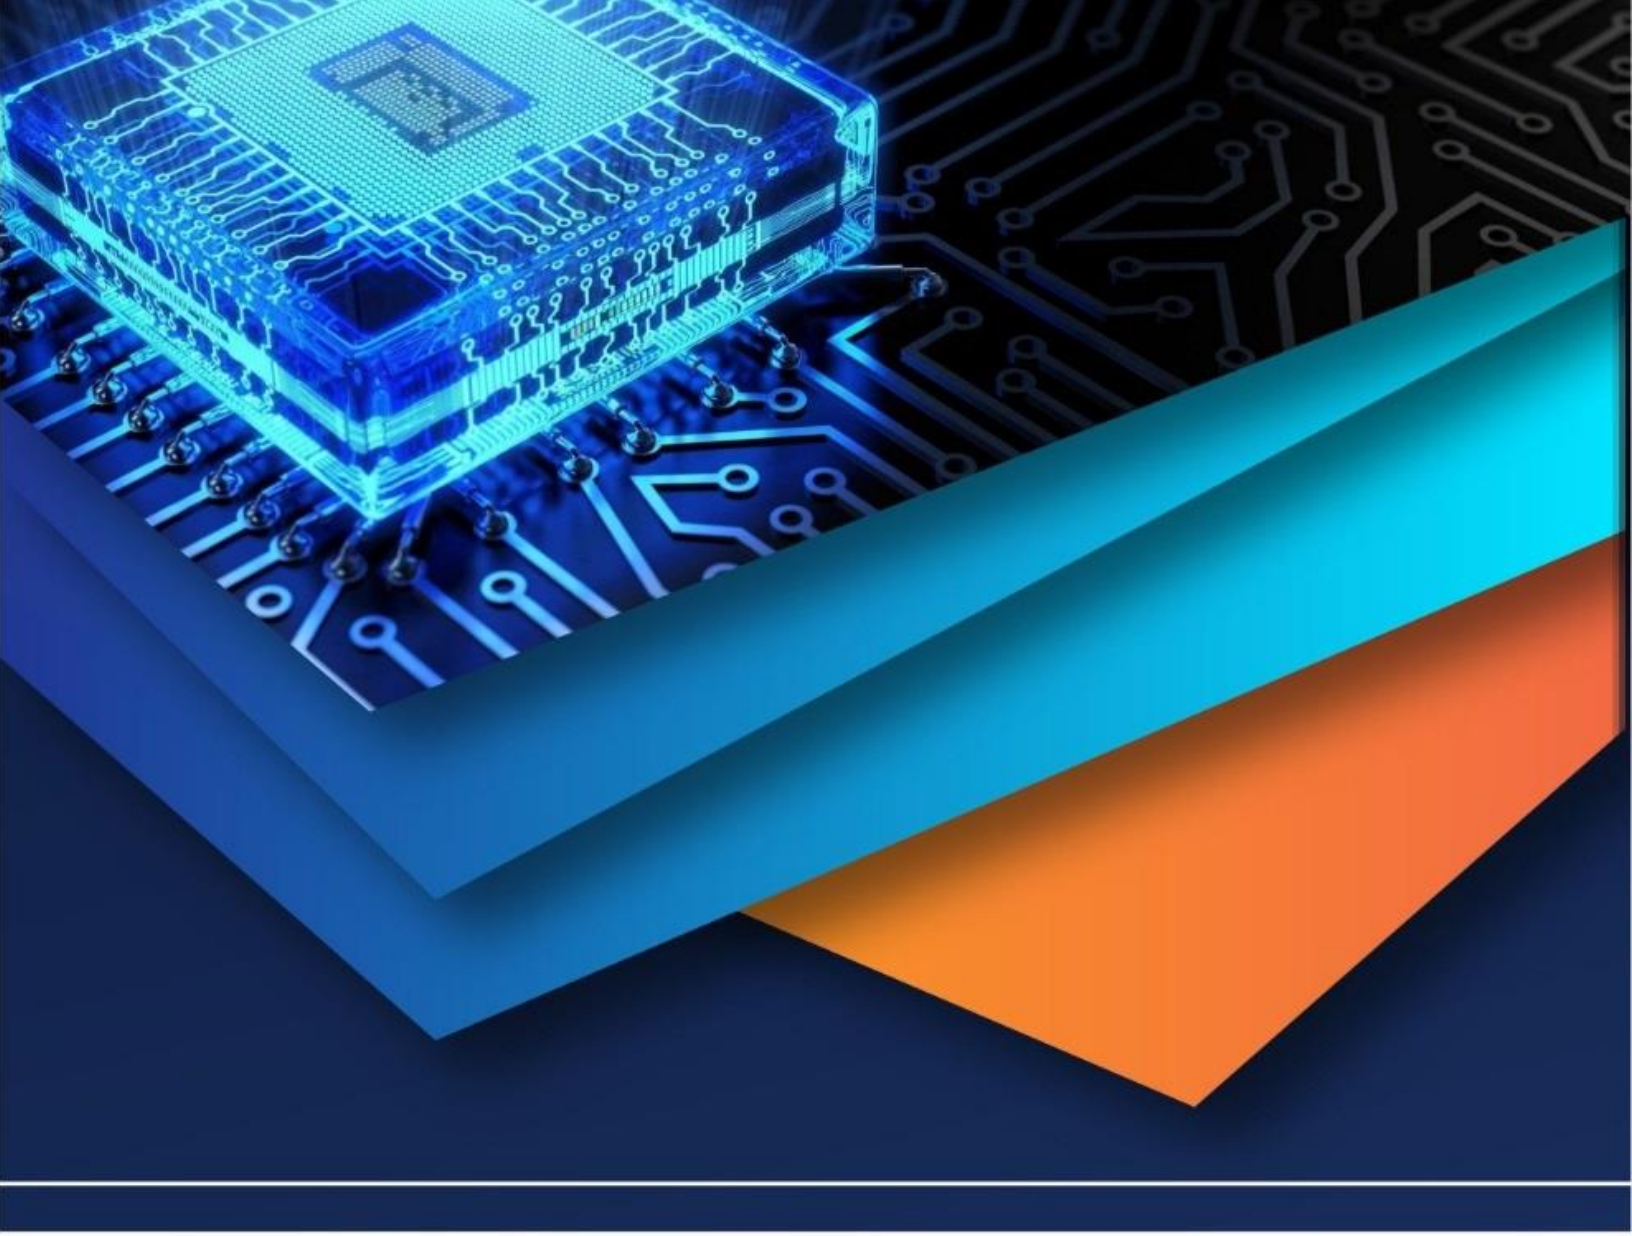

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)