iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 3 **Issue:** VII **Month of publication:** July 2015

DOI:

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Back Pressure Algorithm in Communication Networks Using Shadow Queuing

Ms Vanishree V Potadar[1], Asst Prof Vandana Bhat[2]
[#]*Information Science, VTU*

Abstract— Back-pressure-based adaptative routing algorithms area unit wherever every packet is routed on a presumably totally different path. Algorithms usually lead to poor delay performance and involve high implementation complexness. During this paper, a replacement adaptative routing algorithmic program is constructed upon the back-pressure algorithmic program. It decouples the routing and programming parts of the algorithmic program by planning a probabilistic routing table that's accustomed route packets to per-destination queues. The programming selections within the case of wireless networks area unit created mistreatment counters known as shadow queues. During this case, our algorithmic program provides a low-complexity answer to optimally exploit the routing–coding trade-off.
Keywords— Back-pressure algorithm, network coding, routing, scheduling, shadow queuing.

I. INTRODUCTION

Due to the scarcity of wireless bandwidth resources, it is important to efficiently utilize resources to support high throughput, high-quality communications over multi-hop wireless networks. In this context, good routing an scheduling algorithm are needed to dynamically allocate wireless resources to maximize the network throughput region.

A. Communication Network

Communication networks based on serial data transmission are the plat - form of up-to-date automation systems. Whether this is office automation or automation of manufacturing or process plants, the task remains always the same, exchanging data between different devices or participants within a system. Communication networks provide a number of advantages over systems in which a point-to-point line enables only two participants to communicate with each other.

B. Routing Algorithm

The routing algorithm is stored in the router's memory. The routing algorithm is a major factor in the performance of your routing environment. The purpose of the routing algorithm is to make decisions for the router concerning the best paths for data. The router uses the routing algorithm to compute the path that would best serve to transport the data from the source to the destination. The directing algorithmic guideline can not be adjusted, the sole because of adjustment it\'s to change steering conventions. There zone unit 2 noteworthy classes of steering calculations - separation vector or connection state. every steering convention named "separation vector" utilizes the space vector algorithmic principle, and every "connection state" convention utilizes the connection state algorithmic standard. The Back Pressure rule introduced has been wide studied within the literature. whereas the concepts behind planning mistreatment the weights recommended are winning in follow in base stations and routers, the adaptational routing rule is never used. the most reason for this is often be} that the routing rule can cause poor delay performance thanks to routing loops. to boot, the implementation of the back-pressure rule needs every node to keep up per-destination queues that may be onerous for a wire line or wireless router. Prior add this space has recognized the importance of doing shortest-path routing to enhance delay performance and changed the back-pressure algorithmic rule to bias it toward taking shortest-hop routes. a neighborhood of our algorithmic rule has similar motivating ideas. Additionally to demonstrably throughput-optimal routing that minimizes the quantity of hops taken by packets within the network, we have a tendency to decouple (to an explicit degree) routing and planning within the network through the employment of probabilistic routing tables and therefore the supposed shadow queues. The key step of partly decoupling the routing and programming that results in each important delay reduction and also the use of per-next-hop queuing. Here introduced the shadow queue to resolve a set routing drawback. The min-hop routing needs even additional queues than the initial back-pressure algorithmic program. The main purpose is to check the shadow queue approach extends to the case of planning and routing. The primary contribution is to return up with a formulation wherever the quantity of hops is decreased . The formulation has constant objective, however their answer involves per-hop queues, that dramatically will increase the quantity of

©IJRASET 2015: All Rights are Reserved

queues, even compared to the back-pressure algorithmic program. Here answer is considerably different: this use constant variety of shadow queues because the back-pressure algorithmic program, however the quantity of real queues is incredibly tiny (per neighbor). The new plan here is to perform routing via probabilistic rending, that permits the dramatic reduction within the variety of real queues.

It summarizes the most results as follows.
Using the idea of shadow queues, this partly decouple routing and programming. A shadow network is employed to update a probabilistic routing table that packets use upon arrival at a node. a similar shadow network, with back-pressure algorithmic program, is employed to activate transmissions between nodes. However, first, actual transmissions send packets from first-in–first-out (FIFO) per-link queues, and second, doubtless a lot of links area unit activated, additionally to those activated by the shadow algorithmic program.
The routing algorithmic program is intended to reduce the common range of hops employed by packets within the network. This idea, beside the scheduling/routing decoupling, results in delay reduction compared with the standard back-pressure algorithmic program.
Each node has got to maintain counters, referred to as shadow queues, per destination. this is often terribly kind of like the concept of maintaining a routing table per destination. However, the important queues at every node square measure per-next-hop queues within the case of networks that don\'t use network writing. once network writing is used, per-previous-hop queues may be necessary, however this is often a demand obligatory by network writing, not by our algorithmic program.
The algorithmic program is applied to wire line and wireless networks. intensive simulations show dramatic improvement in delay performance compared to the back-pressure algorithmic program.

II. RELATED WORK

The back-pressure algorithmic program may be a well-known throughput-optimal algorithmic program. However, its delay performance could also be quite poor even once the traffic load isn't near network capability thanks to the subsequent 2 reasons[1].
First, every node needs to maintain a separate queue for every artifact within the network, and only 1 queue is served at a time.
Second, the rear pressure routing algorithmic program might route some packets on terribly long routes.
A solution to the question of however, once and wherever to perform inter-session network committal to writing for a general network model each underneath wired and wireless conditions[2]. Particularly, a resourceful queuing design and a dynamic routing-scheduling-coding strategy are introduced for serving multiple sessions once linear network committal to writing is allowed across sessions. This policy provides a completely unique extension to the category of back-pressure policies by incorporating inter-session committal to writing choices via straightforward rules on the relevant queue-length levels. Despite the actual fact that the capability region of inter-session committal to writing could be a difficult open drawback, this prove that rule will support any set of rates in an exceedingly nontrivial characterized region of accomplish-able rates[4]. Additionally to its sensible implications, this work conjointly provides a theoretical framework within which the gains of inter-session network committal to writing and pure routing are often compared.
A key feature of the back-pressure formula is that packets may not be transferred over a link unless the back-pressure over a link is non negative and therefore the link is enclosed within the picked schedule[3]. This feature prevents any congesting nodes that are already engorged, so providing the adaptivity of the formula. Notice that as a result of all links will be activated while not interfering with one another within the wire-line network, is the set of all links. Thus, the back-pressure formula will be localized at every node and operated in a very distributed manner within the wire-line network.

The back-pressure algorithmic rule needs maintaining queues for every potential destination at each node. This queue management demand might be a preventative overhead for an outsized network.
The back-pressure algorithmic rule is associate adaptational routing algorithmic rule that explores the network resources and adapts to different levels of traffic intensity. However, it'd conjointly lead to high delays as a result of it's going to opt for long ways unnecessarily.

In this paper, we have a tendency to address the high delay and queuing quality issues. The machine quality issue for wireless

©IJRASET 2015: All Rights are Reserved

networks isn't self-addressed here. we have a tendency to merely use the recently studied greedy maximal scheduling (GMS) algorithmic program. Here, we call it the largest-weight-first algorithm—in short, LWF algorithmic program[5]. LWF algorithmic program needs constant queue structure that the back-pressure algorithmic program uses. It conjointly calculates the back-pressure at every link mistreatment constant approach. The distinction between these 2 algorithms solely lies within the strategies to choose a schedule.

A novel mechanism to find delay-optimal numerous ways exploitation distributed learning automata for Voice-over-IP (VoIP) routing in commission overlay networks. Additionally, a unique link failure detection methodology is projected for police investigation and sick from link failures to scale back the amount of born voice sessions. the most contributions area unit a decentralized , ascendible methodology for minimizing delay on each a primary and secondary path between all pairs of overlay nodes, whereas at identical time maintaining the link disjointness between the first and therefore the secondary optimum ways. Simulations of a 50-node model of AT&T's backbone network show that the projected methodology improves the standard of voice calls from unsatisfactory to satisfactory, as measured by the R-factor[6]. With the projected link failure detection mechanism, the time to live through a link failure is significantly reduced.

III. EXISTING SYSTEM

The back-pressure algorithm explores all ways among the network and, as a result, may pick ways that area unit unnecessarily long, which may even contain loops, thus leading to poor performance. we've an inclination to handle this disadvantage by introducing a worth perform that measures the whole amount of resources utilized by all flows among the network. Specially, we've an inclination to feature up traffic plenty on all links among the network and use this as our value perform. The goal then is to attenuate this value subject to network capability constraints.

Min-Resource Routing by Back-Pressure Algorithm

At time-slot , the following applies.

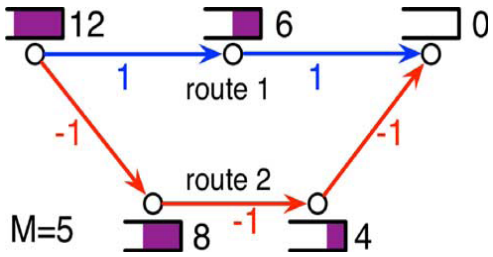


Figure: Link weights under the M-back-pressure algorithm

Each node maintains a separate queue of packets for each destination; its length is denoted Qnd[t] . Each link is assigned a weight

$$w_{nj}[t] = \max_{d}\left(\frac{1}{M}Q_{nd}[t] - \frac{1}{M}Q_{jd}[t] - 1\right)$$

Where M>0 is a parameter

Scheduling/routing rule:

$$\pi^*[t] \in \arg\max_{\pi\in\Gamma} \sum_{(nj)\in\pi} c_{nj}w_{nj}[t].$$

For each activated link , we remove Cnj packets from Qnd[t] if possible and transmit those packets to Q*nd.

©IJRASET 2015: All Rights are Reserved

IV. PROPOSED SYSTEM

The shadow queue approach extends the case of programming and routing. the primary contribution is to return up with a formulation wherever the quantity of hops is reduced. it's fascinating to distinction this contribution. The formulation has identical objective as ours, however their answer involves per-hop queues, that dramatically will increase the quantity of queues, even compared to the back-pressure formula. the answer is considerably different: this use identical variety of shadow queues because the back-pressure formula, however the quantity of real queues is incredibly tiny (per neighbor). The new plan here is to perform routing via probabilistic cacophonous , that permits the dramatic reduction within the variety of real queues. Finally, a very important observation, not found is that the partial ”decoupling” of shadow back-pressure and real packet transmission permits United States to activate additional links than an everyday back-pressure formula would. this idea seems to be essential to cut back delays within the routing case, as shown within the simulations.

A. Shadow Queue Algorithm: M-Back-Pressure Algorithm

The shadow queues area unit updated supported the movement of fictitious entities referred to as shadow packets within the network. The movement of the fictional packets may be thought of as associate exchange of management messages for the needs of routing and schedule.

The back-pressure for destination ***d*** on link ***(nj)*** is taken to be

$$w_{nj}^{d}[t] = p_{nd}[t] - p_{jd}[t] - M,$$

where ***M*** is a properly chosen parameter.
The evolution of the shadow queue

$$p_{nd}[t+1] = p_{nd}[t] - \sum_{j:(nj)\in\mathcal{L}} I_{\{d_{nj}^{*}[t]=d\}}\,\hat{\mu}_{nj}[t] + \sum_{l:(ln)\in\mathcal{L}} I_{\{d_{ln}^{*}[t]=d\}}\,\hat{\mu}_{ln}[t] + \sum_{f\in\mathcal{F}} I_{\{b(f)=n,e(f)=d\}}\,\hat{a}_{f}[t]$$

where $\hat{\mu}_{nj}[t]$ is the number of shadow packets transmitted over join (nj) in time-spaces , $d_{nj}^{*}[t]$ is the destination that has the most extreme weight on connection (nj), and $\hat{a}_{f}[t]$ is the quantity of shadow bundles created by stream f at time t . The quantity of shadow parcels booked over the connections at every time moment is controlled by the back-weight calculation

V. CONCLUSION

The back-weight standard, while being throughput-ideal, isn't useful in watch for versatile directing following the postponement execution is to a great degree unfortunate. amid this paper, given partner decide that courses parcels on briefest bounces once feasible and decouples directing and planning utilizing a probabilistic steering table composed on the thought of shadow lines. By keeping up a probabilistic steering table that progressions gradually over the long run, genuine bundles don't got the opportunity to investigate long approaches to help throughput; this reasonableness is performed by the shadow "parcels." This standard moreover allows further connection actuation to scale back deferrals. The tenet has moreover been demonstrated to scale back the lining quality at each hub and may be stretched out to ideally exchange off in the middle of directing and system committal to composing.


REFERENCES

[1]Eleftheria Athanasopoulou, Member, IEEE, LocX.Bui, Associate Member, IEEE, Tianxiong Ji, Member, IEEE, R. Srikant, Fellow, IEEE, and Alexander Stolyar,” Back-Pressure-BasedPacket-by-Packet Adaptive Routing in Communication Networks”, IEEE/ACM TRANSACTIONS ON NETWORKING, VOL. 21, NO. 1,

©IJRASET 2015: All Rights are Reserved

FEBRUARY 2013.
[2]A. Eryilmaz, D. S. Lun, and B. T. Swapna, "Control of multi-hop communication networks for inter-session network coding," IEEE Trans.
[3]L. Bui, R. Srikant, and A. L. Stolyar, "Novel architectures and algorithm for delay reduction in back-pressure scheduling and routing," in Proc. IEEE INFOCOM Mini-Conf., Apr. 2009, pp. 2936–2940.
[4] H. Seferoglu, A. Markopoulou, and U. Kozat, "Network coding-aware rate contr and scheduling in wireless networks," in Proc. ICME Special Session Netw. Coding Multimedia Streaming, Cancun, Mexico, Jun. 2009, pp. 1496–1499.
[5] T. Ho and H. Viswanathan, "Dynamic algorithms for multicast with intra-session network coding," IEEE Trans. Inf. Theory, vol. 55, no. 2, pp. 797–815, Feb. 2009.
[6] L. Ying, S. Shakkottai, and A. Reddy, "On combining shortest-path and back-pressure routing over multihop wireless networks," in Proc. IEEE INFOCOM, Apr. 2009, pp. 1674–1682.
[7] L. Chen, T. Ho, S. H. Low, M. Chiang, and J. C. Doyle, "Optimization based rate control for multicast with network coding," in Proc. IEEE INFOCOM, Anchorage, AK, May 2007, pp. 1163–1171.
[8] M. J. Neely, E. Modiano, and C. E. Rohrs, "Dynamic power allocation and routing for time varying wireless networks," IEEE J. Sel. Areas Commun., vol. 23, no. 1, pp. 89–103, Jan. 2005.
[9] L. Bui, R. Srikant, and A. L. Stolyar, "A novel architecture for delay reduction in the back-pressure scheduling algorithm," IEEE/ACM Trans. Netw., vol. 19, no. 6, pp. 1597–1609, Dec. 2011.

©IJRASET 2015: All Rights are Reserved

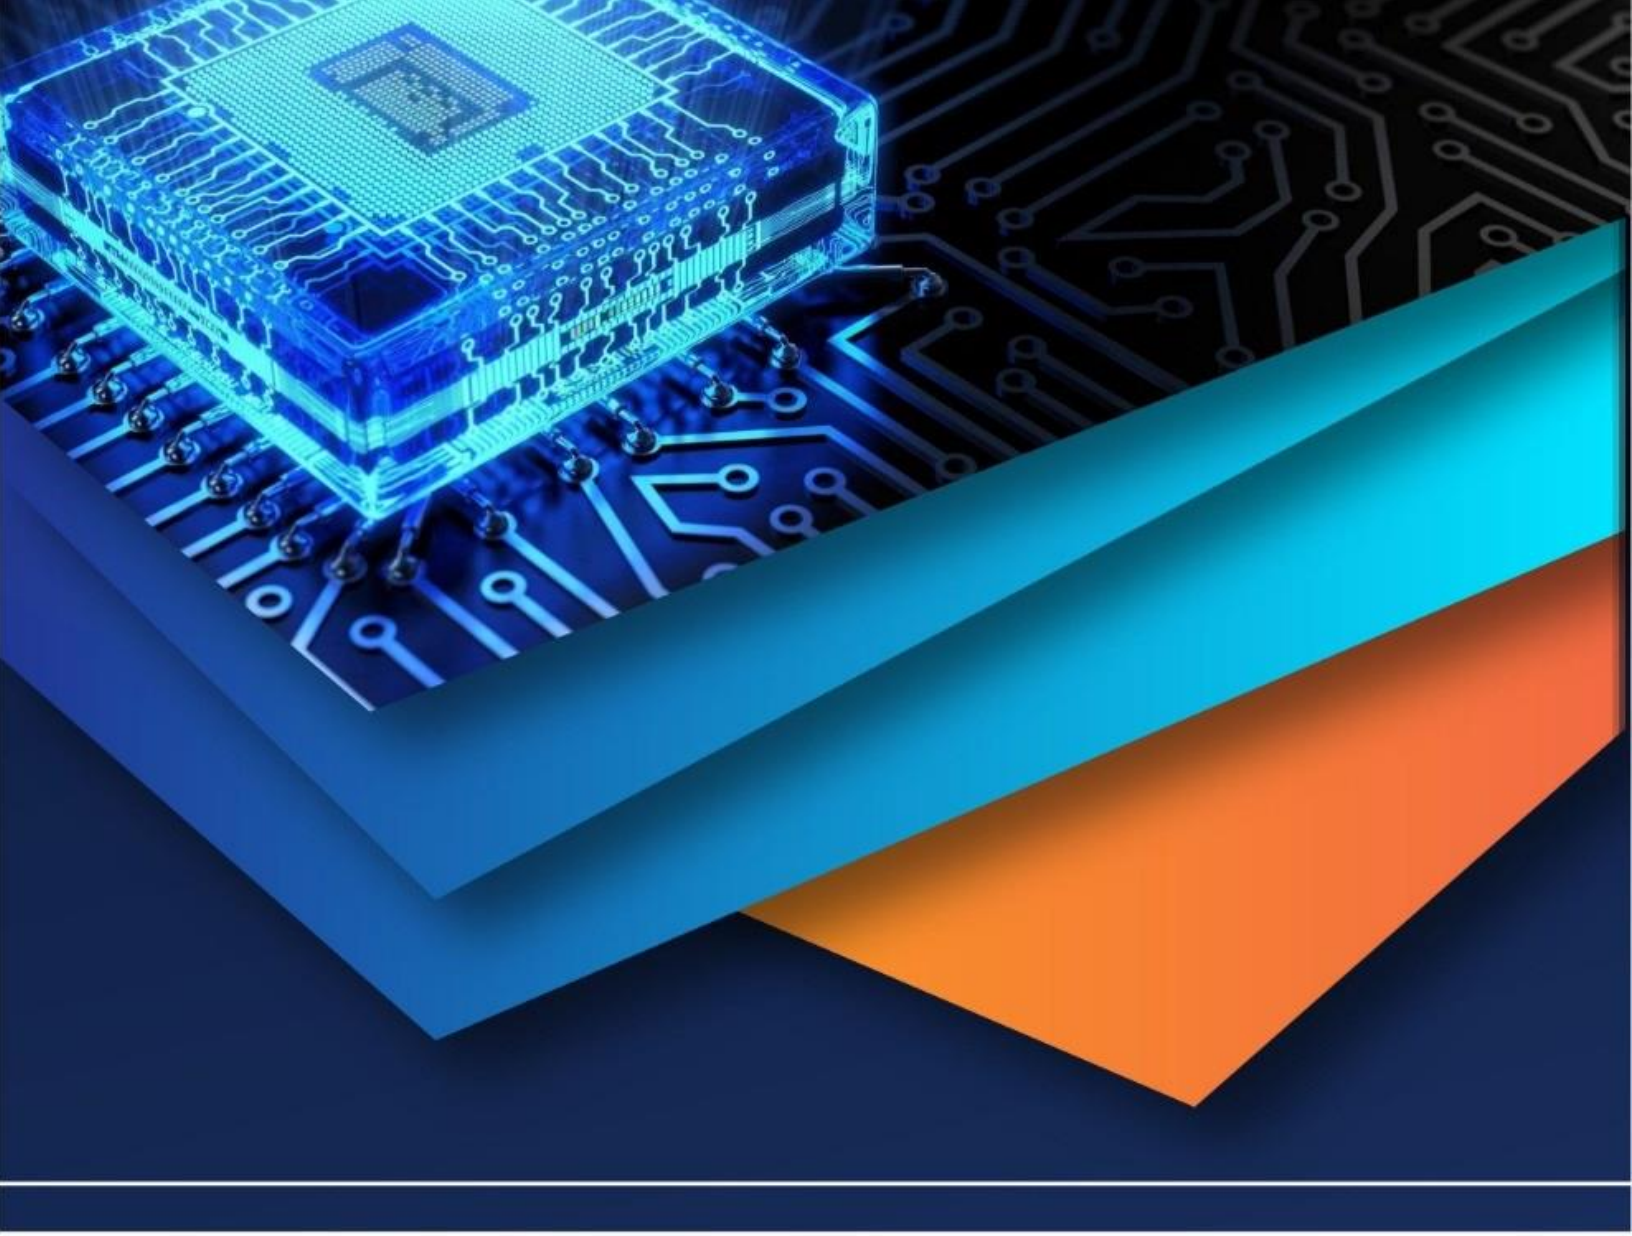

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)