



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 8**

**Issue: IV**

**Month of publication: April 2020**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Comparative Study of Multistoried RC Building with Shear Wall and Outrigger Safety

Sushant Porey<sup>1</sup>, Hemant Dahake<sup>2</sup>

<sup>1</sup>P.G. Student, <sup>2</sup>Assistant Professor, Department of Civil Engineering, G. H. Rasoni University, Amravati, Maharashtra, India

**Abstract:** Sliding wall-specially designed structural walls include in buildings to withstand the horizontal forces that induces in a plane wall through wind, earthquake on earth and other forces. They mainly bend members and are usually provided in high homes to avoid the complete collapse of the high growth of buildings under the seismic forces. In residential construction, the sliding walls are direct exterior walls, which usually form a C-shape, L-SHAPE, H-shape, shape box or wall shape that provides all the side supports for the building. The shear walls are designed and built correctly, and they will have strength and stiffness to withstand the horizontal forces. The study aims to study the optimum shape of the sliding walls in a tall building with a trigger. The high-altitude shear wall consists of a centrally located wall with two equal-length trusses located on top and in mid-height designs. In the present work the building has been provided with shear wall and outrigger system and the comparison is made between different models.

**Keywords:** Outrigger, Shear wall, Lateral Displacement, Storey Drift & Storey Shear

## I. INTRODUCTION

Tilt Wall system is one of the most commonly used side-load resistance systems in high lift homes. The slope of the wall has a high plane of stiffness and durability, which can be used to simultaneously resist large horizontal loads and maintain gravitational loads, which greatly reduces lateral effects of the building and thus reduces damage to the structure and its contents. These walls in general begin at the level of the foundation and are continuous throughout the height of the building. Their thickness can be as low as 150mm, or above 400 mm in high-rise buildings. When the shear walls are located in profitable positions in the building, they can form an effective lateral resistance of the resistance system by reducing the side displacements under the earthquake loads. Therefore it is very necessary to determine the effective, efficient and ideal location of wall shear.

Sliding walls should be located at each level of the structure, including the crawl space. To Forman an effective box design, an equal length shear walls should be placed symmetrically on all four exterior walls of the building. Sliding walls should be bead into the building interior, when the exterior walls can not provide sufficient strength and rigidity or when the permissible ratio of width on the floor or diaphragm of the roof is exceeded. For subfloors with a conventional diagonal sheath, the proportions of width 3:1. This means that a 25-foot building with this underfloor will not require the interior wall shift until its length exceeds 75 feet if the strength or stiffness of the exterior walls of the shear are not insufficient.

The form and plan of the offset wall position affects the behavior of the structure significantly. Structurally, the best position to tilt the wall-the center of each half of the building. This is rarely practical, however, since it dictates the use of space so that they are located at the ends.

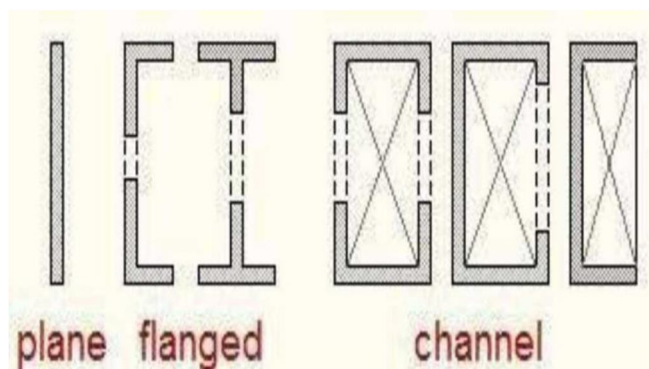


Fig. 2 positioning of shear wall

## II. REVIEW OF LITERATURE

It presents a brief summary of the literature review. The following literature review gives a prediction on the behavior of the R.C. building with a wall tilt and Outrigger security '

Anil Baral ET. Al. (2015); ' Seismic analysis ' RC frame building for different positions slope wall tilt wall included in building confront lateral forces and maintaining gravity loads. The RC tilt Wall has a high rigidity plane. Shear wall positioning affects the overall behavior of the building. For efficient and efficient operation of the building it is important to place the shear wall in an ideal location. This paper presents the reaction of buildings with different placement of the slope of the walls using as an equivalent static method (seismic coefficient method), and analysis of the spectrum of reaction. The five different models of the building APC are investigated, one without tilting the walls and the other four models with different wall tilt position, which undergoes an earthquake load in zone V.

Anshul Sud ET. Al. (2014) ' The best location of shear walls in the space frame RCC, based on seismic recursive walls is one of the most major lateral load of resistance elements in earthquake resistant buildings. To avoid torsion in the buildings, sliding walls should be placed symmetrically in the plan. In this work, a five-storey building RC, located in the seismic zone-V, is considered four walls shear. Considered five different configurations of shear walls Z. Bare frame, symmetrically placed walls on the outer bays (centrally), in a core and adjacent placed in the exterior of the building. These frames are analyzed for seismic forces to assess performance from the point of view of baseline shear, floor shift, member force and joint displacements. A frame with sliding walls in a core and centrally placed on the outer bays showed a significant decrease in the order of 29% to 83% with sidewall.

Asish S. Agharwal e. Al. (2012) ' Research optimization of multi-storey building configuration is subjected to lateral loads by modifying slope wall inclination of wall systems is one of the most commonly used lateral load resistance in a high building growth. The slope of the wall has a high plane of stiffness and durability, which can be used to simultaneously withstand large horizontal load and maintain gravitational loads. The inclusion of the wall tilt has become inevitable in the high-rise building to withstand lateral forces. It is very necessary to determine the effective, efficient and ideal location of wall shear. In this paper the study of a 25-storey building in the V zone is presented with some prior research that analyzed by modifying different wall slope positions with different shapes to determine the parameters such as bending the moment, baseline offset and superficial drift. This analysis is provided by a standard ETAB package.

## III. MODELING

The modeling is carried out in the ETABS software, the elevation considered for modeling is as follows.

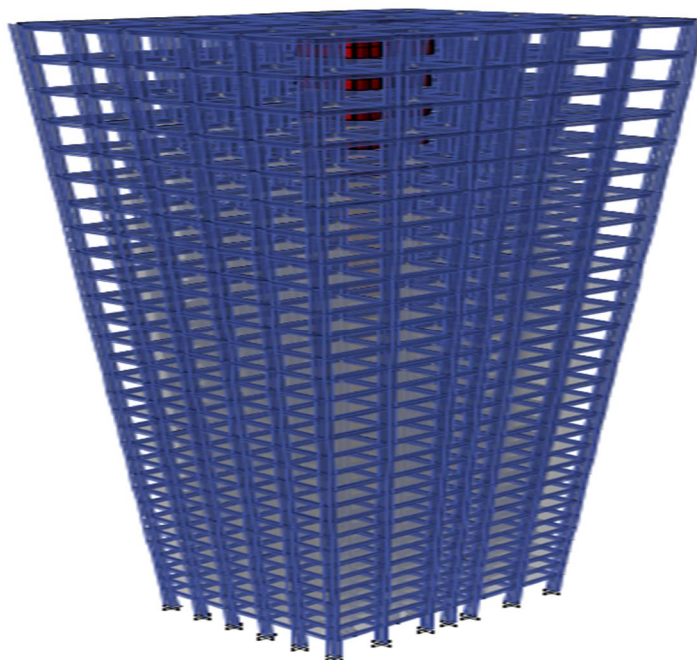


Fig.1 : Elevation of model in ETABS

In the present work the shear wall thickness is considered as 230 mm, the building considered as total of 30 storey building. The three models are considered for modeling:

Model-I: Building with Shear Walls Outrigger system is connected with Core at 1/3<sup>rd</sup> height, Model-II: Building with Shear Walls Outrigger system is connected with Core at mid height & Model-III: Building with Shear Walls Outrigger system is connected with Core at top.

#### IV. RESULTS

The analysis is carried out in ETABS software and the results in terms of storey drift, storey shear, time period is obtained as follows.

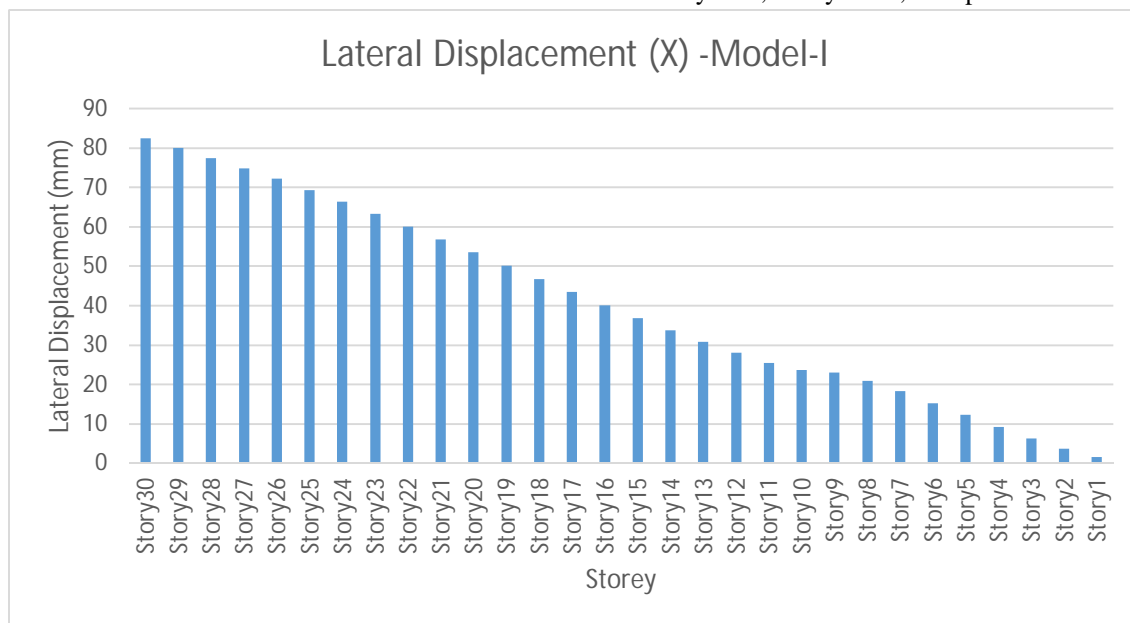


Fig.2 : Lateral Displacement (X)- Model-I

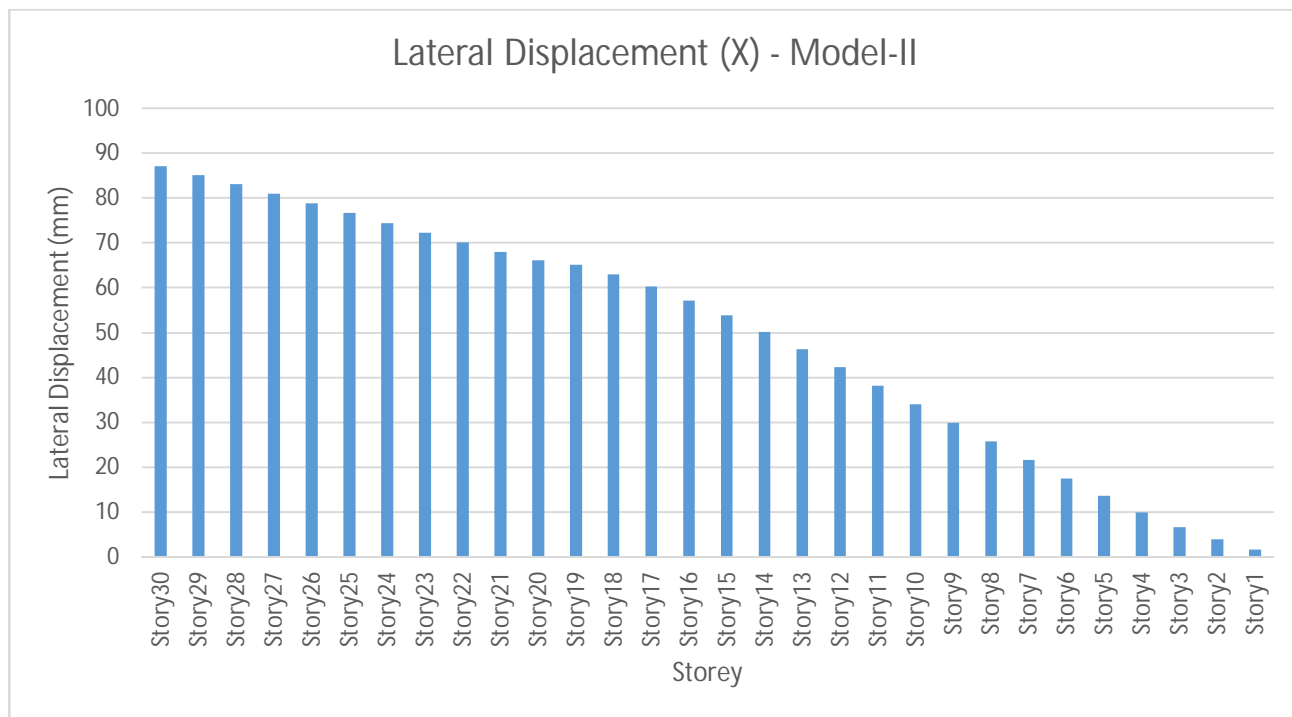


Fig.3 : Lateral Displacement (X)- Model-II



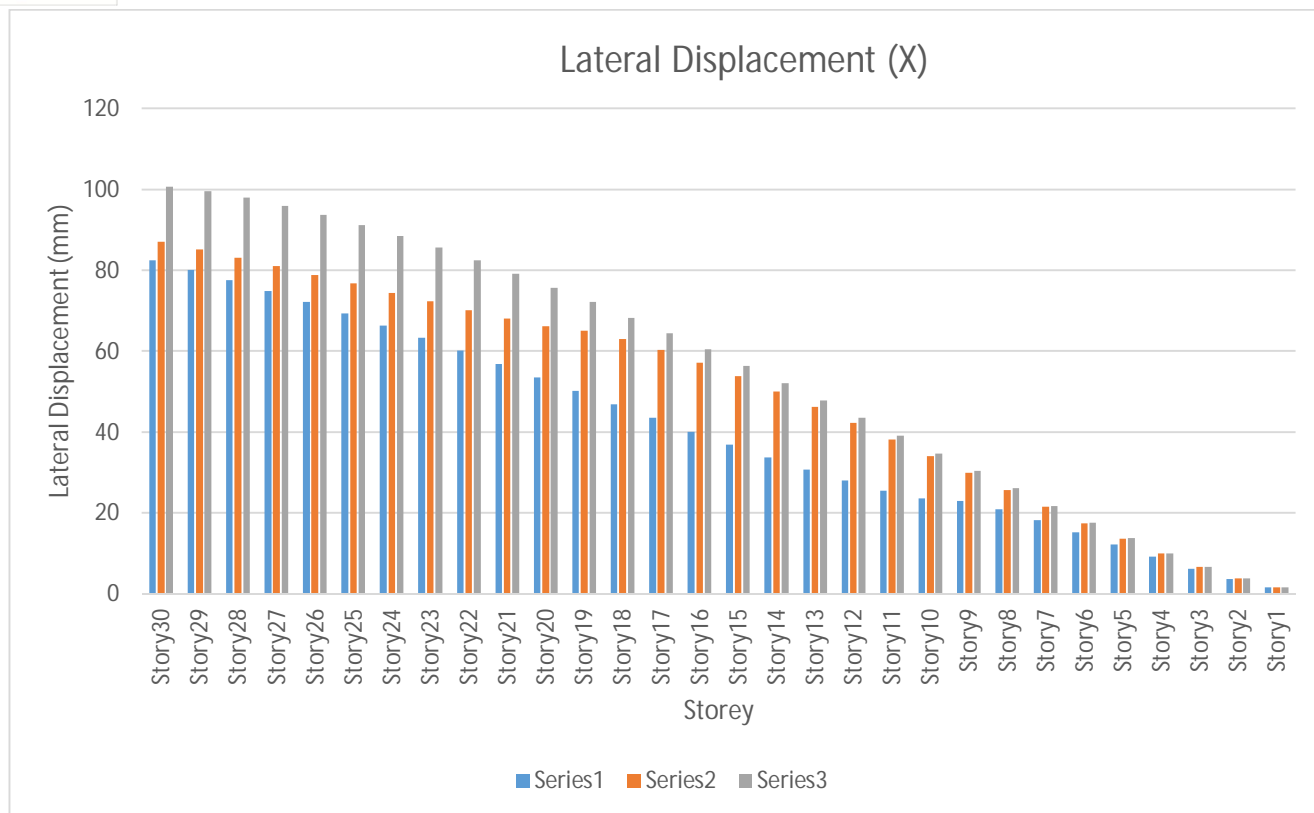


Fig.4 : Lateral Displacement (X)

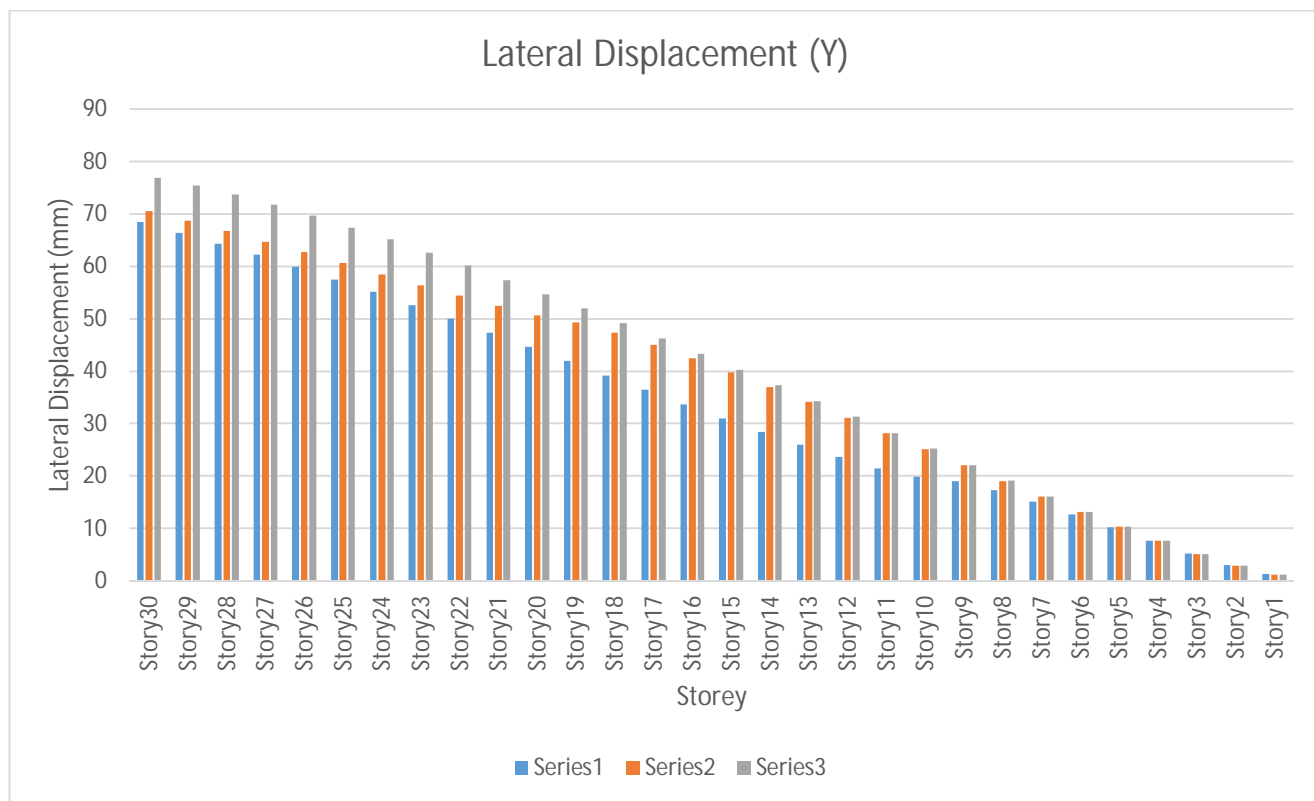


Fig.5 : Lateral Displacement (Y)

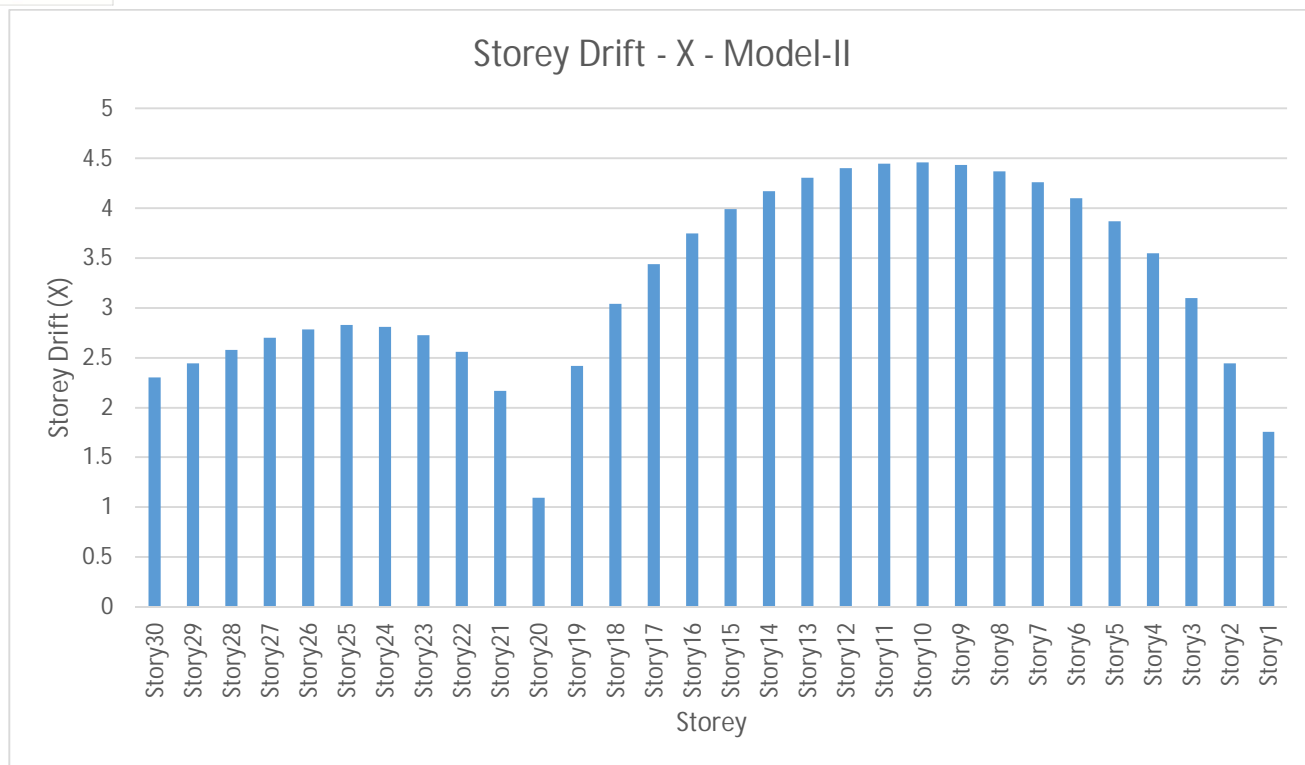


Fig.6 : Storey Drift (X)-Model-II

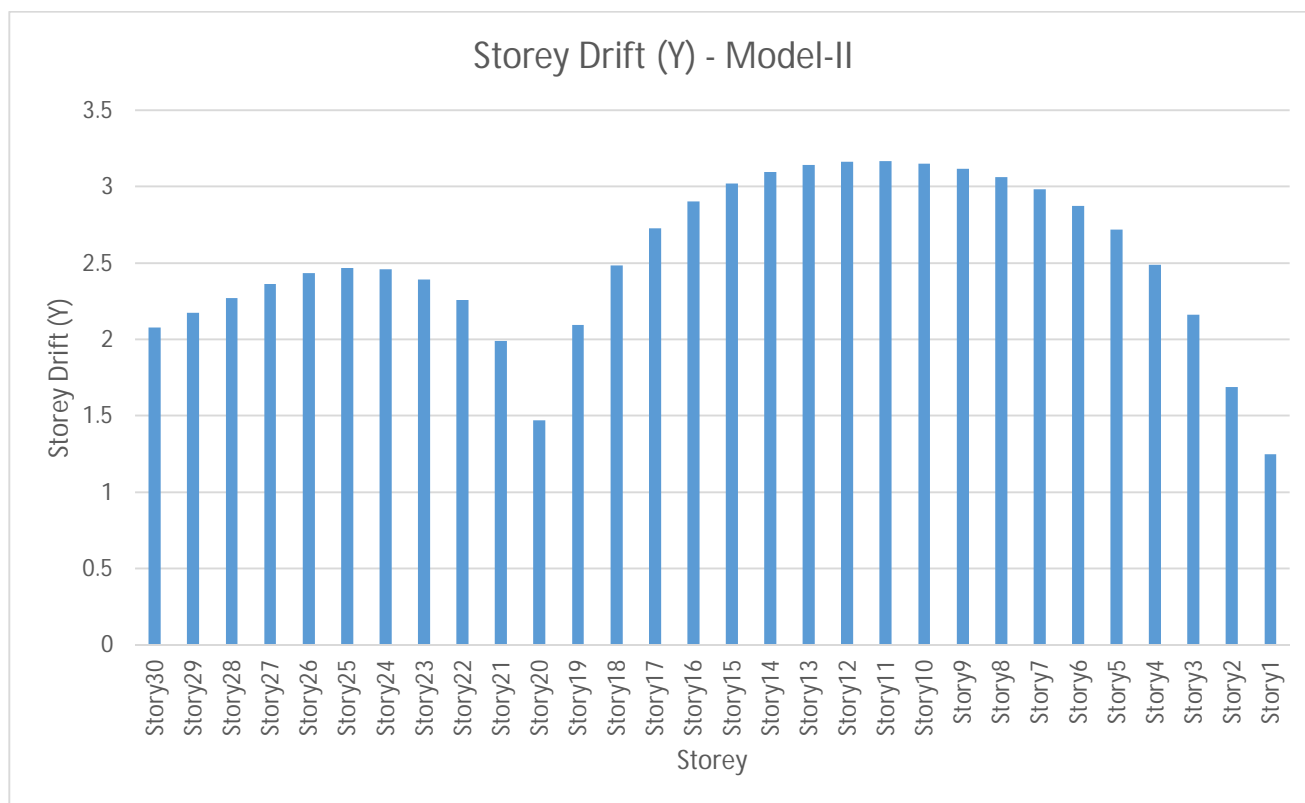


Fig.7 : Storey Drift (Y)-Model-II

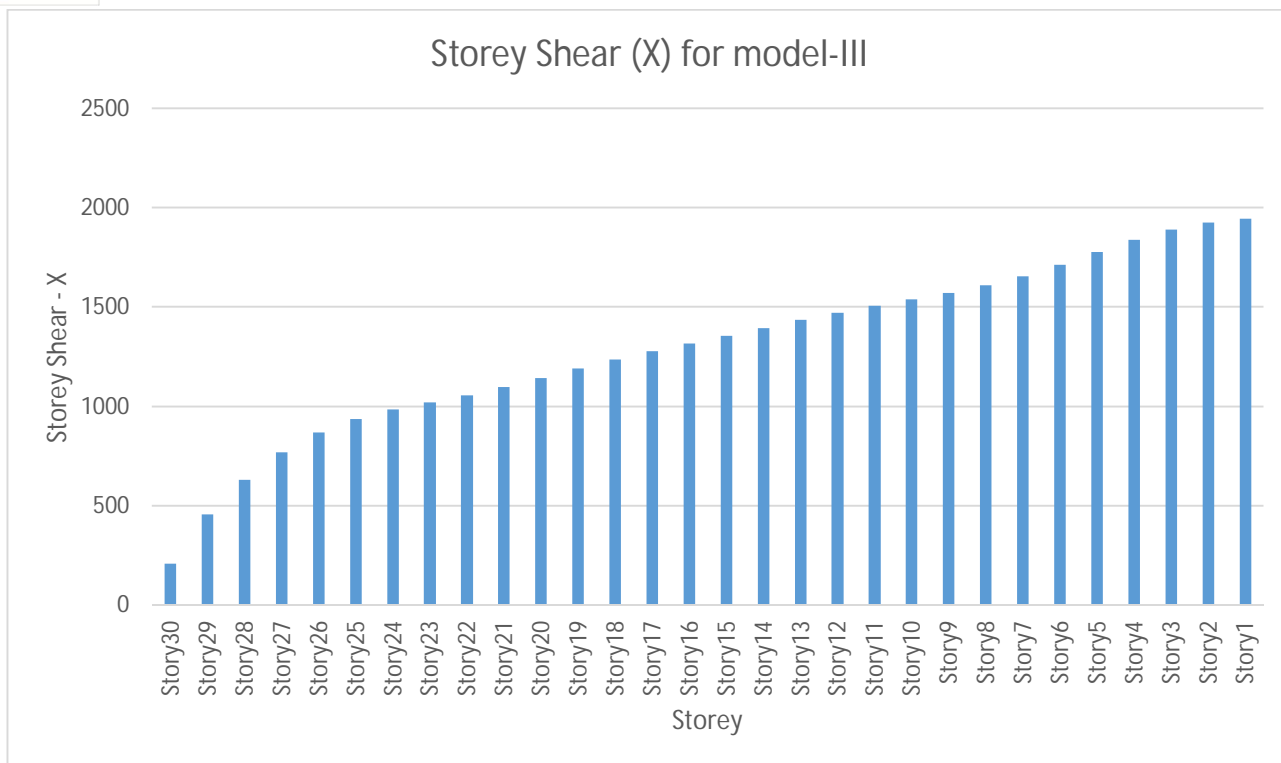


Fig.8 : Storey Shear (X)-Model-III

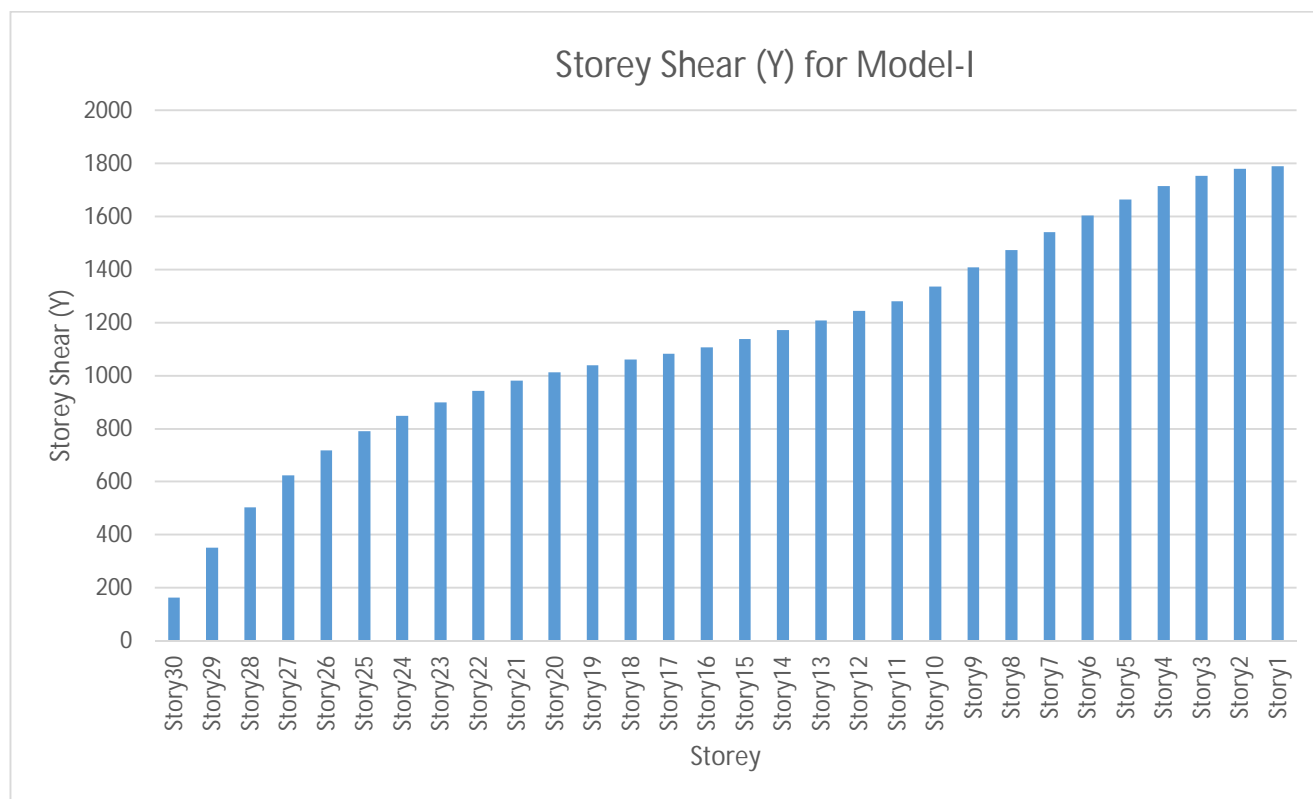


Fig.9 : Storey Shear (Y)-Model-I

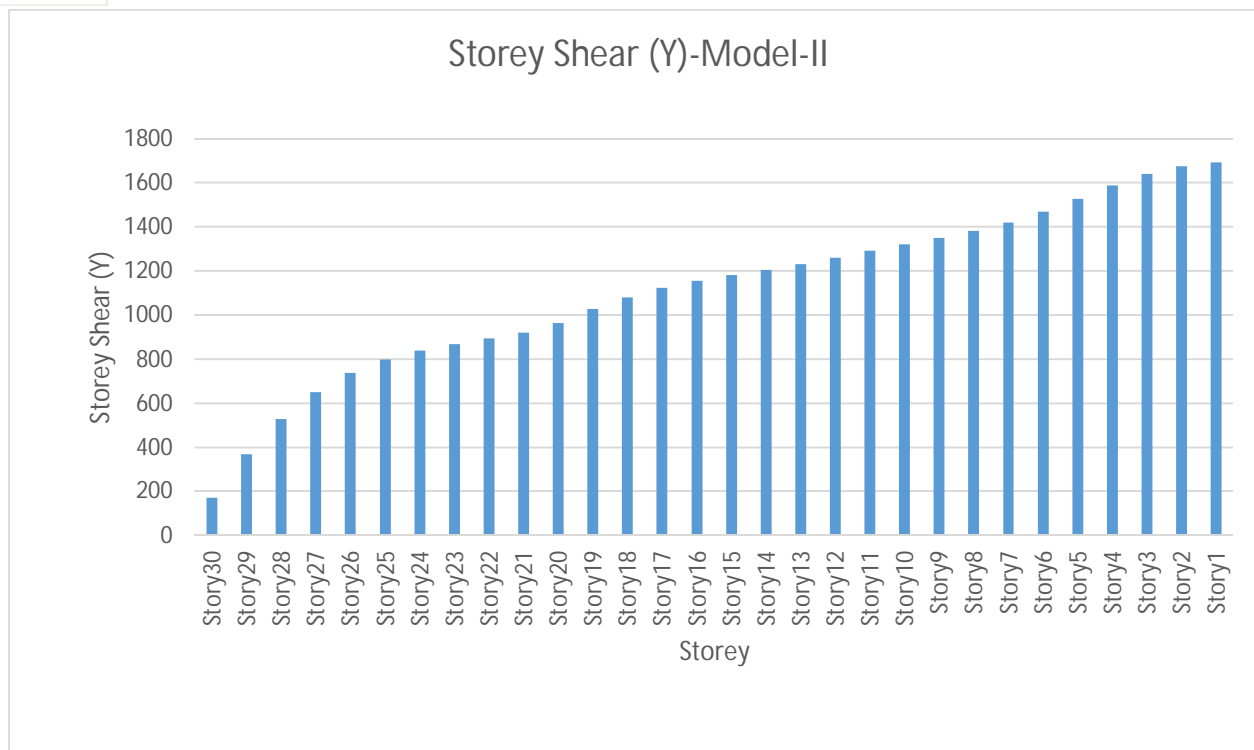


Fig.10 : Storey Shear (Y)-Model-II

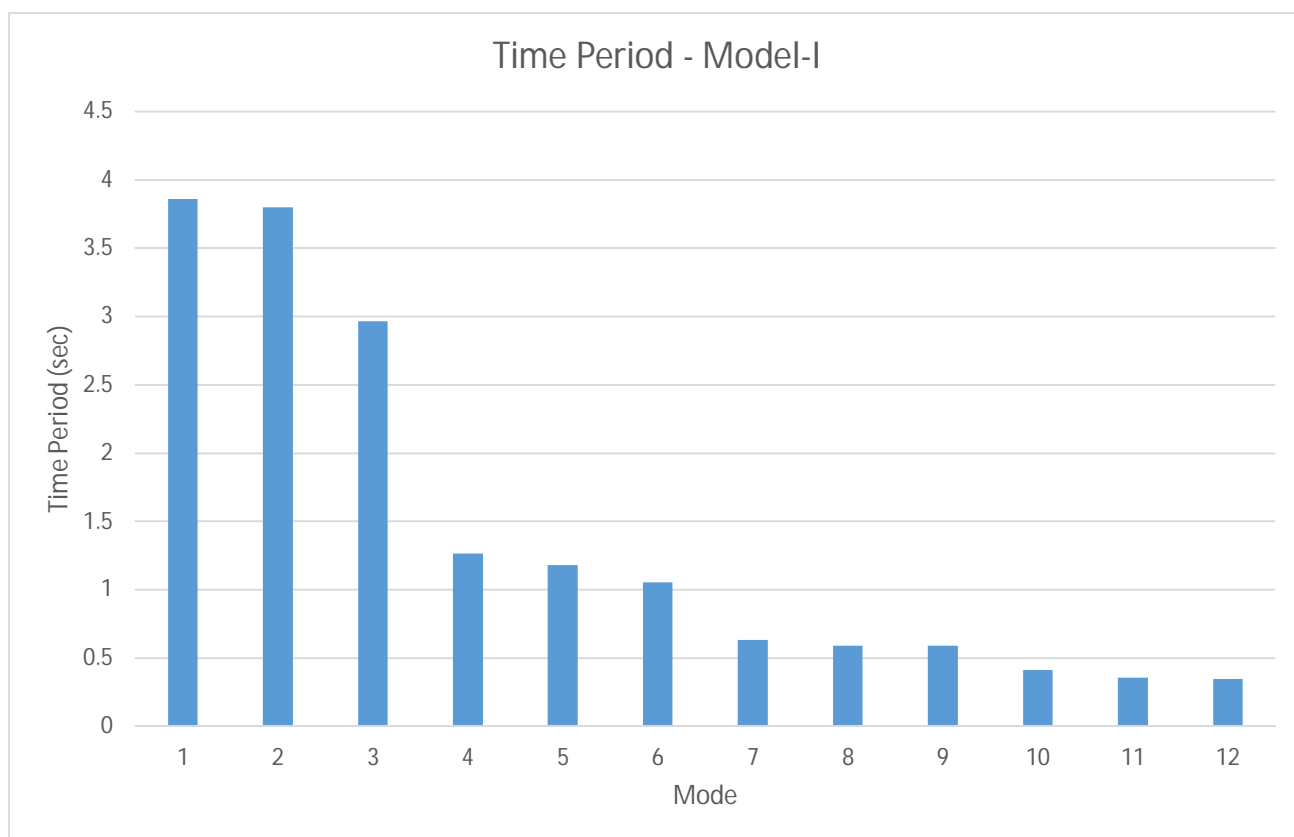


Fig.11 : Time Period-Model-I



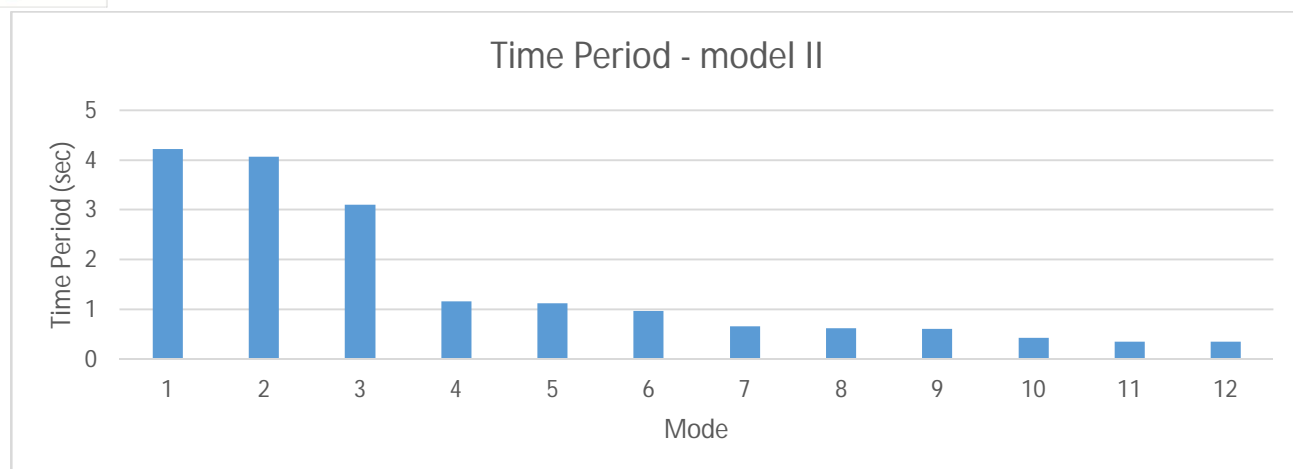


Fig.12 : Time Period-Model-II

The results are obtained for the different parameters for building with shear wall and outrigger system.

## V. CONCLUSION

The conclusions from the above study are as follows:

- A. Lateral displacement is found to be more in model-III as compared to other models
- B. Storey drift is found to be more in model-I
- C. Time period is more in model-III
- D. Storey shear is more in model-I

## REFERENCE

- [1] Anil Baral and Dr. S. K. Yajdani May-(2015); "Seismic Analysis of RC Framed Building for Different Position of Shear wall" International Journal of Innovative Research in Science, Engineering and Technology (An ISO 3297: 2007 Certified Organization) Vol. 4, Issue 5, May 2015
- [2] Vinay Sanjeev Kumar Damam oct-(2015) "Comparative Study on Multi-storeyed RCC Structure with and without Shear Wall by using SAP2000 v17" International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395-0056 Volume: 02 Issue: 07 | Oct-2015
- [3] Anshul Sud, Raghav Singh Shekhawat, Poonam Dhiman (2014) Best Placement of Shear Walls In an RCC Space Frame Based on Seismic Response-International Journal of Engineering Research and Applications (IJERA) ISSN: 2248-9622
- [4] P.P. Chandurkar and P.S. Pajgade (2013)'Seismic Analysis of RCC Building with and Without Shear Wall' - International Journal of Modern Engineering Research Vol. 3, pp 1810 Issue: 2249-6645.
- [5] A.S. Agrawal and S.D. Charkha (2012) 'study of Optimizing Configuration of Multi Story Building Subjected to Lateral Loads by Changing Shear Wall Location' proceedings of International conference on advances in architecture and civil engineering, volume 1 , pp 287-289.
- [6] G.S. Hiremath and Md Saddam Hussain (2012) 'Effect of Change in Shear Wall Location With Uniform and Varying Thickness in High Rise Building' - International Journal of Science and Research ISSN (online): 2319-7064.
- [7] Anuj Chandiwala (2012) 'Earthquake Analysis of Building Configuration with Different Position of Shear Wall' -International Journal of Emerging Technology and Advanced Engineering ISSN 2250-2459, ISO 9001:2008 Certified Journal, Volume 2, Issue 12.
- [8] IS 1893 Part 1, (2002), Indian Standard 'Criteria' for Earthquake Resistant Design Of Structures'
- [9] IS 456:2000, Plain and Reinforced Concrete Code of Practise?
- [10] IS 13920:1993, Ductile Detailing of Reinforced Concrete Structures Subjected to Seismic Forces - Code of Practise.
- [11] IS 875 (Part 2) - 1987, Design Loads (Other than Earthquake) For Buildings and Structures - Code of Practise.
- [12] Thejaswini R.M. And Rashmi A.R.: "Analysis and Comparison of different Lateral load resisting structural Forms" International Journal of Engineering Research & Technology (IJERT) Vol. 4 Issue 7, July - 2015
- [13] Po Seng Kian, Frits Torang Siahaan: "The use of outrigger and belt truss system for high-rise concrete buildings"
- [14] N. Herath, N. Haritos, T. Ngo & P. Mendis: "Behaviour of Outrigger Beams in High rise Buildings under Earthquake Loads", Australian Earthquake Engineering Society 2009
- [15] Kiran Kamath, N. Divya, Asha U Rao: "A Study on Static and Dynamic Behavior of Outrigger Structural System for Tall Buildings", Bonfiring International Journal of Industrial Engineering and Management Science, Vol2, No 4, December 2012
- [16] Vijaya Kumari Gowda M R and Manohar B C: "A Study on Dynamic Analysis of Tall Structure with Belt Truss Systems for Different Seismic Zones", International Journal of Engineering Research & Technology (IJERT) Vol. 4 Issue 8, August - 2015
- [17] Kiran Kamath, Shashikumar Rao and Shruthi : "Optimum Positioning of Outriggers to Reduce Differential Column Shortening Due to Long Term Effects in Tall Buildings", International Journal of Advanced Research in Science and Technology, Volume 4, Issue 3, 2015, pp.353-357.
- [18] Abbas Haghollahi, Mohsen Besharat Ferdous and Mehdi Kasiri: "Optimization of outrigger locations in steel tall buildings subjected to earthquake loads", 15th world conference of earthquake engineering 2012.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)