



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 8

Issue: IV

Month of publication: April 2020

DOI:

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Analyzing Behavior of Multi Story Steel Building with Steel Plate Shear Wall

Bhushan M. S. Kadam¹, Bharati Changode²

¹M-Tech Student in Structural Engineering in Department of Civil Engineering, G. H. Raisoni University, Amravati, Maharashtra, India,

²Assistant Professor, Department of Civil Engineering, G. H. Raisoni University, Amravati, Maharashtra, India.

Abstract: Steel Plate Shear Walls (SPSW) have been introduced as one of the most efficient type of lateral load resisting system in last few decades. A steel shear wall frame consists of beams and column having steel plate connected in between them. The steel plate shear walls are very much similar to plate girders. They are cantilevered vertically and fixed from base. In SPSW system columns act as flanges and beams as stiffeners. The webs in SPSW system are very slender and these webs develop diagonal tension field action responsible for resisting lateral load. Surrounding beams and columns also resist the lateral loads. SPSWs show high initial stiffness, behave in very ductile manner and dissipate high amounts of energy when subjected to cyclic loading. In this paper, the behavior of steel plate shear wall (SPSW) in the multi-story steel building frame has been studied. Analysis is carried out for steel moment resisting building frame having (G+5) stores situated in low and high seismic zone. The analysis of steel plate shear wall and the building are carried out using Software SAAP2000 V20. The main parameters consider in this paper is to compare the seismic performance of buildings such as story drift, bending moment, shear force and lateral deflection. This paper also focused on behavior the steel structure with and without shear wall.

Keywords: Steel plate shear walls (SPSW), SAAP 2000 v20, steel building, Seismic behavior.

I. INTRODUCTION

Steel Plate Shear Walls (SPSW) are one of the innovative types of lateral load resisting systems having capability to resist earthquake and wind loads. They have gained much attention in recent years because of its efficiency over other lateral load resisting systems. Since 1970's, steel plate shear walls have been used in many structures in United States, Japan, Canada. Because of its high ductility and excellent energy dissipation capacity, they are used as primary lateral load resisting system in high rise buildings. The structural elements of SPSW have vertical steel plates also known as web or infill plates connected to the surrounding columns and beams and continued along full height of the structure. It can be installed in frames having simple or moment resisting beam-to-column connection. SPSW can be used in new construction and to retrofit the older structure or repair the damaged structure. As compared to other lateral load resisting systems, steel plate shear walls have unique performance benefits. Its resilient post buckling strength, high initial stiffness, superior ductility, high energy dissipation capacity makes them stand out performer among other lateral load resisting systems. The light weight structure, increased floor area, better quality control make them better than conventional reinforced concrete shear wall. Their light weight ultimately reduces the gravity loads and seismic loads transmitted to the foundation resulting into economical structure. Steel plate shear walls are manufactured in shops which reduces the construction time, field fabrication.

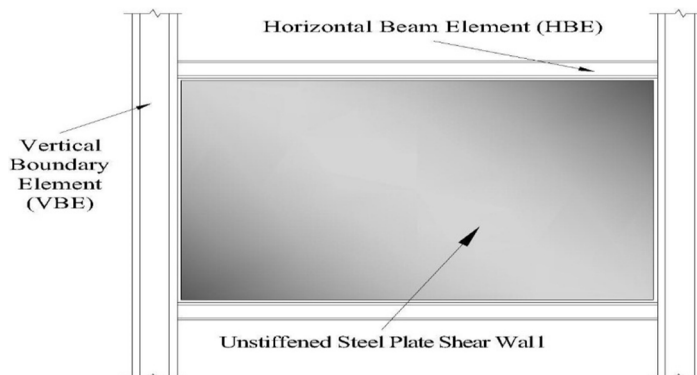


Figure 1. Unstiffened Steel Plate Shear Wall System

II. PREVIOUS RESEARCH

SAAP 2000 has been used by civil engineers because of its advantage and facilities of analysis than other design software. Ms Deepika C. Hiwrale, [2] in her research work she analysis steel moment resisting building frame having (G+6) storey situated in zone III, the analysis of steel plate shear wall and the building are carried out using software STAAD PRO V8i SELECT series II. Pundkar R. S, [4] in his work he analysis high-rise steel building with and without Steel Plate Shear Wall (SPSW) of building frame having (G+19) storey situated in zone III, the analysis of steel plate shear wall building is carried out using Software SAP2000 V15. Prashant Topalakatti [5] in his work he analysis of high-rise steel buildings frames with and without Steel plate shearwall (SPSW) by using STAAD PRO V8i FEA, he focus on thickness of plate. S. D. Ambadkar [7], in her work she analysis cost comparison of industrial steel building with steel plate shear wall by considering I-section & encased I-section as column sections the analysis of sections are carried out using STAAD PRO. Vijay Vadgama, Girish Joshi [9], in this work they analysis G+12 structure and compare result of reinforced wall with steel plate shear wall for weight of structure and economy of structure, they used SAAP 2000 V17 software for their analysis. Dr.J.Premalatha, R. Shanthi Vengadeshwari, Abhijith B, [11] in their work they analysis multi story building using ETAB software. Deepna U, Arjun S Menon, S.Balamurugan, [12] in their work they analysis compare the seismic performance of high rise buildings and optimizing the thickness of RCC shear wall, Steel Plate Shear Wall (SPSW) and composite shear wall for (G+20) stories, suing ETAB software. Many researchers of steel plate shear wall have examined multistory building in their research for various parameters, some of them used STAAD PRO software, some of them used SAAP 2000 software, some of them used ETAB software for structural analysis. However, the analysis of steel plate shear wall using SAAP 2000 V20 for different earthquake zone has not been studied.

III. MODELLING TECHNIQUES

- 1) *Strip Model Method:* Thorburn et al (1983) developed strip model (Figure 2.1) in which infill plates are represented by a series of pin-ended, the tension only strips and subsequently refined by Timler and Kulak (1983). Later Driver et al (1998) indicated that steel shear wall can be modelled as truss members by using a series of diagonal tension struts positioned at almost 45-degree angles. By replacing the shear wall with these struts, the resulting steel structure can be analysed using currently available computer analysis software, such as SAP2000 Nonlinear and inelastic pushover programs.
- 2) *Finite Element Model:* Elgaaly et al. (1993) used finite element models and models based on revised multi- strip model proposed by Timler and Kulak (1983), to replicate results achieved by Caccese et al. (1993). Using multi-strip model, they found results in reasonable agreement with the experimental results with respect to initial stiffness, ultimate strength and displacement at ultimate strength.

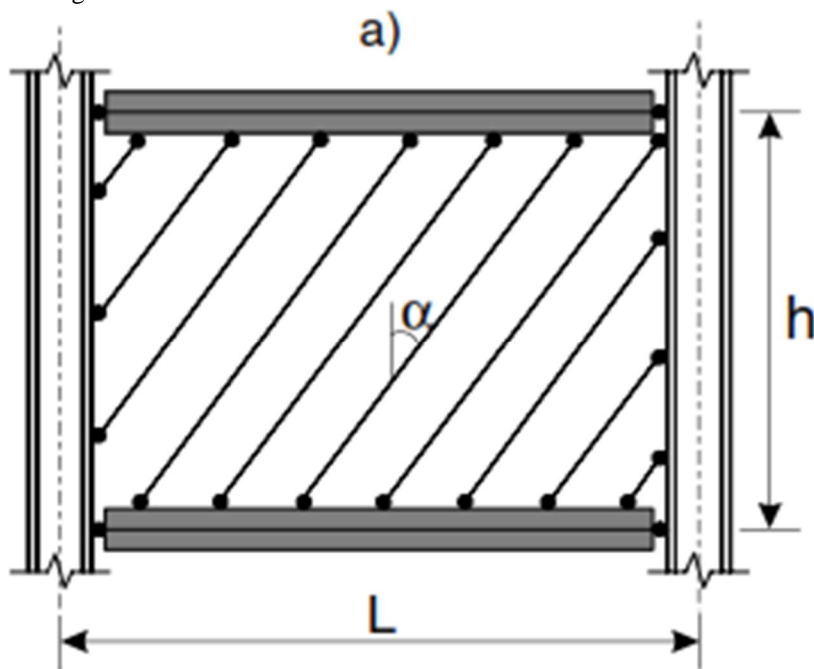


Figure 2. Strip model representation of a typical steel panel developed by Thorburn et al. (1983)

IV. ANALYSIS OF SPSW

A. For Low Seismic Zone

Data of Example: Total seismic weight of building= 29983 KN, Storey height= 5 m, G.F.= 4.1 m, Floors= G+5 floors, Type of soil: Medium, Zone factor, Z=0.16 for zone III, I=1.5 and R= 4, Main girder: D= 650 mm, width of flange= 350 mm, thick of web = 12mm, thick of top flange= 20mm, thick of bottom flange= 12mm, Secondary beams= ISMB 500, Column Section= 600x700 mm, thick = 20 mm. Plan of a building is shown in figure 3.

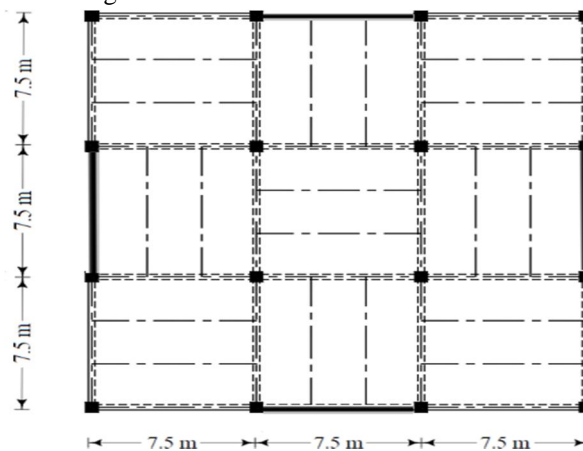


Figure 3. PLAN OF BUILDING

Table 1 Shears in Each Steel Plate Shear Wall

| Shears in each SPSW | |
|---------------------|------------------|
| Level | Frame Shear (KN) |
| Roof | 210 |
| Sixth Floor | 365 |
| Fifth Floor | 465 |
| Fourth Floor | 525 |
| Third Floor | 550 |
| Second Floor | 555 |

- 1) Shears in each storey is divided two parts as each storey has two numbers of SPSW.
- 2) Shears in each SPSW are shown in Table 1.
- 3) The design strength of web plates can be calculated as,

$$\phi V_n = 0.9(0.42) F_y t_w L_{cf} \sin(2\alpha) \quad (10.1)$$

F_y = yield stress (MPa) t_w = thickness of web plate

L_{cf} = clear length of web panel between VBE flanges

α = angle of tension stress

Table 2 Strength of Web Plates

| Strength of Web Plates | | | |
|------------------------|--------------------------|------------------------------|----------------------------|
| Level | Web plate thickness (mm) | Required Shear Strength (KN) | Design Shear Strength (KN) |
| Sixth floor | 1 | 210 | 640 |
| Fifth Floor | 1 | 365 | 640 |
| Fourth Floor | 1 | 465 | 640 |
| Third Floor | 1 | 525 | 640 |
| Second Floor | 1 | 550 | 640 |
| First Floor | 1 | 555 | 640 |

4) Required M.I. of VBE

$$I_c \geq 0.003(t_w h^4/L) \tag{10.2}$$

t_w = thickness of plate

h = distance between HBE centerlines

L = distance between VBE centerlines.

5) Required M.I. of columns are shown in Table 3.

Table 3 Required Moment of Inertia of Column

| Required Moment of Inertia of Column | | | | |
|--------------------------------------|--------------------------|--------|--------|--|
| Level | Web plate thickness (mm) | h (mm) | L (mm) | Moment of Inertia of Column I_c (mm ⁴) |
| Sixth Floor | 1 | 5000 | 7500 | 2.5×10^8 |
| Fifth Floor | 1 | 5000 | 7500 | 2.5×10^8 |
| Fourth Floor | 1 | 5000 | 7500 | 2.5×10^8 |
| Third Floor | 1 | 5000 | 7500 | 2.5×10^8 |
| Second Floor | 1 | 5000 | 7500 | 2.5×10^8 |
| First Floor | 1 | 4100 | 7500 | 1.13×10^8 |

6) Minimum M.I. required for HBE,

$$I_{HBE} \geq 0.003(\Delta t_w L^4/h) \tag{10.3}$$

Δt_w = difference between the web plate thickness above and below the HBE.

L = distance between VBE centerlines

h = distance between HBE centerlines

B. For High Seismic Zone

Data of Example: Total seismic weight of building = 29983 KN, Zone factor, $Z=0.36$ for zone V, $I=1.5$ and $R= 4$, Shears in each SPSW are shown in Table 4 and Table 5 shows strength of web plates.

Table 4 Shears in each SPSW

| Shears in each SPSW | |
|---------------------|------------------|
| Level | Frame Shear (KN) |
| Roof | 466 |
| Sixth Floor | 820 |
| Fifth Floor | 1050 |
| Fourth Floor | 1175 |
| Third Floor | 1233 |
| Second Floor | 1250 |

Table 5 Strength of Web Plates

| Strength of Web Plates | | | |
|------------------------|--------------------------|------------------------------|----------------------------|
| Level | Web plate thickness (mm) | Required Shear Strength (KN) | Design Shear Strength (KN) |
| Sixth floor | 1.5 | 466 | 965 |
| Fifth Floor | 1.5 | 820 | 965 |
| Fourth Floor | 2 | 1050 | 1285 |
| Third Floor | 2 | 1175 | 1285 |
| Second Floor | 2.5 | 1233 | 1605 |
| First Floor | 2.5 | 1250 | 1605 |

Table 6 Required Moment of Inertia of Column

| Required Moment of Inertia of Column | | | | |
|--------------------------------------|--------------------------|--------|--------|--|
| Level | Web plate thickness (mm) | h (mm) | L (mm) | Moment of Inertia of Column I_c (mm ⁴) |
| Sixth Floor | 1.5 | 5000 | 7500 | 3.75×10^8 |
| Fifth Floor | 1.5 | 5000 | 7500 | 3.75×10^8 |
| Fourth Floor | 2 | 5000 | 7500 | 5×10^8 |
| Third Floor | 2 | 5000 | 7500 | 5×10^8 |
| Second Floor | 2.5 | 5000 | 7500 | 6.25×10^8 |
| First Floor | 2.5 | 4100 | 7500 | 6.25×10^8 |

V. COMPARISON OF RESULTS

The figures showing comparison of steel building with and without SPSW are shown in the following figures.

- A. Figure 5.1 shows storey drift comparison of steel buildings (with and without SPSW).
- B. Figure 5.2 shows bending moment comparison of steel buildings (with and without SPSW).
- C. Figure 5.3 shows shear force comparison of steel buildings (with and without SPSW).
- D. Figure 5.4 shows lateral deflection comparison of steel buildings (with and without SPSW).

Comparison of Steel Building (With and Without SPSW)

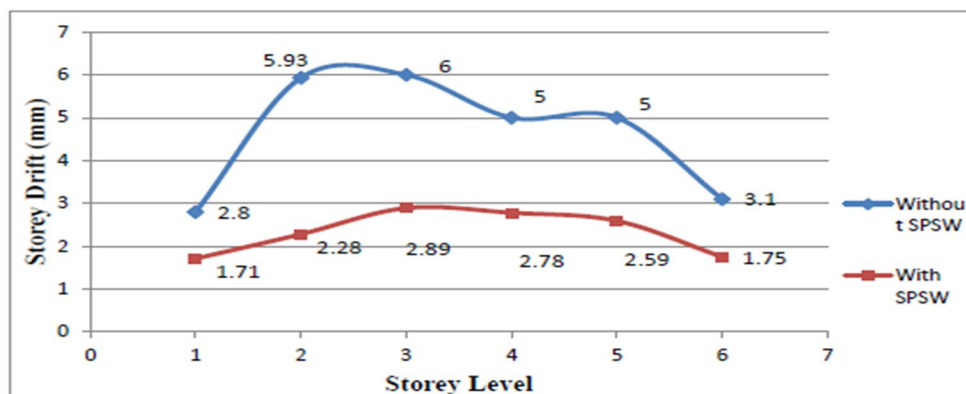


Figure 5.1 Storey Drift

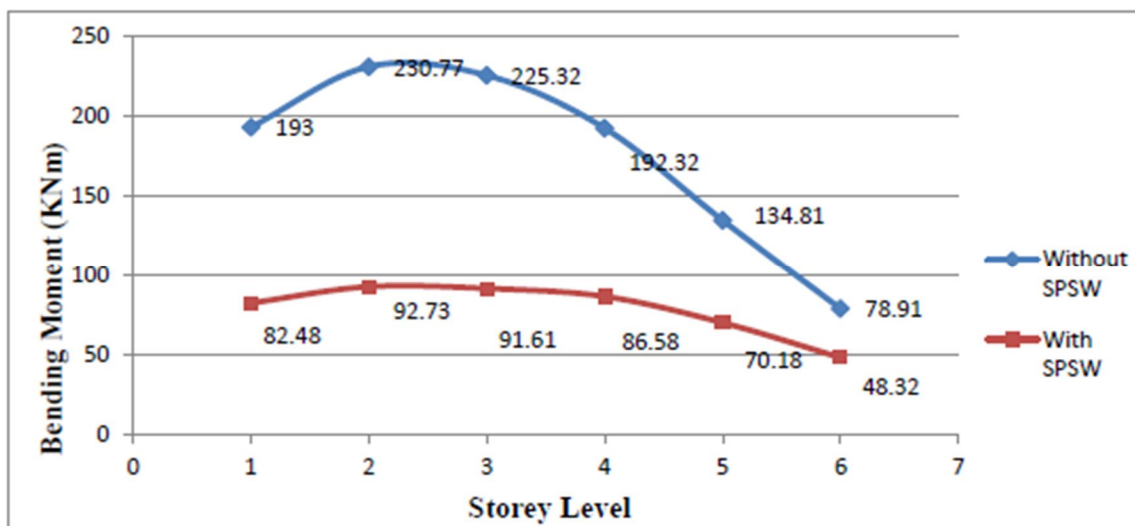


Figure 5.2 Bending Moment

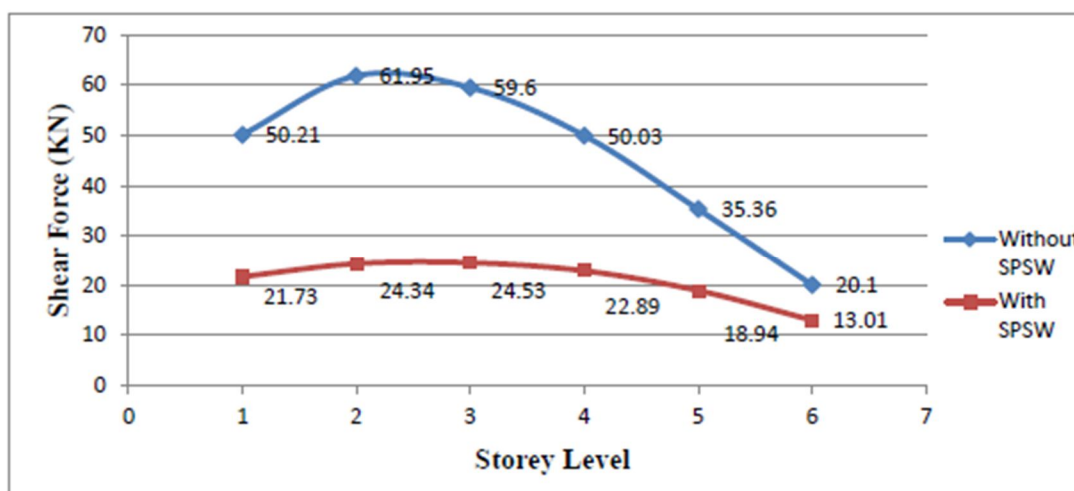


Figure 5.3 Shear Force

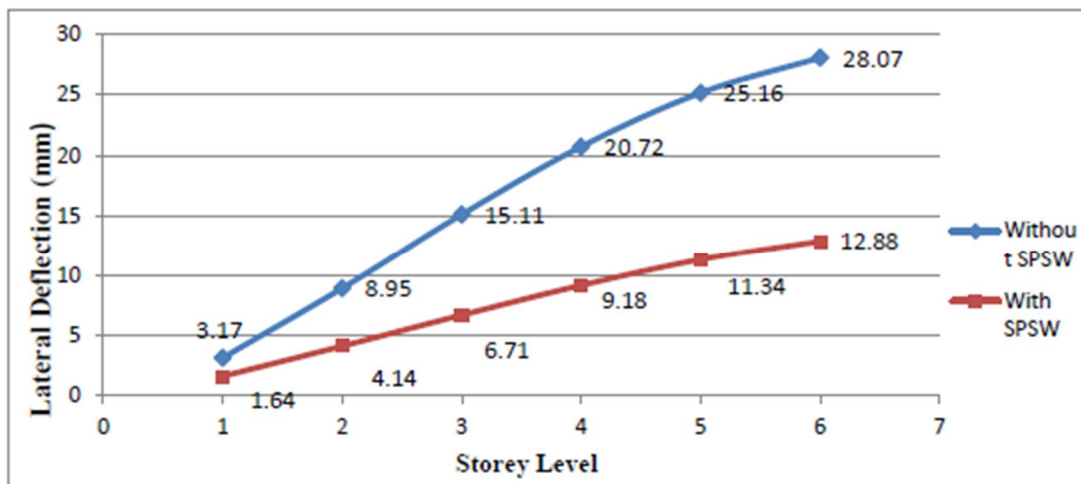


Figure 5.4 Lateral Deflection

VI. CONCLUSIONS

Based on the analyses of multi-story steel building models, the following conclusions are drawn.

- A. Steel plate shear wall system is very effective tool in both low and high seismic zone as compared to steel frame building without SPSW.
- B. From the system analysis it is concluded that multi-story steel frame building with SPSW has lesser story drift, bending moment, shear force and lateral deflection values as compared to steel frame building without SPSW.
- C. Steel plate shear wall occupy much less space due to relatively small thickness and also reduce aver all weight of building as compare to reinforced concrete structure.
- D. Steel plate shear wall aesthetic good from architectural point of view.
- E. Result shows that steel plate shear wall proves to be very useful and provide quick construction option in case of structure rehabilitations and disaster situations.

VII. ACKNOWLEDGEMENT

Author would like to thank our Prof. Hemant Dahake, Head of the Department, Prof. Vishal Sapate, our coordinator and my guide Prof. Bharati Changhode for their valuable advice and technical assistance. I would also like to thank the reviewers for their suggestions which enhanced this paper.

REFERENCES

- [1] Astaneh-Asl, "Seismic Behaviour and Design of Steel Shear Walls", SEAONC Seminar, San Francisco(2001).
- [2] Ms Deepika C. Hiwrale Prof. P.S. Pajgade "Analysis and Design of steel framed buildings with and without Steel Plate Shear Walls" International Journal of Scientific & Engineering Research Volume 3, Issue 6, June-2012 ISSN 2229-5518.
- [3] Swapnil B. Kharmale "Performance-based plastic design of steel plate shear walls", Journal of Constructional Steel Research 90 (2013) 85–97.
- [4] Pundkar R. S, Alandkar P. M "Influence of steel plate shear wall on multistorey steel building" International Journal of Engineering Research and Applications (IJERA) ISSN: 2248-9622 Vol. 3, Issue 4, Jul-Aug 2013, pp.1940-1945.
- [5] Prashant Topalakatti "Parametric Study of Steel Frame Building with and without Steel Plate Shear Wall" ISSN 2224-5790 (Paper) ISSN 2225-0514, Vol.6, No.10, 2014.
- [6] Jian Zhang , Tadeh Zirakian "Probabilistic assessment of structures with SPSW systems and LYP steel infill plates using fragility function method" Engineering Structures 85 (2015) 195–205.
- [7] S. D. Ambadkar "Cost Comparison of Industrial Steel Building with Steel Plate Shear Wall by Considering I-Section & Encased I-Section as Column Sections" International Journal of IT, Engineering and Applied Sciences Research (IJIEASR) ISSN: 2319-4413 Volume 4, No. 3, March 2015.
- [8] Wang Meng , YangWeiguo , Shi Yongjiu , Xu Jian "Seismic behaviors of steel plate shear wall structures with construction details and materials" Journal of Constructional Steel Research 107 (2015) 194–210.
- [9] Vijay Vadgama, Girish Joshi "Analysis of G+12 Structures with different material of Shear wall using SAP2000" IJEDR | Volume 4, Issue 2 | ISSN: 2321-9939 (2016).
- [10] Shahin banaee, Mohammad Hossein Adibrad , Armin roohbakhshan "Investigate the use of steel plate shear walls in buildings" International Journal of Scientific & Engineering Research, Volume 7, Issue 1, January-2016. ISSN 2229-5518
- [11] Dr.J.Premalatha, R. Shanthi Vengadeshwari, Abhijith B "Study On The Behaviour Of Multistoreyed Steel Framed Building With Steel Plate Shear Walls Under Seismic Forces" International Journal of Civil Engineering and Technology (IJCIET), Volume 8, Issue 9, September 2017, pp. 361–370.
- [12] Deepna U, Arjun S Menon, S.Balamurugan "A Comparative Study on Shear Wall Concept in Accordance to its Seismic Behavior" International Journal of Engineering & Technology, 7 (4.5) (2018) 182-187.
- [13] Ebrahim Kosari, Mehdi Poursha, Karim Abedi, "Seismic Evaluation of Tall Unstiffened Steel Plate Shear Wall (SPSW) Systems with Emphasis on Reversal Phenomenon in the Higher Mode Pushover Curve" International Journal of Civil Engineering (2018).
- [14] Jiulin Bai, Shuangshuang Jin, Jinping Ou, "Seismic analysis and evaluation of SPSW structural systems by the ET method" Journal of Constructional Steel Research 147 (2018) 444–456.
- [15] Isha Verma, S. Setia, "Seismic Behaviour of Stiffened Steel Plate Shear Walls" International Journal of Innovative Technology and Exploring Engineering (IJITEE) ISSN: 2278-3075, Volume-8 Issue-8, June 2019.
- [16] Mumtahina Akter, Khan Mahmud Amanat, "NON-LINEAR FINITE ELEMENT INVESTIGATION OF THE LATERAL LOAD CAPACITY OF STIFFENED SPSW FOR VARIOUS ASPECT RATIOS" International Conference on Disaster Risk Management, Dhaka, Bangladesh, January 12-14, 2019.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)