iJRASET
International Journal For Research in Applied Science and Engineering Technology

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 3 **Issue:** VI **Month of publication:** June 2015

DOI:

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Design of Embedded Label Reading System by OCR Technique

B.Ravi Kumar[1], Jadda.Amarendra M.Tech[2]
Department of Electronics and communication Engineering
Audisankara College of Engineering & Technology, Gudur(Autonomous)

Abstract- We proposes a camera-based label reader to help blind persons to read names of labels on the products. Camera acts as main vision in detecting the label image of the product or board then image is processed internally and separates label from image by using open CV library and finally identifies the product and identified product name is pronounced through voice. Now it identifies received label image is converted to text by using tesseract library. Once the identified label name is converted to text and converted text is displayed on display unit connected to controller. Now converted text should be converted to voice to hear label name as voice through ear phones connected to audio jack port using flite library.
This paper presents a true case study to indicate the practicable ness of the projected methodology, and presents a series of in depth simulations to get comparison studies victimization completely different workloads and programming algorithms.
Index Terms – Assistive devices, blindness, distribution of edge pixels, hand-held objects, optical character recognition (OCR), stroke orientation, text reading, and text region localization.

I. INTRODUCTION

Of the 314 million visually impaired people worldwide, 45 million are blind. Recent developments in computer vision, digital cameras and portable computers make it feasible to assist these individuals by developing camera based products that combine computer vision technology with other existing commercial products such optical character recognition (OCR) systems. Reading is obviously essential in today's society. Printed text is everywhere in the form of reports, receipts, bank statements, restaurant menus, classroom handouts, product packages, instructions on medicine bottles, etc. The ability of people who are blind or have significant visual impairments to read printed labels and product packages will enhance independent living and foster economic and social self-sufficiency. Today, there are already a few systems that have some promise for portable use, but they cannot handle product labeling. For example, portable bar code readers designed to help blind people identify different products in an extensive product database can enable users who are blind to access information about these products through speech and Braille. But a big limitation is that it is very hard for blind users to find the position of the bar code and to correctly point the bar code reader at the bar code. Some reading assistive systems such as pen scanner might be employed in these and similar situations. Although a number of reading assistants have been designed specifically for the visually impaired, to our knowledge, no existing reading assistant can read text from the kinds of challenging patterns and backgrounds found on many everyday commercial products. To assist blind persons to read text from these kinds of hand-held objects, we have conceived of a camera based assistive text reading framework to track the object of interest within the camera view and extract print text information from the object. Our proposed algorithm can effectively handle complex background and multiple patterns, and extract text information from both hand-held objects and nearby signage.

II. SOFTWARE SPECIFICATIONS AND FRAMEWORK

A. Software Specifications

1) *Linux Operating System:* The Linux open source operating system, or Linux OS, is a freely distributable, cross-platform operating system based on Unix that can be installed on PCs, laptops, net books, mobile and tablet devices, video game consoles, servers, supercomputers and more.

©IJRASET 2015: All Rights are Reserved



Figure.1: Linux OS Architecture

2) *Qt for Embedded Linux:* Qt for Embedded Linux is a C++ framework for GUI and application development for embedded devices. It runs on a variety of processors, usually with Embedded Linux. Qt for Embedded Linux provides the standard Qt API for embedded devices with a lightweight window system.

3) *OPEN CV Library:* Open CV is an open source computer vision library originally developed by Intel. It is free for commercial and research use under a BSD (Berkeley Software Distribution) license. The library is cross-platform, and runs on Linux, Windows and Mac OS X. It focuses mainly towards real-time image processing, as such, if it finds Intel's Integrated Performance Primitives on the system, it will use these commercial optimized routines to accelerate itself.

III. HARDWARE IMPLEMENTATION

A. *Raspberry pi*

The Raspberry Pi is a credit-card-sized single-board computer developed in the UK by the Raspberry Pi Foundation with the intention of promoting the teaching of basic computer science in schools. The Raspberry Pi is manufactured in two board configurations through licensed manufacturing deals with Newark element14 (Premier Farnell), RS Components and Egoman. These companies sell the Raspberry Pi online. Egoman produces a version for distribution solely in China and Taiwan, which can be distinguished from other Pis by their red coloring and lack of FCC/CE marks. The hardware is the same across all manufacturers.

Fig.2. Raspberry Pi Development Board

The Raspberry Pi has a Broadcom BCM2835 system on a chip (SoC), which includes an ARM1176JZF-S 700 MHz processor, Video Core IV GPU, and was originally shipped with 256 megabytes of RAM, later upgraded to 512 MB. It does not include a built-in hard disk or solid-state drive, but uses an SD card for booting and persistent storage.

©IJRASET 2015: All Rights are Reserved

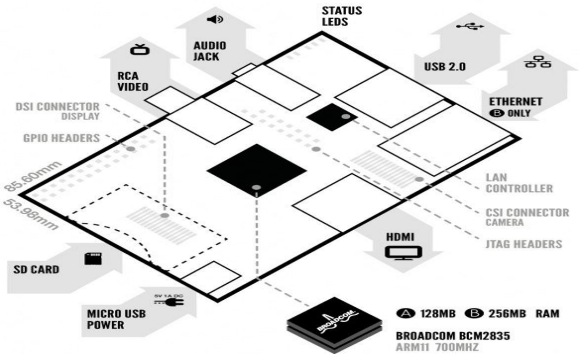

Figure.3: Board Features

The Foundation provides Debian and Arch Linux ARM distributions for download. Tools are available for Python as the main programming language, with support for BBC BASIC (via the RISC OS image or the Brandy Basic clone for Linux), C, Java and Perl.

B. UVC driver Camera

A UVC (or Universal Video Class) driver is a USB-category driver. A driver enables a device, such as your webcam, to communicate with your computer's operating system. And USB (or Universal Serial Bus) is a common type of connection that allows for high-speed data transfer. Devices that are equipped with a UVC driver, such as the Logitech® QuickCam® Pro 9000 for Business, are capable of streaming video. In other words, with a UVC driver, you can simply plug your webcam into your computer and it'll be ready to use.

Figure.4: UVC driver camera

1) What does a UVC driver have to do with my webcam being plug and play?

It is the UVC driver that enables the webcam to be plug and play. A webcam with a UVC driver does not need any additional software to work.

Once you plug your webcam in, it can work with a video-calling application, such as Skype®, Windows Live Messenger®, or Microsoft Office® Communicator.

2) Are there different kinds of webcam drivers?

Yes, there are two kinds of webcam drivers:

a) The one included with the installation disc that came with your product. For your webcam to work properly, this driver requires some time to install. It is specifically tuned for your webcam, designed by your webcam manufacturer and optimized for webcam performance.

b) A UVC driver

©IJRASET 2015: All Rights are Reserved

You can only use one driver at a time, but either one will allow you to use your webcam with various applications.

3) The following Logitech webcams support UVC:

a) Logitech® QuickCam® Pro 9000 for Business
b) Logitech® QuickCam® Pro for Notebooks Business
c) Logitech® QuickCam® Communicate MP for Business
d) Logitech® QuickCam® Deluxe for Notebooks Business
Logitech® QuickCam® 3000 for Business

C. TFT display unit

TFT stands for Thin Film Transistor, and is a type of technology used to improve the image quality of an LCD. Each pixel on a TFT-LCD has its own transistor on the glass itself, which offers more control over the images and colors that it renders.
While TFT-LCDs can deliver sharp images, they also tend to offer relatively poor viewing angles, meaning they look best when viewed head-on. If you view a TFT-LCD from the side, it can be difficult to see.

IV. BLOCK DIAGRAM

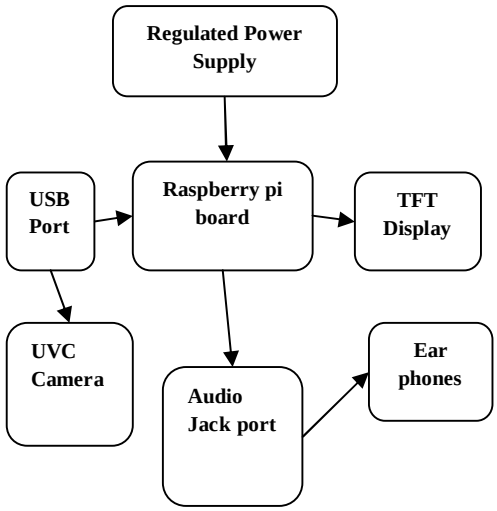

Figure.5: Design of Embedded Label Reading System by OCR Technique

When our application starts running it first check all the devices and resources which it needs are available or not. After that it checks the connection with the devices and gives control to the user. The GUI for the user has the following options. An optional label is used for displaying the image taken from the camera. A status box is for representing whether drowsiness is detected or not. The Raspberry board comes with integrated peripherals like USB, ADC and Serial etc. On this board we are installing Linux operating system with necessary drivers for all peripheral devices.

V. WORKING PRINCIPLE

When capture button is clicked this system captures the product image placed in front of the web camera which is connected to ARM microcontroller through USB .After selecting the process button the captured label image undergoes Optical Character Recognition(OCR) Technology. OCR technology allows the conversion of scanned images of printed text or symbols (such as a page from a book) into text or information that can be understood or edited using a computer program. The most familiar example is the ability to scan a paper document into a computer where it can then be edited in popular word processors such as

©IJRASET 2015: All Rights are Reserved

Microsoft Word. However, there are many other uses for OCR technology, including as a component of larger systems which require recognition capability, such as the number plate recognition systems, or as tools involved in creating resources for SALT development from print based texts. In our system for OCR technology we are using TESSERACT library.

VI. RESULTS

VII. CONCLUSION

`The project titled **"Design Of Embedded Label Reading System By OCR Technique"** has been successfully designed and tested. It has been developed by integrating features of all the hardware components and software used. Presence of every module has been reasoned out and placed carefully thus contributing to the best working of the unit. Secondly, using highly advanced Raspberry pi board and with the help of growing technology the project has been successfully implemented.

©IJRASET 2015: All Rights are Reserved

REFERENCES

[1]World Health Organization. (2009). 10 facts about blindness and visual impairment
[Online].Available:www.who.int/features/factfiles/blindness/blindness_facts/en/index.html
[2] Advance Data Reports from the National Health Interview Survey (2008). [Online].Available: http://www.cdc.gov/nchs/nhis/nhis_ad.htmmThis article has been accepted for inclusion in a future issue of this journal. Content is final as presented, with the exception of pagination. 10 IEEE/ASME TRANSACTIONS ON MECHATRONICS
[3] International Workshop on Camera-Based Document Analysis and Recognition (CBDAR 2005, 2007, 2009, 2011). [Online]. Available: http://www.m.cs.osakafu-u.ac.jp/cbdar2011/
[4] X. Chen and A. L. Yuille, "Detecting and reading text in natural scenes," in Proc. Comput. Vision Pattern Recognit., 2004, vol. 2, pp. II-366–II-373.
[5] X. Chen, J. Yang, J. Zhang, and A. Waibel, "Automatic detection and recognition of signs from natural scenes," IEEE Trans. Image Process., vol. 13, no. 1, pp. 87–99, Jan. 2004.
[6] D. Dakopoulos and N. G. Bourbakis, "Wearable obstacle avoidance electronic travel aids for blind: A survey," IEEE Trans. Syst., Man, Cybern., vol. 40, no. 1, pp. 25–35, Jan. 2010.
[7] B. Epshtein, E. Ofek, and Y. Wexler, "Detecting text in natural scenes with stroke width transform," in Proc. Comput. Vision Pattern Recognit., 2010, pp. 2963–2970.
[8] Y. Freund and R. Schapire, "Experiments with a new boosting algorithm," in Proc. Int. Conf. Machine Learning, 1996, pp. 148–156.
[9] N. Giudice and G. Legge, "Blind navigation and the role of technology," in The Engineering Handbook of Smart Technology for Aging, Disability, and Independence, A. A. Helal, M. Mokhtari, and B. Abdulrazak, Eds. Hoboken, NJ, USA: Wiley, 2008.
[10] A. Shahab, F. Shafait, and A. Dengel, "ICDAR 2011 robust reading competition: ICDAR Robust Reading Competition Challenge 2: Reading text in scene images," in Proc. Int. Conf. Document Anal. Recognit., 2011, pp. 1491–1496.

AUTHORS

[1]B.Ravi Kumar received his B.TECH degree in Electronics and Communication Engineering from PBR Visvodaya institute of technology and science,Kavali,SPSR Nellore, affiliated to JNTU Anantapur. He is currently pursuing M.Tech Embedded systems in Audisankara college of Engineering and Technology, Gudur(Autonomous), SPSR Nellore (Dist), affiliated to JNTU Anantapur.

[2]**Amarendra Jadda** is working as Associate Professor in ECE Dept, ASCET, GUDUR. He has been guiding UG & PG students since five years in this institution. He pursued his M.Tech from JNTUH, Kukatpally Hyderabad. He presented papers in six international journals & six international conferences. His interesting fields are Communications &Signal Processing, Embedded Systems.

©IJRASET 2015: All Rights are Reserved

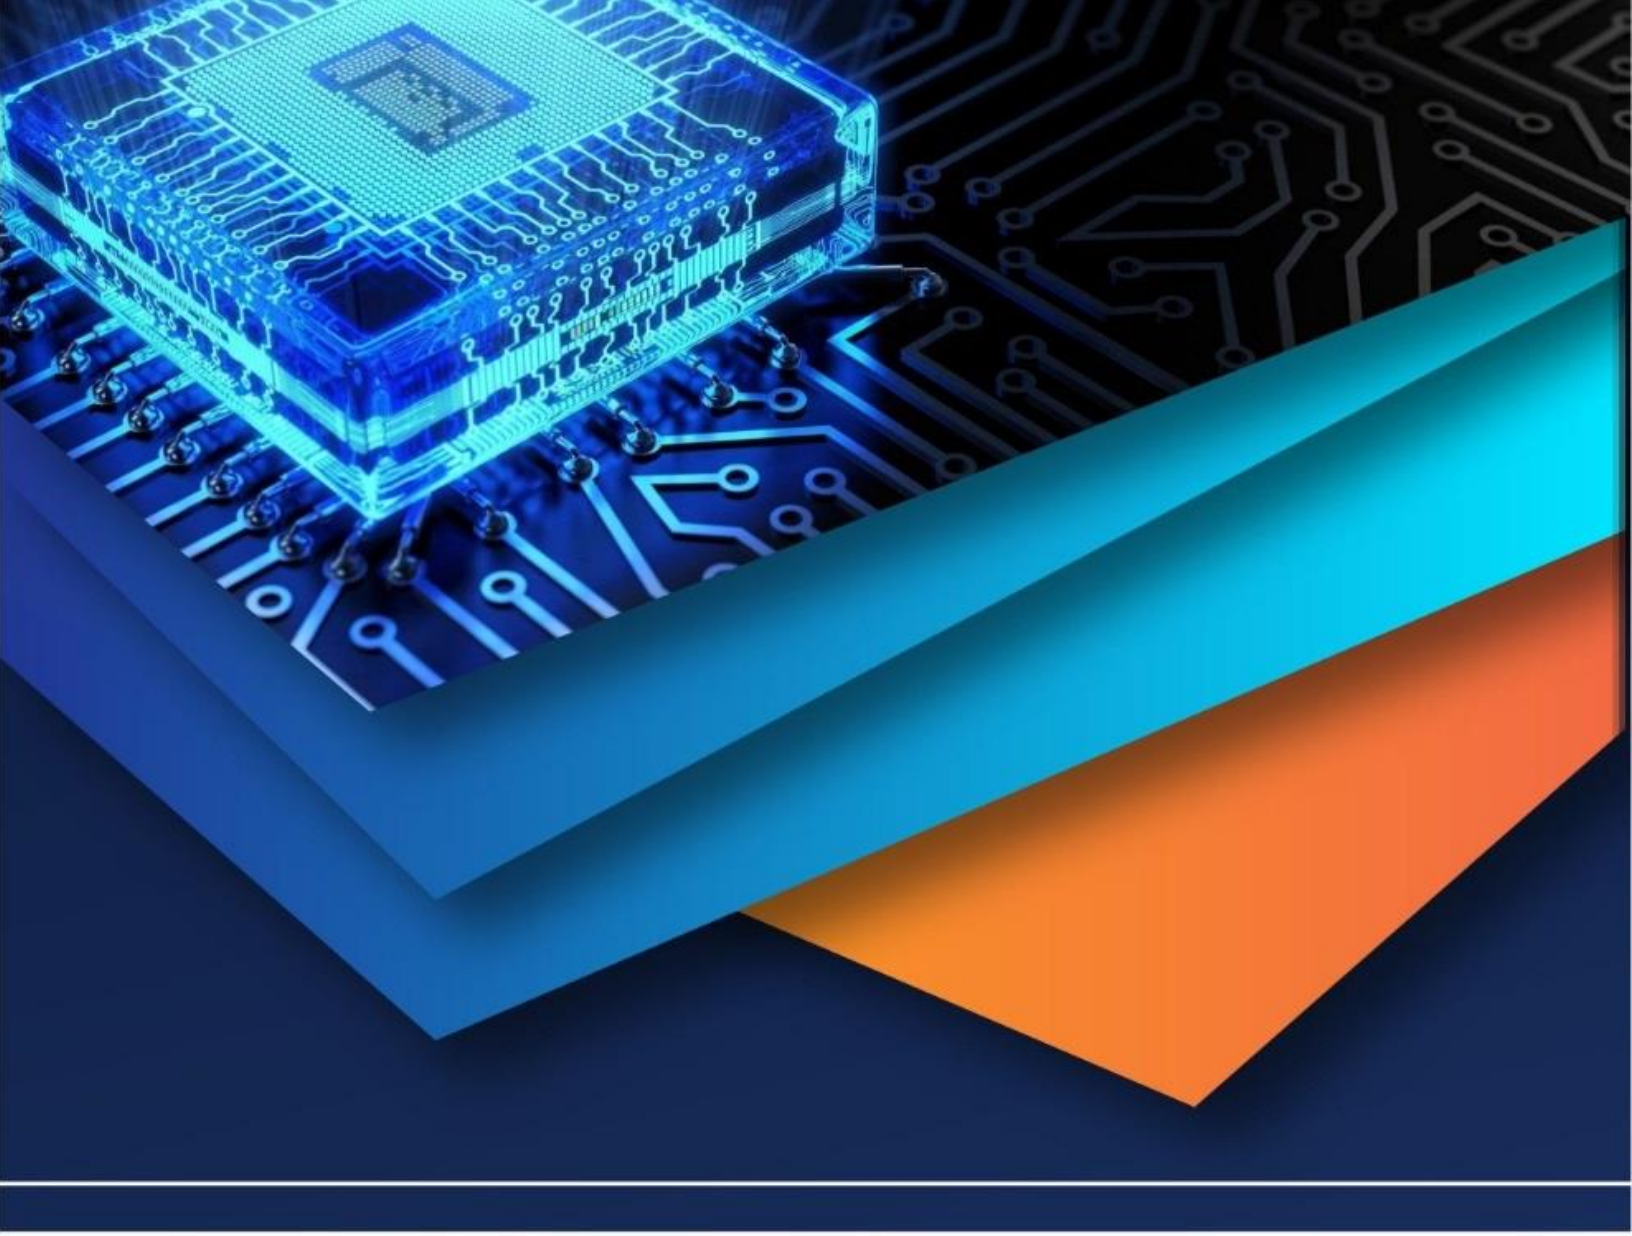

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)