iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 8 **Issue:** VI **Month of publication:** June 2020

DOI: http://doi.org/10.22214/ijraset.2020.6238

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.429
Volume 8 Issue VI June 2020- Available at www.ijraset.com

Comparative Analysis of Geometrically Irregular RCC and Steel Frames

Rahul Shende[1], Prof. Ishant Dahat[2]
[1]*Student of M.E structure Department of Structural Engineering, Raisoni University, Amravati*
[2]*Professor at Department of Structural Engineering, Raisoni University, Amravati*

Abstract*: *From various literatures and studies it is found that vertical irregularities are more hazardous in seismic action of building. In the present work emphasis is given on studying effect of geometric irregularities with different geometric shapes such as O, C, H and PLUS along with change in structural Framing Such as RCC framing and Steel framing. All models are analyzed using Staad. PROV8i software According to IS1893:2002 assuming some basis parameters. After analyzing results are plotted and conclusions are drafted from results obtained.
Keywords: Structural Parameters, Irregularities, Axial force, Displacement, Base shear.

I. INTRODUCTION

There are various types of vertical irregularities such as, vertical discontinuities in the geometry, rigidity, distribution of mass and strength. Buildings with Setback are a subset vertically irregular buildings where there are discontinuities in geometry. However, discontinuity in the distribution of mass, stiffness and strength along the vertical direction. Are major than others The behavior of these types of building is something different. Therefore is a need to work in this regard. So in this work an attempt will be made to reach on more accurate conclusion regarding geometric effects in building during action of seismic forces.

II. AIM

To Analyze and compare various structures with Geometric Irregularities.

III. OBJECTIVE

The objectives of project are as follows :-

A. To study parameters such as base shear, displacement, peak story and story drift.
B. To study seismic response of building with plan discontinuities under earthquake excitations.
C. To propose the best suitable building configuration on the existing condition.
D. To study behavior of RCC and Steel Structures with irregularities.
E. To find the best framing system and framing material.

IV. METHODOLOGY

The methodology for present work is as mentioned below :-

A. In the first phase Decide Aim, Objectives and need of this work.
B. Then Various Literatures will be studied regarding the process of work.
C. Studying Various Parameters related to geometry and irregularity of structure.
D. All general parameters regarding material, their constants, and loading intensities will be decided at this step.
E. Now after doing all above steps No of models and their shapes patterns will be now fixed.
F. Suitable method of analysis (Seismic Co-efficient Method) will now be selected.
G. Suitable type of software (STAAD PRO.) Will be selected for Analysis.
H. After Analyzing all models comparative results will be plotted.
I. Based on obtained results final conclusions will be drafted.
J. At last all references will be made available for future work.

©IJRASET: All Rights are Reserved

V. STRUCTURAL PARAMETERS

Table 1 Detail Structural Parameters

Parameter	Value
Live load	2 kN/m2
Density of concrete	25 kN/m3
Thickness of slab	130 mm
Depth of beam	300 mm
Width of beam	230 mm
Dimension of column	300 x 400 mm
Thickness of outside wall	230 mm
Thickness of inner side wall	100 mm (Along Z direction only)
Height of floor	3.5 m
Earthquake zone	III
Damping ratio	0%
Type of soil	II
Type of structure	Special moment resisting frame
Response reduction factor	5
Importance factor	1.5
Roof treatment	1 kN/m2
Floor finishing	1 kN/m2
Number of Storey's	06 (G+5)

VI. MATERIAL PROPERTIES

Table 2 material properties

Mass Density	2549.3	7849
Unit Weight	25	76.97
Modulus of Elasticity	25000000	20000000
Poisson's Ratio	0.15	0.3

VII. MODEL NOMENCLATURE

Each model according to its specific floor condition are labeled as follows :-

Table 3 Model Description

Model Description	Label
Model With O shape Irregularity with RCC Frame	VR1
Model With C shape Irregularity with RCC Frame	VR2
Model With H shape Irregularity with RCC Frame	VR3
Model With PLUS shape Irregularity with RCC Frame	VR4
Model With O shape Irregularity with STEEL Frame	VR5
Model With C shape Irregularity with STEEL Frame	VR6
Model With H shape Irregularity with STEEL Frame	VR7
Model With PLUS shape Irregularity with STEEL Frame	VR8

©IJRASET: All Rights are Reserved

VIII. 3D VIEW OF MODELS

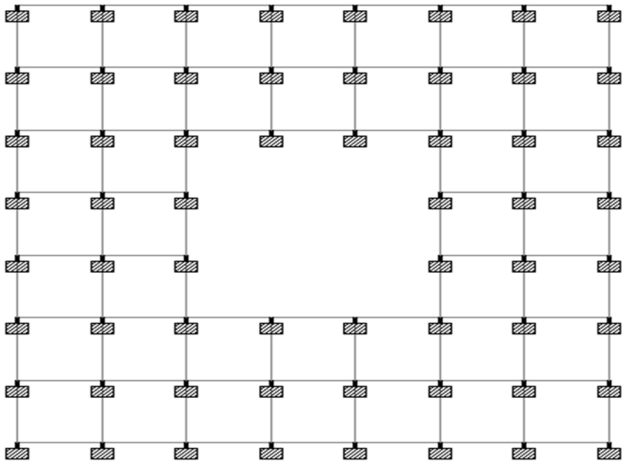


Fig.01 Plan of O shape building

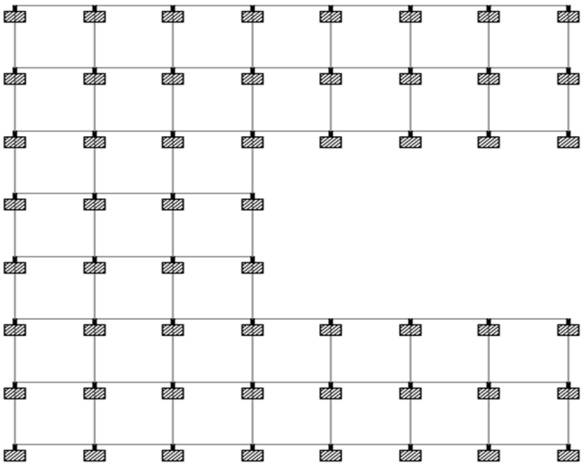


Fig.02 Plan of C shape building

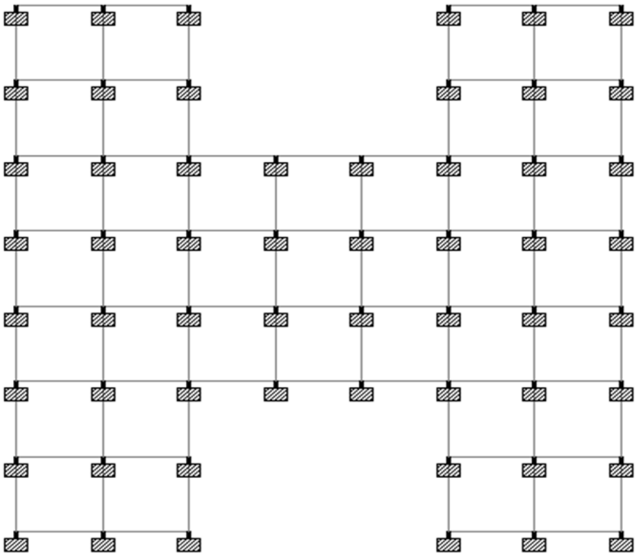


Fig.03 Plan of H-shape Building

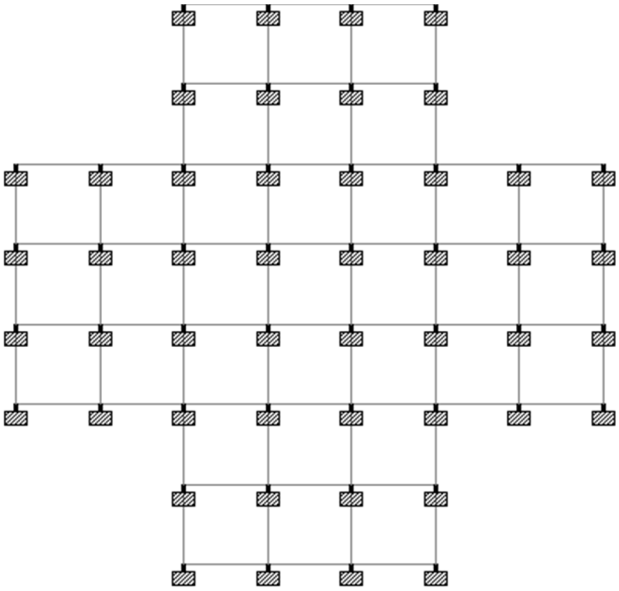


Fig.04 Plan of C-shape Building

IX. RESULTS FOR ALL MODELS

A. RCC Framed Building

Table 04 comparative results of RCC framed models

Sr. No.	Model	Max Axial Force	Displacement	Base shear
01	VR1	1379.86	72.41	1184.07
02	VR2	1088.67	63.20	947.13
03	VR3	1070.61	58.66	947.13
04	VR4	1075.40	60.58	836.59

©IJRASET: All Rights are Reserved

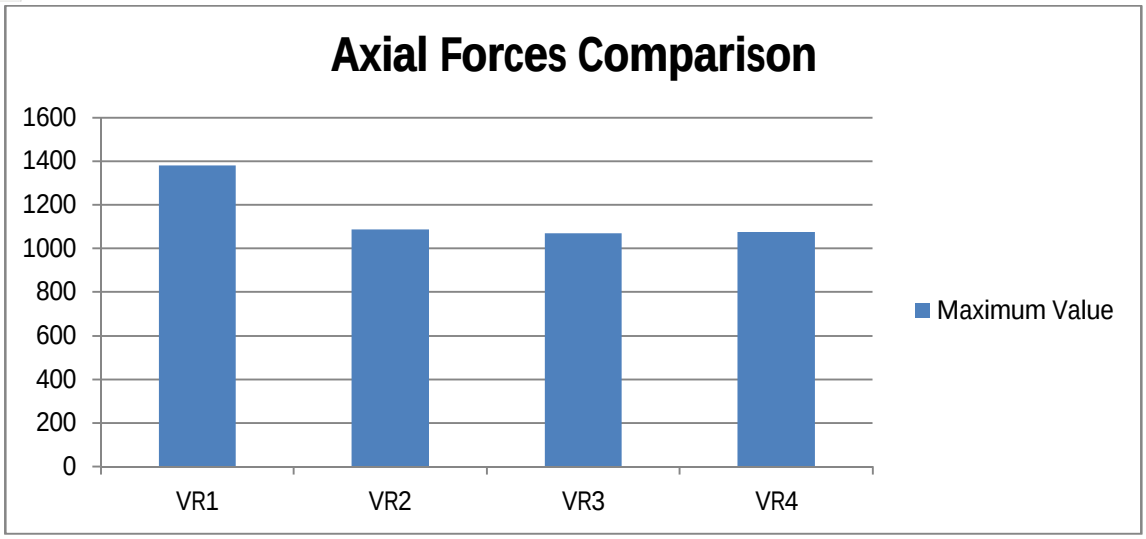


Fig.05 Comparison of axial forces for RCC frames

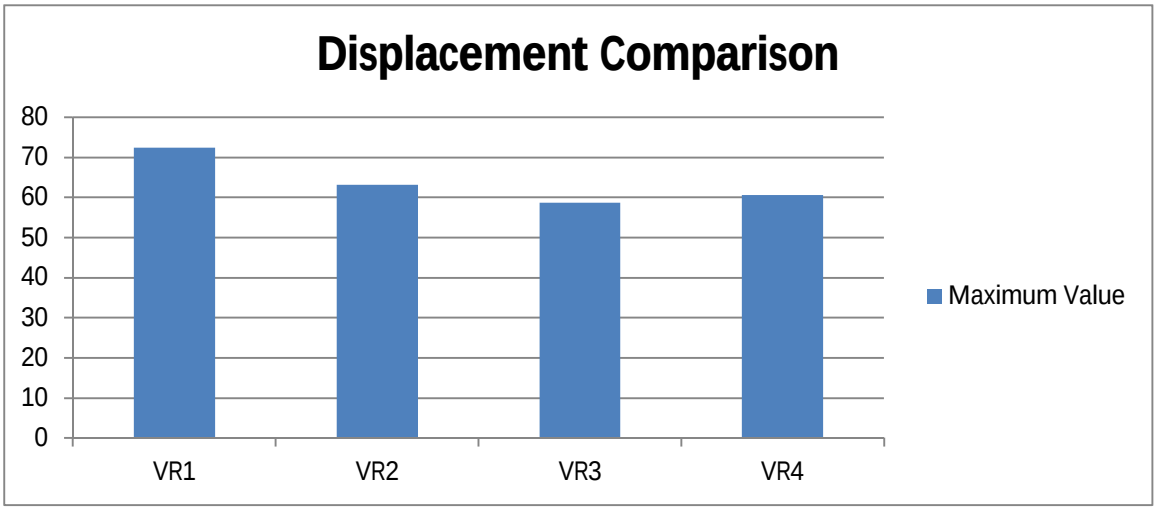


Fig.06 Comparison of Displacement for RCC frames

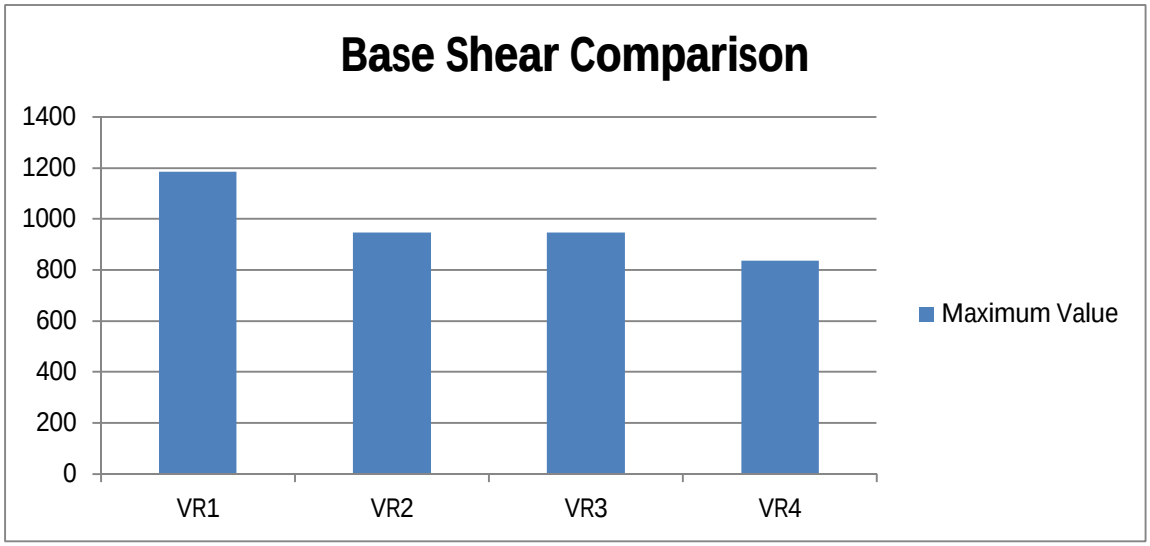


Fig.07 Comparison of Base Shear for RCC frames

©IJRASET: All Rights are Reserved

B. Steel Framed Building

Fig.05 Comparison Results of Steel Framed Models

Sr. No	Model	Max Axial Force	Displacement	Base shear
01	VR5	1470.58	97.07	1219.91
02	VR6	1138.00	86.17	935.34
03	VR7	1098.06	87.92	990.78
04	VR8	1099.77	90.73	878.99

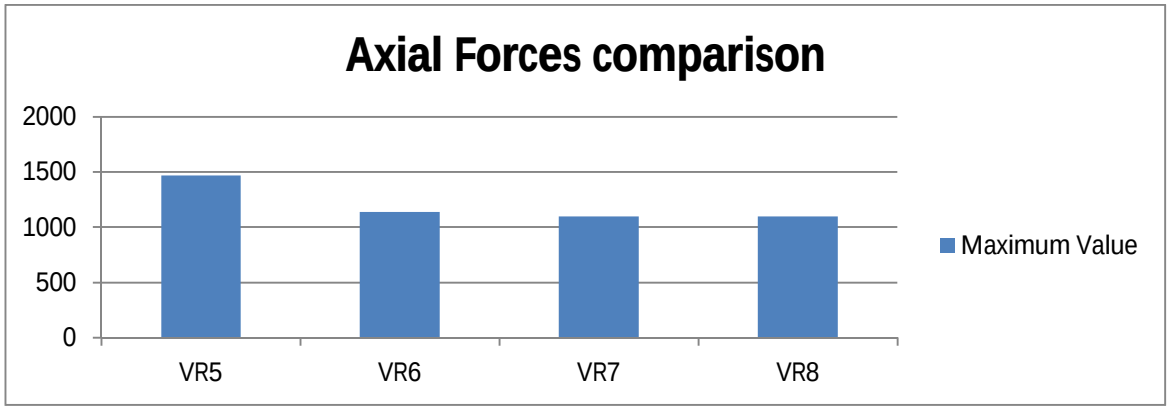


Fig.08 Comparison of axial forces for Steel frames

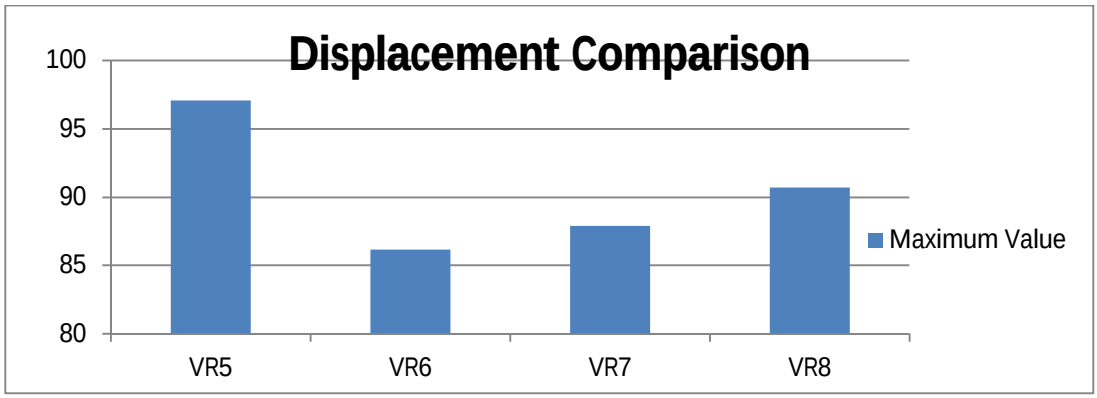


Fig.09 Comparison of Displacement for RCC frames

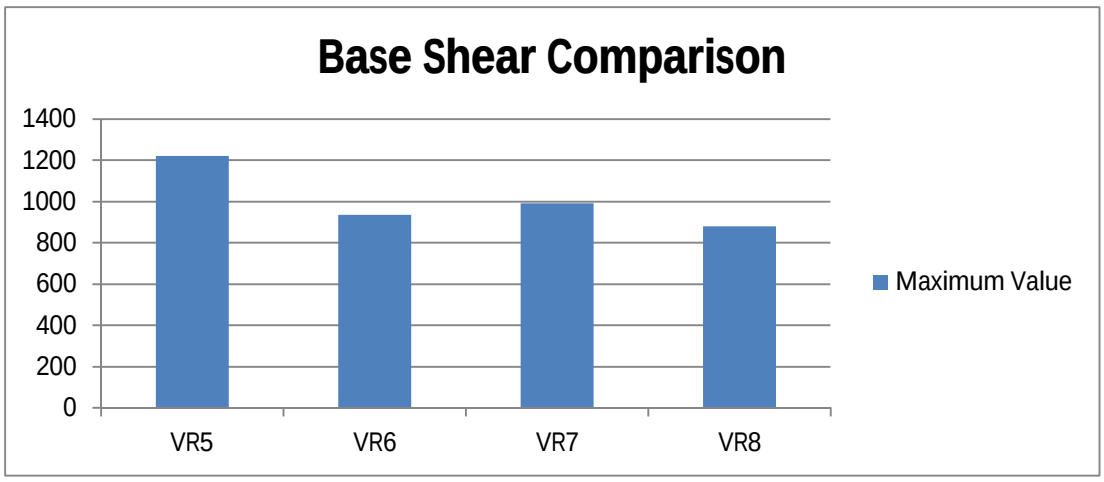


Fig.10 Comparison of Base Shear for Steel frames

©IJRASET: All Rights are Reserved

X. CONCLUISONS

A. In RCC Framing building with H- shape geometry gives lower Axial force and also low displacement values.
B. Similarly in Steel framing building H-shape building gives lower values of Axial Forces and Displacement.
C. In both case of framing material PLUS shape building gives less base shear than other buildings.
D. C-shape building gives comparatively lower values of displacements compared to other geometric shapes.


XI. ACKNOWLEDGEMENT

I express my deep sense of gratitude and sincere regards to Prof. Ishant Dahat for giving me his valuable time, & Knowledge for my work. I am also thankful to all my teaching staff for their valuable guidance in completion of my work.

REFERENCES

[1] COMPARATIVE ANALYSIS OF R.C.C. AND COMPOSITE STRUCTURES WITH DIFFERENT VERTICAL IRREGULARITIES Pak. J. Biotechnol. Vol, 14 (3) 279-282 (2017) ISSN Online: 2312-7791 S. Prabhu Booshan*, S. Sindhu Nachiar, S. Anandh
[2] Seismic Analysis of Regular & Vertical Geometric Irregular RCC Framed Building International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395- 0056 Volume: 02 Issue: 04 | July-2015 p-ISSN: 2395-0072 © 2015, IRJET.NET- All Rights Reserved Page 1396 Dileshwar Rana, Prof. Juned Raheem
[3] Comparative Pushover Analysis of High Rise RCC Building Frame with and Without Vertical Irregularities International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395 -0056 Volume: 03 Issue: 08 | Aug-201 p-ISSN: 2395-0072 Patil Sadhana M. , D.N.Shinde
[4] Seismic base shear variation between regular and irregular RCC structure in various zones by STAAD.PRO International Journal of advance Research Ideas and Innovation in Technologies. R. Arun, K. Suhana, L. Saicharam Reddy
[5] Comparative Study on Design Results of a Multi-storied Building using STAAD PRO and ETABS for Regular and Irregular Plan Configuration International Journal of Applied Engineering Research ISSN 0973-4562 Volume 13, Number 15 (2018) pp. 12194-12201 © Research India Publications. Prof. S .Vijaya Bhaskar Reddy and V.Madhu
[6] Seismic Analysis of R.C.C. Building With Plan Irregularities IJSART - Volume 5 Issue 6 –JUNE 2019 ISSN [ONLINE]: 2395-1052 Page | 127 Ms. Yogita K. Kalambe1, Prof. Sanjay Denge2
[7] Effect of Shape and Plan Configuration on Seismic Response of Structure (ZONE II & V) International Journal of Science and Research (IJSR) ISSN Volume 5 Issue 7, July 2016 Veena S Ravi, Sreedevi Lekshmi
[8] Dynamic Seismic Evaluation of Irregular Multi-Storey Buildings Using Bracing in Zone V as Per Is: 1893-2016 International Journal of Innovative Technology and Exploring Engineering (IJITEE) ISSN: 2278-3075, Volume-8 Issue-7, May, 2019 Lovneesh Sharma, Sandeep Nasier
[9] Seismic Behaviour Of Buildings Having Vertical Irregularities International Journal of Engineering Science Invention Research & Development; Vol. III, Issue X, April 2017 e-ISSN: 2349-6185 Vol. III, Issue X, April 2017/620 Sumit Gurjar and Lovish Pamecha
[10] SEISMIC ANALYSIS ON BUILDING WITH HORIZONTAL AND VERTICAL IRREGULARITIES Scientific Journal of Impact Factor (SJIF): 4.72 e-ISSN (O): 2348-4470 p-ISSN (P): 2348-6406 Abrar Ahmed, Prof. Shaik Abdulla, Prof. Syed Arfat

©IJRASET: All Rights are Reserved

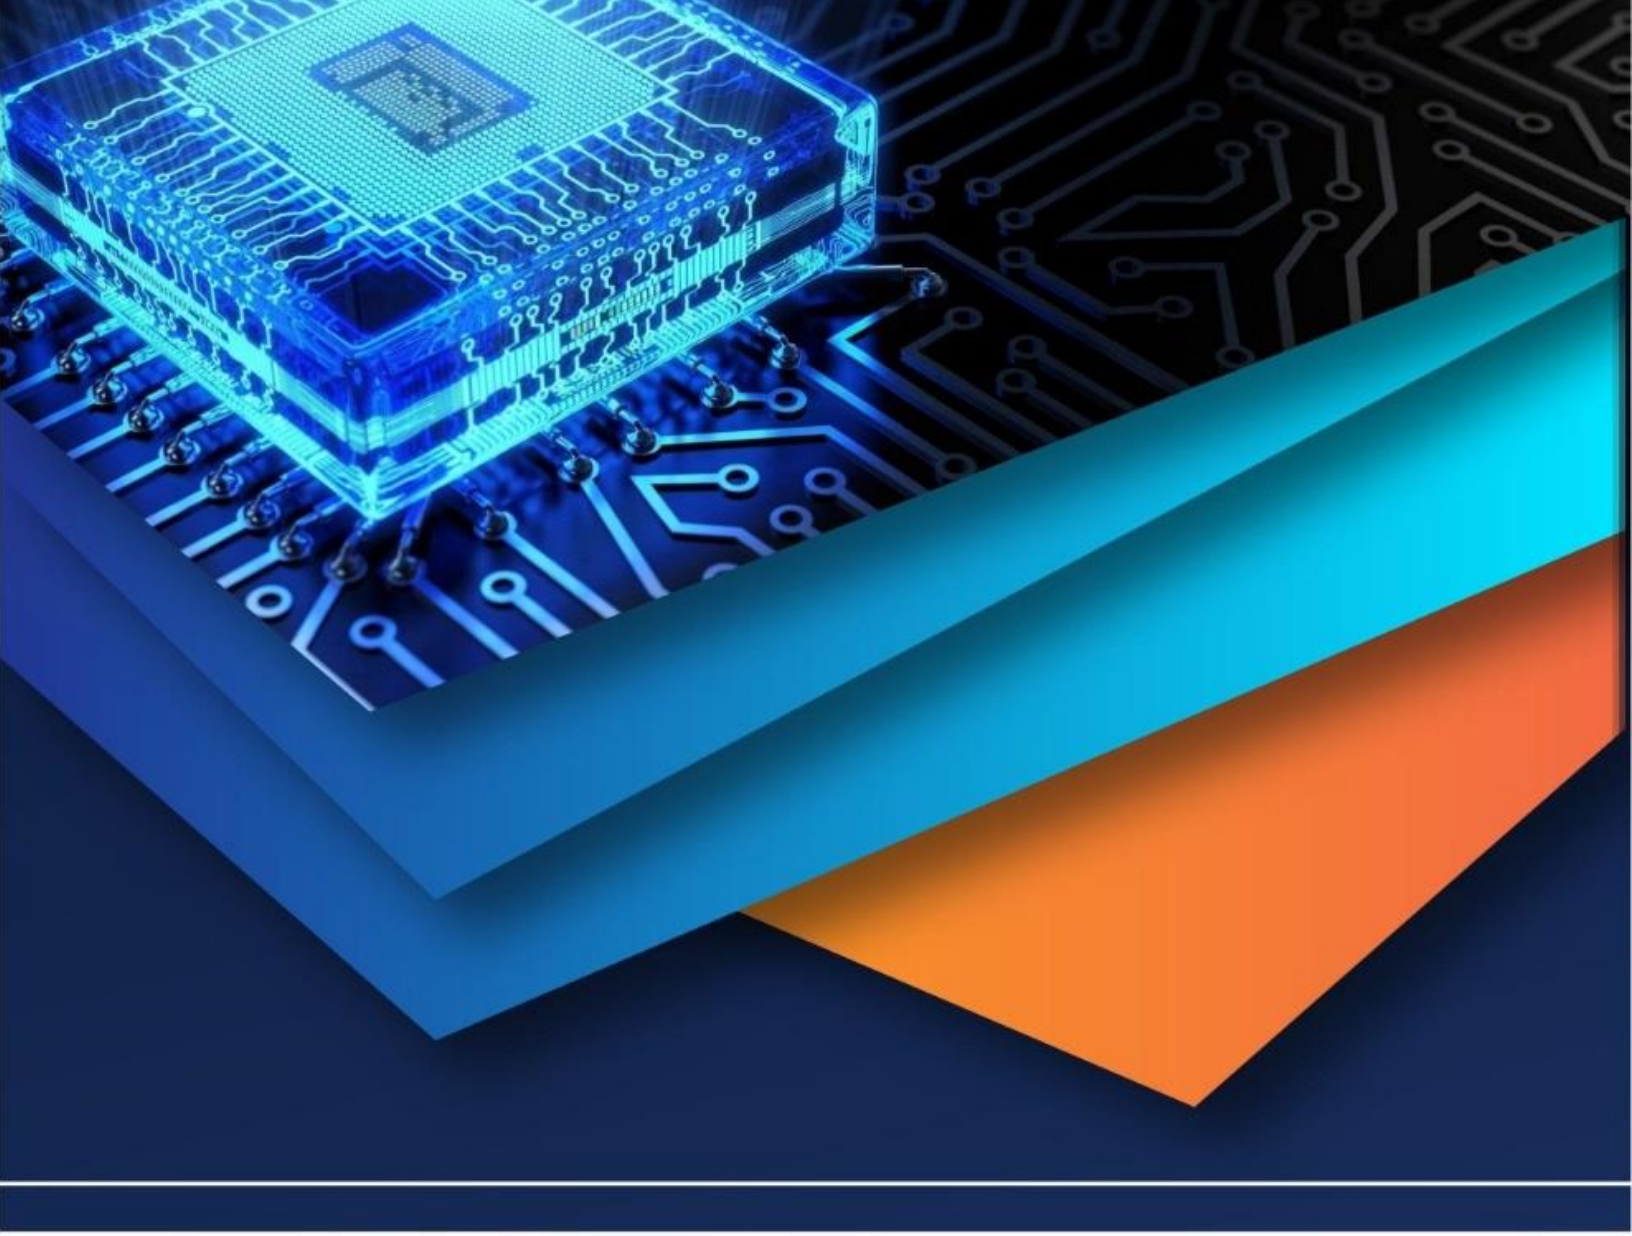

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)