iJRASET
International Journal For Research in Applied Science and Engineering Technology



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

**Volume:** 3 **Issue:** VI **Month of publication:** June 2015

**DOI:**

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

# Mechanical Properties Assessment of Ultra High Performance Fibre Reinforced Concrete (UHPFRC)

Sudarshan N.M.[1], Dr. T. Chandrsekhar Rao[2]
[1]*Department of Civil Engineering, Satara College of Engineering & Management, Satara, Maharashtra, INDIA.*
[2]*Head of Department of Civil Engineering DMSSVH College of Engineering, Machilipatnam, A.P.*

***Abstract - The present paper is aimed to assessment of UHPFRC the conventional concrete is replaced by UHPFRC, an Advanced Cement based Super plasticised concrete with high workability and low water cement ratio. The constituents are optimised in granular packing such as Portland cement, silica fume, sand, quartz sand, high range water reducer admixture, steel fiber, with an improved form of homogeneity and compactness, durability, the research work is carried out to achieve enhanced target compressive strength 150 N/mm$^2$. The optimised effort to reach strengths in compressive, split tensile and flexural strengths. The influence of temperature on concrete was identified and highlighted.***

***Key words : Ultra high performance fiber reinforced concrete, mix-proportioning, temperature influence, steel fiber, silica fume, Quartz Sand, Super Plasticizer.***

## I. INTRODUCTION

The ultra high performance fiber reinforced concrete is a special type of material mixed with cement. The recipes are Silica fume, sand, quartz powder steel fibers, with reduced water cement ratio (w/c) to 0.22 to get high strength with low porosity. In recent years the UHPFRC products developed all over the world several researchers, namely R.yu., P-spiesz, HJH, Brouwers, srinivasan Allen, Katrin Habel, Jean, Philippe contributed for the new findings in UHPFRC. Improved durability and quality of the economical material for 30% replacement of cement yielding a good strength in concrete, workability, and cost efficiency, the strength achievement ranges between 150N/mm$^2$ to 200 N/mm$^2$ The new materials in particle packing and live influence on mechanical properties of UHPFRC permitted to design new concrete mixes, produced and more popular in these days. The UHPFRC is a combination of high strength concrete and fiber reinforced. According to Richard & Cheryrezy (1905) represents the highest development of HPC, its compressive strengths on the curing conditions. Ross (e) experimental study on mechanical behavior of UHPFRC. The design of concrete is based on densely compacted cementious matrix, normal sand is used. The UHPFRC serves several purposes in structural applications in Bridges, stadium panels, roads, power plant, rail bridges, airport runways, in-situ members, and seismic strengthening of existing structures.

## II. RESEARCH SIGNIFICANCE

Now-a-days the increased strength in concrete is required in heavy structures to carry heavier loads for sustainability. The conventional concrete failed to fulfill the requirement. Hence more emphasis is put on durability to withstand heavier loads and aggressive environment conditions. The compressive strength can be enhanced by special materials such as Silica fume, Quartz Powder, fine sand, steel fibers, HRWRA with low water cement ratio. The concrete specimens are exposed to elevated temperature 120$^0$C; the research investigation was done to achieve targeting compressive strength 150N/mm$^2$.

## III. OBJECTIVE

The principal objective of this experimental work is as follows.
To produce ultra high performance fiber reinforced concrete of above 150N/mm$^2$.
The influence of elevated temperature on compressive strength.

## IV. MATERIAL AND METHODS

*A. Cement*

The ordinary Portland cement of 53 Grade conforming to IS-12269-1987 with a specific gravity of 3:15 used.



©IJRASET 2015: All Rights are Reserved

Volume 3 Issue VI, June 2015
ISSN: 2321-9653
International Journal for Research in Applied Science & Engineering Technology (IJRASET)

*B. Sand*

The locally available natural sand with less than 2 mm size, having specific gravity 2.63 conforming to IS 650 specifications.

*C. Silica Fume*

The Silica Fume conforming to Grade 920-0 with a specific gravity 2.25 was used as mineral admixture

*D. Quartz*

The quartz sand was used from locally available source contained 99% silicon dioxide; the specific gravity of quartz sand is 2.59

*E. Steel Fibers*

The micro steel fibers of length 20 mm and diameter 0.16 mm with hooked ends having aspect ratio (a / r) =50 are used.

*F. Super Plasticizer*

The adequate work ability of concrete is improved by adding HRWRA admixture. The rheological behavior of concrete mix and its specific gravity is 1.00 confirms to ASTM - C494 type – F

*G. Water*

The pure, drinkable, free from chemical, mineral impurities used for mixing & curing.

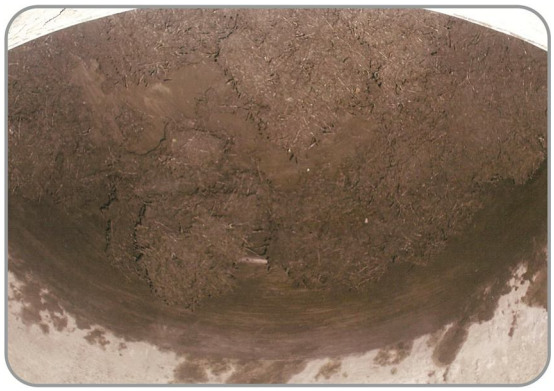


Fig. 1 UHPFRC Mix



Fig. 2 Specimens after Curing

| Material | Cement | Silica Fume |
|---|---|---|
| CaO | 63.49% | 0.28% |
| $SO_2$ | 20.60% | 96.60% |
| $Fe_2O_3$ | 4.75% | 0.25% |
| $Al_2O_3$ | 5.40% | 0.20% |
| MgO | 1.84% | 0.22% |
| $SO_3$ | 2.75% | 0.12% |
| $Na_2O$ | 0.30% | 0.20% |
| $K_2O$ | 0.50% | 0.35% |
| $Mn_2O_3$ | 0.09% | -- |
| $TiO_2$ | 0.25% | -- |


©IJRASET 2015: All Rights are Reserved

Volume 3 Issue VI, June 2015
ISSN: 2321-9653
International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Table 1.Minerological Composition of Cement and Silica Fume

Table2. Properties of material

| Standard | Sl. No. | Material | Material I.D. | Property Analysis |
|---|---|---|---|---|
| IS-12269-1987 | 1 | Cement | C | OPC-53 grade<br>S.G.- 3.5 |
| IS-3831970 | 2 | Sand | NS | S.G.- 2.63 |
| IS-383 1970 | 3 | Silica Fume | SF | S.G.- 2.25 |
| ASTM-C494 Type F | 4 | Steel fibers | ST F | L=20 m = 0.16,mm |
| ASTM-C 494 Type F | 5 | Super Plasticizer | SP | SG -1.00 |
| -- | 6 | Quartz | Q | SG.- 2-59 |

C=Cement ,NS=Normal sand, SF=Silica fume, STF=Steel fiber, SP=Super plasticizer
Q=Quartz sand

Table 3.UHPRRC Composition

| Material | Kg/ $m^3$ | % by Wt. |
|---|---|---|
| Cement | 728 | 1.0 |
| Fine Sand | 965 | 1.32 |
| Silica fume | 195 | 0.20 |
| Quartz | 210 | 0.28 |
| Steel fibers | 156 | 0.2% / Vol. |
| HRWRA | 30 | 0.04 |
| Water | 165(lit) | 0.22 |


©IJRASET 2015: All Rights are Reserved

Volume 3 Issue VI, June 2015
ISSN: 2321-9653
International Journal for Research in Applied Science & Engineering Technology (IJRASET)

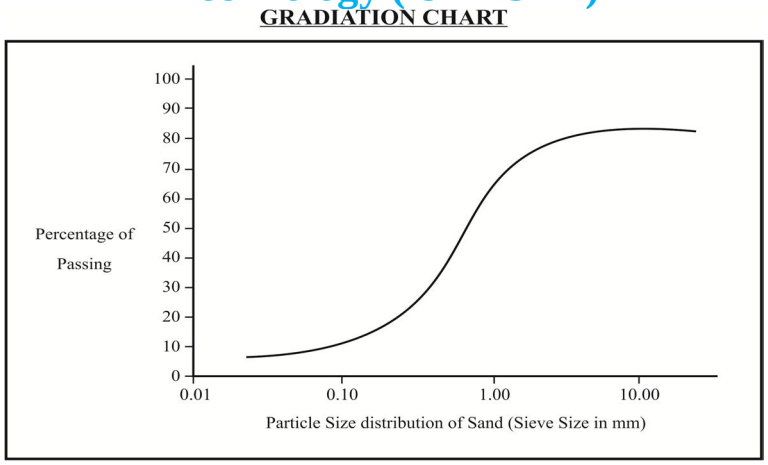



Fig. 6

## V. EXPERIMENTAL INVESTICATION

In this experimental research programme: The concrete mixing is performed in a concrete mixture. The materials are weighed carefully mixing, Cement, sand, quartz sand, to obtain homogenous mix, followed by adding Silica Fume mix containing steel fiber mixing with water and Super Plasticizer. The compaction process is performed by means of a concrete needle vibrator distributed casting uniformly, after 24hrs the specimens are demoulded and allowed for drying. Then the specimens are subjected to Temperature in an electric oven to a temperature of $120^0$ for 24hrs. The specimens are tested for compressive, split and tensile strengths.



Fig. 3 UHPFRC Hot Air Curing



Fig. 4 Test Setup Tensile Automatic CTM (3000 KN)



Fig. 5 UHPFRC Specimen after Testing



©IJRASET 2015: All Rights are Reserved

Volume 3 Issue VI, June 2015
ISSN: 2321-9653
International Journal for Research in Applied Science & Engineering Technology (IJRASET)

EFFECT OF ELEVATED TEMPERATURE

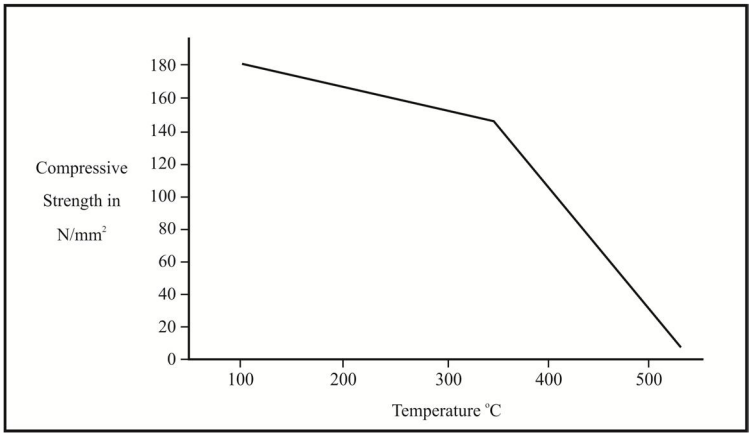



Fig. 7

## VI. RESULT AND ANALYSIS

| Day | Compressive strength in $N/mm^2$ | Split tensile strength in $N/mm^2$ | Flexural Strength in $N/mm^2$ |
|---|---|---|---|
| 3 day | 58.25 | 9.75 | 12.15 |
| 7 day | 85.44 | 11.05 | 14.50 |
| 14 day | 122.52 | 13.45 | 24.75 |
| 28 day | 148.25 | 17.50 | 26.25 |
| 90 day | 155.30 | 21 | 29 |

## VII. CURING REGIME OF UHPFRC

The thermal curing plays a vital role in strength up gradation. The acceleration of chemical process increases in faster curing in high temperature $120^0$C. The specimens are exposed to hot air curing for 24 hours duration at the age 3 day to 90 day.

The elevated temperature condition may affect concrete structure. The testing samples were cured under temperature condition increases compressive strength significantly.

90 Days Compressive Strength of UHPFRC

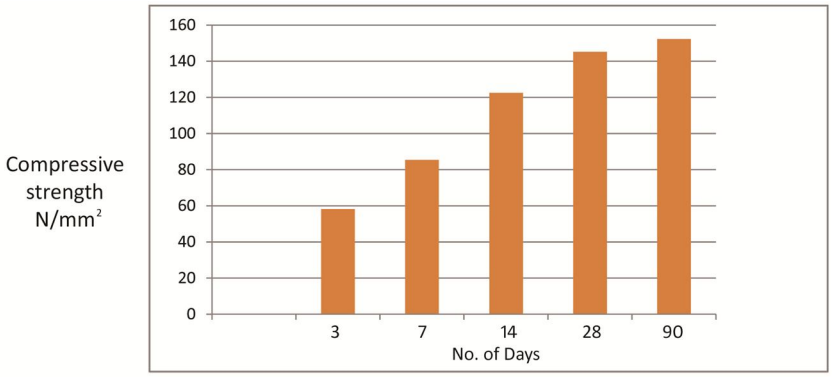



Fig. 8


©IJRASET 2015: All Rights are Reserved

Volume 3 Issue VI, June 2015
ISSN: 2321-9653
International Journal for Research in Applied Science & Engineering Technology (IJRASET)

90 Days Split tensile Strength of UHPFRC

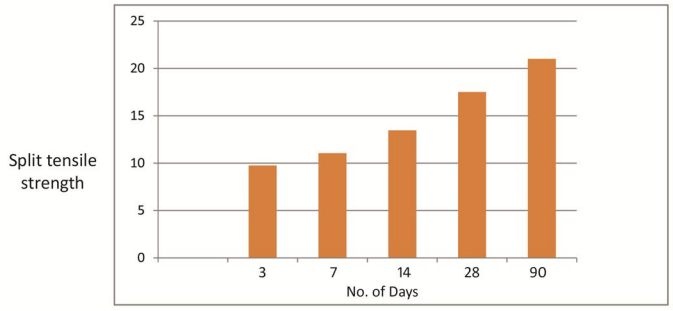



Fig. 9

90 Days Flexural Strength of UHPFRC

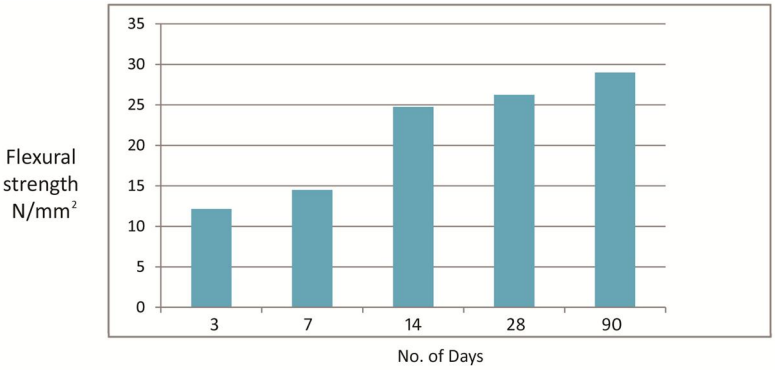



**Fig. 10**

## VIII. CONCLUSIONS

The following conclusions are drawn based on the experimental work,

The mechanical properties determination and performance of the Higher strengths upto 180 N/mm$^2$ can be achieved by careful Mix proportioning and quality of material use.

The steel fiber enhance the strengths of concrete

The influence of elevated temperature 20% -25% strength can be increased

The pure, clean free from impurities and suitable proportion of super plasticizer use enhance the strengths.


The proper mixing, placing, curing influence on strength.

## REFERENCES

[1] "Ultra high performance fiber reinforced concrete mix design in central Canada By KATRIN Habel, Jean Philippe,Charron, shadi braike, R-Douglas,
[2] Effect of curing regimes on the strength properties of refractive powder concrete, By Dattatreya.J.K. Harish K.V. and Neelamegam M
[3] Development of the mechanical properties of an ultra high performance fiber reinforced concrete , Cement &Research 36/7 1362-1370
[4] Composition of reactive powder concrete ,cement &concrete research 25/7 150-1511 By Richard P& Cheyrezy(1995)
[5] Effect of Mix proportions and curing regimes on ultra high performance concrete. By Jains justs & Genadu Shakhmanko (june- 23-2010-)
[6] The UHPFRC revolution in structural design and construction By Jaques Resplendino and Francois , Toultemonde.
[7] High performance concrete properties & applications By Shah S Ahmed. (1994)



©IJRASET 2015: All Rights are Reserved

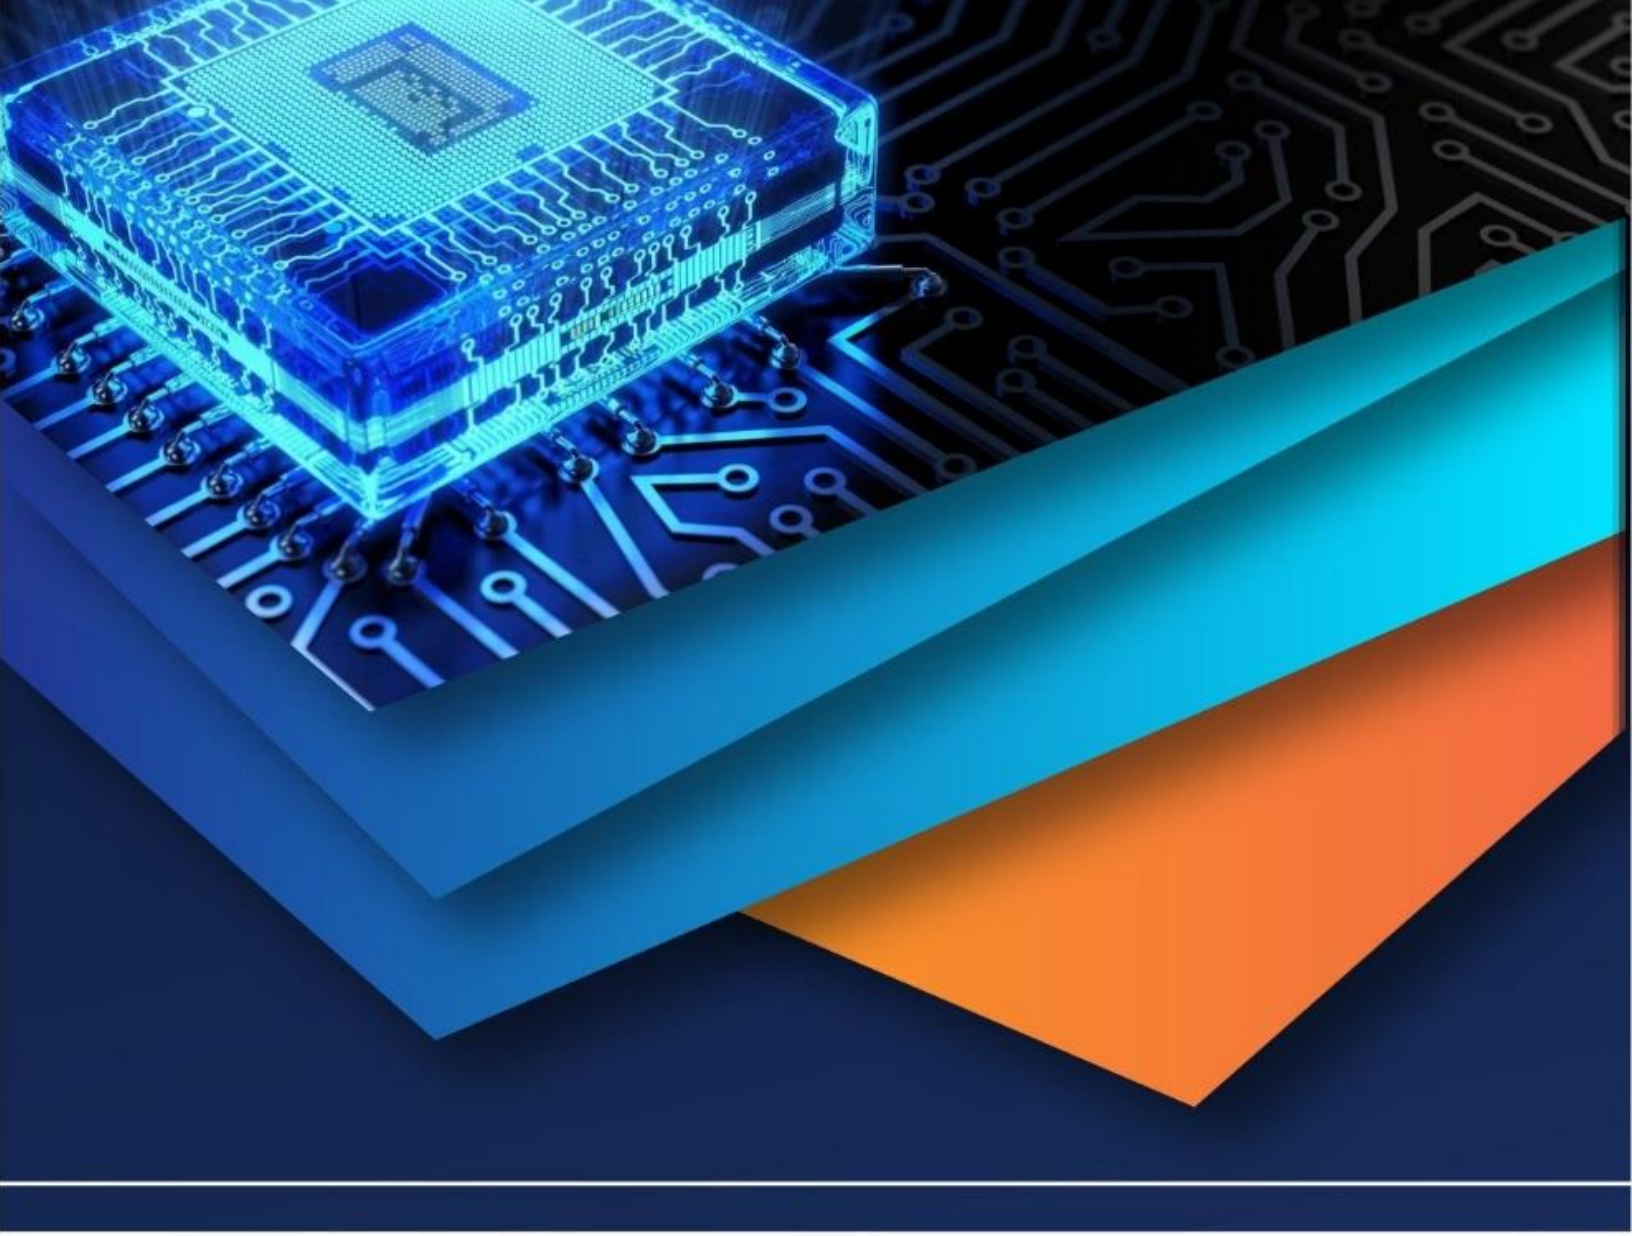

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)