



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 8      Issue: IX      Month of publication: September 2020**

**DOI: <https://doi.org/10.22214/ijraset.2020.31622>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# A Review on Biodiesel as an Alternative Fuel for Diesel Engine Applications

Mohammad Zeeshan Aman Shaikh<sup>1</sup>, Prof. S. S. Deshmukh<sup>2</sup>

<sup>1</sup>Dept. of Mechanical Engineering, SRCOEM, Nagpur, Maharashtra, India.

<sup>2</sup>Assistant Professor, Dept. of Mechanical Engineering, SRCOEM, Nagpur, Maharashtra, India.

**Abstract:** Many research works are being carried out to enhance the performances of internal combustion engines to meet out the current energy demand and to reduce the emission with the alternate fuels. Energy production is heavily dependent on fossil fuels that are not only diminishing, but also are considered the main cause of harmful emissions and global warming. Therefore using vegetable oils such as *Jatropha*, palm, algae and waste cooking oils as alternative fuels in diesel engines has drawn a great attention. Biodiesel from *Jatropha*, palm, algae and waste cooking oils is produced using the transesterification process. Biodiesel fuel is one of the environmentally friendly alternative energy that can reduce toxic gas emissions and at the same time reduces dependence on petroleum-based fuels. Therefore, the purpose of this paper is to provide a comprehensive review of biodiesel as an alternative fuel for diesel engine applications. A significant number of literatures from various journals were cited accordingly. The results of previous studies had shown that the use of biodiesel would mostly increase the amount of brake specific fuel consumption and nitrogen oxide gas while conversely reducing other toxic gas emissions. The study concluded that biodiesel and its blends have a bright future in the marine sector, provided some of the highlighted issues can be solved.

**Keywords:** Internal combustion engine, Diesel Engine, Biodiesel, *Jatropha*, Palm, Algae, Waste Cooking oil, Emission.

## I. INTRODUCTION

Diesel fuel is widely employed as a major fuel in industry, power and transportation areas owing to its high efficiency. Pollutants such as carbon monoxide, smoke and hydrocarbons from diesel fuel combustion have a serious impact on human health and the environment. To facilitate lowering these emissions, fuel derived from a renewable source is highly promising [6]. Biodiesel and bio-alcohols are the potential fuels which could be used in current engines without much alteration [7]. These fuels have similar fuel properties to diesel. However, neat biodiesel in a diesel engine results in higher viscosity issues [8]. Hence, the viscosity of neat biodiesel should be lowered as far as possible to minimize the drawbacks mentioned. Many studies were attempted by blending the lower carbon-hydrogen (C-H) alcohols such as methanol and ethanol which resulted in phase separation leading to poor ignition [9][10]. To reduce this drawback, alcohols having a longer C-H chain and higher calorific value, namely butanol, pentanol and octanol, are potential additives to diesel-biodiesel blends [11]. Many studies explored the usage of higher C-H alcohols to diesel/biodiesel blends [12][13]. Devaraj et al. [14] have found that the addition of higher C-H alcohols (pentanol) to diesel reduces CO, NOx emissions. Yuvarajan et al. [15] confirmed that pentanol addition lowered biodiesel HC and CO emissions. Kishore Pandian et al. [16] also agreed with the result stating that the addition of pentanol to biodiesel fuel lowers its NOx emissions. Radhakrishnan et al. [17] evaluated the impact of adding different volumes of pentanol to palm biodiesel in a research engine. They found a 3.9% reduction in NOx emissions by including 20% volume of higher C-H alcohols to palm biodiesel. In addition, they also found that the usage of pentanol reduces CO and smoke emissions in a diesel engine. Yuvarajan et al. [18] observed the emission efficiency of cyclo-octanol with biodiesel. Cyclo-octanol addition results in lower tailpipe emissions at low, moderate and high loads. Further, cyclo-octanol also boosts the rate of dispersion in fuel. Pandian et al. [19] confirmed that hexanol addition lowered biodiesel (cashew nutshell) HC, CO emissions. Mahalingam [20] found that the addition of pentanol to biodiesel reduces CO, NOx emissions. Previous literature confirms that the addition of longer C-H chain and higher calorific value, namely butanol, pentanol and octanol, to diesel/biodiesel results in lower emissions and improved fuel efficiency.

### A. Global Energy Trends

Hydrocarbon or fossil fuels are accounting for more than 80% of today's world total supplied energy. Fossil fuel resources are becoming less day by day and approximately 65.5% of world oil reserves come from Middle East countries [28]. Fig. 1 shows the forecasts of world oil production based on present demand scenario. The maximum production is expected in between 2015 and 2020. After this period, world crude oil would gradually decline in production amount. The primary energy consumption forecast for the next twenty years is shown in Fig. 2. [30].

The increasing of world population and salary is a major factor behind the growing demand for energy. The world population is expected to increase to 8.8 billion by 2035, which will lead to more energy requirements.

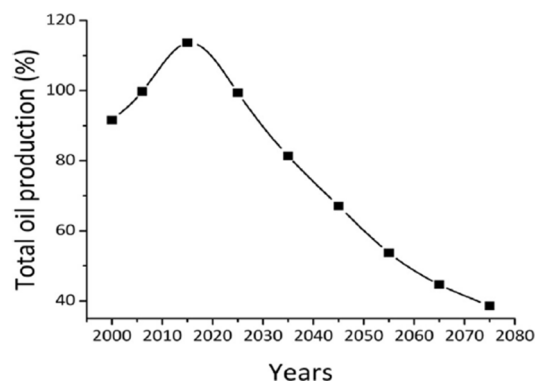


Fig. 1. World oil production forecast based on current scenario [29]

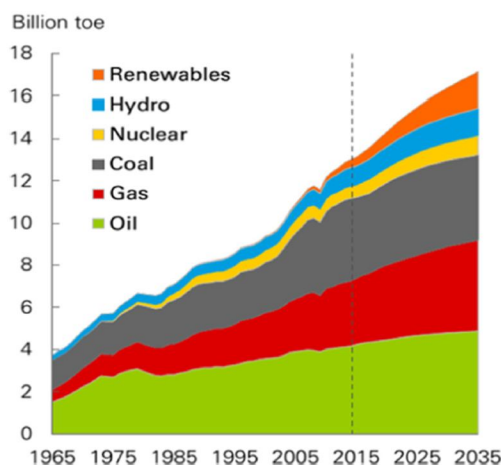


Fig. 2. Energy consumption growth forecast for 2015–2035 [30]

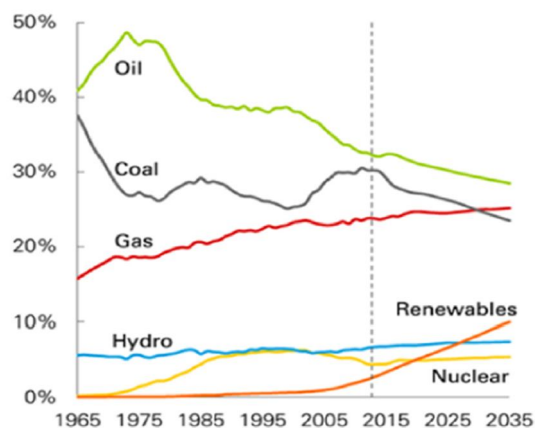


Fig. 3. Shares of primary energy forecast for 2015–2035 [30]

Fossil fuels will still remain the dominant energy source, accounting for more than three quarters of global energy in 2035, down 10% compared to 2015. However, renewable energy is expected to experience rapid growth with the consumption of 439 million tonne oil equivalent (Mtoe) in 2015, increased to 1715 Mtoe by 2035. This upward trend may be due to the lack of coal resources (0.2% decrease per year) and more stringent environmental regulations imposed by most countries in the future. Fig. 3 shows the past and future shares of different types of fuel for year 2015–2035. Oil and coal shares declined to 29% and 24% respectively by

2035, while gas fuel rose by 1%. Shares on renewable energy including biofuels that are growing dramatically from 3% in 2015 to 10% in 2035 will outstrip nuclear energy in the early 2020's and hydro energy in the early 2030's. Annual growth of renewable energy is expected to grow well at 7.1% per year for the next twenty years. The prospect of renewable energy is seen to be very promising in the near future. Their energy cost per British thermal unit (BTU) is declined. The method used is always improved either for use in buildings or vehicles. Most governments support renewable energy projects by giving incentives such as tax relief, grants and other forms of schemes. According to the Renewable Energy Policy Network (REN) report, renewable energy accounts for about 19.3% of the global energy consumed in 2015 [32]. This percentage comprises 9.1% from traditional biomass and 10.2% from modern renewable energy which include biodiesel fuel as well. The detailed composition of world energy consumption in 2015 is illustrated in Fig. 4. Biodiesel fuel has been internationally recognized and used by many countries including the European Union, the United States, Brazil and Asia. Table 1 lists the world's ten major biodiesel producers in 2016. The United States is the largest biodiesel nation with 5.5 billion litres of production. It is followed by Brazil with 3.8 billion litres, while third to fifth places are shared by Germany, Indonesia and Argentina with a production of 3 billion litres each, in a year. Most of the biodiesel feedstock comes from soybeans, palm oil, animal fat, coconut oil, olive oil, rapeseed and sunflower.

## II. BIODIESEL OVERVIEW

In short, biodiesel is monoalkyl esters of long chain fatty acids oils derived from renewable lipid sources such as vegetable oil or animal fat [33]. Pure biodiesel that contains 100% biodiesel is commonly referred as B100. Biodiesel blends with petroleum diesel is usually designated as BXX, where XX indicates the biodiesel percentage, for example B80 contains 80% of biodiesel and 20% of petroleum diesel [34].

### A. Biodiesel Feedstock

The first biodiesel fuel is peanut oil which was introduced by Rudolf Diesel in 1910 [34]. Since then, a variety of feedstocks were tested and utilized across the world. Currently, there are more than 350 species of plants that have been identified and potentially as a source of biodiesel [35][36]. Potential biodiesel feedstocks according to the country of origin are listed in Table 2. Selection of suitable feedstock for biodiesel production is very significant as it is associated with 75% of the total cost [37][38][39]. In addition, biodiesel fuel quality also depends on the type of resource use, production process and country of origin [40]. Generally, biodiesel sources can be classified into four main groups [33][38][41]:

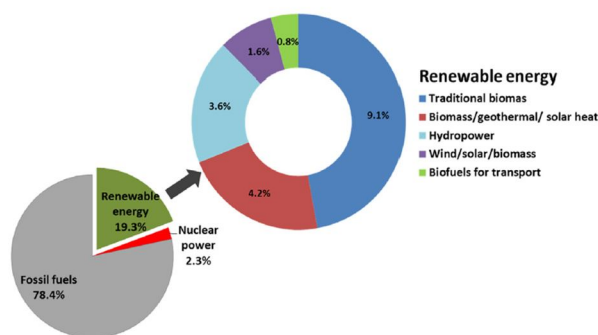


Fig. 4. World energy consumption in 2015

Table 1. World's major biodiesel producer in 2016

Rank	Country	Biodiesel volume (Billion litres)
1	USA	5.5
2	Brazil	3.8
3	Germany	3.0
4	Indonesia	3.0
5	Argentina	3.0
6	France	1.5
7	Thailand	1.4
8	Spain	1.1
9	Belgium	0.5
10	Colombia	0.5

Table 2. Potential biodiesel feedstock in each country

Country	Biodiesel feedstock
USA	Soybeans and waste oil
Canada	Canola
Mexico	Animal fat and waste oil
UK	Rapeseed and waste oil
Germany	Rapeseed
Italy	Rapeseed and sunflower
France	Rapeseed and sunflower
Turkey	Rapeseed and sunflower
Spain	Linseed and sunflower
Greece	Cottonseed
Sweden	Rapeseed
Malaysia	Palm oil
Indonesia	Palm oil
Thailand	Palm oil and coconut oil
Philippines	Coconut oil
India	Jatropha and pongamia
China	Waste oil, rapeseed and waste oil
South Africa	Jatropha and castor
Brazil	Soybeans and palm oil
Argentina	Soybeans
Japan	Waste oil
Australia	Jatropha
New Zealand	Waste oil and tallow

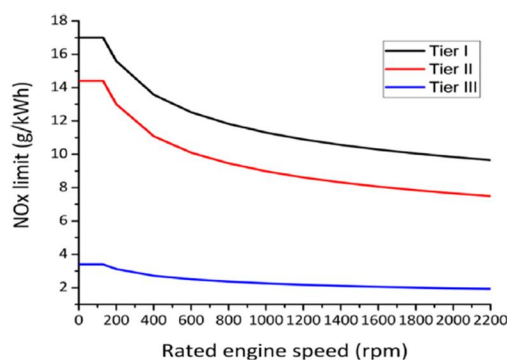


Fig. 5. MARPOL allowable limit for nitrogen oxide emissions. [27]

- 1) *Edible Vegetable Oil*: soybean, rapeseed, sunflower, palm, olive, rice bran, corn, coconut, canola, wheat, barley, groundnut, safflower, sesame seed, sunflower and peanut.
- 2) *Non-Edible Vegetable Oil*: algae, cotton seed, pongamia, mahua, jatropha, camelia, karanja, cumaru, jojoba, neem, linseed, moringa, tobacco seed and rubber seed.
- 3) Recycle and waste oil.
- 4) Animal fats.

Biodiesel is also classified as a first and second generation based on the feedstock used. The first generation term refers to the biodiesel derived from edible feedstock such as soybean, canola, coconut and others, while at the same time serving as a food source for humans. On the other hand, second generation biodiesel usually processes from nonedible feedstock including jatropha, waste oil and palm fatty acid distillate PFAD) [42].

### B. Biodiesel Production Process

Biodiesel extraction process involves a chemical reaction where biodiesel feedstock is mixed with alcohol (methanol or ethanol) and catalyst (Potassium Hydroxide). The by-product of this process is called Fatty Acid Methyl Ester (FAME) or biodiesel. There are four types of biodiesel production process namely; transesterification, micro-emulsion, pyrolysis, and dilution [43].

- 1) *Transesterification*: The most popular biodiesel production process is called transesterification. This process is very economical which involves low temperatures and pressures in addition to producing a high conversion efficiency [40]. Properties of end product biodiesel through this reaction are closer to diesel. Transesterification involves the chemical reaction of triglycerides (oils/fats) with alcohols to form esters and glycerol. The details of the chemical reaction of the transesterification process are shown in Fig. 6, whereby the catalyst is used to enhance the conversion and process response rates.

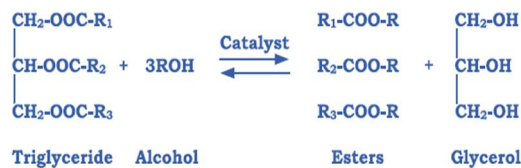


Fig. 6. Transesterification processes of triglycerides.

- 2) *Micro-emulsion*: Another method used to create biodiesel is through the micro emulsion process. Emulsions are defined as a system consisting of two liquid phases which are not mutually dissolving where one liquid phase is dispersed in another liquid. High viscosity problems in vegetable oils can be reduced by mixing with alcohol (methanol/ethanol) and surfactant. Micro-emulsion generally have dispersion particle sizes in the range of 1–150 nm [44]. Biodiesel produced from micro-emulsion processes are able to improve fuel spray characteristics [45].
- 3) *Pyrolysis*: Pyrolysis is defined as the thermal decomposition of a material at certain temperature when it is exposed to heat through the condensation of gas. Biodiesel Pyrolysis is the process of heating vegetable oil or animal fat in the absence of oxygen. Pyrolysis is a simple process, with less waste and no pollution compared to other processes. The goal of pyrolysis is to optimize biodiesel produced from raw materials with thermal methods [46]. There are previous studies claiming that the pyrolysis of triglycerides is suitable for diesel engines [46][47][48][49][50][51].
- 4) *Dilution*: Biodiesel fuel dilution can be achieved by mixing it with diesel fuel and ethanol solvent. The dilution process normally reduces viscosity and density of biodiesel. Low viscosity of biodiesel is good for improving engine performance [44]. Dilution with ethanol may increase the combustion characteristics of biodiesel because ethanol has a lower boiling point than biodiesel [34].

### C. Biodiesel Blend

Generally, there are two methods commonly used for biodiesel blends that are splash and manifold blending. Splash blending is when a certain amount of pure biodiesel is added to the tank and followed with petroleum diesel, which is added into the same tank with a certain ratio. Mixing of the two fuels will occur naturally. This method is preferred by biodiesel producers because it does not require high cost but sometimes it does not produce a blended mixture as desired. On the other hand, manifold or ratio blending is achieved by loading biodiesel and petroleum diesel into the tank at the same time and using a meter and valve at a common header. This method can deliver a better end product because it gets thoroughly mixed. Since both fuels are blended prior to entering the tank, the mixing problems associated with splash blending are eliminated.

### D. Biodiesel Properties

The properties of biodiesel depends on the type of raw materials used [52][53][54][55][56]. Some of these properties include viscosity, density, flash point, cetane number, acid value, oxidation stability, cloud and pour points. Different feedstocks will provide different proportions of biodiesel properties. The following section discusses the basic properties of biodiesel.

- 1) *Density*: The density of a substance is defined as the weight per unit volume of the material. The density of biodiesel is measured according to EN ISO 3675/12185 and ASTM D1298 [57]. According to this standard, density test should be carried out at 15 °C or 20 °C as the reference temperature [55]. Biodiesel fuels are found to have higher density compared to diesel fuel [58]. The density range of biodiesel fuel is mostly between 830 and 960 kg/m<sup>3</sup> depending on the type of feedstock used [59]. Ropkins claimed that denser fuel contains more energy [53]. The weight of the biodiesel molecule is among the factors that contribute to the higher density of biodiesel fuel. The density of a fuel used has influence on the engine performance due to its impact on the injection spray pattern, injection timing and injected fuel amount [60]. Furthermore, denser fuel will have bigger size of fuel droplets [61].

- 2) *Viscosity*: Viscosity is a term used to describe the measure of fluid resistance to flow due to the internal friction [62]. In diesel engines, viscosity of fuel is a crucial property because it affects fuel injection characteristics and in turn influence the quality of combustion [63]. Fuel with high viscosity would disrupt injection pump operations and cause the engine to lose power. However, too low fuel viscosity can cause leakage through the seal inside the injection pump [64][65]. Generally, the viscosity of biodiesel is higher than petroleum diesel because of its chemical structure and large molecular mass. Biodiesel can be more viscous at low temperatures because viscosity increases when the temperature decreases [57][66]. Kinematic viscosity test of biodiesel can be determined in accordance with ASTM D445 and EN ISO 3104 standards [67].
- 3) *Flash Point*: The minimum temperature at which fuel will burn when exposed to fire is called fuel flash point. This property is very important in terms of fuel storage, fuel handling and transportation. The biodiesel flash point may vary due to different feedstock used and other factors such as the residual alcohol content and chemical composition [68]. The flashpoint of biodiesel is higher than petroleum diesel, thus making it safer for transport and storage purposes [69][70]. The common standards for flash point measurements are ASTM D93 and EN ISO 3697. The flash point of biodiesel is higher than petroleum diesel, which is more than 150 °C [71].
- 4) *Cetane Number*: Diesel fuel ignition delay is measured through a Cetane number parameter. This is the time interval between the start of injection and start of combustion of the fuel in the engine cylinder. It is one of the important fuel properties that need to be considered during the selection of methyl esters for biodiesel production process [72]. Normally, higher cetane number fuel will have shorter ignition delay periods. Biodiesel has a higher cetane number than conventional diesel, which results in shorter ignition delays, thereby improving combustion efficiency [73]. In addition, biodiesel from animal fats have higher Cetane number than those biodiesel from vegetable oils [29]. Cetane number can be measured according to ASTM D613/EN ISO 5165 test methods [64].
- 5) *Calorific Value*: Calorific value is defined as the quantity of heating power generated during combustion under specified conditions. It is an extremely important parameter of fuel, which represents the amount of energy available that can be converted to useful works during the combustion process [74]. Higher calorific value of fuel will contribute to higher engine performance [64]. Based on mass, biodiesel fuel has 12% less calorific value compared to petroleum diesel [75]. The minimum heating value of biodiesel is 35 MJ/kg as prescribed in the EN 14213 standard [76].
- 6) *Acid Value*: Acid value is defined as the measurement of free fatty acid content in biodiesel. It is defined as the weight in milligrams of potassium hydroxide (KOH) required to neutralize 1 g of fatty acid in a biodiesel sample. Biodiesel possess more acid value compared to conventional diesel. Highly acidic fuels have the potential to cause corrosion in fuel supply systems, especially in fuel injectors [76]. ASTM D664 and EN 14104 standards are used to determine the acid value of biodiesel. Both standards define the maximum levels of acid number for biodiesel as 0.50 mg KOH/g [77].
- 7) *Cloud and Pour Point*: Cloud point is the temperature where one component of a mixture of liquids begins to solidify on cooling; resulting in visible cloudiness (wax crystals), while pour point is the temperature where fuel ceases to flow or pour. Cloud and pour points are determined using the ASTM D2500 and ASTM D97 procedures respectively [78]. Biodiesel fuels possess higher cloud and pour point values than petroleum diesel [58]. The behaviour of biodiesel during cold weather is an important parameter to be considered; too high cloud and pour point values can easily damage the engine systems at low temperature conditions [71][79]. These obstacles can be solved by blending biodiesel with diesel [59].
- 8) *Oxidation Stability*: Oxidation stability is a measure of fuel resistance to oxidation or degradation process. It is one of the essential characteristics of biodiesel since it is associated with fuel stability during storage. Oxidation may happen because of the presence of unsaturated fatty acids chain and that immediately react with oxygen once it exposed to air [71]. The quality of biodiesel is assessed through the oxidation stability. Biodiesel is more susceptible to stability degradation as compared to petroleum diesel due to its composition [78]. Oxidation stability test for biodiesel is performed according to the ASTM D7462 method.

#### E. Biodiesel Standards

There are two main standards established for biodiesel; which are EN 14214 (European) and the ASTM 6751 (American) standards [80]. The requirements specified in these standards are almost similar, only slightly different on the desired application and the selection of test methods. Both standards specify the test methods and specifications of the pure biodiesel fuel and its blends.

#### F. Advantages of Biodiesel

Biodiesel is classified as one of the alternative energy which has rapidly gained interest and increased in commercial availability. It has an excellent quality and offers some unique features as compared with other fuels. Among the features and benefits of biodiesel are as follows:

- 1) *Renewable* – Biodiesel, which is processed from plant and animal sources, is always renewable, unlike fossil fuels which will deplete.
- 2) *Versatile* – Biodiesel can be obtained from a wide range of feed stocks depending on the geographical location.
- 3) *Easy to Use* – Biodiesel can be applied in diesel engines as 100% or blend fuels without engine modification.
- 4) *Lower Emissions* – Biodiesel helps to reduce harmful gases from the engine. Some studies claim that 78% of greenhouse gases can be deducted using biodiesel [81].
- 5) *Biodegradable and Non-toxic* – Biodiesel has minimal environmental impact and is user friendly. It contains virtually no sulphur or aromatics. Biodiesel degrades faster than petroleum diesel. Flash point for biodiesel is higher than petroleum diesel, making biodiesel less flammable, safer to handle and easier to store.
- 6) *Higher Lubricity* – Biodiesel is a natural lubricant. Blending the biodiesel fuel with petroleum diesel has proven to increase lubrication, reduce engine wear and extend engine life cycle [82].
- 7) *Positive Energy Balance* – Although biodiesel consume fossil fuels in their production and transportation, but it has a very favourable energy balance [83].
- 8) *Less Dependence on Fossil Fuels* – The dependence on fossil fuels can be reduced with application of biodiesel although it cannot replace completely.

#### G. Limitations of Biodiesel

Along with the many benefits discussed earlier, biodiesel also has some limitations and drawbacks as follows:

- 1) *Higher viscosity and density* – Higher viscosity and density value of biodiesel can sometimes create problems to the fuel injection system. A study by Tesfa et al. showed that it affects the operation of fuel filters and reduces fuel pump performance in compression ignition engines [84].
- 2) *Lower energy content* – Biodiesel has slightly less energy content than petroleum diesel. Some researchers reported that engine power was slightly lower with application of biodiesel [27][85][86]. Thus this will increase fuel consumption about 2–10% [39].
- 3) *Higher cloud and pour point* – Higher cloud and pour point is associated in biodiesel [58]. Solidification of biodiesel in cold weather can cause clogged filter and fuel lines that lead to engine system damage.
- 4) *Higher NOx* – The NOx emissions of biodiesel fuel is about 10% higher than petroleum diesel depending on the engine tuning state. Nitrogen Oxide is one of the gasses used in ozone formation and can cause acid rain once it gets dissolved in the atmospheric moisture.
- 5) *Material compatibility* – Biodiesel tends to deteriorate natural rubber materials such as hoses and seals. Biodiesel oxidation process can create catalytic effects on some metal [87].
- 6) *Engine cold start* – Biodiesel requires special handling in cold weather. Broatch et al. stated that engine operated with biodiesel have difficulty to start in cold weather and this can be overcome by fuel blending [88].
- 7) *Variation in quality* – Biodiesel has different end product quality based on the feedstock used.
- 8) *Competition for resources* – The use of human food resources as biodiesel feedstock has caused food crisis in some countries.
- 9) *High cost* – At present, the biodiesel costs are slightly higher than petroleum diesel.

### III. LITERATURE REVIEW

F. Aydın & H. Ögüt. [1] In this research the biodiesel was produced from safflower seeds by converting the raw oil obtained through dampening them via the rolling process, roasting at 90 °C and pressing into Safflower Oil Methyl Ester (Safflower Biodiesel) using the trans-esterification method. Experimental fuels were obtained in the forms of D<sub>100</sub>, B<sub>2.5</sub>M<sub>2.5</sub>2.5D<sub>95</sub>, B<sub>5</sub>M<sub>5</sub>2.5D<sub>90</sub>, B<sub>5</sub>M<sub>2.5</sub>2.5D<sub>92.5</sub>, and B<sub>2.5</sub>M<sub>5</sub>2.5D<sub>92.5</sub>

by mixing the biodiesel fuel obtained from safflower with diesel fuel, adding bio-ethanol at the rates of 2.5 % and 5 %, and volumetrically in inverse ratio. Tests were conducted to determine the fuel properties of the mixed fuels obtained and the diesel fuel, their kinematic viscosity, density, water content, pH level, caloric value, flash point, clouding, pour and freezing points, copper bar corrosion test, iodine number, CFPP (Cold Filter Plugging Point) test and cetane number.

Moreover, the mixtures obtained and the diesel fuel were tried and examined in a water-cooled, four-stroke, single cylinder diesel engine that had a direct injection fuel system. As a result of the experiments, performance characteristics of the test engine were obtained. Exhaust emission values (CO, CO<sub>2</sub>, HC, O<sub>2</sub>, SO<sub>2</sub>, NO<sub>x</sub>) were obtained from the exhaust stack of the test engine using the probe of the gas analysis device.

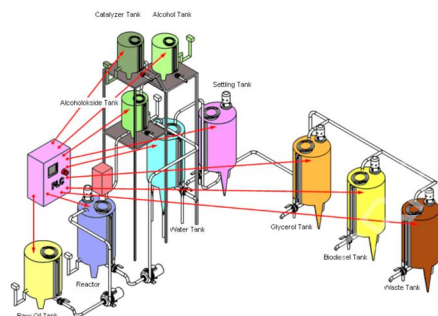


Fig. 7. Biodiesel production and programmable logic controller (PLC) facility. [21]

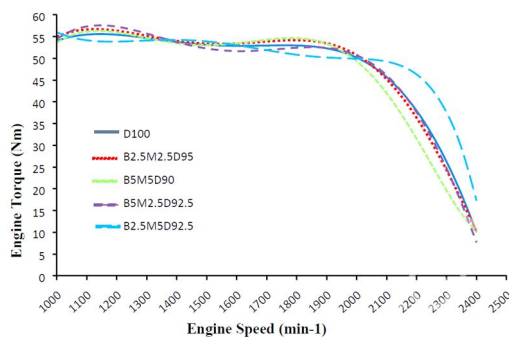


Fig. 8. Torque values of fuels depending on the engine speed. [21]

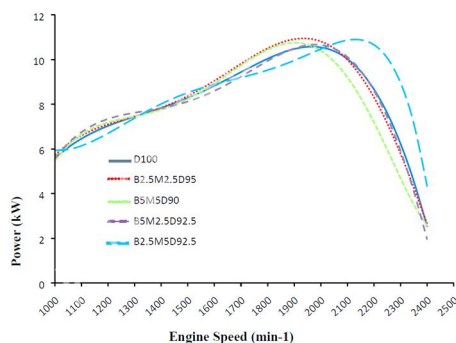


Fig. 9. Effective power values of fuels depending on engine speed. [21]

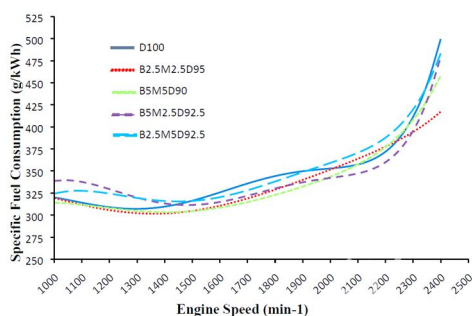


Fig. 10. Specific fuel consumption values of fuels depending on engine speed. [21]

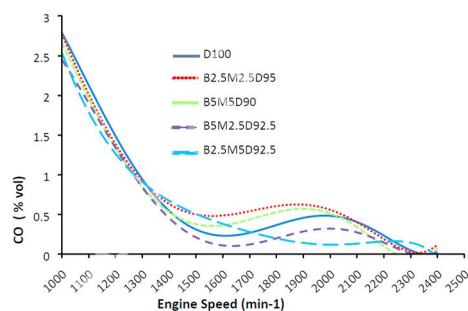


Fig. 11. CO emission values of fuels depending on engine speed. [21]

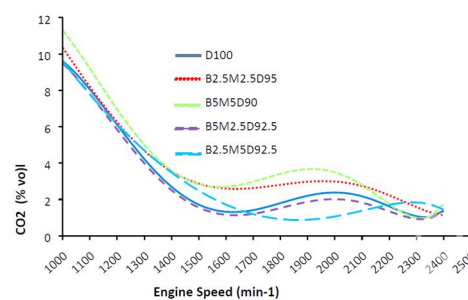


Fig. 12. CO2 emission values of the fuels depending on engine speed. [21]

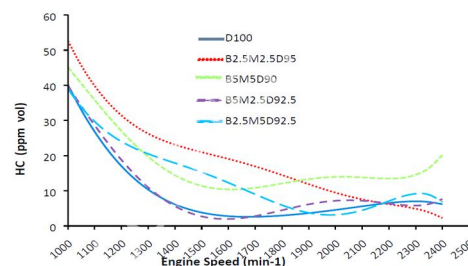


Fig. 13. HC emission values of the fuels depending on engine speed. [21]

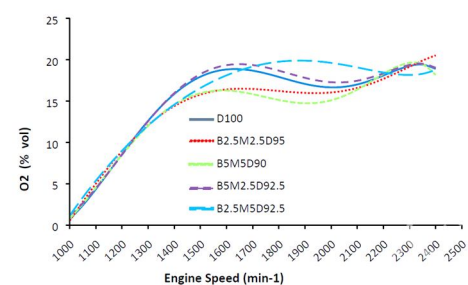


Fig. 14. O2 emission values of the fuels depending on engine speed. [21]

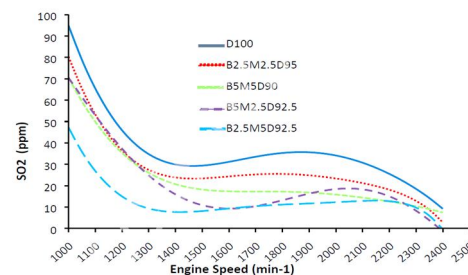


Fig. 15. SO2 emission values of fuels depending on engine speed. [21]

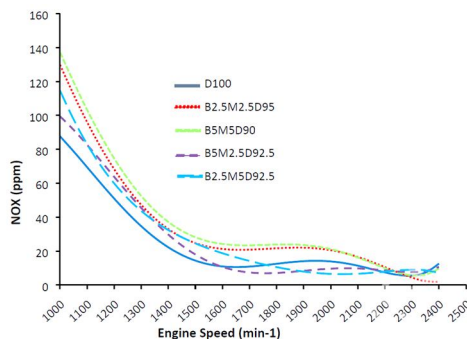


Fig. 16. NOx emission values of fuels depending on engine speed. [21]

Table 3. Technical specifications of the test engine. [22]

Super Star Engine	Units	Value
Working principle	---	4 stroke, direct injection
Cylinder Bore	mm	108
Stroke	mm	100
Cylinder Number	----	1
Cylinder Volume	lt	0,92
Compression Ratio	---	17:1
Maximum Power	HP	15 (2100 min <sup>-1</sup> )
Maximum Torque	Nm	60 (1100 min <sup>-1</sup> )
Maximum Speed	min <sup>-1</sup>	2600
Cooling System	---	Water Cooling
Injection Advance	kg/cm <sup>2</sup>	175
Injection Advance	derece	28-35 ° (Crank Shaft angle)

Table 4. Technical specifications of the hydraulic dynamometer. [23]

Type	Units	Value
Braking Torque Range	Nm	0-1700
Operating Speed	min <sup>-1</sup>	0-7500
Trunk Weight	kgf	45
Total Weight	kgf	110
Trunk Diameter	mm	350
Torque Length	mm	350

Table 5. Specifications of Mobydic 5000 exhaust emission analyzer device. [24]

Mobydic 5000	Units	Value
CO	% Vol	0-10
CO <sub>2</sub>	% Vol	0-20
HC	ppm Vol	0-10000
O <sub>2</sub>	% Vol	0-21
SO <sub>2</sub>	ppm	0-500
NO <sub>x</sub>	ppm	0-5000
Lambda (λ)	---	0-5
Response Time	s	< 10
Measure Flow	lt/min	05-7

Table 6. Names of the fuels and their volumetric constitution percentages. [21]

Fuels	Diesel	Bioethanol	Biodiesel
D <sub>100</sub>	100	0	0
B <sub>2.5</sub> M <sub>2.5</sub> D <sub>95</sub>	95	2.5	2.5
B <sub>5</sub> M <sub>5</sub> D <sub>90</sub>	90	5	5
B <sub>5</sub> M <sub>2.5</sub> D <sub>92.5</sub>	92.5	5	2.5
B <sub>2.5</sub> M <sub>5</sub> D <sub>92.5</sub>	92.5	2.5	5

In this particular research, experiment was conducted on a single-cylinder, four-stroke and water cooled diesel engine, the biodiesel fuel which is transformed from safflower oil through the transesterification method was combined volumetrically with 2.5% and 5% diesel fuel with bioethanol addition and also in reverse proportion were used. In experiments, the fuels obtained in the form of D<sub>100</sub>, B<sub>2.5</sub>M<sub>2.5</sub>D<sub>95</sub>, B<sub>5</sub>M<sub>5</sub>D<sub>90</sub>,

$B_{5.5}M_{2.5}D_{92.5}$ , and  $B_{2.5}M_{5.5}D_{92.5}$  are used. The data obtained by searching the features of that fuels, engine performances and exhaust emissions were presented by following graphics. After the experiments, the optimum mixture of engine fuel is  $D_{100}$  if the evaluation is according to performance and  $B_{2.5}M_{5.5}D_{92.5}$  fuel if the evaluation is according to emissions.

K.A. Abed, M.S. Gad, A.K. El Morsi, M.M. Sayed & S. Abu Elyazeed. [2] Energy production is heavily dependent on fossil fuels that are not only diminishing, but also are considered the main cause of harmful emissions and global warming. Therefore using vegetable oils such as Jatropa, palm, algae and waste cooking oils as alternative fuels in diesel engines has drawn a great attention. Biodiesel from Jatropa, palm, algae and waste cooking oils has been produced using the transesterification process. Biodiesel from different feedstock is mixed with diesel oil in different proportions e.g. B10 and B20. Biodiesel physical and chemical properties are measured according to ASTM standards. A “single cylinder diesel engine” is employed as the test engine in the present work. Exhaust emissions such as CO, CO<sub>2</sub>, NO<sub>x</sub>, HC, and smoke are measured and compared with diesel oil. CO, HC, CO<sub>2</sub> and smoke emissions are lower for biodiesel mixtures B10 and B20 (Jatropa, algae and palm) compared “to diesel fuel”. CO<sub>2</sub> emissions from biodiesel blends B10 and B20 produced from waste cooking oil are higher compared to diesel fuel. NO<sub>x</sub> emissions from all biodiesel mixtures B10 and B20 increases than diesel fuel for all biodiesel blend B10 and B20.

Table 7. Diesel engine technical specifications, [25]

Engine parameters	Specification
Engine model	DEUTZ F1L511
Number of cylinder	1
Bore	100 mm
Stroke	105 mm
Displacement	824 cm <sup>3</sup>
Rated power	5.775/7.7 kW/hp
Rated speed	1500 rpm
Injection point BTDC	24 °C.A
Type of Injection	Direct injection
Type of cooling	Air cooling

Table 8. Physical and chemical properties of biodiesel blends as compared to diesel fuel according to ASTM standards.

Physical and chemical properties of biodiesel blends as compared to diesel fuel according to ASTM standards.

Biodiesel Blends	Density at 15.56 °C, kg/m <sup>3</sup> ASTM D-4052	Kinematic Viscosity at 40 °C, mm <sup>2</sup> /s(cst) ASTM D-445	Flash Point, °C ASTM D-93	Heating Value, kJ/kg ASTM D-224	Cetane Number ASTM D-13
Diesel oil	829	2.8	75	42,000	45
Jatropa biodiesel (B20)	845	5.2	88	40,000	53
Jatropa biodiesel (B10)	835	3.5	83	41,500	48
Palm biodiesel (B20)	835	2.82	71.5	41,206	60
Palm biodiesel (B10)	833	2.49	69	41,780	51
WCO biodiesel (B20)	855.8	2.98	60	43,953	60.71
WCO biodiesel (B10)	856.4	2.85	69	47,021	59.53
Algae biodiesel (B20)	843.8	4.8	90	37,866	70
Algae biodiesel (B10)	840.5	3.31	83	40,017	56

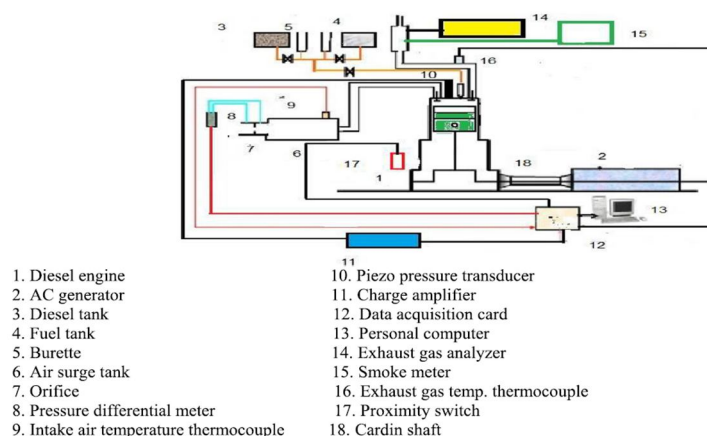


Fig. 17. Schematic diagram of a diesel test engine [25]

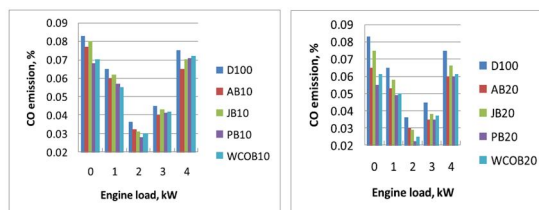


Fig. 18. Variation of CO emission with engine load for biodiesel blends.

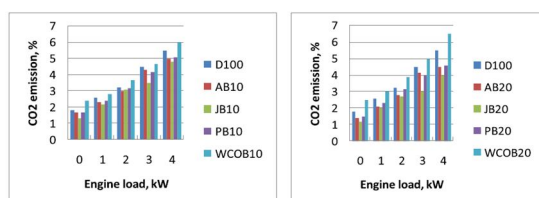


Fig. 19. Variation of CO<sub>2</sub> emission with engine load for biodiesel blends.

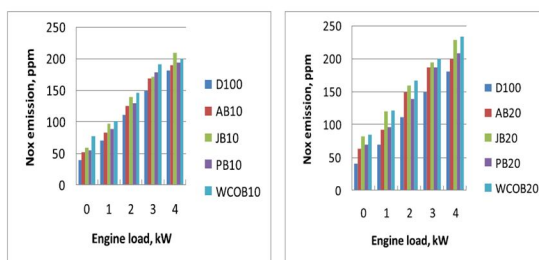


Fig. 20. Variation of NO<sub>x</sub> emission with engine load for biodiesel blends.

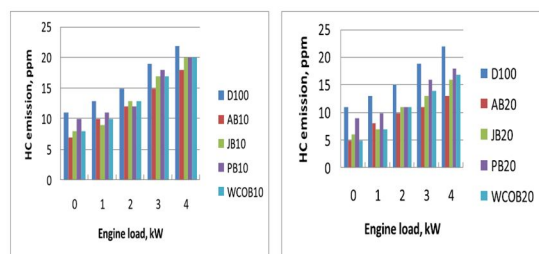


Fig. 21. Variation of HC emission with engine load for biodiesel blends.

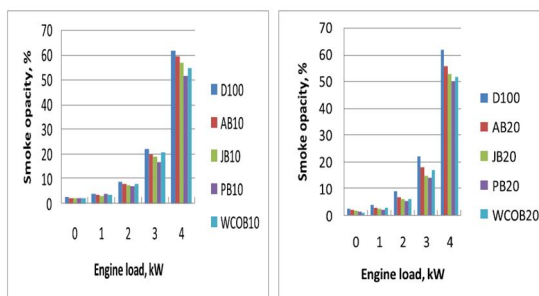


Fig. 22. Variation of smoke emission with engine load for biodiesel blends.

A single cylinder diesel engine was run using different sources of biodiesel such as Jatropha, palm, algae and waste cooking oil biodiesel blends B10 and B20. Exhaust emissions were examined at different engine loads of 1, 2, 3 and 4 kW and a constant engine speed of 1500 rpm. Exhaust emissions such as CO, CO<sub>2</sub>, NO<sub>x</sub>, HC and smoke emissions were examined and compared with diesel fuel.

The following conclusions could be summarized as:

- 1) CO, HC and smoke emissions were lower for the tested four biodiesel types (Jatropha, algae and palm and waste cooking oil) mixtures B10 and B20 as compared to diesel fuel.
- 2) CO<sub>2</sub> emissions from biodiesel blends B10 and B20 produced from waste cooking oil were higher compared to diesel fuel and the other biodiesel fuel.
- 3) NO<sub>x</sub> emissions; from biodiesel mixtures, B10 and B20 increased compared with diesel fuel for the examined biodiesel blends.
- 4) The obtained results were compared with previous results of other authors. This comparison showed accepted conformity.

*Yuvarajan Devarajan, Dineshabu Munuswamy, Beemkumar Nagappan & Ganesan Subbiah.* [3] This work examines the effect of butanol as an oxygenated additive to lower carbon monoxide, smoke, nitrogen oxide and hydrocarbon emissions and to improve the performance aspects of *Calophyllum inophyllum* (Punnai) biodiesel. Singlecylinder, oil-cooled compression ignition engines are employed in this work. Neat Punnai biodiesel (P100) is blended with butanol at 10% and 20% by volume and labelled as B10P90 and B20P80, respectively. Methanol and alkaline catalyst (KOH) were used for the transesterification process for biodiesel production. The transesterification technique yielded 88% biodiesel from raw Punnai oil. Engine tests resulted in lower CO, smoke, NO<sub>x</sub> and HC emissions when fuelled with both butanol blends when compared to P100. In addition, BSFC (brake-specific fuel consumption) reduced and BTE (brake thermal efficiency) increased with the inclusion of butanol blends (B10 and B20) to neat Punnai biodiesel.

Table 9. Properties of tested fuels

Properties	P100	B10P90	B20P80	Diesel	Allowable limit	Method
Density @ 15 °C, gm/cc	0.77	0.75	0.73	0.75	0.65-0.86	ASTM D4052
Kinematic viscosity @40 °C, mm <sup>2</sup> /s	4.8	4.5	4.2	2.7	1.9-6.5	ASTM D445
Calorific value, kJ/kg	37,698	38,125	38,623	42,500	> 15,000	ASTM D240
Flash point, °C	154	155	157	45	> 40	ASTM D824
Cetane index, CI	54	55	55	47	> 47	ASTM D976

Table 10. Specification of the experimental setup

Make	Kirloskar
Stroke	4
Cylinder	Single
Rated power	5.5 kW
Rated speed	1500 rpm
Bore diameter (D)	87.5 mm
Stroke (L)	110 mm
Compression ratio	17.5:1
Injection timing	17°bTDC



Fig. 23. Photographic view of the experimental setup

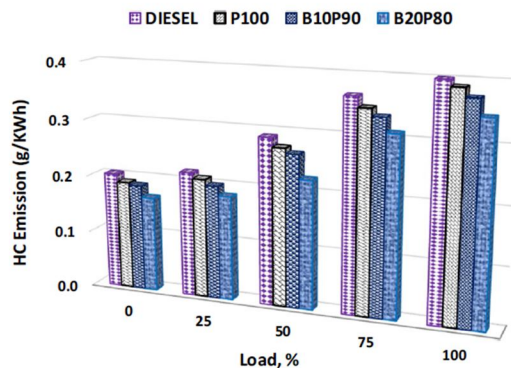


Fig. 24. Variation in HC emissions with load

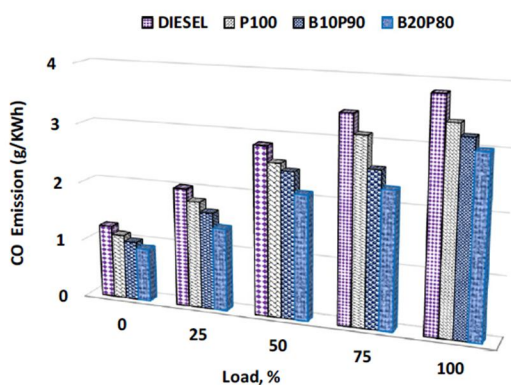


Fig. 25. Variation in CO emissions with load

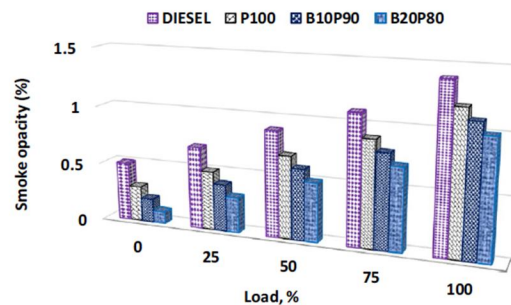


Fig. 26. Variation in smoke opacity with load

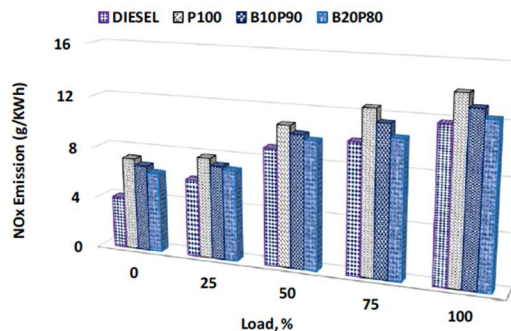


Fig. 27. Variation in NOx emissions with load

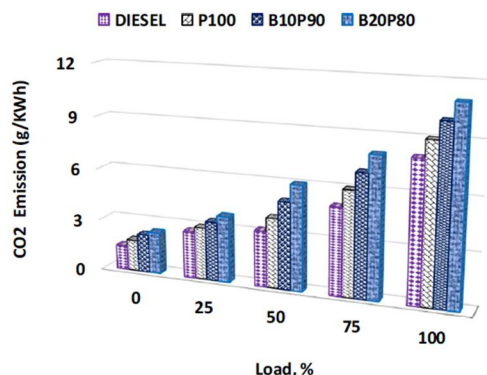


Fig. 28. Variation in CO2 emissions with load

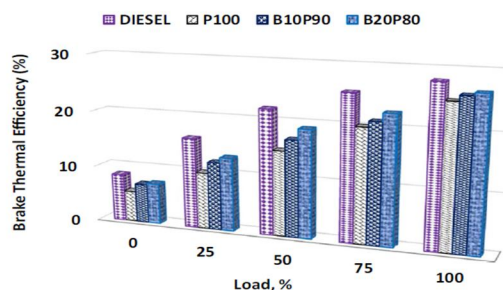


Fig. 29. Variation in BTE with load

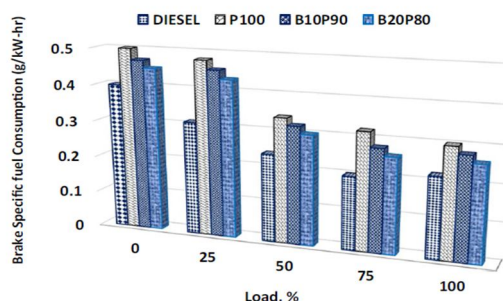


Fig. 30. Variation in BSFC with load

The consequence of using butanol as a higher alcohol up to 20% in volume on the emission and performance pattern of Punnai biodiesel/butanol blends was investigated.

The following conclusions arise from this study.

- B10P90, B20P80 blends showed the potential results of significant physicochemical properties.
- Smoke opacity decreased for B10P90 with the reduction being even greater for B20P80. Smoke opacity hardly increased due to the dominance of oxygenated conditions for B10P90, B20P80 blends.
- NOx emissions for B10P90, B20P80 blends displayed comparable behaviours under all conditions. NOx emissions lowered with an increase in butanol percentage in the blends.
- The HC emissions were lower for B10P90, B20P80 than P100 under all conditions. This is because of their higher cetane number.
- Increasing butanol content in the P100 improved CO emissions. Butanol has a high heat of vaporization, which enhances the oxidation reaction.
- The BTE of test fuels is: diesel > B20P80 > B10P90 > P100.
- The BSFC of test fuels is: diesel < B20P80 < B10P90 < P100.
- B20P80 demonstrated better emissions and performance patterns among all tested fuels at testing conditions.

M. Vijayakumar & P. C. Mukesh Kumar. [4] Many research works are being carried out to enhance the performances of internal combustion engines to meet out the current energy demand and to reduce the emission with the alternate fuels. In this experimental investigation, the performances and emission characteristics of compression ignition engine were studied by using electronic fuel fumigation method. The lemongrass biodiesel blended with 20% of biodiesel and 80% of diesel (B20) was used as primary fuel and 1-propanol is used as secondary fuel for fumigation. The Kirlosker, single cylinder four stroke, direct injection, and water cooled engine was taken for conduction of tests. The speed of the engine is maintained constant and the engine load was varied in the range of 0%e100% and fumigation injection timing is varied in the range of 1 ms, 3 ms and 5 ms to study the engine parameters. It is studied that the brake thermal efficiency of fumigation fuel at 5 ms is 6.7% higher than diesel and at 3 ms is 3.1% higher than the diesel fuel at 100% load. The specific fuel consumption at 5 ms is 16 % higher than the reference diesel fuel. The 5 ms 1-propanol fumigation produces the maximum HC and CO with minimum smoke and NO because of lower combustion temperature and incomplete combustion. The SFC of fumigation fuel at 5 ms is 18.6% higher than diesel at 100% load and 23 % higher than diesel at 80% load. The net heat release of fumigation fuel (1-propanol) at 1 ms produces 2% higher than the reference diesel at crank angle of 360. The fumigation fuel (1-propanol) injection timing at 5 ms produces more percentage of CO at different load conditions. It is also studied that the minimum level of CO is 0.38 % at 40% load condition. The fumigation fuel at 5 ms injection timing produces minimum percentage of CO<sub>2</sub> at different load conditions. The minimum level of CO<sub>2</sub> is 9.3% at 80% load condition. The other emissions are also analyzed and recorded the levels based on the load condition.

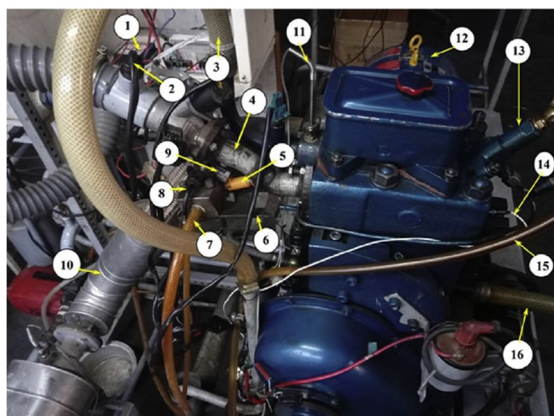


Fig. 31. Photograph of the experimental setup. 1. ECU, 2. Air flow measuring sensor, 3. Engine cooling water outlet, 4. Inlet Manifold, 5. Electronic fumigation injector, 6. Fumigation injector bed, 7. Fumigation fuel inlet, 8. Fumigation fuel return line, 9. ECU signal connections, 10. Exhaust gas pipe line, 11. Cooling water temperature sensor (out), 12. Eddy current dynamometer, 13. Primary fuel injector, 14. Pressure sensor, 15. Primary fuel return line, 16. Engine cooling water inlet

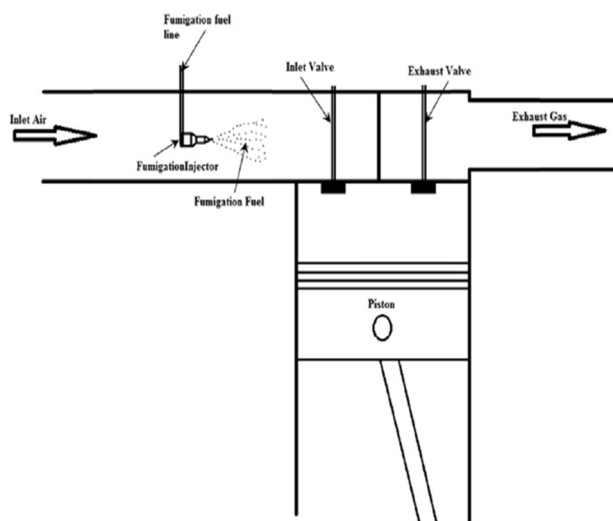


Fig. 32. Schematic diagram of fumigation of fuel.

Table 11. Engine specifications.

Particulars	Specifications
Manufacturer	Kirloskar
Type	Four stroke, single cylinder, Direct injection, VCR engine
Bore	87 mm
Stroke	110 mm
Compression ratio	18:1
Engine speed	1500 RPM
Fuel injection pressure	210 bar
Injection timing	23° BTDC
Cooling system	Water cooled engine

Table 12. Fuel properties.

Properties	Diesel	Lemon Grass	1-Propanol
Viscosity at 40 °C Cst	3.25	4.18	2.8
Density kg/m <sup>3</sup> at 15 °C	835	984	803
Cetane Number	50	38	15
Flash Point	>52 °C	150 °C	22 °C
Auto Ignition Temperature °C	>250 °C	-	371
Heating Value MJ/kg	44.8	36.27	30.68

Table 13. Uncertainty and measuring range of gas analyzer and smoke meter.

S.No	Parameters	Accuracy
1	Airflow	0.6481 %
2	Fuel flow	0.7319 %
3	Engine Power	0.9434 %
4	Exhaust gas Temperature	±5 °C
5	Viscosity	0.7 %
6	Cylinder Pressure	0.61644 %
7	Brake power	1.087%
8	Fuel consumption	0.25%
9	Friction power	0.25%
10	Brake thermal efficiency	1.116%
11	CO	±0.03 %
12	CO <sub>2</sub>	±0.5 %
13	HC	±10 ppm
14	O <sub>2</sub>	±5 %
15	NO	±10 ppm
16	SMOKE	±1 %

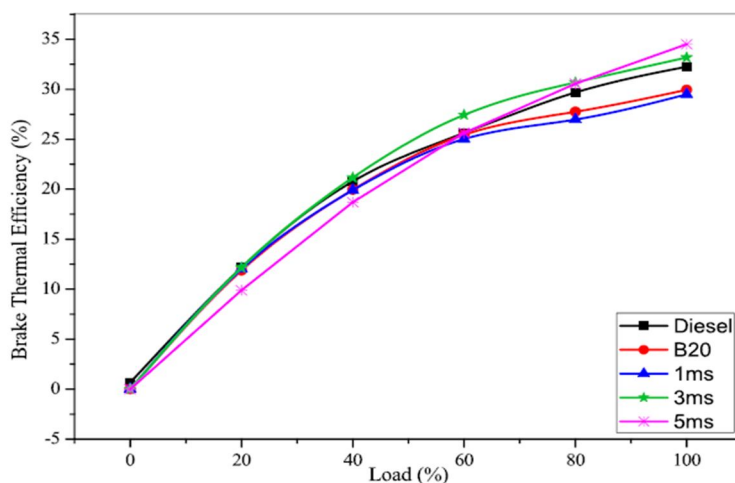


Fig. 33. Variation of Brake Thermal Efficiency with load.

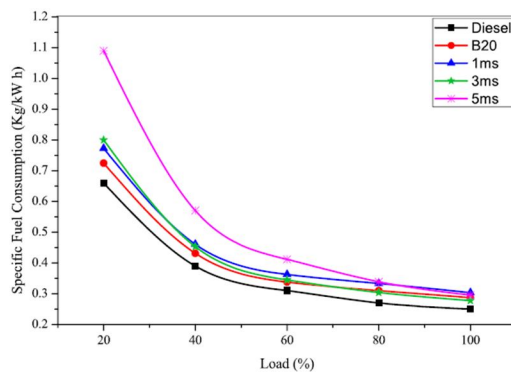


Fig. 34. Variation of Specific Fuel Consumption with load.

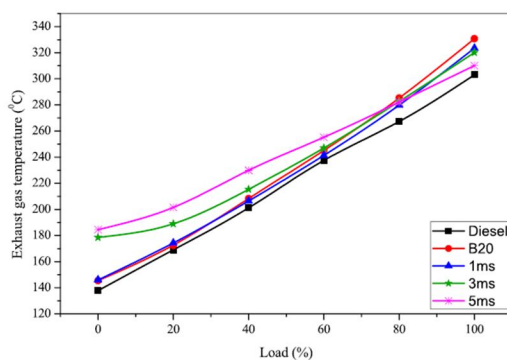


Fig. 35. Exhaust gas temperature vs load.

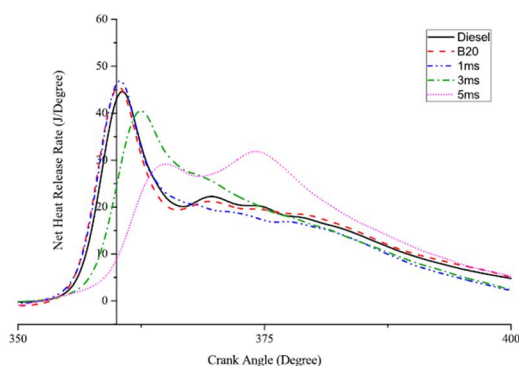


Fig. 36. Net heat release rate with crank angle at 80% load.

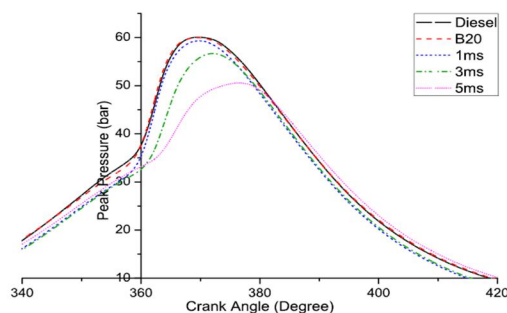


Fig. 37. Effect of cylinder peak pressure on fumigation timing at 80% load.

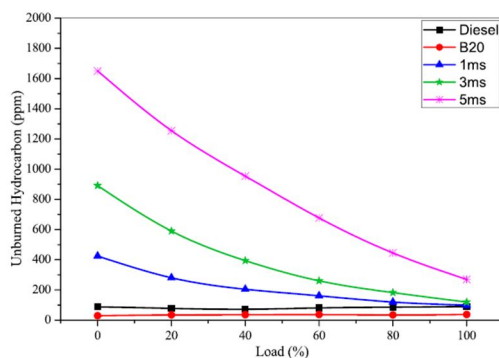


Fig. 38. Variation of exhaust hydrocarbon with load.

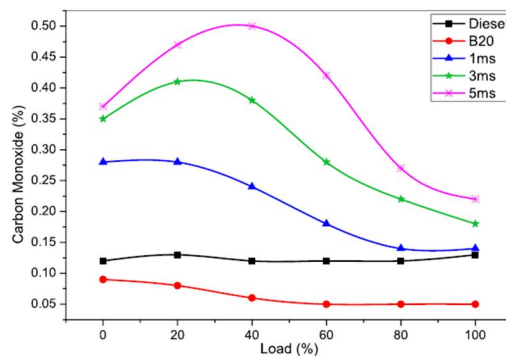


Fig. 39. Variation of carbon monoxide emission with load.

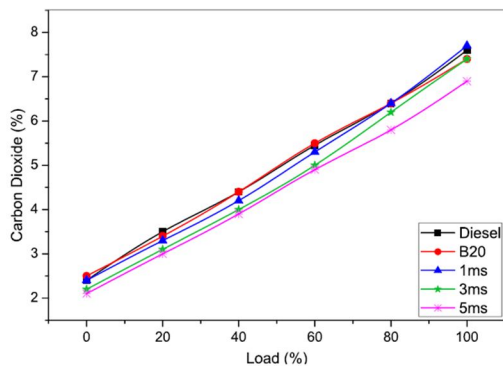


Fig. 40. Exhaust Carbon Dioxide vs loads.

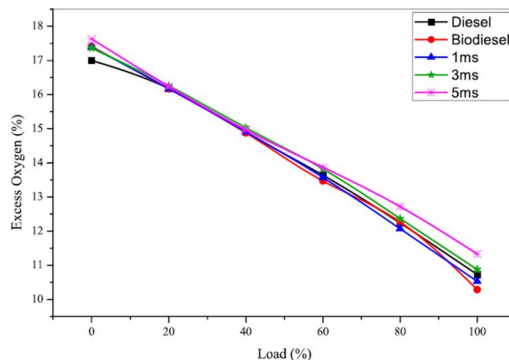


Fig. 41. Variation of excess oxygen with load.

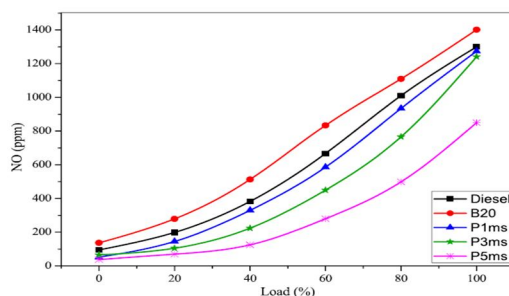


Fig. 42. Variation of nitrous oxide with different percentage of loads.

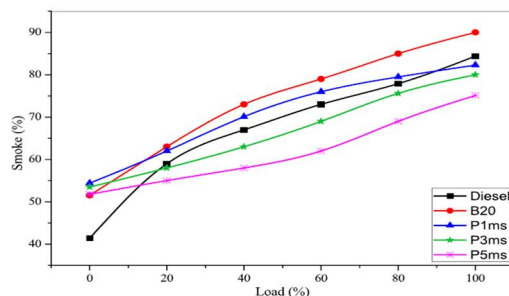


Fig. 43. Smoke particulate with loads.

In this experimental analysis, the performance and emission characteristics of single cylinder four stroke diesel engine handling lemongrass biodiesel blended with 20% of biodiesel and 80% of diesel (B20) as primary fuel and 1-propanol as secondary fuel for fumigation were studied with different load conditions and at different fumigation injection timings. The following are the observations made out of this experimental work:

The brake thermal efficiency of fumigation fuel at 5 ms is 6.7% higher than diesel and at 3 ms is 3.1% higher than the diesel fuel at 100% load. The SFC of fumigation fuel at 5 ms is 18.6% higher than diesel at 100% load and 23 % higher than diesel at 80% load. The B20 blend gives 6% and 9.15% higher exhaust temperature than the diesel at 80% and 100% load respectively. The net heat release of fumigation fuel (1- propanol) at 1 ms produces 2% higher than the reference diesel at crank angle of 360. The fumigation fuel (1-propanol) injection timing at 5 ms produces more percentage of CO at different load conditions. Also studied that the minimum level of CO is 0.38 % at 40% load condition. The NO level is 34.61% lower than the diesel at 100% load condition. The fumigation fuel at 5 ms injection timing produces minimum percentage of CO<sub>2</sub> at different load conditions. The minimum level of CO<sub>2</sub> is 9.3% at 80% load condition. The exhaust of fumigation fuel at 5 ms injection timing gives maximum excess oxygen percentage at different load conditions. The excess oxygen of fumigation fuel at 1 ms level is 4.1% lower than the diesel at 100% load condition. Therefore it is concluded that the fumigation effect on engine performance and emissions gives considerable favorable outcome at different injection timings and at 80%e100% load condition. The future work is required to optimize the fumigation fuel injection timing for optimum engine performance and reduced emissions.

C.W. Mohd Noora, M.M. Noora & R. Mamata. [5] Transportation and shipping activities are major contributor to air pollution at sea where most of it occurs as a result of exhaust emissions from ships. Stringent emission limitations enforced by the International Maritime Organization have hastened the need to find a new alternative fuel for marine diesel engines. Thus, biodiesel fuel was chosen as one of the environmentally friendly alternative energy that can reduce ship toxic gas emissions and at the same time reduces dependence on petroleum-based fuels. Therefore, the purpose of this paper is to provide a comprehensive review of biodiesel as an alternative fuel for marine diesel engine applications. This review covers the biodiesel fuel background, engine performance, history, recent progress, engine warranty, issues, challenges, and possible solutions on using biodiesel for marine applications. A significant number of literatures from indexed journals were cited accordingly. The results of previous studies had shown that the use of biodiesel would mostly increase the amount of brake specific fuel consumption and nitrogen oxide gas while conversely reducing other toxic gas emissions. Although a number of issues and challenges arise, most marine engine manufacturers give conditional warranty against the use of biodiesel in the engines. The study concluded that biodiesel and its blends have a bright future in the marine sector, provided some of the highlighted issues can be solved.

Table 14. Marine fuel type and grades [26]

Fuel type	Fuel grades	Common industry name
Distillate	DMX, DMA, DMB, DMZ	Gas oil or marine gas oil, marine diesel oil
Intermediate	IFO 180, 380	Intermediate fuel oil
Residual	RMA-RMK	Fuel oil or residual fuel oil

Table 15. Properties comparison of biodiesel, automotive and marine fuels [26]

Property	Biodiesel EN14214	Automotive diesel EN590	Marine diesel ISO 8217	Heavy fuel oil ISO 8217
Density/15 °C, kg/m <sup>3</sup>	860–900	820–845	< 900	975–1010
Viscosity/ 40 °C, cSt	3.5–5.0	2.0–4.5	< 11	< 700/50 °C
Flashpoint	> 120	> 55	> 60	> 60
Cetane no.	> 51	> 51	> 35	> 20
Ash content, %	< 0.01	< 0.01	< 0.01	< 0.2
Water content, ppm	< 500	< 200	< 300	< 5 000
Acid no. (TAN)	< 0.5	–	–	–
Sulphur, ppm	< 10	< 350	< 200,000	< 50,000
Calorific value, MJ/kg	37.5	43	42	40

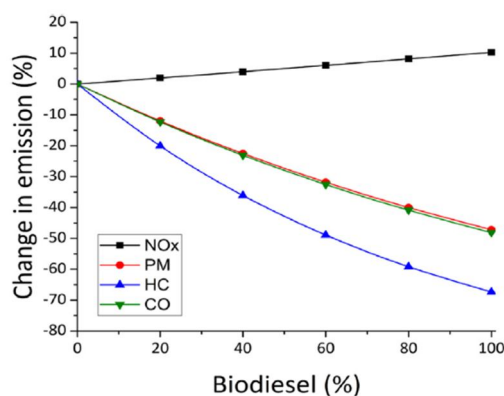


Fig. 44. Relationship between the percentage of biodiesel and percentage change in emissions [31]

The use of marine fuels blended with these biodiesels can be considered as the proper way to reduce air pollution at sea and simultaneously meet IMO regulations. Most marine engine makers are aware of the biodiesel advantages by providing conditional warranty, provided the biodiesel meet the standards of ASTM D6751 or EN14214. Therefore, effective strategies and potential solutions have been proposed in the previous section to realize the goal of this alternative fuel use in the marine industry. Furthermore, official mandate by the government and international bodies such as IMO is able to encourage and promote the application of biodiesel in the marine industry.

#### IV. CONCLUSION

Outcome of the previous studies have indicated that biodiesel fuel is suitable for use as an alternative fuel for marine engine applications. Many reports have revealed that alternative fuels derived from vegetable oil and animal fats were found to be environmentally friendly, renewable, non-toxic, biodegradable, sulphur free and aromatic. Biodiesel typically contains slightly low energy as compared to petroleum diesel; however, it also contains no sulphur and contributes to better environmental conditions. At present the average percentage of allowable biodiesel is not more than 20%, although there are a handful of manufacturers that allow the use of B100. Despite the fact that biodiesel has a lot of advantages, there are some obstacles that arise, such as fuel stability, higher production and feedstock costs, material compatibility & cold flow properties. Barriers to production costs and fuel economy can be mitigated by the use of a new source of feedstock from second and third generation biodiesel. Research on new sources such as algae & waste oil is seen to have grown rapidly lately. The role of biodiesel is not to replace the existing fossil fuel, but more towards the establishing of balance energy policy that could benefit the international community. Last but not least, the authors believe that biodiesel has a bright future as a green alternative energy for diesel engine applications.


## REFERENCES

- [1] F. Aydn, H. Öüt, effects of using ethanol-biodiesel-diesel Fuel in single cylinder diesel engine to engine performance and emissions, *Renewable Energy* (2016).
- [2] K.A. Abed, M.S. Gad, A.K. El Morsi, M.M. Sayed, S. Abu Elyazeed. Effect of biodiesel fuels on diesel engine emissions, *Egyptian Journal of Petroleum* 28 (2019) 183–188.
- [3] Yuvarajan Devarajan, Dineshbabu Munuswamy, Beemkumar Nagappan, Ganesan Subbiah. Experimental assessment of performance and exhaust emission characteristics of a diesel engine fuelled with Punnai biodiesel/ butanol fuel blends, *Petroleum Science* (2019) 16:1471–1478.
- [4] M. Vijayakumar, P. C. Mukesh Kumar. Performance and emission characteristics of compression-ignition engine handling biodiesel blends with electronic fumigation, *Heliyon* 5 (2019) e01480.
- [5] C.W. Mohd Noora, M.M. Noora, R. Mamat. Biodiesel as alternative fuel for marine diesel engine applications: A review, *Renewable and Sustainable Energy Reviews* 94 (2018) 127–142.
- [6] Devarajan Y, Choubey G, Mehar K. Ignition analysis on neat alcohols and biodiesel blends propelled research compression ignition engine. *Energy Sources Part A Recov Util Environ Eff*. 2019.
- [7] Ganesan S. Effect Of EGR & nanoparticles on performance and emission characteristics of a diesel engine fuelled with palm biodiesel and diesel blends. *J Oil Palm Res*. 2019;31:130–137.
- [8] Rajesh Kumar B, Saravanan S. Effects of iso-butanol/diesel and n-pentanol/ diesel blends on performance and emissions of a DI diesel engine under premixed LTC (low temperature combustion) mode. *Fuel*. 2016;170:49–59.
- [9] Ramakrishnan G, Krishnan P, Rathinam S, R T, Devarajan Y. Role of nano-additive blended biodiesel on emission characteristics of the research diesel engine. *Int J Green Ener*. 2019.
- [10] Devarajan Y. Experimental evaluation of combustion, emission and performance of research diesel engine fuelled di-methyl- carbonate and biodiesel blends. *Atmos Pollut Res*. 2018;10(3):795–801.
- [11] Joy N, Devarajan Y, Nagappan B, Anderson A. Exhaust emission study on neat biodiesel and alcohol blends fueled diesel engine. *Energy Sour Part A Recovery Util Environ Eff* 2017;40(1):115–9.
- [12] Devarajan Y. Experimental evaluation of combustion, emission and performance of research diesel engine fuelled di-methyl- carbonate and biodiesel blends. *Atmos Pollut Res*. 2018;10(3):795–801.
- [13] Devaraj A, Yuvarajan D, Vinoth Kanna I. Study on the outcome of a cetane improver on the emission characteristics of a diesel engine. *Int J Ambient Energy*. 2018.
- [14] Yuvarajan D, Ravikumar J, Babu MD. Simultaneous optimization of smoke and NOx emissions in a stationary diesel engine fuelled with diesel–oxygenate blends using the grey relational analysis in the Taguchi method. *Anal Meth*. 2016;8(32):6222–30.
- [15] Kishore Pandian A, Munuswamy DB, Radhakrishnan S, Bathey Ramakrishnan RB, Nagappan B. Influence of an oxygenated additive on emission of an engine fueled with neat biodiesel. *Pet Sci*. 2017;14(4):791–7.
- [16] Radhakrishnan S, Munuswamy DB, Devarajan Y, Mahalingam A. Performance, emission and combustion study on neat biodiesel and water blends fuelled research diesel engine. *Heat Mass Transf*. 2018;55(4):1229–37.
- [17] Yuvarajan D, Nagappan B, Subbiah G. A comprehensive study on emission and performance characteristics of a diesel engine fueled with nanoparticle-blended biodiesel. *Environ Sci Pollut Res*. 2019.
- [18] Pandian AK, Munuswamy DB, Radhakrishnan S, Ramakrishnan RBB, Nagappan B. Emission and performance analysis of a diesel engine burning cashew nut shell oil bio diesel mixed with hexanol. *Pet Sci*. 2018;15(1):176–84.
- [19] Mahalingam A. Investigation on the emission reduction technique in acetone-biodiesel aspirated diesel engine. *J Oil Palm Res*. 2018;30(2):345–9.
- [20] Aydn, F., Effects of using e-b diesel fuel in single cylinder diesel engine to engine performance, Emissions and Lubrication Oil, Ph.D. thesis, The Graduate School of Natural And Applied Science Of Selcuk University, Konya 2014 pp, 1-71.
- [21] Anonymous, 2009, Super Star Diesel Engine Operation and Maintenance Manual, İstanbul.
- [22] J Anonymous. 2013 a, Hydraulic dynamometer [online], <http://netfren.com/>, Date of visit: [11.07.2013].
- [23] Anonymous, 2013 b, Exhaust emissions device [online], <http://www.ozenelektronik.com.tr/>, Date of visit : [16.07.2013].
- [24] K.A. Abed, Akila K. El Morsi, Mahmoud M. Sayed, Abd El Hamid El Shaib, M.S. Gad, Effect of Waste Cooking-oil Biodiesel on Performance and Exhaust Emissions of a Diesel Engine, *Egyptian J. Petroleum (EGYJP)* 27 (4) (2018) 985–989.
- [25] Kolwzan K, Narewski M. Study on alternative fuels for marine applications. *Clean Shipp Curr* 2012;1:1–43.
- [26] Nayyar M. The use of biodiesel fuels in the US marine industry. Washington, D.C., United States: The U.S. Maritime Administration (MARAD); 2010.
- [27] OPEC. OPEC annual statistical bulletin. Vienna, Austria; 2017.
- [28] Demirbas A. Biodiesel: a realistic fuel alternative for diesel engines. London: Springer-Verlag London Limited; 2008.
- [29] British Petroleum. BP energy outlook. London, United Kingdom; 2017.
- [30] US EPA. Analysis of biodiesel impacts on exhaust emissions-draft technical report. Springfield, USA: Environmental Protection Agency; 2002.
- [31] REN21. Renewables global status report. Paris, France: REN21; 2017.
- [32] Atabani AE, El-Sheekh MM, Kumar G, Shobana S. Edible and nonedible biodiesel feedstocks: microalgae and future of biodiesel. In: Rasul MG, Azad AK, Sharma SC, editors. *Clean energy Sustain. Dev*. London: Elsevier Inc.; 2017. p. 507–56.
- [33] Demirbas A. Progress and recent trends in biodiesel fuels. *Energy Convers Manag* 2009;50:14–34.
- [34] Sadeghinezhad E, Kazi SN, Badarudin A, Oon CS, Zubir MNM, Mehrli M. A comprehensive review of bio-diesel as alternative fuel for compression ignition engines. *Renew Sustain Energy Rev* 2013;28:410–24.
- [35] Othman MF, Adam A, Najafi G, Mamat R. Green fuel as alternative fuel for diesel engine: a review. *Renew Sustain Energy Rev* 2017;80:694–709.
- [36] Ali OM, Mamat R, Abdullah NR, Adam A. Analysis of blended fuel properties and engine performance with palm biodiesel-diesel blended fuel. *Renew Energy* 2016;86:59–67.
- [37] Kumar N, Chauhan SR. Performance and emission characteristics of biodiesel from different origins: a review. *Renew Sustain Energy Rev* 2013;21:633–58.
- [38] Atabani AE, Silitonga AS, Badruddin IA, Mahlia TMI, Masjuki HH, Mekhilef S. A comprehensive review on biodiesel as an alternative energy resource and its characteristics. *Renew Sustain Energy Rev* 2012;16:2070–93.

- [39] Mahmudul HM, Hagos FY, Mamat R, Adam AA, Ishak WFW, Alenezi R. Production, characterization and performance of biodiesel as an alternative fuel in diesel engines – a review. *Renew Sustain Energy Rev* 2017;72:497–509.
- [40] Lin L, Cunshan Z, Vittayapadung S, Xiangqian S, Mingdong D. Opportunities and challenges for biodiesel fuel. *Appl Energy* 2011;88:1020–31.
- [41] Abdul Kapor NZ, Maniam GP, Rahim MHA, Yusoff MM. Palm fatty acid distillate as a potential source for biodiesel production – a review. *J Clean Prod* 2017;143:1–9.
- [42] Mofijur M, Atabani AE, Masjuki HH, Kalam MA, Masum BM. A study on the effects of promising edible and non-edible biodiesel feedstocks on engine performance and emissions production: a comparative evaluation. *Renew Sustain Energy Rev* 2013;23:391–404.
- [43] Singh SP, Singh D. Biodiesel production through the use of different sources and characterization of oils and their esters as the substitute of diesel: a review. *Renew Sustain Energy Rev* 2010;14:200–16.
- [44] Gashaw A, Getachew T, Teshita A. A review on biodiesel production as alternative fuel. *J Prod Ind* 2015;4:80–5.
- [45] Balat M, Demirbas MF. Bio-oil from pyrolysis of black alder wood. *Energy Sources Part A Recover Util Environ Eff* 2009;31:1719–27.
- [46] Lappi H, Alén R. Pyrolysis of vegetable oil soaps – palm, olive, rapeseed and castor oils. *J Anal Appl Pyrolysis* 2011;91:154–8.
- [47] Maher KD, Bressler DC. Pyrolysis of triglyceride materials for the production of renewable fuels and chemicals. *Bioresour Technol* 2007;98:2351–68.
- [48] Mohan D, Pittman CU, Steele PH. Pyrolysis of wood/biomass for bio-oil: a critical review. *Energy Fuels* 2006;20:848–89.
- [49] Bridgwater AV. Review of fast pyrolysis of biomass and product upgrading. *Biomass Bioenergy* 2012;38:68–94.
- [50] Şensöz S, Angın D, Yorgun S. Influence of particle size on the pyrolysis of rapeseed (*Brassica napus* L.): fuel properties of bio-oil. *Biomass Bioenergy* 2000;19:271–9.
- [51] Demirbas A. Relationships derived from physical properties of vegetable oil and biodiesel fuels. *Fuel* 2008;87:1743–8.
- [52] Filemon J. Biofuels from plant oils. Jakarta, Indonesia: ASEAN Foundation; 2010.
- [53] Lin B-F, Huang J-H, Huang D-Y. Experimental study of the effects of vegetable oil methyl ester on DI diesel engine performance characteristics and pollutant emissions. *Fuel* 2009;88:1779–85.
- [54] Torres-Jimenez E, Svoljšak M, Gregorc A, Lisec I, Dorado MP, Kegl B. Physical and chemical properties of ethanol–diesel fuel blends. *Fuel* 2011;90:795–802.
- [55] Soo-Young N. Inedible vegetable oils and their derivatives for alternative diesel fuels in CI engines: a review. *Renew Sustain Energy Rev* 2011;15:131–49.
- [56] Alptekin E, Canakci M. Determination of the density and the viscosities of biodiesel- diesel fuel blends. *Renew Energy* 2008;33:2623–30.
- [57] Canakci M, Sanli H. Biodiesel production from various feedstocks and their effects on the fuel properties. *J Ind Microbiol Biotechnol* 2008;35:431–41.
- [58] Wan Nor Maawa WG, Rizalman M, Masjuki HH, Najafi G. Effects of biodiesel from different feedstocks on engine performance and emissions: a review. *Renew Sustain Energy Rev* 2015;51:585–602.
- [59] Lee S, Tanaka D, Kusaka J, Daisho Y. Effects of diesel fuel characteristics on spray and combustion in a diesel engine. *JSAE Rev* 2002;23:407–14.
- [60] Rakopoulos DC, Rakopoulos CD, Giakoumis EG. Impact of properties of vegetable oil, bio-diesel, ethanol and n-butanol on the combustion and emissions of turbocharged HDDI diesel engine operating under steady and transient conditions. *Fuel* 2015;156:1–19.
- [61] Knothe G, Gerpen JH Van, Krahl J. The biodiesel handbook 2. Champaign, Illinois: AOCS Press; 2005.
- [62] Tate RE, Watts KC, Allen CAW, Wilkie KI. The densities of three biodiesel fuels at temperatures up to 300 C. *Fuel* 2006;85:1010–5.
- [63] Ashrafali AM, Masjuki HH, Kalam MA, Rizwanul Fattah IM, Imtenan S, Shahir SA, et al. Production and comparison of fuel properties, engine performance, and emission characteristics of biodiesel from various non-edible vegetable oils: a review. *Energy Convers Manag* 2014;80:202–28.
- [64] Kwangdinata R, Raya I, Zakir M. Production of biodiesel from lipid of phytoplankton *Chaetoceros calcitrans* through ultrasonic method. *Sci World J* 2014;2014.
- [65] Alptekin E, Canakci M. Characterization of the key fuel properties of methyl ester/diesel fuel blends. *Fuel* 2009;88:75–80.
- [66] Shahabuddin M, Kalam MA, Masjuki HH, Bhuiya MMK, Mofijur M. An experimental investigation into biodiesel stability by means of oxidation and property determination. *Energy* 2012;44:616–22.
- [67] Boog JHF, Silveira ELC, De Caland LB, Tubino M. Determining the residual alcohol in biodiesel through its flash point. *Fuel* 2011;90:905–7.
- [68] Canakci M, Van Gerpen J. Biodiesel production via acid catalysis. *Trans ASAE (Am Soc Agric Eng)* 1999;42:1203–10.
- [69] Murugesan A, Umarani C, Chinnusamy TR, Krishnan M, Subramanian R, Neduzchezhain N. Production and analysis of bio-diesel from non-edible oils-A review. *Renew Sustain Energy Rev* 2009;13:825–34.
- [70] Sanford S, White J, Shah P. Feedstock and biodiesel characteristics report. Ames, Iowa, United States; 2009.
- [71] Saloua F, Saber C, Hedi Z. Methyl ester of [*Maclura pomifera* (Rafin.) Schneider] seed oil: biodiesel production and characterization. *Bioresour Technol* 2010;101:3091–6.
- [72] Lapuerta M, Armas O, Rodríguez-Fernández J. Effect of biodiesel fuels on diesel engine emissions. *Prog Energy Combust Sci* 2008;34:198–223.
- [73] Iastiaque G, Secco D, Aparecido H, Aparecido R, Dresch B, Nelson S, et al. Physical and chemical properties of fish oil biodiesel produced in Brazil. *Renew Sustain Energy Rev* 2015;42:154–7.
- [74] Oliveira LE, Silva DMLC. Comparative study of calorific value of rapeseed, soybean, jatropha curcas and crambe biodiesel. *Renew Energy Power Qual* 2013;1–3.
- [75] Atabani AE, Silitonga AS, Ong HC, Mahlia TMI, Masjuki HH. Non-edible vegetable oils: a critical evaluation of oil extraction, fatty acid compositions, biodiesel production, characteristics, engine performance and emissions production. *Renew Sustain Energy Rev* 2013;18:211–45.
- [76] Sakthivel R, Ramesh K, Purnachandran R, Mohamed Shameer P. A review on the properties, performance and emission aspects of the third generation biodiesels. *Renew Sustain Energy Rev* 2018;82:2970–92.
- [77] Silitonga AS, Atabani AE, Mahlia TM, Masjuki HH, Badruddin IA, Mekhilef S. A review on prospect of *Jatropha curcas* for biodiesel in Indonesia. *Renew Sustain Energy Rev* 2011;15:3733–56.
- [78] Demirbas A. Biodiesel production from vegetable oils by supercritical methanol. *J Sci Ind Res* 2005;64:858–65.
- [79] Foon CS, May CY, Liang YC, Ngan MA, Basiron Y. Palm biodiesel: gearing towards Malaysian biodiesel standards 42. Kuala Lumpur, Malaysia: Malaysian Palm Oil Board; 2005.
- [80] Conserve Energy Future. Advantages and disadvantages of biodiesel fuel. United States: Renewable Resources; 2015.
- [81] US National Biodiesel Board. Advantage biodiesel on marine. United States: National Biodiesel Board; 2015.



- [82] Lin CY. Strategies for promoting biodiesel use in marine vessels. *Mar Policy* 2013;40:84–90.
- [83] Tesfa B, Mishra R, Gu F, Powles N. Prediction models for density and viscosity of biodiesel and their effects on fuel supply system in CI engines. *Renew Energy* 2010;35:2752–60.
- [84] Murillo S, Míguez JL, Porteiro J, Granada E, Morán JC. Performance and exhaust emissions in the use of biodiesel in outboard diesel engines. *Fuel* 2007;86:1765–71.
- [85] Kaplan C, Arslan R, Sürmen A. Performance characteristics of sunflower methyl esters as biodiesel. *Energy Sources Part A Recover Util Environ Eff* 2006;28:751–5.
- [86] Fazal MA, Haseeb ASMA, Masjuki HH. Biodiesel feasibility study: an evaluation of material compatibility; performance; emission and engine durability. *Renew Sustain Energy Rev* 2011;15:1314–24.
- [87] Broatch a, Tormos B, Olmeda P, Novella R. Impact of biodiesel fuel on cold starting of automotive direct injection diesel engines Economic Commission for Europe. *Energy* 2014;73:653–60.

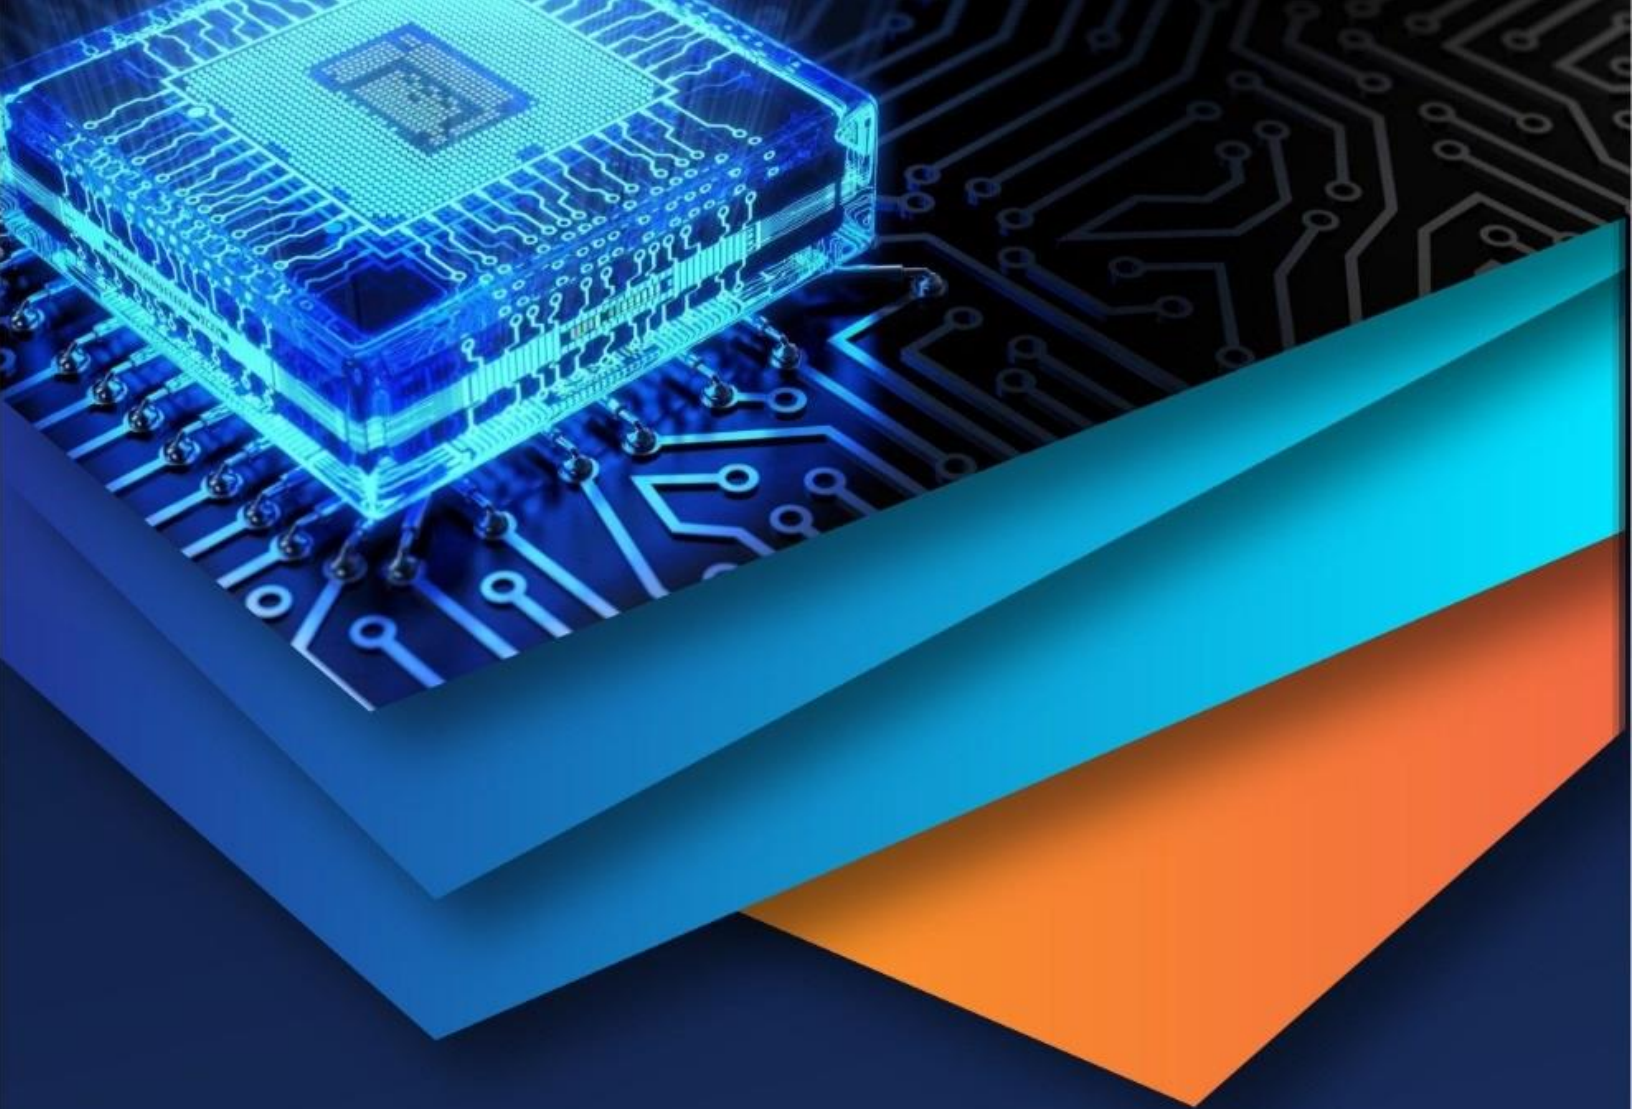

10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)