



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 8      Issue: X      Month of publication: October 2020**

**DOI: <https://doi.org/10.22214/ijraset.2020.31832>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Automated Water Body Cleaning Mechanism

Ritwik P. Trivedi<sup>1</sup>, Shipi Dubey<sup>2</sup>, Shreyansh Choure<sup>3</sup> Shubham Tale<sup>4</sup> Sushmita Maity<sup>5</sup>, Syed Mohsin Raza Naqvi<sup>6</sup>  
<sup>1, 2, 3, 4, 5, 6</sup>UG, Mech. Dept., SIRT, Bhopal

**Abstract:** It is generally seen that even now when we have many alternatives of dumping and recycling waste, a large percentage of waste still getting disposed in water bodies. This debris affects the aquatic wildlife and vegetation, the water is used by people, which is how humans also are affected by this depleting quality of water. Hence, it is must to collect this waste and make them properly disposed or recycled. As human driven cleaning is inconsistent and lags in efficiency, introducing a versatile solution to the problem, **AUTOMATED WATER BODY CLEANING MECHANISM**

**Keywords:** Water cleaning device, Automatic robot, IoT device for water bodies.

## I. INTRODUCTION

Lakes, Ponds and every stagnant water body plays a vital role for the people and wildlife as well as for the vegetation of nearby area. These water bodies are resourceful to multiple activities taking place. A lake in a rural area is the only source of water for the people to utilize. In cities lakes are the source to water supply all around the city. Hence the quality of water must be inspected and ensured to be at its finest. It is therefore necessary to clean these water bodies. Since many years this cleaning is done by the people. But there are some drawbacks in human governed cleaning. Firstly, they cannot work 24x7, secondly, it's difficult for them to clean parts which are farther from the shore. Efficiency varies and seasonal effects are also seen. Plus, they are exposed to the debris which may be harmful for their skin and respiratory system. These problems are removed by this mechanism which is completely automatic and efficient in working. Automated water body cleaning mechanism detects the floating waste through the sensors in three directions and moves towards the waste and collects the waste in the storage bin through conveyor. Whole mechanism is powered by solar energy.

## II. PROBLEM STATEMENT

To design a fully automated water body cleaning mechanism which collects floating waste efficiently.

## III. OBJECTIVE

To overcome the difficulty in cleaning a water body efficiently, within the safety standards of human, irrespective of time duration and seasonal effects.

## IV. METHODOLOGY

The three sensors at the front will detect the floating waste in left, right and straight direction. Right fan will stop if right sensor detects waste, similarly for the left side condition. When front sensor detects, both fans will run. Once reached, the garbage is picked up by the conveyor and dumps it into the waste collecting container at the back of the boat. When the container fills up to the brim, a message is sent to the control room and the controller will bring back the boat to the shore by remote control for dumping.

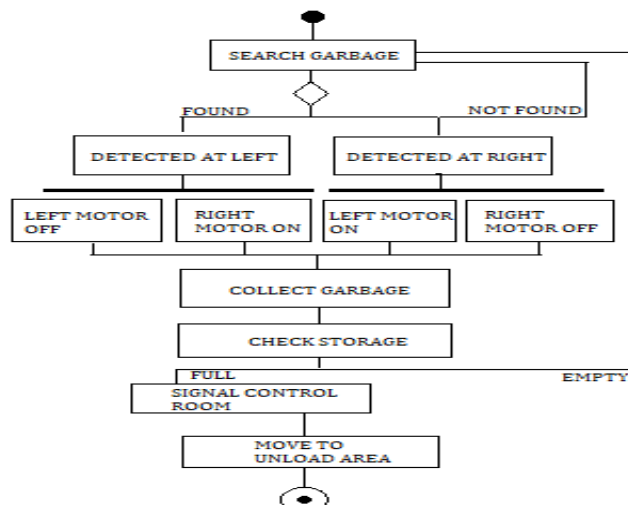


Fig. 1 An activity diagram explaining the working of the automated waterbody cleaning device.

## V. CONSTRUCTION AND WORKING

### A. Construction

The boat consists of the following parts:

- 1) *Frame*: The frame is made by Galvanized Iron and flex pipe, with four upward erected members for solar panel mounting. And two front members for front mounting of conveyor.
- 2) *Conveyor*: Front mounting of conveyor is at the height of 9cm from base. Rear mounting of conveyor is on the two vertically erect rear members at the height 70cm from base.
- 3) *Propellers*: The propellers are positioned at 5cm height from base on both the sides of the boat.
- 4) *Storage bin*: The storage bin is hinged to the frame at the back of the boat.
- 5) *Wiring box*: Waterproof wiring box is positioned under conveyor covered by a safety lid.

### B. Specifications

#### 1) Static

- a) Waste bin – 30cm x 55cm x 15cm = 24750cm<sup>3</sup>
- b) Room volume – 90cm x 55cm x 15cm = 74250cm<sup>3</sup>
- c) Rear conveyor mounting height = 70cm
- d) Front conveyor mounting height = 5cm
- e) Horizontal distance between rollers = 80cm
- f) Solar panel height = 60cm
- g) Front taper dimension – 17cm x 6cm

#### 2) Dynamic

- a) 10N 300RPM motors for fans – 2 units
- b) 10N 100RPM motor for conveyor – 1 unit
- c) Ultrasonic sensors – 3 units
- d) Solar panel – 1 unit

### C. Working

The objective of the machine is to detect the floating waste and collect it in the bin all by itself. The working is explained in following points:

- 1) In initial condition, the boat will move in the forward direction, the motion to the boat is given by the rotating fans on both sides of both. While the sensors continue to detect the floating objects on the water surface.
- 2) The three sensors are positioned to detect the floating waste on the left, right and in the forward direction. When the sensor on the right side detects the object, right fan stops, giving the boat rightward motion and the waste is collected through the conveyor. When left sensor detects, left fan stops and the boat moves leftward. When front sensor detects, boat continues to move forward. In case of waste detection by all three sensors, boat will move forward.
- 3) Collection of waste and dumping in the bin is done by conveyor. Waste comes on the conveyor due to the motion of the boat and the conveyor takes the waste and leaves it in the bin.
- 4) Conveyor and fans are powered by 12V battery. Sensing and navigation is done by Arduino Uno powered by 9V battery. In case of battery discharge, batteries will charge itself by the solar panel placed as the roof of the boat.

## VI. CONCLUSION

The project emphasis in the more efficient and versatile method of cleaning water body keeping the safety standards of humans and eliminate manual scavenging of waste. The mechanism is completely solar powered making it an eco-friendly mechanism in working. Simple design and made of easily available materials make it favourable for mass production. The mechanism can be used country-wide and beneficial for rural areas and areas receiving less rainfall.

## VII. ACKNOWLEDGEMENT

This research was supported/partially supported by Sagar Institute of Research and Technology (Bhopal), Hon'ble Dr. Manish Manoria (Dir. SIRT), Hon'ble Dr. Nitin Tenguria (HOD Mechanical Dept.). We thank our Whole Faculty Staff from Mechanical

Dept. SIRT who provided insight and expertise that greatly assisted the research, although they may not agree with all the interpretations/conclusions of this paper.

We thank Dr. Ajay Choubey sir and Dr. Irshad Ahmed Khan sir (Asst. Proff. Mechanical, SIRT), Mrs. Ruchi Dronawat ma'am (Asst. Proff. Computer Science) for assistance with Ideation and Evaluation of Paper, and Mr. Vedant Patel and Mr. Ashish Mishra (CEO SNA-Sistec) for comments that greatly improved the manuscript.

We would also like to show our gratitude to each helping hand for sharing their pearls of wisdom with us during this research, and we thank 13 "anonymous" reviewers for their insights. We are also immensely grateful for their comments on an earlier version of the manuscript, although any errors are our own and should not tarnish the reputations of these esteemed persons.

### REFERENCES

- [1] Mr. Tejpal Parshwanikar, Mr. Maitreya Fulmali, Mr. Pritam Banabakode, Design & Fabrication of Automatic River Cleaning System, JETIR Vol.6, Issue 5, (14-17); May 2019, ISSN-2349-5162.
- [2] Kumar Sainath U.N, Shridhar K, Vijay B, Siddarth K, AQUA DRONE REMOTE CONTROLLED UNMANED RIVER CLEANING BOT, Proj. Ref. No. 40S\_BE\_1930.
- [3] Aishwarya N A, Arpitha M, Chaithra K, Chira Shankar, Navyashree D, Detection and Removal of Floating Wastes on Water Bodies, IJRSI Vol.4, Issue 6, (19-22); June 2017, ISSN 2321-2705.
- [4] Mr. P. M. Sirsat, Dr. I. A. Khan, Mr. P. V. Jadhav, Mr. P. T. Date, Design and fabrication of River Waste Cleaning Machine, ICSESD-2017, IJCMES Sp. Issue-1, ISSN: 2455-5304.
- [5] Pankaj Singh Sirohi, Rahul Dev, Shubham Gautam, Vinay Kumar Singh, Saroj Kumar, Advance River Cleaner, IJIR Vol-3, Issue-4, (1689-1691), 2017: ISSN-2454-1362.
- [6] Mahto Ravishankarkumar Ravindrabhai, Dehadray Vaibhav, Kaka Smit, Prof. Ankur Joshi, Design And Fabrication Of River Waste Collector, Scientific Journal of Impact Factor (SJIF): 5.71, Volume 5, Issue 03, (736-740), March -2018, e-ISSN (O): 2348-4470, p-ISSN (P): 2348-6406.
- [7] Raj Vaibhav Tiwari, Aditya Maheshwari, Dr. M.C. Srivastava, Ashwini Sharma, Design and Fabrication of Project on Water Bodies Cleaning Robot, International Journal of Engineering and Management Research(IJEMR), Volume-8, Issue-3, (15-17), June 2018, ISSN (ONLINE): 2250-0758, ISSN (PRINT): 2394-6962.

### REFERENCES

The heading of the References section must not be numbered. All reference items must be in 8 pt font. Please use Regular and Italic styles to distinguish different fields as shown in the References section. Number the reference items consecutively in square brackets (e.g. [1]).

When referring to a reference item, please simply use the reference number, as in [2]. Do not use "Ref. [3]" or "Reference [3]" except at the beginning of a sentence, e.g. "Reference [3] shows ...". Multiple references are each numbered with separate brackets (e.g. [2], [3], [4]–[6]).

Examples of reference items of different categories shown in the References section include:

- 1) Example of a book in [1]
- 2) Example of a book in a series in [2]
- 3) Example of a journal article in [3]
- 4) Example of a conference paper in [4]
- 5) Example of a patent in [5]
- 6) Example of a website in [6]
- 7) Example of a web page in [7]
- 8) Example of a databook as a manual in [8]
- 9) Example of a datasheet in [9]
- 10) Example of a master's thesis in [10]
- 11) Example of a technical report in [11]
- 12) Example of a standard in [12]



## CONCLUSIONS

The version of this template is V2. Most of the formatting instructions in this document have been compiled by Causal Productions from the IEEE LaTeX style files. Causal Productions offers both A4 templates and US Letter templates for LaTeX and Microsoft Word. The LaTeX templates depend on the official IEEEtran.cls and IEEEtran.bst files, whereas the Microsoft Word templates are self-contained. Causal Productions has used its best efforts to ensure that the templates have the same appearance.

Causal Productions permits the distribution and revision of these templates on the condition that Causal Productions is credited in the revised template as follows: “original version of this template was provided by courtesy of Causal Productions ([www.causalproductions.com](http://www.causalproductions.com))”.

## ACKNOWLEDGMENT

The heading of the Acknowledgment section and the References section must not be numbered.

Causal Productions wishes to acknowledge Michael Shell and other contributors for developing and maintaining the IEEE LaTeX style files which have been used in the preparation of this template. To see the list of contributors, please refer to the top of file IEEETran.cls in the IEEE LaTeX distribution.

## REFERENCES

- [1] S. M. Metev and V. P. Veiko, Laser Assisted Microtechnology, 2nd ed., R. M. Osgood, Jr., Ed. Berlin, Germany: Springer-Verlag, 1998.
- [2] J. Breckling, Ed., The Analysis of Directional Time Series: Applications to Wind Speed and Direction, ser. Lecture Notes in Statistics. Berlin, Germany: Springer, 1989, vol. 61.
- [3] S. Zhang, C. Zhu, J. K. O. Sin, and P. K. T. Mok, “A novel ultrathin elevated channel low-temperature poly-Si TFT,” IEEE Electron Device Lett., vol. 20, pp. 569–571, Nov. 1999.
- [4] M. Wegmuller, J. P. von der Weid, P. Oberson, and N. Gisin, “High resolution fiber distributed measurements with coherent OFDR,” in Proc. ECOC’00, 2000, paper 11.3.4, p. 109.
- [5] R. E. Sorace, V. S. Reinhardt, and S. A. Vaughn, “High-speed digital-to-RF converter,” U.S. Patent 5 668 842, Sept. 16, 1997.
- [6] (2002) The IEEE website. [Online]. Available: <http://www.ieee.org/>
- [7] M. Shell. (2002) IEEEtran homepage on CTAN. [Online]. Available: <http://www.ctan.org/tex-archive/macros/latex/contrib/supported/IEEEtran/>
- [8] FLEXChip Signal Processor (MC68175/D), Motorola, 1996.
- [9] “PDCA12-70 data sheet,” Opto Speed SA, Mezzovico, Switzerland.
- [10] A. Karnik, “Performance of TCP congestion control with rate feedback: TCP/ABR and rate adaptive TCP/IP,” M. Eng. thesis, Indian Institute of Science, Bangalore, India, Jan. 1999.
- [11] J. Padhye, V. Firoiu, and D. Towsley, “A stochastic model of TCP Reno congestion avoidance and control,” Univ. of Massachusetts, Amherst, MA, CMPSCI Tech. Rep. 99-02, 1999.
- [12] Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specification, IEEE Std. 802.11, 1997.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)