



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 3**

**Issue: IX**

**Month of publication: September 2015**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# **Effects on Unsteady MHD Free Convection and Mass Transfer Flow Past Through a Porous Medium in a Slip Regime with Chemical Reaction**

K.Sharmilaa<sup>1</sup>, K.Sivaranjani<sup>2</sup>

<sup>1</sup>Assistant Professor, Department of Mathematics, PSGR Krishnammal College for Women, Coimbatore, Tamilnadu, India.

<sup>2</sup>Department of Mathematics, PSGR Krishnammal College for Women, Coimbatore, Tamilnadu, India.

**Abstract**—In the present analysis, we study the two-dimensional effects on unsteady MHD free convection and mass transfer flow past through a porous medium in a slip regime with chemical reaction. A magnetic field of uniform strength is assumed to be applied transversely to the direction of the main flow. Perturbation technique is applied to transform the non-linear coupled governing partial differential equations in dimensionless form into a system of ordinary differential equations. The equations are solved analytically and the solutions for the velocity, temperature and concentration fields are obtained. The effects of various flow parameters on velocity, temperature and concentration fields are presented graphically.

**Key Words**— MHD, Free Convection, Porous medium, Heat and Mass transfer, Chemical reaction.

## **I. INTRODUCTION**

Natural convection flow over vertical surfaces immersed in porous media has paramount importance because of its potential applications in soil physics, geohydrology, and filtration of solids from liquids, chemical engineering and biological systems. Ostrach [1], the initiator of the study of convection flow, made a technical note on the similarity solution of transient free convection flow past a semi-infinite vertical plate by an integral method. Study of fluid flow in porous medium is based upon the empirically determined Darcy's law. Such flows are considered to be useful in diminishing the free convection, which would otherwise occur intensely on a vertical heated surface. Study of flow problems through porous medium is heavily based on Darcy's experimental law [2]. Wooding [3] and Brinkman [4,5] have modified Darcy's law, which are used by many authors on study of convective flow in porous media. Many transport processes exist in nature and in industrial applications in which the simultaneous heat and mass transfer occur as a result of combined buoyancy effects of thermal diffusion and diffusion of chemical species. A few representative fields of interest in which combined heat and mass transfer plays an important role are designing of chemical processing equipment, formation and dispersion of fog, distribution of temperature and moisture over agricultural fields and groves of fruit trees, crop damage due to freezing, and environmental pollution. In this context, Soundalgekar [7] extended his own problem of Soundalgekar [6] to mass transfer effects. Callahan and Marner [8] considered the transient free convection flow past a semi-infinite vertical plate with mass transfer. Unsteady free convective flow on taking into account the mass transfer phenomenon past an infinite vertical plate was studied by Soundalgekar and Wavre [9].

Magnetohydrodynamic flows have many applications in solar physics, cosmic fluid dynamics, geophysics and in the motion of earth's core as well as in chemical engineering and electronics. Verma and Srivastava [10] proposed the effect of magnetic field on unsteady blood flow through a narrow tube. Huges and Young [11] gave an excellent summary of applications. MHD free convective flow of an electrically conducting fluid between two heated parallel plates in the presence of induced magnetic field by using analytical solution was carried out by Sharma [12]. Chakrabarti and Gupta [13] explained the heat transfer effect on hydromagnetic flow over a stretching sheet. Convective heat transfer effect on MHD flow past a continuously moving plate embedded in a non-Darcian porous medium has been proposed by Abo-Eldahab and El-Gendy [14]. Radiation is a process of heat transfer through electromagnetic waves. Radiative convective flows are encountered in countless industrial and environmental process. For example, heating and cooling chambers, fossil fuel combustion energy processes, evaporation from large open water reservoirs, astrophysical flows etc. Radiative heat and mass transfer play an important role in space related technology. The effect of radiation on various convective flows under different conditions have been studied by many researchers including Hussain and Thakar [15], Ahmed and Sarmah [16], Rajesh and Varma [17], Pal and Mondal [18], Samad and Rahman [19], Karthikeyan *et al.* [20], Das *et al.* [21] and Pal *et al.* [22].

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

The study of heat source/sink effects on heat transfer is very important because its effects are crucial in controlling the heat transfer. Radiation effects on unsteady MHD flow through a porous medium with variable temperature in presence of heat source/sink is studied by Vijaya Kumar et al. [23]. Vijaya sekhar and Viswanadh reddy [24] have obtained the analytical solution for the effects of heat sink and chemical reaction on MHD free convective oscillatory flow past a porous plate with viscous dissipation. Gireesh Kumar and Satyanarayana [25] studied the heat and mass transfer effects on unsteady MHD free convective walter's memory flow with constant suction in presence of heat sink.

The present work is concerned with the effects on unsteady MHD free convection and mass transfer flow past through a porous medium in a slip regime with chemical reaction. Perturbation technique is applied to convert the governing non-linear partial differential equations into a system of ordinary differential equations, which are solved analytically.

### II. MATHEMATICAL ANALYSIS

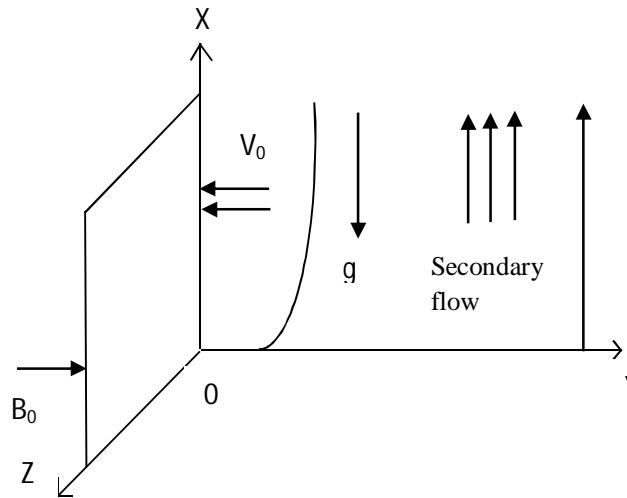


Fig. 1 Physical model of the problem.

We consider a two-dimensional unsteady flow of a laminar, incompressible, electrical conducting and heat absorbing fluid past a semi-infinite vertical porous plate embedded in a uniform porous medium. We introduce the coordinate system  $(\bar{x}, \bar{y}, \bar{z})$  with  $X$  axis is chosen along the plate,  $Y$  axis perpendicular to it and directed in the fluid region and  $Z$  axis is along the width of the plate as shown in the Fig. 1 A uniform magnetic field  $B_0$  of strength in the presence of radiation is imposed transversely in the direction of  $Y$  axis. The induced magnetic field is neglected under the assumption that the magnetic Reynolds number is small. It is assumed that there is no applied voltage which implies the absence of any electrical field. The radiative heat flux in the  $X$  direction is considered negligible in comparison to that in  $Y$  direction. The governing equations for this study are based on the conservation of mass, linear momentum, energy and species concentration. Taking in to consideration the assumptions made above, these equations in Cartesian frame of reference are given by equation of

$$\text{Continuity equation: } \frac{\partial \bar{v}}{\partial \bar{y}} = 0 \quad (1)$$

$$\text{Momentum equation: } \frac{\partial \bar{u}}{\partial \bar{t}} + \bar{v} \frac{\partial \bar{u}}{\partial \bar{y}} = -\frac{1}{\rho} \frac{\partial \bar{p}}{\partial \bar{x}} + g\beta(\bar{T} - \bar{T}_\infty) + g\beta^*(\bar{C} - \bar{C}_\infty) + \nu \frac{\partial^2 \bar{u}}{\partial \bar{y}^2} - \frac{\sigma B_0^2}{\rho} \bar{u} - \frac{\nu}{K^*} \bar{u} \quad (2)$$

$$\text{Energy equation: } \frac{\partial \bar{T}}{\partial \bar{t}} + \bar{v} \frac{\partial \bar{T}}{\partial \bar{y}} = \frac{k}{\rho C_p} \frac{\partial^2 \bar{T}}{\partial \bar{y}^2} - \frac{1}{\rho C_p} \frac{\partial q_r^*}{\partial \bar{y}} - \frac{Q_0(\bar{T} - \bar{T}_\infty)}{\rho C_p} \quad (3)$$

$$\text{Species equation: } \frac{\partial \bar{C}}{\partial \bar{t}} + \bar{v} \frac{\partial \bar{C}}{\partial \bar{y}} = D_M \frac{\partial^2 \bar{C}}{\partial \bar{y}^2} + D_T \frac{\partial^2 \bar{T}}{\partial \bar{y}^2} - \bar{K}_c(\bar{C} - \bar{C}_\infty) \quad (4)$$

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Where  $\bar{x}$ ,  $\bar{y}$  and  $\bar{t}$  are the dimensional distances along and perpendicular to the plate and dimensional time, respectively.  $\bar{u}$  and  $\bar{v}$  are the components of the dimensional velocities along  $\bar{x}$  and  $\bar{y}$  respectively.  $\rho$  is the density of the medium,  $g$  is the acceleration due to gravity,  $\nu$  is the kinematic viscosity,  $\sigma$  is the fluid electrical conductivity,  $B_0$  is the magnetic induction,  $K^*$  is the permeability of the porous medium,  $\beta$  is the coefficient of thermal expansion,  $\bar{\beta}$  is the coefficient of mass expansion,  $\bar{T}$  is the dimensional temperature of the fluid near the plate,  $\bar{T}_\infty$  is the dimensional free stream temperature,  $\bar{C}$  is the dimensional concentration of the fluid near the plate,  $\bar{C}_\infty$  is the dimensional free stream concentration,  $k$  is the thermal conductivity of the fluid,  $q_r^*$  is the radiative heat flux, the term  $Q_0(\bar{T} - \bar{T}_\infty)$  is assumed to be amount of heat generated or absorbed per unit volume,  $Q_0$  is constant, which may take on either positive or negative values. When plate temperature  $\bar{T}$  exceeds the free stream temperature  $\bar{T}_\infty$ , the source term  $Q_0 > 0$  and heat sink when  $Q_0 < 0$ ,  $\mu$  is the fluid viscosity,  $C_p$  is the specific heat at constant pressure,  $D_M$  is the coefficient of chemical molecular diffusivity and  $D_T$  is the coefficient of thermal diffusivity,  $\bar{K}c$  is chemical reaction parameter.

Cogley et al. [27] showed that, in the optically thin limit for a non-gray gas near equilibrium, the radiative heat flux is represented

by the following form: 
$$\frac{\partial q_r^*}{\partial \bar{y}} = 4(\bar{T} - \bar{T}_\infty)I^* \quad (5)$$

where  $I^* = \int K_{\lambda w} \frac{\partial e_{b\lambda}}{\partial \bar{T}} d\lambda$ ,  $K_{\lambda w}$  is the absorption coefficient at the wall and  $e_{b\lambda}$  is the Planck's function. Under the assumption, the appropriate boundary conditions for velocity involving slip flow, temperature and concentration fields are given by

$$\bar{u} = \bar{u}_{slip} = \bar{h} \frac{\partial \bar{u}}{\partial \bar{y}}, \quad \bar{T} = \bar{T}_w + \varepsilon(\bar{T}_w - \bar{T}_\infty)e^{n^*t^*}, \quad \bar{C} = \bar{C}_w + \varepsilon(\bar{C}_w - \bar{C}_\infty)e^{n^*t^*} \quad \text{at } \bar{y} = 0 \quad (6)$$

$$\bar{u} \rightarrow \bar{U}_\infty = U_0(1 + \varepsilon e^{n^*t^*}), \quad \bar{T} \rightarrow \bar{T}_\infty, \quad \bar{C} \rightarrow \bar{C}_\infty \quad \text{as } \bar{y} \rightarrow \infty \quad (7)$$

where  $\bar{T}_w$  and  $\bar{C}_w$  are the dimensional temperature and species concentration at the wall respectively and  $\bar{h}$  is the characteristic dimension of the flow fluid. The suction velocity normal to the plate is a function of time only, it can be taken in the exponential form as  $\bar{v} = -V_0(1 + \varepsilon A e^{n^*t^*})$  (8)

where  $A$  is a real positive constant,  $\varepsilon$  and  $\varepsilon A$  are small quantities less than unity and  $V_0$  is a scale of suction velocity which is a non-zero positive constant. In the free stream, from equation (2) we get

$$-\frac{1}{\rho} \frac{\partial \bar{p}}{\partial \bar{x}} = \frac{d\bar{U}_\infty}{d\bar{t}} + \frac{\sigma B_0^2}{\rho} \bar{U}_\infty + \frac{\nu}{K^*} \bar{U}_\infty \quad (9)$$

Now we introduce the dimensionless variables as follows

$$\begin{aligned} u = \frac{\bar{u}}{U_0}, \quad v = \frac{\bar{v}}{V_0}, \quad y = \frac{\bar{y}V_0}{\nu}, \quad U_\infty = \frac{\bar{U}_\infty}{U_0}, \quad t = \frac{\bar{t}V_0^2}{\nu}, \quad \theta = \frac{\bar{T} - \bar{T}_\infty}{\bar{T}_w - \bar{T}_\infty}, \quad \phi = \frac{\bar{C} - \bar{C}_\infty}{\bar{C}_w - \bar{C}_\infty}, \quad n = \frac{n^*\nu}{V_0^2}, \quad K = \frac{K^*V_0^2}{\nu^2}, \quad Pr = \frac{\mu C_p}{k}, \\ M = \frac{\sigma B_0^2 \nu}{\rho V_0^2}, \quad Gr = \frac{\nu \beta g (\bar{T}_w - \bar{T}_\infty)}{U_0 V_0^2}, \quad Gm = \frac{\nu \beta^* g (\bar{C}_w - \bar{C}_\infty)}{U_0 V_0^2}, \quad Q = \frac{Q_0 \nu}{\rho C_p V_0^2}, \quad R = \frac{4\nu I^*}{\rho C_p V_0^2}, \quad h = \frac{V_0 \bar{h}}{\nu}, \quad S_0 = \frac{D_T}{\nu} \left( \frac{\bar{T}_w - \bar{T}_\infty}{\bar{C}_w - \bar{C}_\infty} \right) \\ S_c = \frac{\nu}{D_M}, \quad K_c = \frac{\bar{K}c\nu}{V_0^2} \end{aligned} \quad (10)$$

where  $Pr$  is the Prandtl number,  $M$  is the magnetic field parameter,  $Gr$  is the Grashof number for heat transfer,  $Gm$  is the Grashof number for mass transfer,  $Q$  is the heat sink parameter,  $\alpha$  is the permeability parameter,  $\theta$  is the non dimensional temperature,  $\phi$

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

is the non dimensional concentration,  $R$  is the radiation parameter,  $h$  is the rarefaction parameter,  $S_0$  is the Soret number and  $S_c$  is the Schmidt number.

In view of equations (8) to (10) the governing equations (2), (3) and (4) reduce the following non-dimensional form:

$$\frac{\partial u}{\partial t} - (1 + \varepsilon A e^{nt}) \frac{\partial u}{\partial y} = \frac{dU_\infty}{dt} + \frac{\partial^2 u}{\partial y^2} + Gr\theta + Gm\phi + N(U_\infty - u) \quad (11)$$

$$\frac{\partial \theta}{\partial t} - (1 + \varepsilon A e^{nt}) \frac{\partial \theta}{\partial y} = \frac{1}{Pr} \frac{\partial^2 \theta}{\partial y^2} - R\theta - Q\theta \quad (12)$$

$$\frac{\partial \phi}{\partial t} - (1 + \varepsilon A e^{nt}) \frac{\partial \phi}{\partial y} = \frac{1}{Sc} \frac{\partial^2 \phi}{\partial y^2} + S_0 \frac{\partial^2 \theta}{\partial y^2} - K_c \phi \quad (13)$$

Where  $N = M + \frac{1}{K}$

The boundary conditions (6) and (7) in the dimensionless form can be written as,

$$u = u_{slip} = h \frac{\partial u}{\partial y}, \quad \theta = 1 + \varepsilon e^{nt}, \quad \phi = 1 + \varepsilon e^{nt}, \quad \text{at } y = 0 \quad (14)$$

$$u \rightarrow U_\infty = 1 + \varepsilon e^{nt}, \quad \theta \rightarrow 0, \quad \phi \rightarrow 0, \quad \text{as } y \rightarrow \infty \quad (15)$$

### III. SOLUTION OF THE PROBLEM

Equations (11) to (13) are coupled non-linear partial differential equations and these can be solved in closed form. However, these equations can be reduced to a set of ordinary differential equations, which can be solved analytically. These can be done by representing the velocity, temperature and concentration of the fluid in the neighborhood of the plate as

$$u = u_0(y) + \varepsilon e^{nt} u_1(y) + O(\varepsilon^2) \quad (16)$$

$$\theta = \theta_0(y) + \varepsilon e^{nt} \theta_1(y) + O(\varepsilon^2) \quad (17)$$

$$\phi = \phi_0(y) + \varepsilon e^{nt} \phi_1(y) + O(\varepsilon^2) \quad (18)$$

Substituting (16) to (18) in equations (11) to (13) and equating the harmonic and non harmonic terms and neglecting the coefficient of  $O(\varepsilon^2)$  we get the following pairs of equations for  $(u_0, \theta_0, \phi_0)$  and  $(u_1, \theta_1, \phi_1)$ .

$$u_0'' + u_0' - Nu_0 = -N - Gr\theta_0 - Gm\phi_0 \quad (19)$$

$$u_1'' + u_1' - (N + n)u_1 = -Au_0' - Gr\theta_1 - Gm\phi_1 - (N + n) \quad (20)$$

$$\theta_0'' + Pr\theta_0' - Pr(R + Q)\theta_0 = 0 \quad (21)$$

$$\theta_1'' + Pr\theta_1' - Pr(R + Q + n)\theta_1 = -A Pr\theta_0' \quad (22)$$

$$\phi_0'' + Sc\phi_0' - ScKc\phi_0 = -ScS_0\theta_0'' \quad (23)$$

$$\phi_1'' + Sc\phi_1' - Sc(Kc + n)\phi_1 = -ASc\phi_0' - ScS_0\theta_1'' \quad (24)$$

where the primes denote the differentiation with respect to  $y$ .

The corresponding boundary conditions can be written as

$$u_0 = hu_0', \quad u_1 = hu_1', \quad \theta_0 = 1, \quad \theta_1 = 1, \quad \phi_0 = 1, \quad \phi_1 = 1 \quad \text{at } y = 0 \quad (25)$$

$$u_0 = 1, \quad u_1 = 1, \quad \theta_0 \rightarrow 0, \quad \theta_1 \rightarrow 0, \quad \phi_0 \rightarrow 0, \quad \phi_1 \rightarrow 0 \quad \text{as } y \rightarrow \infty \quad (26)$$

The solutions of equations (19) to (24) which satisfy the boundary conditions (25) and (26) are given by



## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

$$u_0 = 1 + A_{11}e^{-m_5 y} - A_8 e^{-m_1 y} - A_9 e^{-m_2 y} + A_{10} e^{-m_1 y} \quad (27)$$

$$u_1 = 1 + A_{25}e^{-m_6 y} + A_{12}e^{-m_5 y} - A_{13}e^{-m_1 y} - A_{14}e^{-m_3 y} + A_{15}e^{-m_1 y} - A_{16}e^{-m_2 y} - A_{17}e^{-m_1 y} \\ - A_{18}e^{-m_4 y} - A_{19}e^{-m_3 y} - A_{20}e^{-m_1 y} - A_{21}e^{-m_2 y} - A_{22}e^{-m_1 y} \quad (28)$$

$$\theta_0 = e^{-m_1 y} \quad (29)$$

$$\theta_1 = A_0 e^{-m_2 y} + A_1 e^{-m_1 y} \quad (30)$$

$$\phi_0 = (1 + A_2)e^{-m_3 y} - A_2 e^{-m_1 y} \quad (31)$$

$$\phi_1 = A_6 e^{-m_4 y} + A_3 e^{-m_3 y} + A_4 e^{-m_2 y} + A_5 e^{-m_1 y} \quad (32)$$

In view of the above solutions, the velocity, temperature and concentration distributions in the boundary layer become

$$u(y, t) = 1 + A_{11}e^{-m_5 y} - A_8 e^{-m_1 y} - A_9 e^{-m_2 y} + A_{10}e^{-m_1 y} + \varepsilon e^{nt} (1 + A_{25}e^{-m_6 y} + A_{12}e^{-m_5 y} - A_{13}e^{-m_1 y} - A_{14}e^{-m_3 y} \\ + A_{15}e^{-m_1 y} - A_{16}e^{-m_2 y} - A_{17}e^{-m_1 y} - A_{18}e^{-m_4 y} - A_{19}e^{-m_3 y} - A_{20}e^{-m_1 y} - A_{21}e^{-m_2 y} - A_{22}e^{-m_1 y})$$

$$\theta(y, t) = e^{-m_1 y} + \varepsilon e^{nt} (A_0 e^{-m_2 y} + A_1 e^{-m_1 y})$$

$$\phi(y, t) = (1 + A_2)e^{-m_3 y} - A_2 e^{-m_1 y} + \varepsilon e^{nt} (A_6 e^{-m_4 y} + A_3 e^{-m_3 y} + A_4 e^{-m_2 y} + A_5 e^{-m_1 y})$$

It is now important to calculate the physical quantities of primary interest, which are the local wall shear stress, the local surface heat and mass flux. Given the velocity field in the boundary layer, we can now calculate the local wall shear stress (i.e., skin-friction) is given by

$$\tau_w^* = \mu \left( \frac{\partial \bar{u}}{\partial y} \right)_{\bar{y}=0}$$

and in dimensionless form, we obtain

$$C_f = \frac{\tau_w^*}{\rho U_0 V_0} = \left( \frac{\partial u}{\partial y} \right)_{y=0} = u'(0) = \left( \frac{\partial u_0}{\partial y} + \varepsilon e^{nt} \frac{\partial u_1}{\partial y} \right)_{y=0}$$

$$= -m_5 A_{11} + m_1 A_8 + m_2 A_9 - m_1 A_{10} + \varepsilon e^{nt} (-m_6 A_{25} - m_5 A_{12} + m_1 A_{13} + m_3 A_{14} - m_1 A_{15} + m_2 A_{16} + m_1 A_{17} + m_4 A_{18} \\ + m_3 A_{19} + m_1 A_{20} + m_2 A_{21} + m_1 A_{22})$$

Knowing the temperature field, it is interesting to study the non-dimensional form of the rate of heat transfer in terms of Nusselt number at the plate is given by:

$$N_u = - \left( \frac{\partial \theta}{\partial y} \right)_{y=0} = - \left( \frac{\partial \theta_0}{\partial y} + \varepsilon e^{nt} \frac{\partial \theta_1}{\partial y} \right)_{y=0} = -(-m_1 + \varepsilon e^{nt} (-m_2 A_0 - m_1 A_1))$$

Knowing the concentration field, it is interesting to study the non-dimensional form of the rate of mass transfer in terms of Sherwood number at the plate is given by:

$$S_h = - \left( \frac{\partial \phi}{\partial y} \right)_{y=0} = - \left( \frac{\partial \phi_0}{\partial y} + \varepsilon e^{nt} \frac{\partial \phi_1}{\partial y} \right)_{y=0} = -(-m_3 (1 + A_2) + m_1 A_2 + \varepsilon e^{nt} (-m_4 A_6 - m_3 A_3 - m_2 A_4 - m_1 A_5))$$

### IV. RESULTS AND DISCUSSION

In order to get physical insight into the problem, we have calculated the non-dimensional velocity field, temperature field,

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

concentration field, co-efficient of skin-friction  $C_f$  at the plate, the rate of heat transfer in terms of Nusselt number  $N_u$  and the rate of mass transfer in terms of Sherwood number  $S_h$ . Magnetic field parameter  $M$ , Grashof number for heat transfer  $Gr$ , Grashof number for mass transfer  $Gm$ , permeability parameter  $K$ , heat sink parameter  $Q$ , rarefaction parameter  $h$ , Prandtl number  $Pr$ , Radiation parameter  $R$ , Schmidt number  $S_c$ , Soret number  $S_0$  and Chemical reaction parameter  $Kc$  are involved in the problem. In the present study, the following default parametric values are adopted.  $Gr = 6.0$ ,  $Gm = 4.0$ ,  $M = 3.0$ ,  $K = 1.0$ ,  $n = 0.1$ ,  $A = 1.0$ ,  $t = 1.0$ ,  $Pr = 0.71$ ,  $R = 1.0$ ,  $Q = 1.0$ ,  $S_c = 0.6$ ,  $S_0 = 1.0$ ,  $Kc = 0.2$ ,  $h = 0.3$  and  $\varepsilon = 0.2$ . All graphs therefore correspond to these unless specifically indicated on the appropriate graph.

It is observed from Fig. 2 that an increase in Grashof number for heat transfer  $Gr$  leads to a rise in the values of velocity  $u$  due to enhancement in buoyancy force.

The plot of velocity profile for different values of Grashof number for mass transfer  $Gm$  is given in Fig. 3 It is observed that velocity increase for the increasing values of Grashof number for mass transfer  $Gm$ .

Fig. 4 plots the velocity profiles against the span-wise coordinate  $y$  for different magnetic field parameter  $M$ . this illustrates that velocity decreases as the existence of magnetic field becomes stronger. This conclusion agrees with the fact that magnetic field exerts retarding force on the free-convection flow.

The changes in velocity profile due to different permeability of the porous medium are plotted in Fig. 5. This figure shows that the velocity profiles increases rapidly as increases permeability of porous medium  $K$ .

The effect of the Radiation parameter  $R$  on the dimensionless velocity  $u$  is shown in Fig. 6 shows that velocity component decreases with an increase in the radiation parameter  $R$ .

Fig. 7 illustrates the dimensionless velocity  $u$  for different values of the Prandtl number  $Pr$ . The analytical results show that the effect of increasing values of Prandtl number results in a decreasing velocity.

Fig. 8 depict the dimensionless velocity component  $u$  profiles for different values of heat sink parameter  $Q$ . It is noticed that an increase in the heat sink parameter  $Q$  results in decrease in the dimensionless velocity component  $u$  within the boundary layer.

The influence of the Schmidt number  $S_c$  on velocity profiles are plotted in Fig. 9. The Schmidt number  $S_c$  embodies the ratio of the momentum to the mass diffusivity. It is noticed that as the Schmidt number  $S_c$  increases the velocity decreases. This causes the concentration buoyancy effects to decrease yielding a reduction in the fluid velocity.

Fig. 10 depicts the velocity profiles for different values of the Soret number  $S_0$ . The Soret number defines the effect of the temperature gradients inducing significant mass diffusion effects. It is noticed that an increase in the Soret number results in an increase in the velocity within the boundary layer.

Fig. 11 indicated that the velocity component  $u$  for different values of rarefaction parameter  $h$ . The velocity  $u$  increases as the rarefaction parameter  $h$  is increased indicating the fact that slips at the surface accelerates the fluid motion.

From Fig. 12, it is observed that an increase in the Prandtl number results a decrease of the thermal boundary layer thickness and in general lower average temperature within the boundary layer. The reason is that smaller values of  $Pr$  are equivalent to increasing the thermal conductivities, and therefore heat is able to diffuse away from the heated plate more rapidly than for higher values of  $Pr$ . Hence in the case of smaller Prandtl numbers as the boundary layer is thicker and the rate of heat transfer is reduced.

Fig. 13 shows the variation of temperature profiles with respect to the radiation parameter  $R$ . from this figure, it is observed that as temperature decreases for the increasing values of radiation parameter  $R$ . This result qualitatively agrees with expectations, since the effect of radiation is to decrease the rate of energy transport to the fluid, thereby decreasing the temperature of the fluid.

The influence of the parameter heat sink on dimensionless temperature profiles  $\theta$  is plotted in Fig. 14. It is noticed that dimensionless temperature decreases with an increase in heat sink parameter  $Q$ .

The concentration profiles for different values of Schmidt number  $S_c$  are plotted in Fig. 15. The analytical results show that the effect of increasing Schmidt number decreases the concentration profile.

For various values of Soret parameter  $S_0$ , the concentration profiles is plotted in Fig. 16 Clearly as  $S_0$  increases, the dimensionless concentration increases.

Fig. 17 displays the effects of the chemical reaction  $Kc$  on concentration profiles. We observe that concentration profiles increases with increasing  $Kc$ .

# International Journal for Research in Applied Science & Engineering Technology (IJRASET)

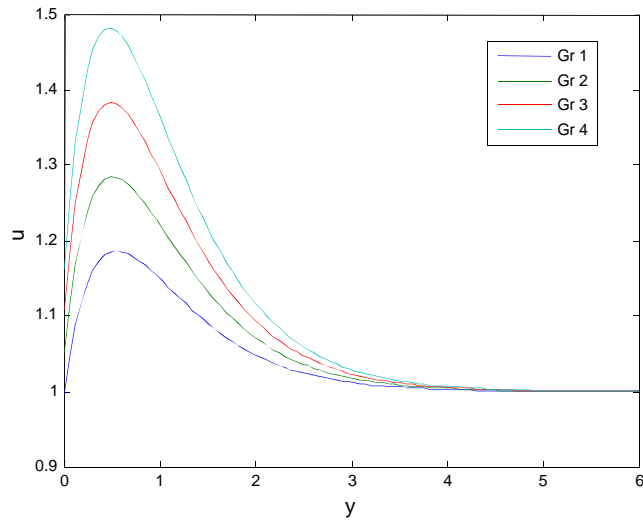


Fig. 2 Velocity  $u$  versus  $y$ , under the effect of  $Gr$

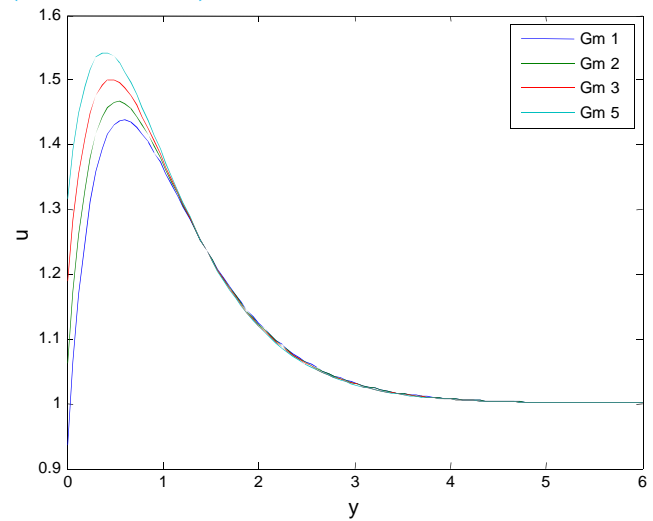


Fig. 3 Velocity  $u$  versus  $y$ , under the effect of  $Gm$

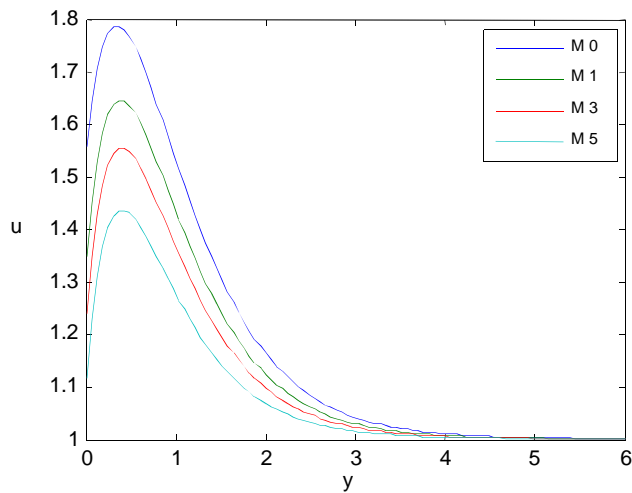


Fig. 4 Velocity  $u$  versus  $y$ , under the effect of  $M$



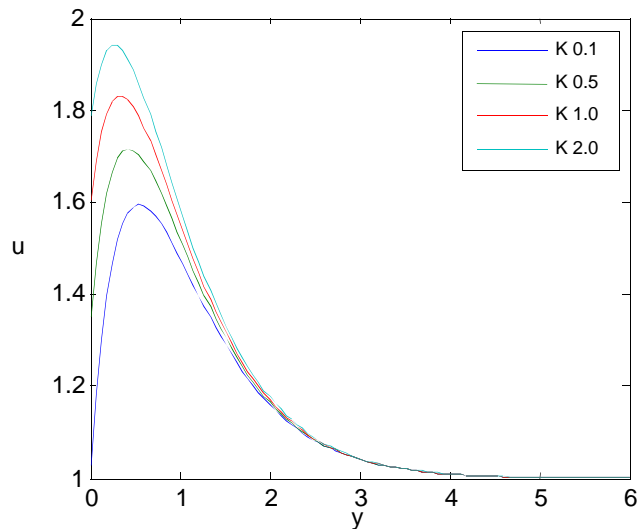


Fig. 5 Velocity  $u$  versus  $y$ , under the effect of  $K$

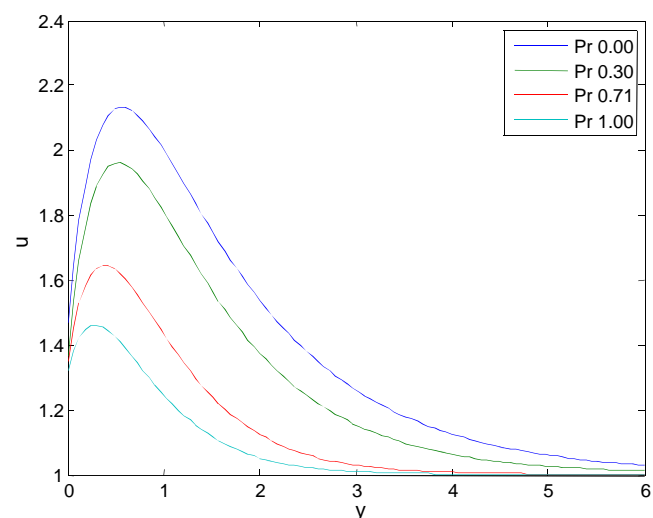

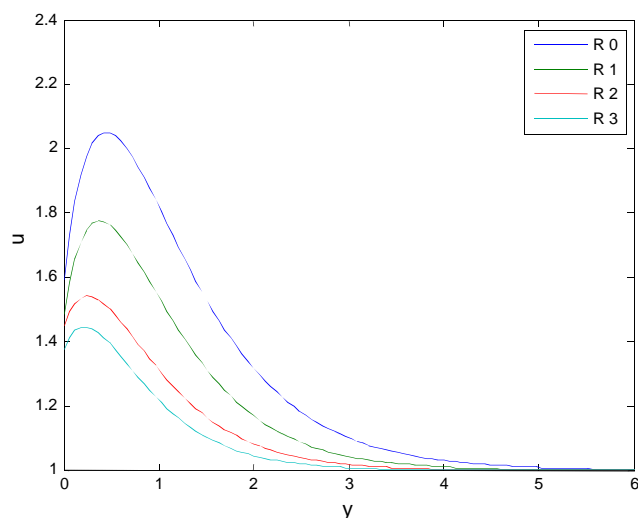

# International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Fig. 6 Velocity  $u$  versus  $y$ , under the effect of  $R$

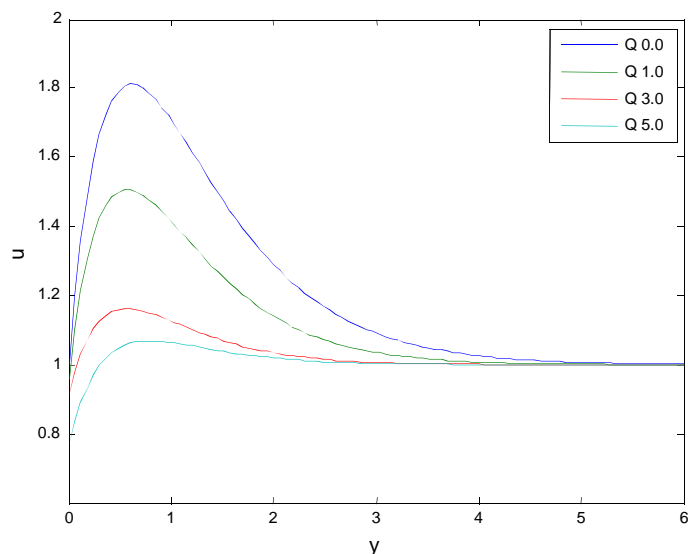


Fig. 7 Velocity  $u$  versus  $y$ , under the effect of  $Pr$

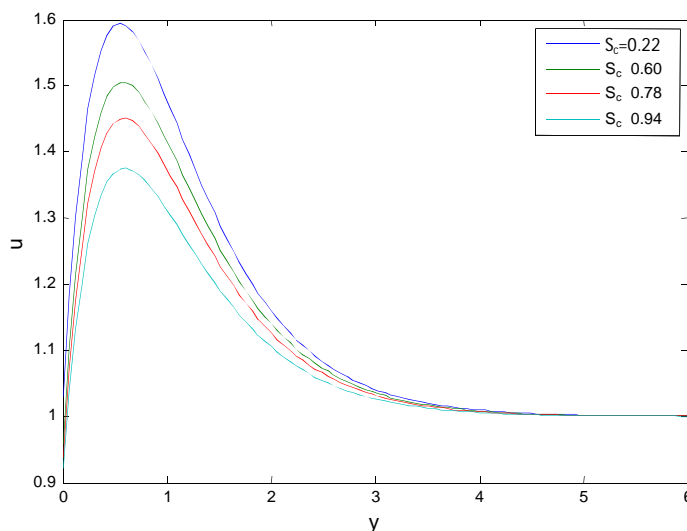


Fig. 8 Velocity  $u$  versus  $y$ , under the effect of  $Q$

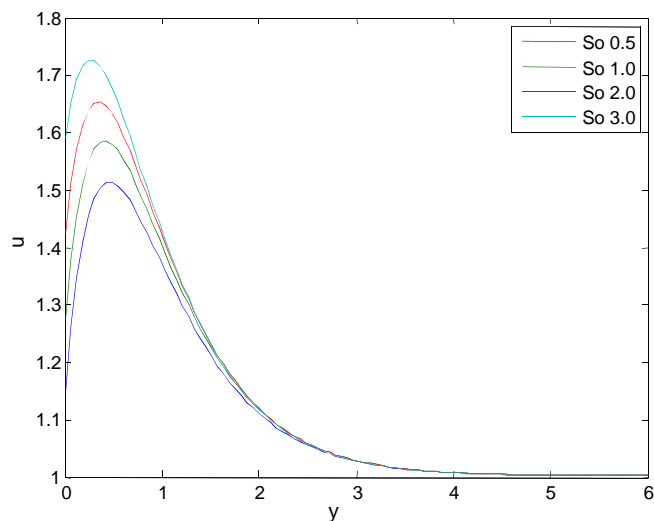


Fig. 9 Velocity  $u$  versus  $y$ , under the effect of  $S_c$

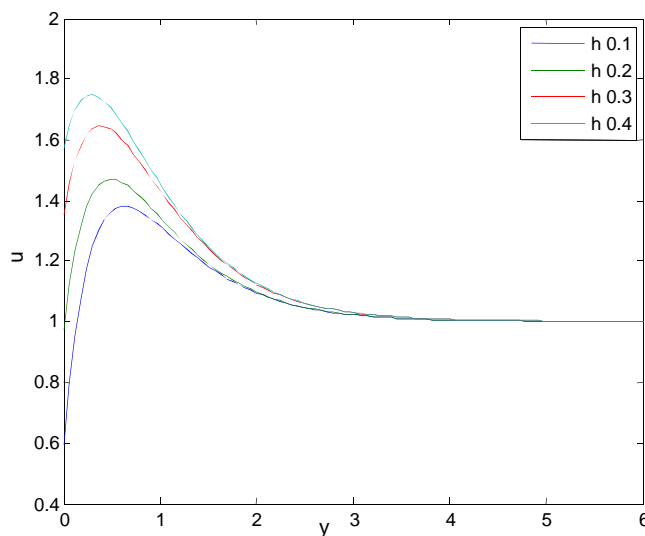


Fig. 10 Velocity  $u$  versus  $y$ , under the effect of  $S_0$

Fig. 11 Velocity  $u$  versus  $y$ , under the effect of  $h$

# International Journal for Research in Applied Science & Engineering Technology (IJRASET)

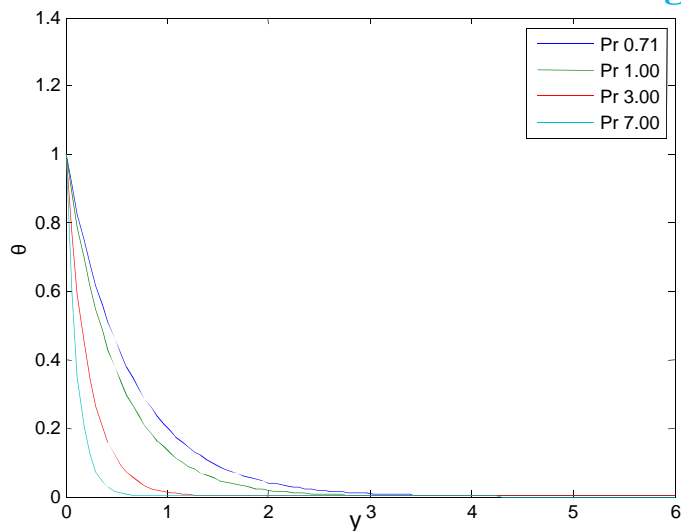


Fig. 12 Temperature  $\theta$  versus  $y$ , under the effect of  $Pr$

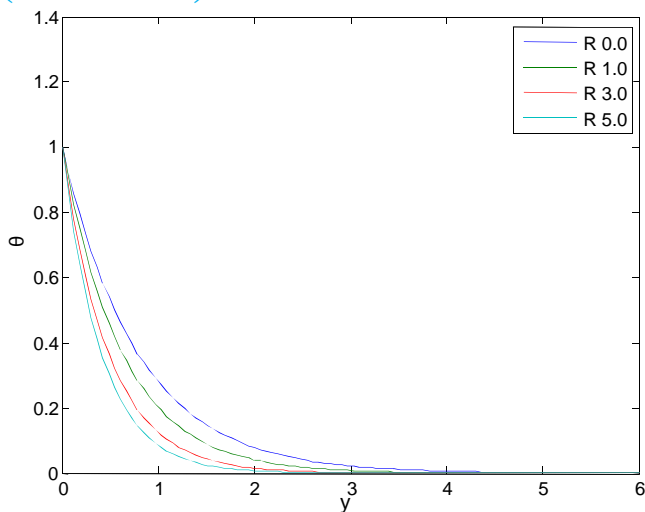


Fig. 13 Temperature  $\theta$  versus  $y$ , under the effect of  $R$

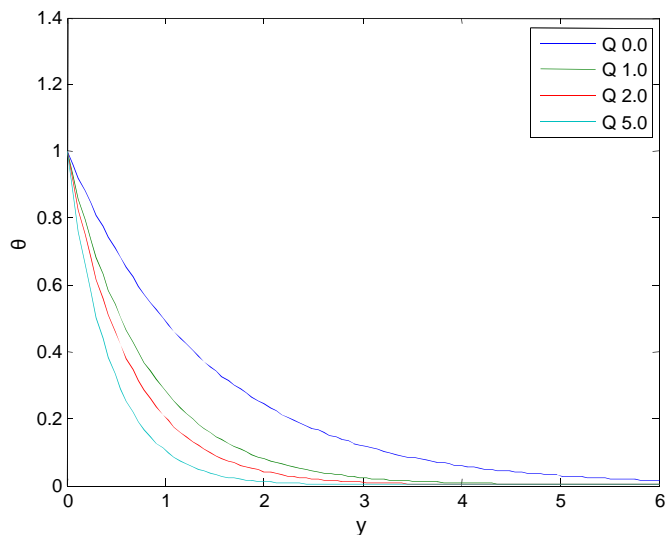


Fig. 14 Temperature  $\theta$  versus  $y$ , under the effect of  $Q$

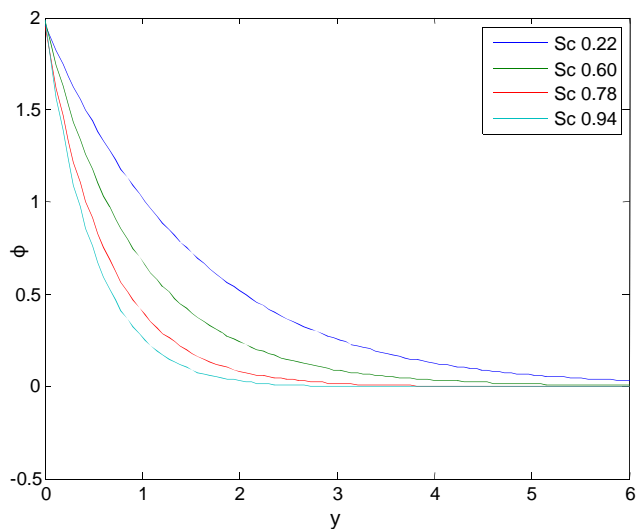


Fig. 15 Concentration  $\phi$  versus  $y$ , under the effect of  $Sc$

# International Journal for Research in Applied Science & Engineering Technology (IJRASET)

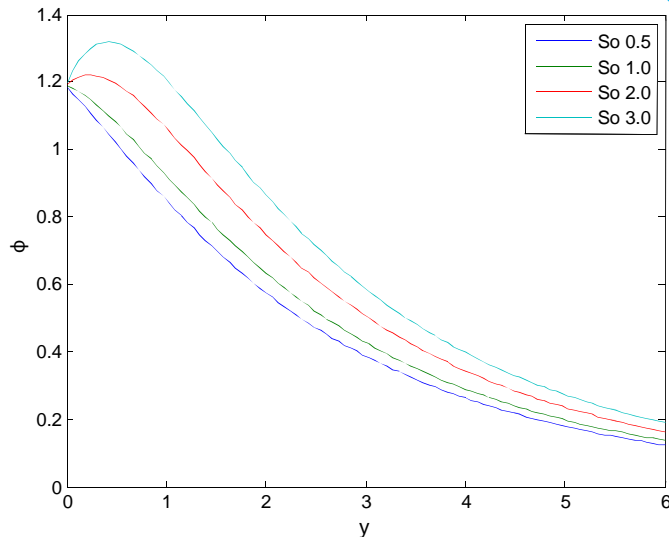


Fig. 16 Concentration  $\phi$  versus  $y$ , under the effect of  $S_0$

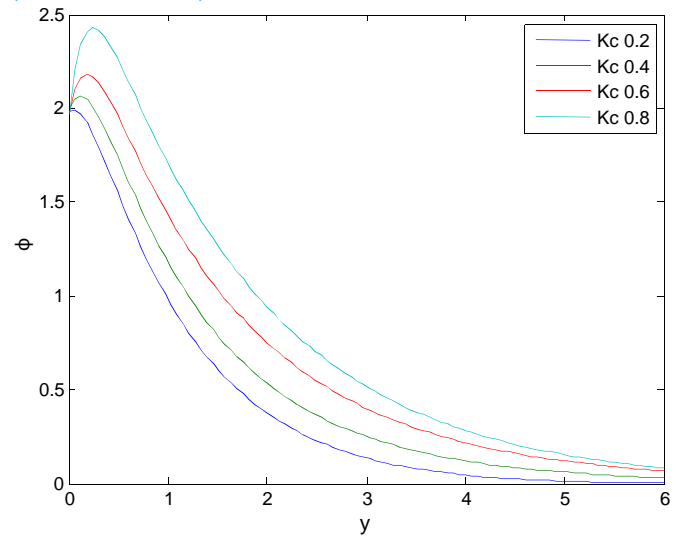


Fig. 17 Concentration  $\phi$  versus  $y$ , under the effect of  $Kc$

## V. CONCLUSION

In this study, we examined the effects on unsteady MHD free convection and mass transfer flow past through a porous medium in a slip regime with chemical reaction. The leading governing equations are solved analytically by perturbation method. We present the results to illustrate the flow characteristics for the velocity, temperature and concentration and show how the flow fields are influenced by the material parameters of the flow problem. We can conclude from these results that

An increase in  $Gr$ ,  $Gm$ ,  $K$ ,  $S_0$ , and  $h$  increases the velocity field, while an increase in  $M$ ,  $R$ ,  $Pr$ ,  $Q$  and  $S_c$  decreases the velocity field.

An increase in  $Pr$ ,  $R$  and  $Q$ , decreases the temperature distribution.

An increase in  $S_0$  increases the concentration distribution, while an increase in  $Kc$  increases the concentration distribution.

## REFERENCES

- [1] S Ostrach, An Analysis of laminar free convection flow and heat transfer about a flat plate parallel to the direction of the generating body force, Technical Note, NACA Report, Washington. 1952.
- [2] H. P. G. Darcy, "Lee Fort Airs Publication La Ville de Dijon Victor Dalonat," Paris, Vol. 1, p. 41. 1857.
- [3] R. Wooding, "Steady State Free Thermal Convection of Liquid in a Saturated Permeable Medium," Journal of Fluid Mechanics, Vol. 2, No. 3, pp. 273-285. 1957.
- [4] H. C. Brickman, "A Calculation of the Viscous Force Exerted by a Flowing Fluid on a Dense Swarm of Particles," Applied Sciences Research, Vol. A1, pp. 27-34. 1947.
- [5] H. C. Brickman, "On the Permeability of Media Consisting of Closely Packed Porous Particles," Applied Sciences Research, Vol. A1, pp. 81-86. 1947.
- [6] V.M Soundalgekar, Convection Effects on the Stokes Problem for Infinite Vertical Plate, ASME. J. Heat Transfer, Vol. 99, pp. 499-501. 1977.
- [7] V.M Soundalgekar, Effects of Mass Transfer and Free Convection on the Flow Past an Impulsively Started Vertical Flat Plate, ASME Journal Appl. Mech., Vol. 46, pp. 757-760. 1979.
- [8] Callahan G. D., and Marner W. J., Transient Free Convection with Mass Transfer on an Isothermal Vertical Flat Plate, Int. J. Heat Mass Transfer, 19, (1976), 165-174.
- [9] V.M Soundalgekar and P.D Wavre, Unsteady Free Convection Flow Past an Infinite Vertical Plate with Constant Suction and Mass Transfer, Int. J. Heat Mass Transfer, Vol. 20, 1977, pp. 1363-1373.
- [10] R Varma and A Srivastava, Effect of magnetic field on unsteady blood flow through a narrow tube, International Journal of Stability and Fluid Mechanics, Vol3, No. 1, 2012, PP. 9 – 18 [10] R Varma and A Srivastava, Effect of magnetic field on unsteady blood flow through a narrow tube, International Journal of Stability and Fluid Mechanics, Vol3, No. 1, 2012, PP. 9 – 18.
- [11] W.F Huges, and F.J Young, The Electro-Magneto Dynamics of fluids. John Wiley and Sons, NewYork. 1966.
- [12] B.K Sharma, Comment on "Analytical solution to the problem of MHD free convective flow of an electrically conducting fluid between two heated parallel plates in the presence of an induced magnetic field". Int. J. Appld. Math. &Comp. Vol. 4, No. 3, 2012, pp. 337-338.
- [13] A. Chakrabarti and A. S. Gupta, "Hydromagnetic flow and heat transfer over a stretching sheet," Quarterly Journal of Mechanics and Applied Mathematics, Vol. 37, 1979, pp. 73-78.
- [14] E. M. Abo Eldahab and M. S. El Gendy, "Convective Heat Transfer past a Continuously Moving Plate Embedded in a Non-Darcian Porous Medium in the

# International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- Presence of a Magnetic Field,” Canadian Journal of Physics, Vol. 79, 2001, pp. 1031-1038.
- [15] M. A. Hussain and H. S. Takhar, “Radiation Effect on Mixed Convection along a Vertical Plate in Presence of Heat Generation or Absorption,” Journal of Heat Trans- fer, Vol. 31, No. 4, 1996, pp. 243- 248.
- [16] N. Ahmed and H. K. Sarmah, “The Radiation Effect on a Transient MHD Flow Mass Transfer Past an Impulsively Fixed Infinite Vertical Plate,” International Journal of Applied Mathematics and Mechanics, Vol. 5, No. 5, 2009, pp. 87-98.
- [17] V. Rajesh and S. V. K. Varma, “Radiation Effects on MHD Flow through a Porous Medium with Variable Tem- perature and Mass Diffusion,” International Journal of Applied Mathematics and Mechanics, Vol. 6, No. 11, 2010, pp. 39-57.
- [18] D. Pal and H. Mondal, “Radiation Effects on Combined Convection over a Vertical Flat Plate Embedded in a Porous Medium of Variable Porosity,” Meccanica, Vol. 44, No. 2, 2009, pp. 133-144.
- [19] A. M. D. Samad and M. M. Rahman, “Thermal Radiation Interaction with Unsteady MHD Flow past a Vertical Porous plate immersed in a porous medium, Journal of Na- val Architecture and Marine Engineering, Vol. 3, No. 1, 2006, pp. 7-14.
- [20] S. Karthikeyan, S. Sivasankaran and S. Rajan, “Thermal Radiation Effects on MHD Convective Flow over a Ver- tical Porous Plate Embedded in a Porous Medium by Perturbation Technique,” Proceedings of International Conference on Fluid Dynamics and Its Applications, Bangalore, 2010, pp. 484-491.
- [21] S. Das, M. Jana and R. N. Jana, “Radiation Effect on Natural Convection near a Vertical Plate Embedded in Porous Medium with Ramped Wall Temperature,” Open Journal of Fluid Dynamics, Vol. 1, No. 1, 2011, pp. 1-11.
- [22] D. Pal and B. Talukdar, “Perturbation Analysis of Un- steady Magnetohydrodynamic Convective Heat and Mass Transfer in a Boundary Layer Slip Flow past a Vertical Permeable Plate with Thermal Radiation Chemical Reaction,” Communications in Nonlinear Science and Nume- rical Simulation, Vol. 15, No. 7, 2010, pp. 1813-1830.
- [23] A.G Vijaya Kumar., Y Rajasekhara Goud., S.V.K Varma and K Raghunath, Thermal Diffusion and radiation effects on unsteady MHD flow through porous medium with variable temperature and mass diffusion in the presence of heat source/sink, Acta Technica Corvininensis – Bulletin of Engineering, Vol. 6, No. 2, 2013, pp. 79-85.
- [24] D Vijaya Sekhar and G Viswanadh Reddy, Effects of chemical reaction on MHD free convective oscillatory flow past a porous plate with viscous dissipation and heat sink, Advances in Applied Science Research, Vol. 3, No. 5, 2012, pp. 3206-3215.
- [25] J Gireesh Kumar and P.V Satyanarayana, Mass transfer effects on MHD unsteady free convective Walter’s memory flow with constant suction and heat sink, Int. J. of Appl. Math and Mech. Vol.7, No. 19, 2011, pp. 97-109.
- [26] N.Ahmed, H.Kalila, ” Oscillatory MHD free convective flow through a Porous Medium with mass transfer, Soret Effect and Chemical Reaction” ,Indian Journal Of Science and Technology, Vol.3, No.8, pp-919-924, 2012.
- [27] A. C. L. Cogley, W. G. Vincenti and E. S. Giles, “Differ- ential Approximation for Radiative Heat Transfer in a Non- Grey Gas near Equilibrium,” American Institute of Aero-nautics and Astronautics, Vol. 6, No. 3, 1968, pp. 551- 553.

## APPENDIX

$$m_1 = \frac{\text{Pr} + \sqrt{\text{Pr}^2 + 4 \text{Pr}(R + Q)}}{2} \quad m_2 = \frac{\text{Pr} + \sqrt{\text{Pr}^2 + 4 \text{Pr}(R + Q + n)}}{2} \quad m_3 = \frac{Sc + \sqrt{Sc^2 + 4 ScKc}}{2} \quad m_4 = \frac{Sc + \sqrt{Sc^2 + 4 Sc(Kc + n)}}{2}$$

$$m_5 = \frac{1 + \sqrt{1 + 4N}}{2} \quad m_6 = \frac{1 + \sqrt{1 + 4(N + n)}}{2} \quad A_0 = 1 - A_1 \quad A_1 = \frac{A \text{Pr} m_1}{m_1^2 - \text{Pr} m_1 - \text{Pr}(R + Q + n)} \quad A_2 = \frac{Sc \text{Som}_1^2}{m_1^2 - Sc m_1 - ScKc}$$

$$A_3 = \frac{A Sc m_3 (1 + A_2)}{m_3^2 - Sc m_3 - Sc(Kc + n)} \quad A_4 = \frac{A_2 m_1}{m_1^2 - Sc m_1 - Sc(Kc + n)} \quad A_5 = \frac{-A_0 Sc \text{Som}_2^2}{m_2^2 - Sc m_2 - Sc(Kc + n)} \quad A_6 = \frac{-A_1 Sc \text{Som}_1^2}{m_1^2 - Sc m_1 - Sc(Kc + n)}$$

$$A_7 = 1 - (A_3 + A_4 + A_5 + A_6) \quad A_8 = \frac{Gr}{m_1^2 - m_1 - N} \quad A_9 = \frac{Gm(1 + A_2)}{m_3^2 - m_3 - N} \quad A_{10} = \frac{Gm A_2}{m_1^2 - m_1 - N}$$

$$A_{11} = \frac{-1 + A_8 + A_9 - A_{10} + hm_1 A_8 + hm_3 A_9 - hm_1 A_{10}}{1 + hm_5} \quad A_{12} = \frac{AA_{11} m_5}{m_5^2 - m_5 - (N + n)} \quad A_{13} = \frac{AA_8 m_1}{m_1^2 - m_1 - (N + n)}$$

$$A_{14} = \frac{AA_9 m_3}{m_3^2 - m_3 - (N + n)} \quad A_{15} = \frac{AA_{10} m_1}{m_1^2 - m_1 - (N + n)} \quad A_{16} = \frac{Gr A_0}{m_2^2 - m_2 - (N + n)} \quad A_{17} = \frac{Gr A_1}{m_1^2 - m_1 - (N + n)}$$

$$A_{18} = \frac{Gm A_7}{m_4^2 - m_4 - (N + n)} \quad A_{19} = \frac{Gm A_3}{m_3^2 - m_3 - (N + n)} \quad A_{20} = \frac{Gm A_4}{m_1^2 - m_1 - (N + n)} \quad A_{21} = \frac{Gm A_5}{m_2^2 - m_2 - (N + n)}$$

$$A_{22} = \frac{Gm A_6}{m_1^2 - m_1 - (N + n)} \quad A_{23} = -1 - A_{12} + A_{13} + A_{14} - A_{15} + A_{16} + A_{17} + A_{19} + A_{20} + A_{21} + A_{22}$$

$$A_{24} = hm_5 A_{12} - hm_1 A_{13} - hm_3 A_{14} + hm_1 A_{15} - hm_2 A_{16} - hm_1 A_{17} - hm_4 A_{18} - hm_3 A_{19} - hm_1 A_{20} - hm_2 A_{21} - hm_1 A_{22}$$

$$A_{25} = \frac{A_{23} + A_{24}}{1 + hm_6}$$



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)