



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 8 Issue: XII Month of publication: December 2020

DOI: <https://doi.org/10.22214/ijraset.2020.32629>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Design and Analysis of Power Train for All-Terrain Vehicle (ATV)

Tushar Laxmikant Galphade¹, Ganesh Arjun Prabhu²

^{1,2}Department of Mechanical Engineering, Mumbai University, India

Abstract: Power train is an interlinkage of mechanism that transmits, power and torque from Engine to the Wheels of an automobile. Power train is also known as Transmission system. The objective of transmission is to provide required power, consistently and efficiently, to overcome every severe terrain conditions. An All-Terrain Vehicle (ATV) is a single seat, open cockpit vehicle, which is used for Off-roading purpose.

The ATV designed for BAJA SAE competition was aimed at providing complete safety, dynamic stability, sustainability and reliability. This paper provides detailed information about Designing, Mathematical analyzing and fabrication of power train for ATV.

The application of modern designing technique like CAD and FEA assisted in determining the critical point in design and possible failure location. This encouraged in discovering new methods of fabricating and assembling components and ensured clear understanding of project.

The paper enlightens about various types of power trains with their advantages and disadvantages, and optimum use of available resources for designing affordable ATV.

Keywords: ATV, Gradeability, CVT, Tractive Effort, Transmission system

I. INTRODUCTION

The ever-increasing universal demand for rugged, energy efficient, stable and economical All-Terrain Vehicle (ATV) requires developing current ATV's with significant changes. ATV's are built for their exclusive performance in all type of terrain conditions and thus their design plays a crucial role. They are used for adventurous sports, military exercises and can be used in agricultural fields. Society of Automotive Engineers (SAE) organizes BAJA SAEINDIA in which undergraduate college students participate to compete and showcase their own designed and fabricated ATV's. The ATV's are designed and build for their optimum performance during the competition.

As ATV's are designed for any severe terrain conditions, the power train should be capable of transmitting power to the wheels. The Power train thus becomes a crucial section, which needs to be designed carefully. It consists of several power generating and power transmitting components.

It includes Engine, Clutch, Gearbox, Propeller shaft, Universal joints, Differential, Axles, Wheels. Broadly, Transmission is referred to only as gearbox and is classified as Manual Transmission and Automatic Transmission. Manual Transmission works on principle of shifting gears manually to obtain different gear ratios. While in Automatic transmission, there is no need to manually change the gears. Automatic Transmission operates basically by controlling vehicle speed and engine load.

A. Advantages and Disadvantages

- 1) Manual transmissions are less complex, more efficient and weigh less than automatic transmission but due to space restriction in cockpit the gear lever would have proved discomfort for the driver.
- 2) Automatic Transmission proves beneficial because it does not require gear shifting mechanism to change the gear but they are more complex and costly. Moreover, they require more maintenance than manual transmission.

The main objectives aimed for designing ATV was light weight, affordable and energy efficient ATV. The overall weight of ATV with driver was targeted around 300 kilograms.

The mounting of Manual and Automatic Transmission on chassis was an issue due to their weight and size. A type of automatic transmission, CVT was considered which required low space and was affordable and light weight. CVT can obtain any desired speed ratio within its operating limits. So, the selection of CVT was finalized.

II. CONCEPT SELECTION AND DESIGN

A. Selection of Engine

Internal Combustion Engine is the power generating component from which power is transmitted to the other parts of power train. For SAE BAJA competition, Engine was one of the constraints and only use of Briggs and Stratton OHV engine model was permitted. It is a four-stroke, air cooled engine having following specifications: -



Fig – Engine

- 1) MODEL - 19L232-0054 G1
- 2) DISPLACEMENT -305 CC
- 3) BORE/STROKE - 3.12” / 2.44”
- 4) ENGINE TYPE - OHV
- 5) COMPRESSION RATIO - 8.1 TO 1
- 6) MAX POWER - 10.0 HP
- 7) MAX RPM - 3,800 RPM

B. Selection of CVT

The Advantages and Disadvantages of Manual Transmission and Automatic transmission were noted and considering them CVT was finalized. Continuous Variable Transmission (CVT) is a form of automatic transmission which can select any desired gear ratio within its operating limit. It consists of pair of pulleys of which input shaft is coupled with engine shaft and output is coupled with gearbox. A rubber belt runs over the two pulley and transmits required power. Research and Market survey about the CVT was carried out and CVTech CVT was selected. The diameter of Engine output shaft and ID of hole of primary pulley was same. Following are the specifications of CVT: -

Company	CVtech
Model	Series 6
Ratio	3:1 to 043:1
Material	Al- 6061-T6



Fig – CVT Dismantled



Fig – CVT Assembled

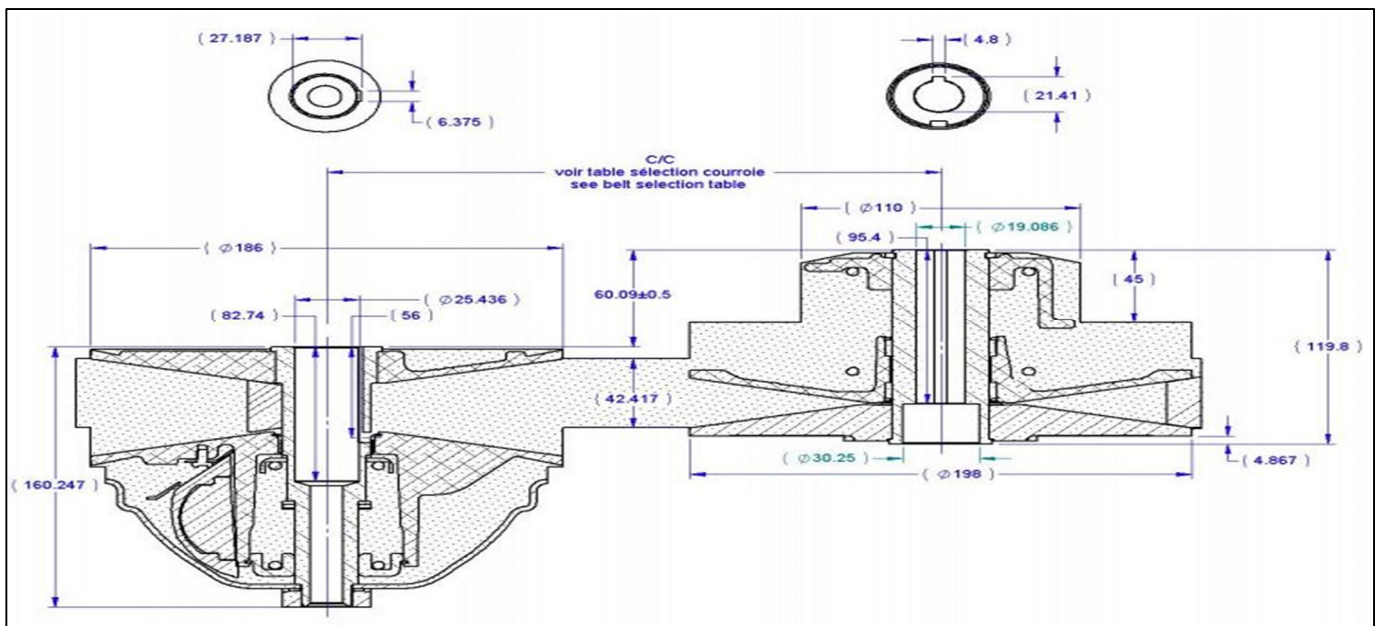


Fig – CVT Layout



Fig – Engine power vs RPM vs Torque

III. CALCULATION OF GEAR RATIO

- N: Speed of the engine (rpm)
- P: Circumference of Wheel (m)
- E: Transmission Efficiency (%)
- C. R.: C.V.T Ratio
- G.R.: Gear Ratio
- T: Max engine Torque (Nm)
- T: Engine Torque (Nm)
- R: Radius of Wheel (m)
- W: Weight of Vehicles (N)
- m: Mass of the vehicles (kg)
- α : Pressure angle
- Z: No. of Teeth
- PCD: Pitch Circle Diameter (mm)
- M: Module of gears

Vehicles should not exceed the speed of 60 Km/hr as per the SAE BAJA2020 rules. So, gearbox should be design to attend maximum speed of 60 Km/hr. Maximum engine rpm is 3800 at this condition CVT ratio is 0.53:1.

Maximum engine rpm (N): 3800

CVT ratio @3800 rpm (C): 0.53:1

Maximum desired speed (V): 60 Km/hr

Wheel perimeter (P): $\pi \times D = 3.14 \times 0.533 = 1.676 \text{ m}$

Gearbox ratio

$$V = \frac{N \cdot P \cdot 60}{1000 \cdot C.R. \cdot G.R.}$$

$$60 = \frac{3800 \cdot 1.676 \cdot 60}{1000 \cdot 0.56 \cdot G.R.}$$

G.R. = 12

Therefore, Gear ratio = 12:1

Hence the first stage and second stages of gearbox should be 3.4 and 3.5 respectively.

A. Design of Gear

Gearbox Type	2 stage compound gearbox
Gear type	Spur gear
Gear ratio	12:1
1st stage reduction ratio	3.4
2nd stage reduction ratio	3.5
Pressure angle	20 degree
Module	2

For the selected gear ratio 12:1 the Pitch circle diameter (PCD) and No. of teeth (Z) is given by the following calculation.

$$\begin{aligned} \text{Stage 1 gear ratio} &= \frac{\text{No. of teeth of gear 1}}{\text{No. of teeth of pinion 1}} \\ &= \frac{62}{18} \\ &= 3.4 \end{aligned}$$

PCD for Gear 1

$$\text{PCD} = Z \cdot M = 62 \times 2 = 124 \text{ mm}$$

Same approach is done to get the rest values

	Stage 1		Stage 2	
	Pinion 1	Gear 1	Pinion 2	Gear 2
No. of teeth	18	62	18	63
Face width	20	20	20	20
PCD (mm)	36	124	36	126

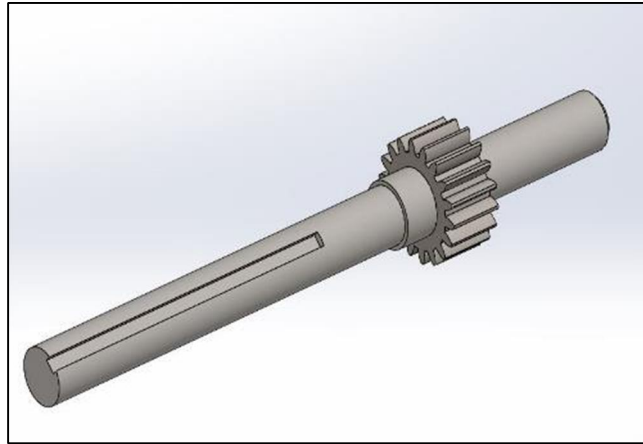


Fig - Stage 1 Pinion

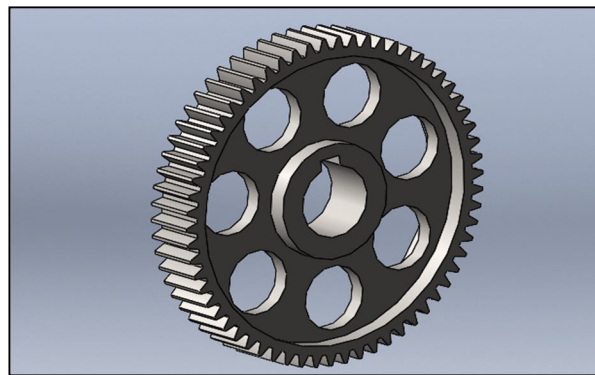


Fig - Stage 1 Gear

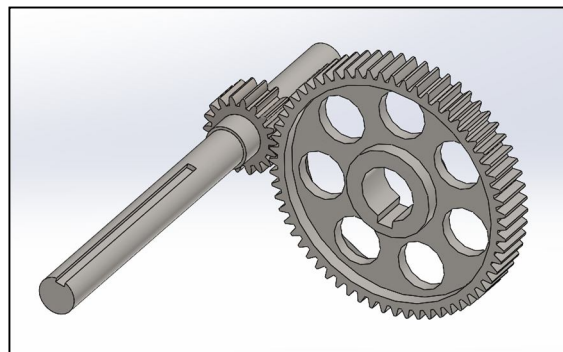


Fig - Stage 1 Assembly

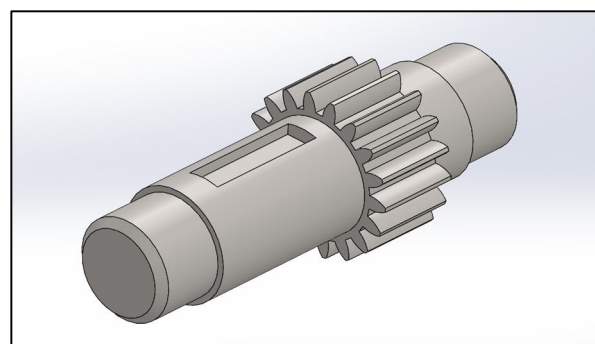


Fig - Stage 2 Pinion

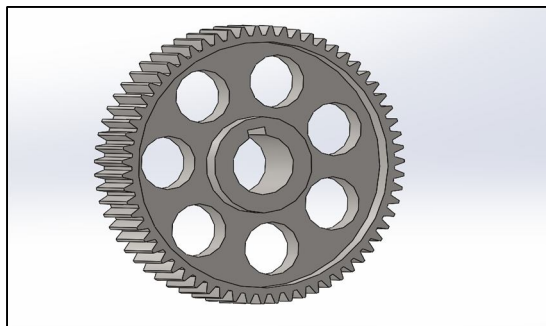


Fig - Stage 2 Gear

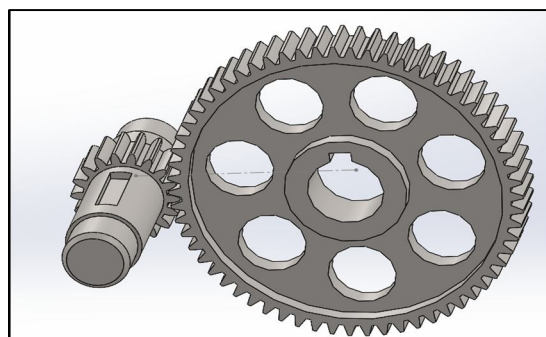


Fig - Stage 2 Assembly

IV. GEAR MATERIAL SELECTION

Gear material selection is based on the amount of total load which acts on the gears or on gear tooth. The load which acts on the gears and gear tooth while dynamic events and endurance race in the BAJA competition may cause the failure of the gears and breakage of gear tooth. The gear material should have sufficient strength to resist this failure & avoid breakage of the tooth.

Therefore 30CrNiMo8 (DIN 1.6580) Material has been selected for gears.

	Gear material	Casing material
Material	30CrNiMo8	Al-6061
Tensile strength	1250 Mpa	124 Mpa
Yield strength	1050 Mpa	55 Mpa
Poisson ratio	0.28	0.33

V. ANALYSIS OF GEAR

Analysis has been done in Solidworks 2020.

Component	Max. deformation (mm)	Max. stress (N/mm ²)	Factor of safety
1 st stage gears	0.155	108	9.7
2 nd stage gears	0.155	516	2.04

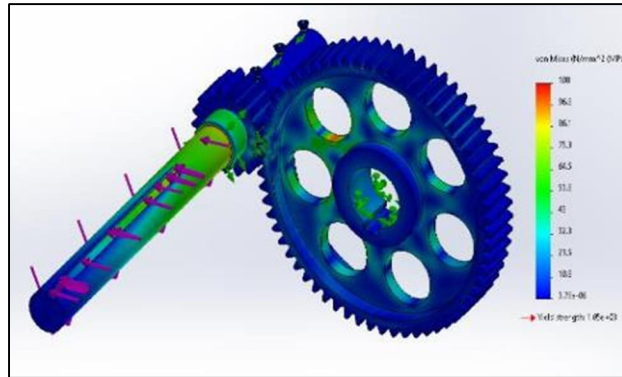


Fig - Stress analysis of 1st stage gears.

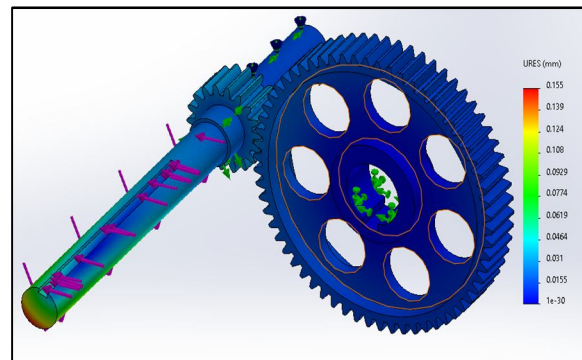


Fig - Deformation analysis of 1st stage gears

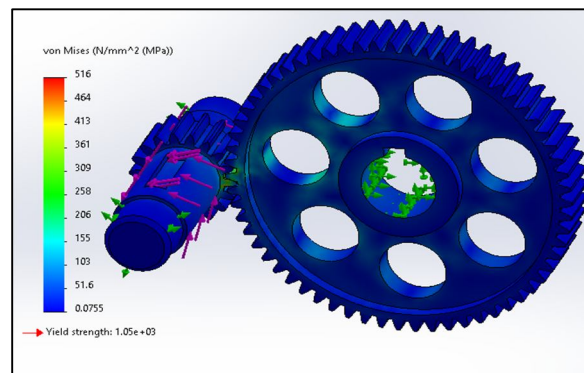


Fig - Stress analysis of 2nd stage gears.

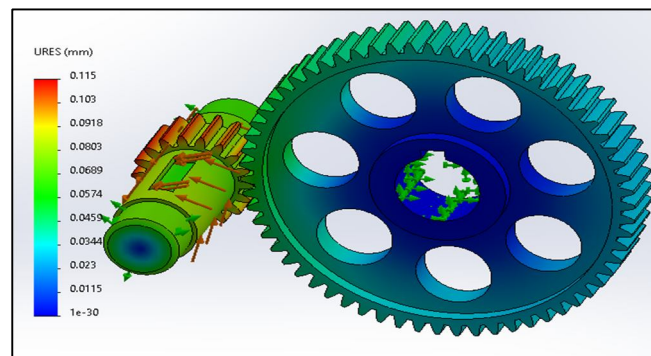


Fig - Deformation analysis of 2nd stage gears

Calculation of theoretical parameters after designing Gearbox

$$\begin{aligned}
 1) \text{ Max. Speed of Vehicles} &= \frac{N * C * E * 3.6}{C.R * G.R * 60} \\
 &= \frac{3800 * 1.676 * 0.95 * 60}{0.56 * 12 * 1000} \\
 &= 54.02 \text{ Km/hr.}
 \end{aligned}$$

2) *Acceleration*

a) *Tractive Effort*: It is the force which acts at the rims of the driving wheels of moving vehicles. It is required to accelerate the vehicle mass horizontally.

$$\begin{aligned}
 \text{Tractive effort (T.E)} &= \frac{T * C.R * G.R * E}{R} \\
 &= \frac{19 * 3 * 12 * 0.95}{0.2667} \\
 &= 2436.45 \text{ N}
 \end{aligned}$$

b) *Rolling Resistance*: It the force resisting the motion when a body rolls over the surface.

$$\begin{aligned}
 \text{Rolling Resistance (R.R)} &= W * \mu \\
 &= 300 * 9.81 * 0.08 \\
 &= 235.44 \text{ N}
 \end{aligned}$$

c) *Air Resistance*: Air resistance describes the forces that are in opposition to the relative motion of a vehicle as it passes through the air.

$$\begin{aligned}
 \text{Air Resistance (A.R.)} &= \rho * A * C_d * V^2 / 2 \\
 &= 1.1644 * 1 * 0.4 * 2.02^2 / 2 \\
 &= 0.95 \text{ N}
 \end{aligned}$$

$$\begin{aligned}
 d) \text{ Total Resistance (T.R)} &= A.R + R.R \\
 &= 0.95 + 235.44 \\
 &= 236.39 \text{ N}
 \end{aligned}$$

$$\begin{aligned}
 e) \text{ Acceleration} &= \frac{T.E - T.R}{m} \\
 &= \frac{2436.45 - 236.39}{300} \\
 &= 7.33 \text{ m/s}^2
 \end{aligned}$$

f) *Gradeability*: The ability of the vehicles to climb the slope is gradeability.

$$\begin{aligned}
 \text{Gradeability} &= \frac{100 * (T.E - T.R.)}{W} \\
 &= \frac{100 * (2436.45 - 236.39)}{300 * 9.81} \\
 &= 74.75 \%
 \end{aligned}$$

$$\begin{aligned}
 g) \text{ Maximum Torque on Wheels (T.W)} \\
 &= T * C.R. * G.R. * E \\
 &= 19 * 3 * 12 * 0.95 \\
 &= 649.8 \text{ Nm}
 \end{aligned}$$

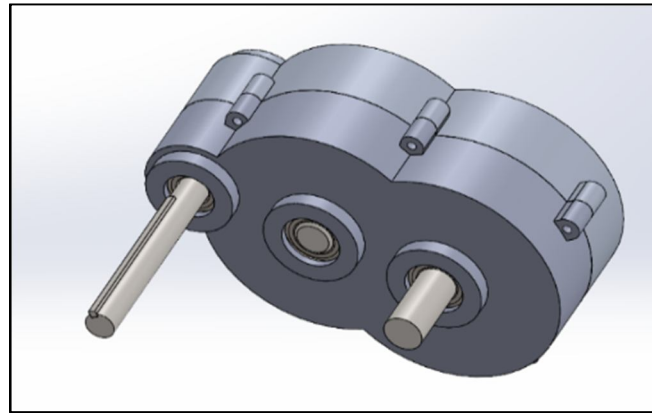


Fig – Gearbox Casing

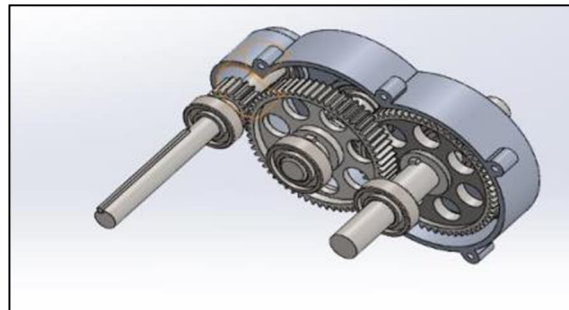


Fig – Gearbox cross-sectional view

VI. RESULT

From all the Design, Analysis and calculations, following results are obtained:

Engine RPM	Engine Torque	CVT Ratio	Secondary CVT RPM	Secondary CVT Torque	Gear box Ratio	Gear box input RPM	Gear box input Torque	Gear box output RPM	Gear box output Torque	Wheel RPM	Wheel RPH	Vehicle Speed	Vehicle Speed m/s	Tractive Force(N)	Air Drag (N)	Rolling Resistance	Extra tractive force available	Acceleration	GRADEABILITY (%)	Gradeability
1800	18.5	3	600.00	55.5	12	600.00	55.5	50.00	666.00	50.00	3000.00	5.02	1.40	2247.47	0.45	294.30	1952.72	6.51	66.35	33.56
1900	18.5	3	633.33	55.5	12	633.33	55.5	52.78	666.00	52.78	3166.67	5.30	1.47	2247.47	0.51	294.30	1952.66	6.51	66.35	33.56
2000	18.5	3	666.67	55.5	12	666.67	55.5	55.56	666.00	55.56	3333.33	5.58	1.55	2247.47	0.56	294.30	1952.61	6.51	66.35	33.56
2100	18.6	3	700.00	55.8	12	700.00	55.8	58.33	669.60	58.33	3500.00	5.86	1.63	2259.62	0.62	294.30	1964.70	6.55	66.76	33.73
2200	18.7	3	733.33	56.1	12	733.33	56.1	61.11	673.20	61.11	3666.67	6.14	1.71	2271.77	0.68	294.30	1976.79	6.59	67.17	33.89
2300	18.8	3	766.67	56.4	12	766.67	56.4	63.89	676.80	63.89	3833.33	6.42	1.78	2283.91	0.74	294.30	1988.87	6.63	67.58	34.05
2400	18.8	3	800.00	56.4	12	800.00	56.4	66.67	676.80	66.67	4000.00	6.70	1.86	2283.91	0.81	294.30	1988.81	6.63	67.58	34.05
2500	18.9	3	833.33	56.7	12	833.33	56.7	69.44	680.40	69.44	4166.67	6.98	1.94	2296.06	0.88	294.30	2000.89	6.67	67.99	34.21
2600	19	3	866.67	57	12	866.67	57	72.22	684.00	72.22	4333.33	7.26	2.02	2308.21	0.95	294.30	2012.96	6.71	68.40	34.37
2700	19	2.8	964.29	53.2	12	964.29	53.2	80.36	638.40	80.36	4821.43	8.08	2.24	2154.33	1.17	294.30	1858.86	6.20	63.16	32.28
2800	19	2.6	1076.92	49.4	12	1076.92	49.4	89.74	592.80	89.74	5384.62	9.02	2.51	2000.45	1.46	294.30	1704.69	5.68	57.92	30.08
2900	18.95	2.4	1208.33	45.48	12	1208.33	45.48	100.69	545.76	100.69	6041.67	10.12	2.81	1841.71	1.84	294.30	1545.57	5.15	52.52	27.71
3000	18.9	2.2	1363.64	41.58	12	1363.64	41.58	113.64	498.96	113.64	6818.18	11.42	3.17	1683.78	2.34	294.30	1387.14	4.62	47.13	25.24
3100	18.8	2	1550.00	37.6	12	1550.00	37.6	129.17	451.20	129.17	7750.00	12.98	3.61	1522.61	3.03	294.30	1225.28	4.08	41.63	22.60
3200	18.7	1.8	1777.78	33.66	12	1777.78	33.66	148.15	403.92	148.15	8888.89	14.89	4.14	1363.06	3.98	294.30	1064.78	3.55	36.18	19.89
3300	18.6	1.5	2200.00	27.9	12	2200.00	27.9	183.33	334.80	183.33	11000.00	18.42	5.12	1129.81	6.10	294.30	829.41	2.76	28.18	15.74
3400	18.4	1.3	2615.38	23.92	12	2615.38	23.92	217.95	287.04	217.95	13076.92	21.90	6.08	968.64	8.62	294.30	665.72	2.22	22.62	12.75
3500	18	1	3500.00	18	12	3500.00	18	291.67	216.00	291.67	17500.00	29.31	8.14	728.91	15.44	294.30	419.17	1.40	14.24	8.11
3600	17.7	0.6	6000.00	10.62	12	6000.00	10.62	500.00	127.44	500.00	30000.00	50.25	13.96	430.06	45.37	294.30	90.39	0.30	3.07	1.76
3700	17.7	0.6	6166.67	10.62	12	6166.67	10.62	513.89	127.44	513.89	30833.33	51.64	14.35	430.06	47.92	294.30	87.83	0.29	2.98	1.71
3800	17.7	0.53	7169.81	9.381	12	7169.81	9.381	597.48	112.57	597.48	35849.06	60.04	16.68	379.88	64.78	294.30	20.80	0.07	0.71	0.40


Gear material	30CrNiMo8
Gear casing material	Al-6061
Gearbox type	2 stage compound spur gear
Overall gear reduction ratio	12
1 st stage reduction ratio	3.4
2 nd stage reduction ratio	3.5
Module	2
Pressure angle	20
Face width	20
Max. speed	54.02
Acceleration	7.33 m/s ²
Gradeability	74.75%
Torque on wheel	649.8
Total weight of gearbox	5.8 Kg

VII. CONCLUSION

From the above calculations and analysis, it can be concluded that optimization had been successfully done in gear design to reduce the overall weight of gearbox and to increase the performance of ATV. Overall gear reduction of 12 is achieved. The power train is essential in not only providing required speed and torque but also to provide stability to vehicle as 40-50% weight of ATV is contributed by power train. Selection of gear material may differ the analysis result so proper choice should be made during selection process. All customized parts were designed and analyzed on solidworks software. The center of gravity (C.G.) should be placed at lower height from ground to achieve vehicle stability. The kerb weight of ATV is reduced by application of CVT transmission and optimizing gearbox. Due to decrease in weight, ATV's speed and efficiency is increased. The main motive of Affordable ATV production was achieved. Various unwanted components which increased the cost and weight of ATV were reduced or cut-offed without compromising in driver's safety and vehicle stability.

REFERENCES

- [1] Dr. Kirpal Singh "Automobile Engineering" Vol. 1 published by Standard Publishers Distributors, 2013.
- [2] V. B. BHANDARI, "Design of MACHINE ELEMENTS" Published by Tata McGraw Hill, 2007.
- [3] Akshay Kumar, Sayan Karmakar, Nasit Malay, and Nitesh Lohia, "Performance optimization of CVT using Data Acquisition System (DAQ)", International Journal of Engineering and Technology (IJET) Vol No. 7 Jan 2016.
- [4] Akshay Bodake, Aditya Khairnar, and Ashraf Pathan, "Design & development of a powertrain system in scope of baja vehicle" International Journal of Advance Engineering and Research Development Volume 5, Issue 12, December -2018.
- [5] Bobby George, Abin Jose, Adarsh John George, Ajoy Augustine, and Alvin Reji Thomas, "Innovative Design and Development of Transmission System for an Off-road Vehicle", International Journal of Scientific & Engineering Research, Volume 7, Issue 3, March-2016.
- [6] Tudose, L. Buiga, O. Jucan, D. Stefanache, C. Optimal Design of Two Stage Speed Reducer, *MACMESE*, Romania (74-79), 2008
- [7] N. Srivastava, I. Haque, A review on belt and chain continuously variable transmissions (CVT): dynamics and control, *Mech. Mach. Theory* 44 (2009) 19– 41.
- [8] A textbook of "MATERIAL SELECTION IN GEAR DESIGN", Radinko Gligorijević, Jeremija Jevtić, Djuro Borak.

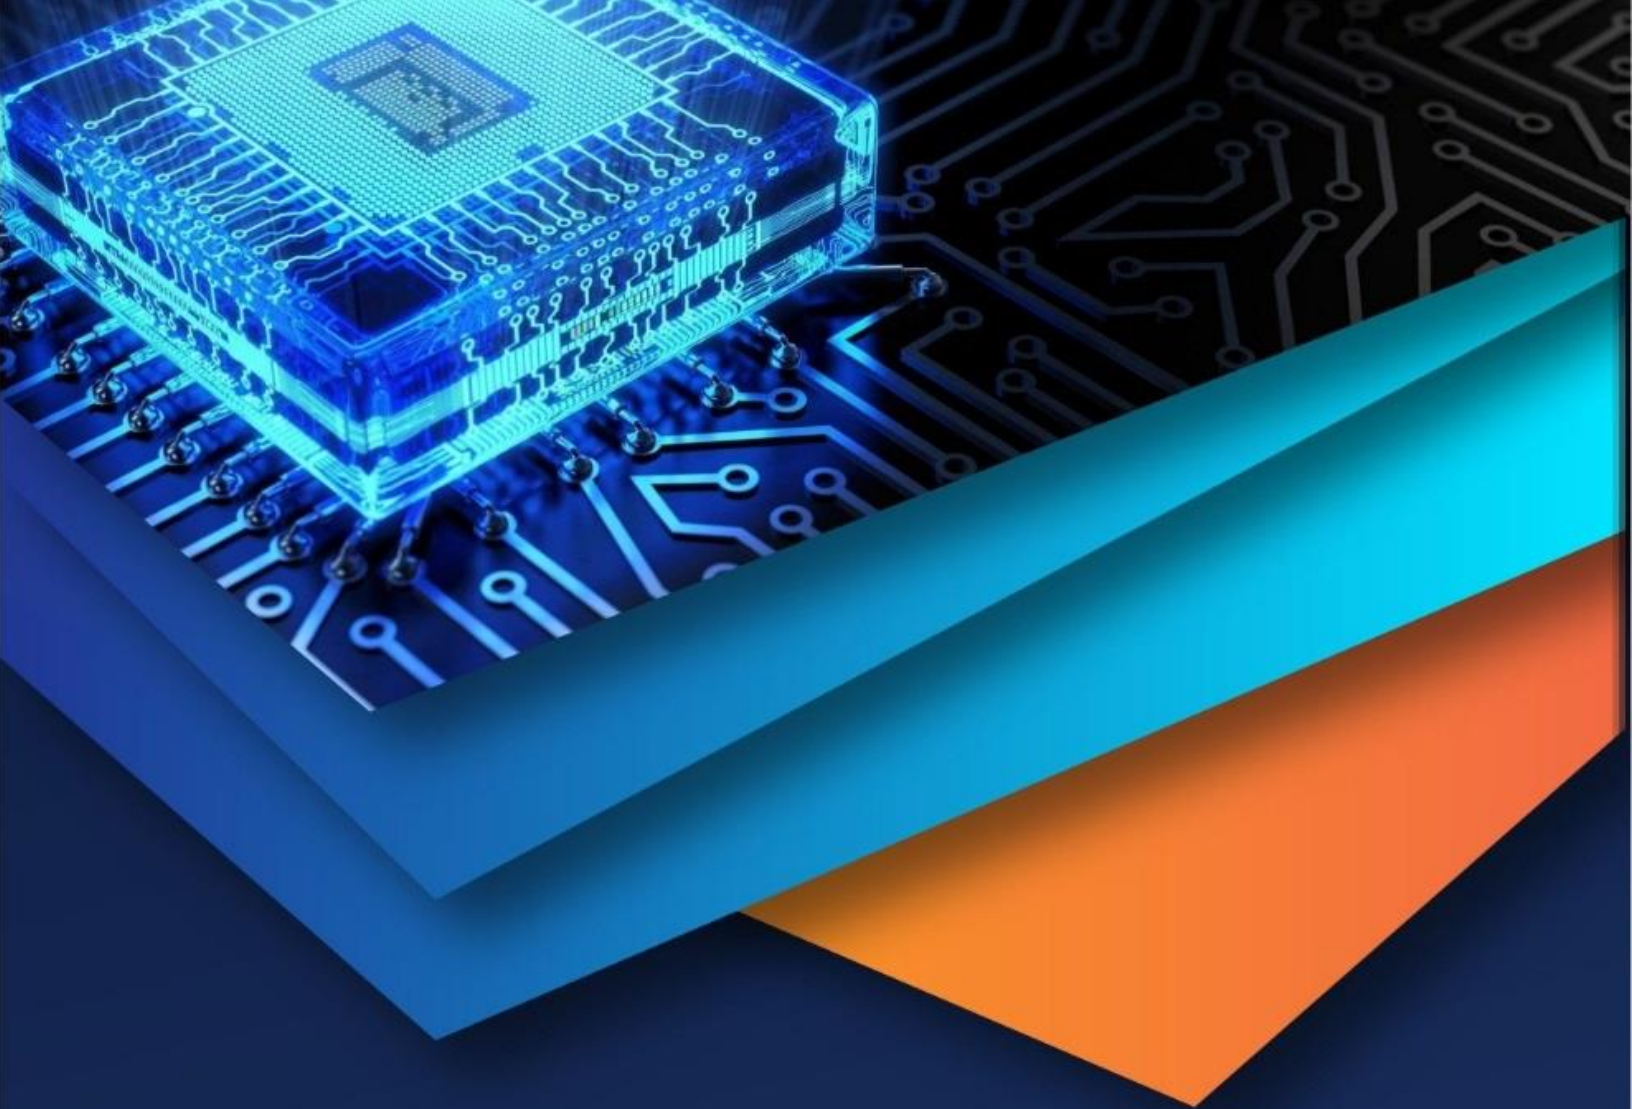

10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)