



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: III Month of publication: March 2021

DOI: <https://doi.org/10.22214/ijraset.2021.33199>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Humanoid Robot using Robotic Arm

R. Babu¹, S. Balamurugan², M. Eraghavendran³, R. Gowtham⁴, C. N. Marimuthu⁵

^{1, 2, 3, 4}Dept of Electronics and Communication Engineering, Nandha Engineering College(Autonomous), Erode, Tamil Nadu, India.

⁵Professor & Dean (R&D), Dept of Electronics and Communication Engineering, Nandha Engineering College(Autonomous), Erode, Tamil Nadu, India.


Abstract: The use of robots has meanwhile shifted from industry to everyday life. Using voice commands to control the robot is much easier for home and industrial users. The humanoid robotic system has proven to be very useful in crowded areas. the risk of illustration people . This project suggests using an Android mobile device to control a robot using voice commands. The integration of the control panel to a Bluetooth device is achieved through the use of a Bluetooth module to capture and read the voice commands. The robotic car works on a command received via an Android device. For this, Arduino is integrated into the system. The control device can be any smart phone with an Android application. The transmitter uses an Android app to transmit signal and the receiver side reads the commands and interprets them to control the robotic vehicle. The android APP sends commands to move the car forward, backward, left and right. Upon receiving the commands, Arduino controls the motors to move the car in four directions.

The communication between the Android device and the receiver is transmitted as serial communication data. The Arduino program is used to move the motor through the motor driver circuit according to the commands sent. The wireless camera connects to the robot head for surveillance. Using the robot, the robot can wirelessly transmit live broadcasts with night vision functions. A robotic arm is mounted on the front of the system for the purpose of choosing and placing. An obstacle detector is added to protect the system from obstacles on the way using an ultrasonic sensor.


I. INTRODUCTION

The use of humanoid robots in the present day has moves from industries to the normal day to life. The use of voice commands to control a robot is much easier for domestic as well as industrial users. Humanoid robotic system is very beneficial in areas where there is high risk for humans to enter. This project suggests using an Android mobile phone to control a robot using voice commands. The robot is useful in places where people are difficult to reach, but it hears a human voice. In areas affected by natural disaster and fire high risk areas. The robot can be used as a toy and used to transport and place small objects. The idea behind this project is to save people who need help due to natural disasters. The main goal of the project is to control the robot with a voice or a joystick. The purpose of a humanoid robot using a robotic arm is to hear and respond to commands received from the user.

A. Circuit Diagram

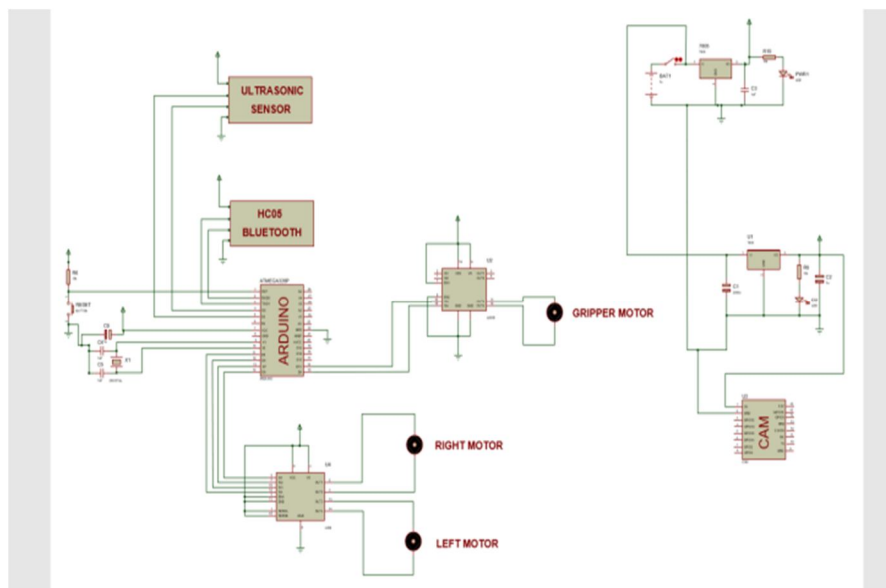


B. Block Diagram

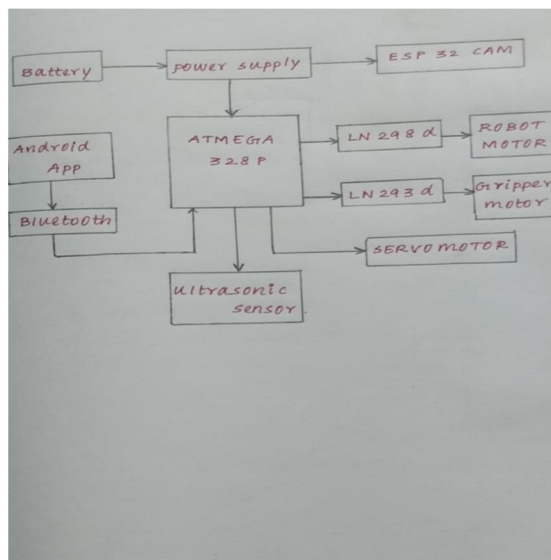

Blockdiagram Description

C. Arduino Uno

Arduino PIC type microcontroller is commonly used in programming and software. Recently Arduino has become very popular in the world. It builds on previous Arduino wiring and processing projects. The process was not written for any programmer. Arduino wiring is done according to the programming language. What they both have in common is that they provide an environment in which even basic knowledge of electronics and programming can be easily developed. Arduino is becoming increasingly common nowadays. Even unmanned aerial vehicles made with Arduino, which is used almost all fields, they are visible.

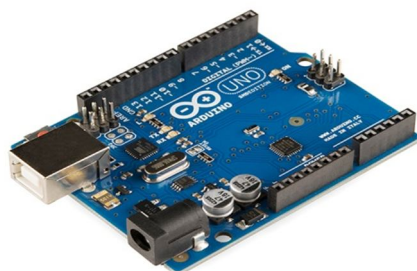

D. HC-05 Bluetooth module

The HC-05 BT module is a slave that operates only and uses a serial communication protocol. In Bluetooth communication, the master and the slave are determined according to the start state of the connection. A master module can start the connection, but the slave module cannot start the connection. In our project we will provide an external device for connection to a slave PC or an Android device. Bidirectional data can be sent and received normally.




E. Servo Motor



Servo detects the operation error of a mechanism, provides feedback and corrects faults. The servo motor can have alternating current (AC), direct current (DC) or stepper motors. Servo motors are the kinds of motors that can fulfil the commands we want. They can operate steadily even at very small or very large speeds. In these motors, the large moment can be obtained from the small size. Servo motors are used in control systems such as fast operation, excessive axis movement, condition control and so on. Servo motors are the last control element of a mechanism. Suppose, a motor is connected in a robot for movement its arms or hands. So if the motor is rotating more than the requirement, the robot cannot be work properly. Servo motor always works in a closed-loop system. A regular motor always rotate in 360 degrees but servo motor can rotate in 0 to 180 degree.

F. 5DC Motor Driver LN298

The L298N is a dual H-Bridge motor driver which allows speed and direction control of two DC motors at the same time. The module can drive DC motors that have voltages between 5 and 35V, with a peak current up to 2A.

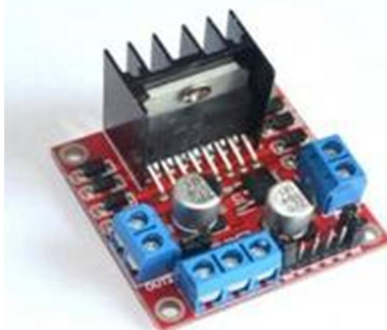

G. Robotic Arm

The robotic arm is an excellent robotic gripper for development of any robotic arm project without spending a lot of money. It is best suitable for pick and place type robots and it can also be used for other robotic and IOT project. It has a wide operating voltage range 5-12V. It is best suitable for object size up-to 11 cm. It has low power consumption and high torque.



H. Wireless Camera


The wireless camera has a night vision which enables no light or low light usage. It performs high-quality picture transmitting and receiving.



I. Software Specifications

The Android application Arduino Voice Controller is an open source code consisting of a Bluetooth module that can be used to start a robot and control a humanoid robot. Speech recognition is used to identify the speaker. Speech recognition analyzes speech characteristics that differ from person to person. Each of them has a unique speech pattern based on their anatomy (size and shape of mouth and voice, pronunciation style, accent, etc.). speech recognition applications are very different from speech recognition applications. Most commonly, speech recognition technology is used to verify the identity of a speaker or to identify an unknown speaker. Speaker verification and speaker identification are two common types of speech recognition. The speaker test uses a person's voice to test who they are. Basically, a person's voice is used as a fingerprint. After a sample of his speech is recorded, the person's speech samples are checked against the database to determine if his voice matches the claimed identity. Speaker verification is most commonly used in situations where secure access is required. These systems work with the knowledge and collaboration of the user. An unknown speaker is identified during speaker identification. In contrast to speaker verification, speaker ID is usually converted and executed without the knowledge of user.

II. RESULT

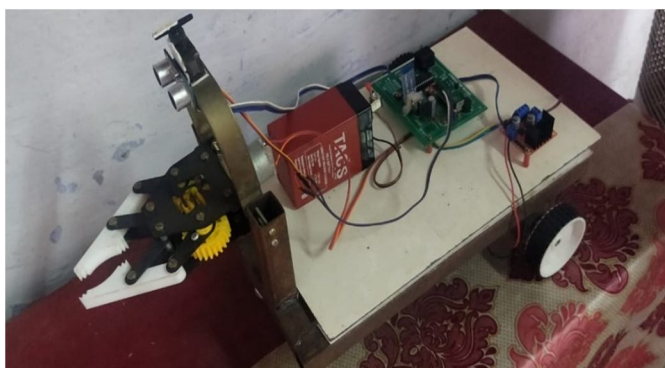

The result can be viewed in the form of Humanoid Robot Using Robotic Arm. In this case, it is determined that the final result of the project.

III. DISCUSSION

The end result of using a humanoid robot with a robotic arm will help people escape the disaster area when the rescue team cannot intervene within the appropriate perimeter of the site

IV. CONCLUSION

The finished product of our project is helps to rescue the people in the danger situation.

V. ACKNOWLEDGMENT

We are highly indebted to our project guide Dr.C.N. Marimuthu ,Professor & Dean(R&D) , Department of Electronics and Communication Engineering for his guidance and motivation in completing this project.

REFERENCES

- [1] WMHW Kadir, RE Samin, BSK Ibrahim. Internet controlled a robotic arm. Procedia Engineering.2019.
- [2] MAK Yusoff, RE Samin, mobile robotic arm. Procedia Engineering 2019.
- [3] AM Al-Busaidi, Development of an educational environment for online control of a biped robot using MATLAB and Arduino, (MECHATRONICS), 9th France-Japan, 2019.
- [4] HS Juang, KY Lurr. Design and control of a two-wheel self-balancing robot using the Arduino microcontroller board. Control and Automation (ICCA), 2020.
- [5] R Krishna, GS Bala, SS ASC, BBP Sarma. Design and implementation of a robotic arm based on haptic technology. Int. J. of Eng. Research,2020 .
- [6] Electric Electronic Technology-Step and Servo Motors, SVET, 2020.
- [7] Niroui, F., Zhang, K., Kashino, Z. and Nejat, G. (2019). Deep Reinforcement Learning Robot for Search and Rescue Applications: Exploration in Unknown Cluttered Environments. IEEE Robotics and Automation Letters, 4(2), pp.610-617.
- [8] Robots.ieee.org. (2020). BEAR - ROBOTS: Your Guide to the World of Robotics. [online] Available at: <https://robots.ieee.org/robots/bear/> [Accessed 14 Jan. 2020].
- [9] Market, M. (2020). Military Robots Market | Size, Share, and Global Market Forecast to 2022 | Market sand Markets™.[online]Marketsandmarkets.com. Online source Aavailable at: <https://www.marketsandmarkets.com/Market-Reports/military-robotsmarket-245516013.html> [Accessed 11 Jan. 2020]:



- [10] Armyupress.army.mil. (2020). Pros and Cons of Autonomous Weapons Systems. [online] Available at: Review/ English Edition-Archives/May June-2017/Pros-and- Cons-of Autonomous Weapons-Systems/ [Accessed 23 Feb. 2020].
- [11] Kumari, A. (2020). Military Robots Play a Pivotal Role as a Tactical and Operational Tool for Armed Forces. [online] Blog.marketresearch.com. Available at: <https://blog.marketresearch.com/military-robots-play-apivotal-role-as-a-tactical-and-operational-tool-for-armed-forces> [Accessed 11 Jan. 2020].
- [12] IFLScience. (2020). Military Test Amphibious Robot Guard Balls. [online] Available at: <https://www.iflscience.com/technology/meetguardbot-spherical-amphibious-robot/> [Accessed 15 Jan. 2020].
- [13] U.Zaman, H., Chowdhury, B. and Rezwan, U. (2016). Design, control & performance analysis of Muktibot. In: 2016 IEEE 7th Annual Information Technology, Electronics and Mobile Communication Conference(IEMCON). [online] Available at: <https://ieeexplore-ieee.org.ezproxy1.hw.ac.uk/document/7746321> [Accessed 14 Jan. 2020].
- [14] KNOWLEDGE, G., GK, C. and Singh, H. (2020). Daksha: Country's first Anti-Terror Robot. [online] Jagranjosh.com. Available at: <https://www.jagranjosh.com/general-knowledge/daksha-countrys-firstanti-terror-robot-1574428779-1> [Accessed 15 Jan. 2020].
- [15] Uy, J. (2020). The Jevit: home-grown Cambodian demining robot saves time and... [online] AEC News Today. Available at: <https://aecnewstoday.com/2019/the-jevit-home-grown-cambodiandemining-robot-saves-time-and-limbs/> [Accessed 15 Jan. 2020]



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)