iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 **Issue:** IV **Month of publication:** April 2021

DOI: https://doi.org/10.22214/ijraset.2021.33898

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.429
Volume 9 Issue IV Apr 2021- Available at www.ijraset.com

Mixed Mode Crack Propagation Analysis using XFEM

Patel Amit V.[1], Parekh Abhishek J.[2], Yash Kotadiya J.[3], Chovatiya Milind D.[4], Nakrani Dhruvil L.[5], Bhandari Dhruval B.[6] , Ghyanchandani Shyamsunder O.[7]
[1]*Assistant Professor,* [1, 2, 3, 4, 5, 6, 7]*Student, Mechanical Department, SSASIT, Surat*

Abstract: ***In all across the globe, we encounter to different situations where we face serious challenges in designing of pressure vessels, aerofoil shapes for aerospace industry, civilian structures, pipe lines, automobiles sector. These all structures are dominated by loading conditions of complex type. Under such situation, notches & cracks play very important role in deciding the destiny of safety and leading to catastrophic failures. Crack growth takes place under combined effect of tensile and shear force [MIXED MODE TYOE]. A well known specimen for fracture tests is PMMA [polymethyl methacrylate]. It has tendency to fail as brittle manner under room temperature and moderate loading rates. Also it has factors such as machinabilty, low cost, convenience in test specimen preparation and optical transparency direct observation of the crack tip region and the crack growth path. So, experiments were performed on DLSP specimen [diagonally loaded square plate]. Also to take account of crack trajectory, a special technique called XFEM [extended finite element analysis] was used in ABAQUS software. Crack initiation angles were also deducted with numerical methods of MTS criteria and matched with results of XFEM as well as experimental data. After DLSP, SENT [side edge notched tension] and SCB [semi circular bend] were also analyzed.***
Keyword: 1. Mixed Mode and Pure Mode, 2. Crack propagation, 3. Fracture mechanics, 4. XFEM, 5. PMMA

I. INTRODUCTION

Engineering structures can fail due to various reasons, including uncertainties in the loading or environment, inappropriate design, defects in the materials, and deficiencies in construction or maintenance. Generally disasters occur because engineering structures contain cracks-arising either during production or during service, and the results can be fatal. Human mankind have witnessed many Catastrophes in wide ranges of applications involving aeronautics, automobiles, bridges and highways, and great loss has been induced in human life along with economics. Defects in materials are inevitable, and complex factors are often involved in the scope of the entire picture. The principles of mechanics for continuous media break down when engineering structures contain cracks. Over the past 50 years, contributions have been made for the understanding of crack-related structural failures and various approaches were introduced to deal with the problems. Material science looks into the microscopic composition and crystallographic defects of materials and provides us with understandings about the fundamentals of crack nucleation and crack propagation. Fracture mechanics aims at studying the driving force on a macroscopic crack and the material's resistance to fracture. Research is mainly divided into two categories: brittle fracture and ductile fracture, depending on the macroscopic deformation characteristics of the material without considering time-dependent behaviour.

II. EXPERIMENTAL WORK

1) *Material Selection:* Poly methyl methacrylate (PMMA) is a well-known polymer that usually fails in a brittle manner at room temperature and under moderate loading rates. Due to its good mechanical and physical properties, PMMA has been widely used in many laboratory fracture studies. This is because of its certain advantages like: brittle type of fracture at room temperature, machinability and optical transparency that allows a direct observation of the crack tip region and the crack growth path using optical methods such as caustics. In addition to its role as a suitable test material, PMMA has also found many practical applications in engineering components and structures. For example, in orthopaedic surgery the PMMA bone cements are commonly used for fixing or replacement of artificial joints as cemented prostheses to the hosting bone. Therefore, the crack growth analysis of such materials under complex tensile and shear loading conditions (i.e. mixed mode I/II) is an important task for designing biomedical components. PMMA (cast Acrylic) sheet of 4mm used to prepare specimens. Geometry of test specimens is taken as specified in ASTM D638-02a for material property.
2) *Model Geometry:* 3D Deformable geometry of the DLSP specimen made of PMMA material considered in this analysis. Dimension of the specimen are taken as shown in Fig.3.4 with 4 mm thickness. All parts were modelled with elastic material models. The material properties used in these simulations are shown in Table 3.1 for PMMA. The XFEM analysis requires additional material information in the enriched area of the crack. The maximum principal stress criteria (Maxps Damage in Abaqus) was selected for the damage initiation criteria. The calculated true ultimate strength was used as the limiting maximum principal stress [11]. Fracture energy was used for the damage evolution criteria

©IJRASET: All Rights are Reserved

Material Property	Value
Young's Modulus	2940 MPa
Poisson's Ratio	0.38
Ultimate Stress	46.2 MPa

Material properties PMMA

A. Specifying XFEM in ABAQUS

Model containing a precrack so the following steps to be done:

Part Module →Create a 3D deformable solid for a UN cracked part and 3D deformable shell for model crack. Fig. 3.12 shows the UN cracked and crack model separately.

1) Assembly Module →Translate the crack instance in the place where precrackis situated that can be seen in Fig. 3.13

2) Interaction Module→ Special→ Crack →ManagerCreate→ XFEM→Continue →Select sections or part for crack location →Allow crack growth (checkbox) →Crack location (check box) →Select Planar Shell part that represents the crack! Specify contact property →okay

3) Mesh Module →An aspect ratio near 1 for the element dimensions in the enriched area are used. In order to visualize the crack in the output database the following changes need to be made to the Step Module:

4) Step Module → Output → Field Output Requests → Manager→F-Output1→Edit→Fracture/Failure→PHILS→STATE/FIELD/USER/TIME →STATSXFEM →OKAY

B. DLSP: Diagonally Loaded Square Specimen

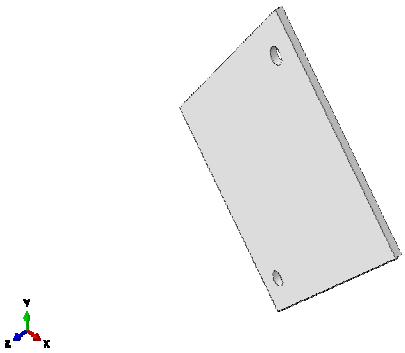


Fig1.Part 1




Fig2. Part 2

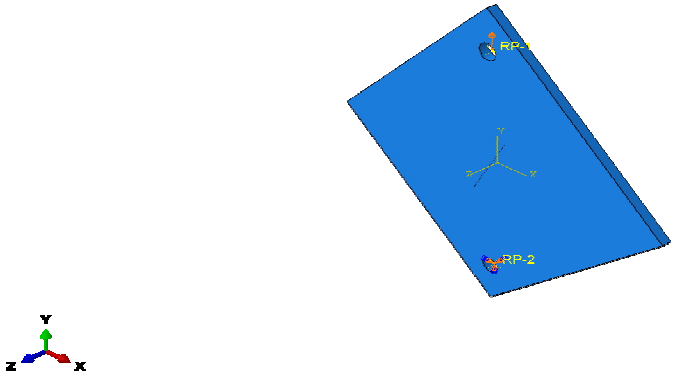


Fig3.Boundary conditions, assembly & interaction

©IJRASET: All Rights are Reserved

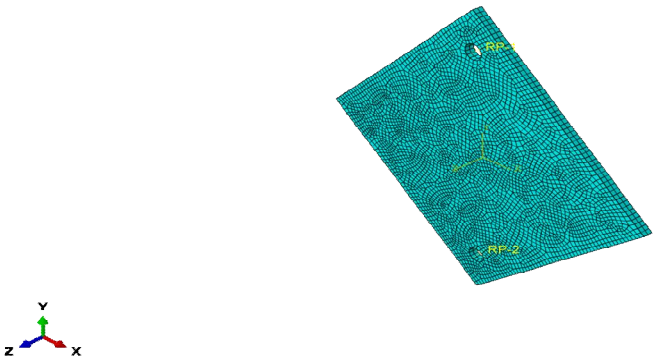


Fig4. Meshing

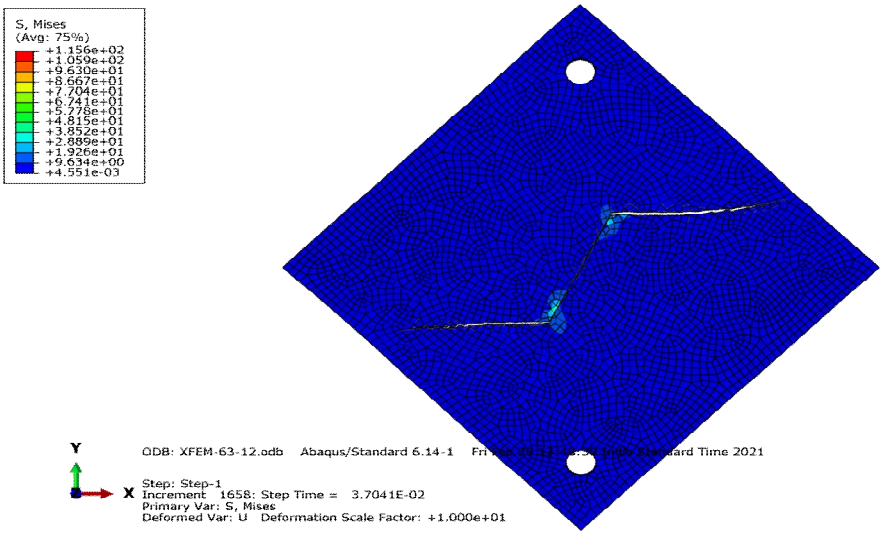


Fig5. Crack growth trajectory in ABAQUS using XFEM

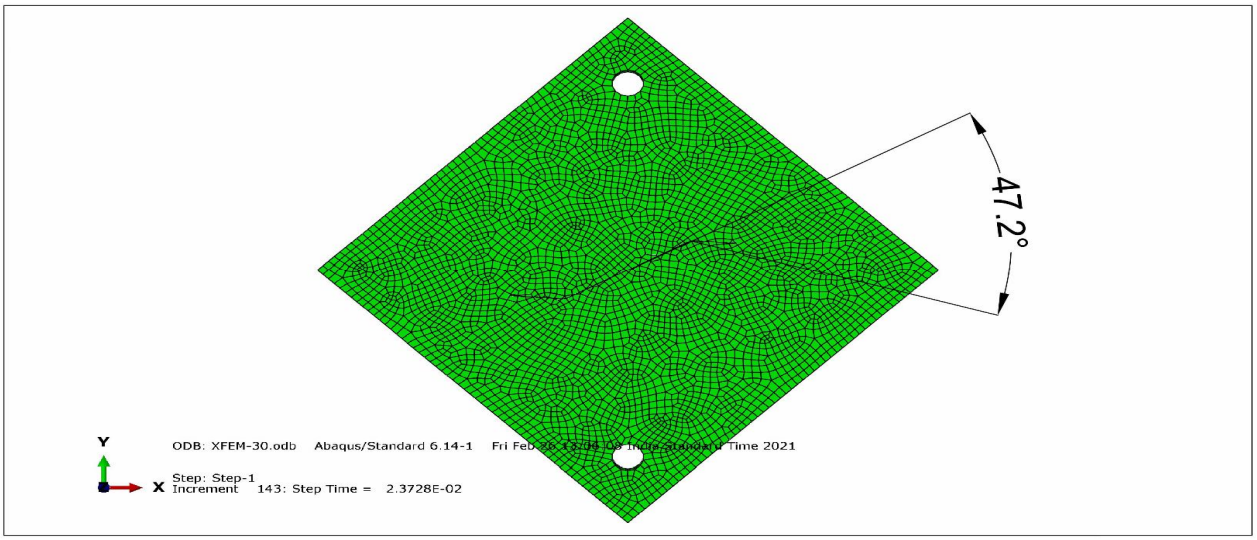


Fig6. Crack initiation angle

©IJRASET: All Rights are Reserved

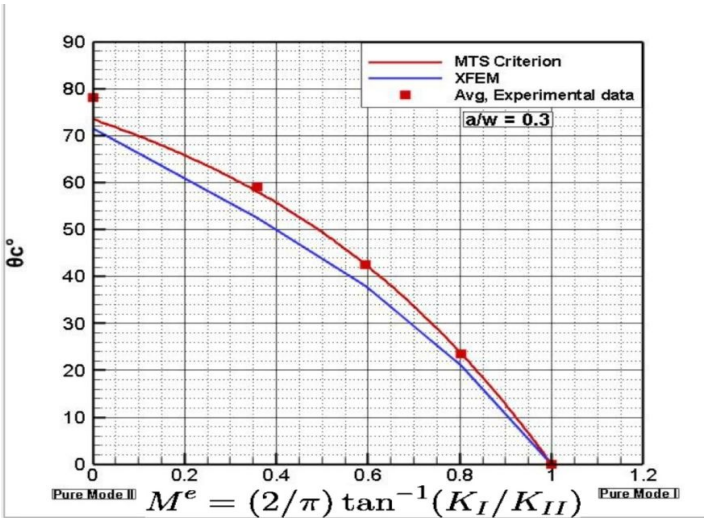


Fig7. Crack Initiation Angle through MTS & XFEM:-

C. SENT [Side Edge Notch Tension]


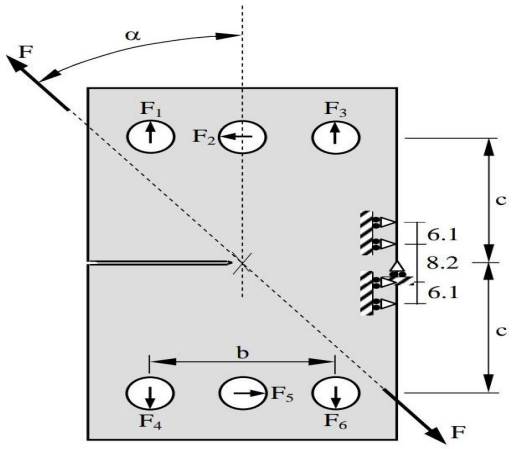


Fig8. Force Value and Direction in Software (ABAQUS)

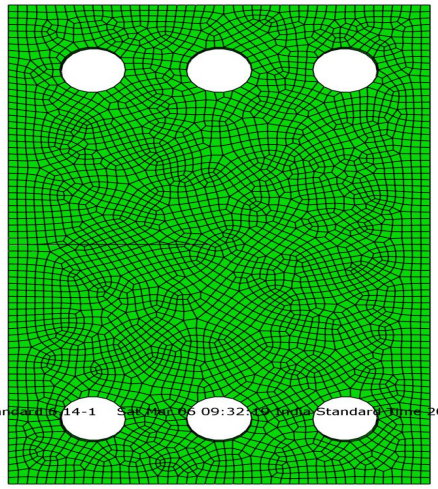

Loading Direction From Vertical Axis.
0^0
18^0
36^0
54^0
72^0
90^0

Fig9. Loading angles.

©IJRASET: All Rights are Reserved

D. Force Value

	α	RP1	RP2	RP3	RP4	RP5	RP6	F
		CF2	CF1	CF2	CF2	CF1	CF2	
		F1	F2	F3	F4	F5	F6	
Pure MODE I	0	681	0	681	-681	0	-681	1362
mix mode	18	1038.73791	-409.138501	220.460913	-220.460913	409.138501	-1038.73791	1324
	36	1359.44244	-805.265796	-251.089154	251.089154	805.265796	-1359.44244	1370
	54	1615.76259	-1185.2099	-754.657199	754.657199	1185.2099	-1615.76259	1465
	72	1855.13809	-1595.87283	-1336.60758	1336.60758	1595.87283	-1855.13809	1678
Pure MODE II	90	2118	-2118	-2118	2118	2118	-2118	2118

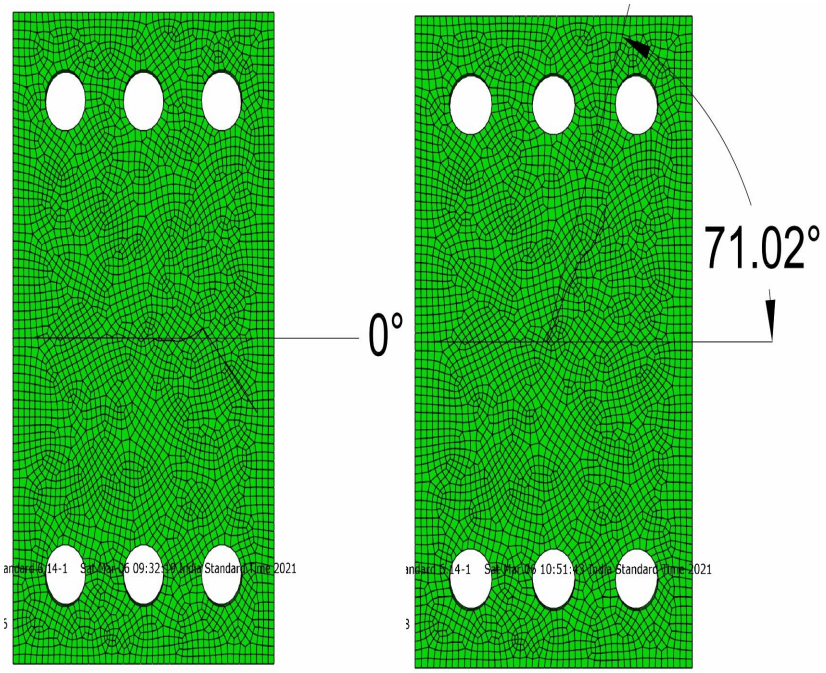


Fig10. Pure mode I & Pure mode II

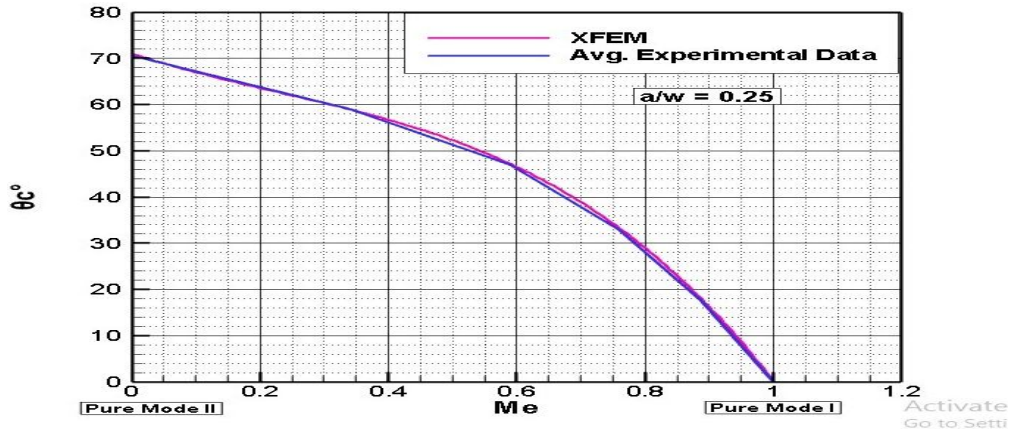


Fig11.graph for SENT

©IJRASET: All Rights are Reserved

E. SCB [Semi Circular Bend]

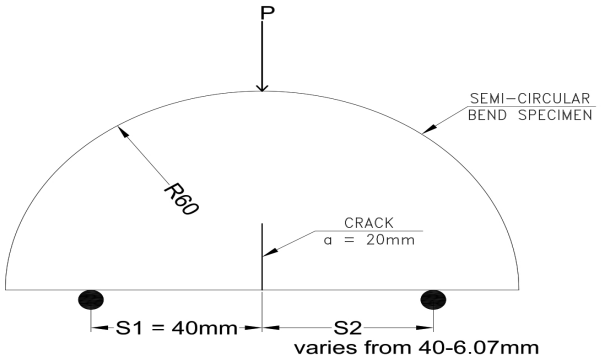


Fig..12 Dimensions of SCB

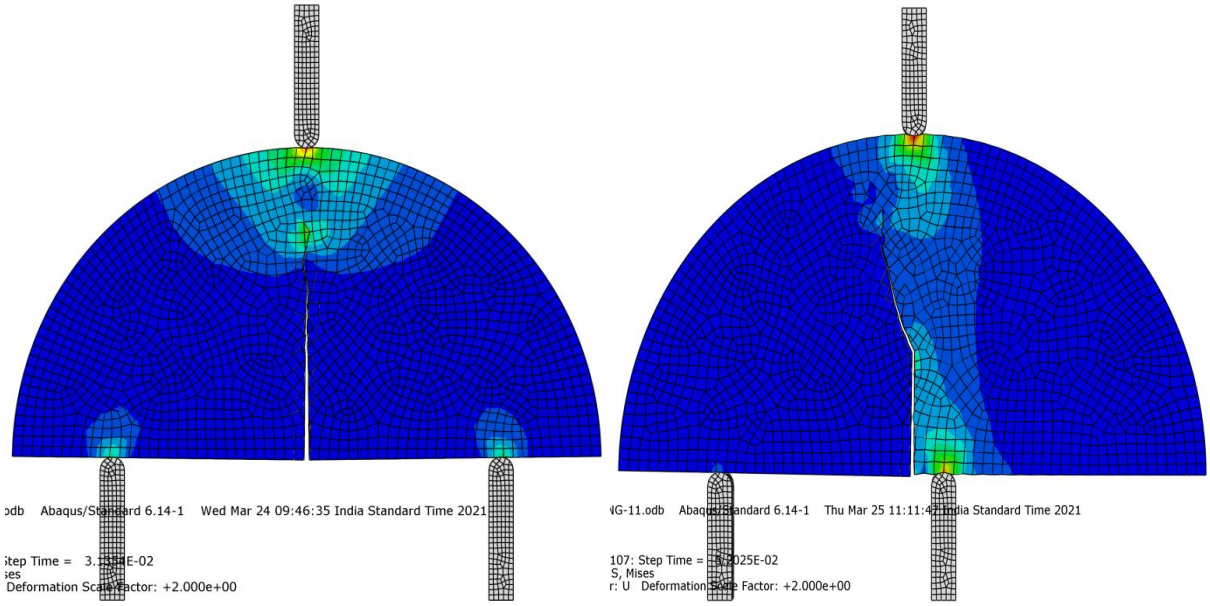


Fig.13 Pure mode I & Pure mode II

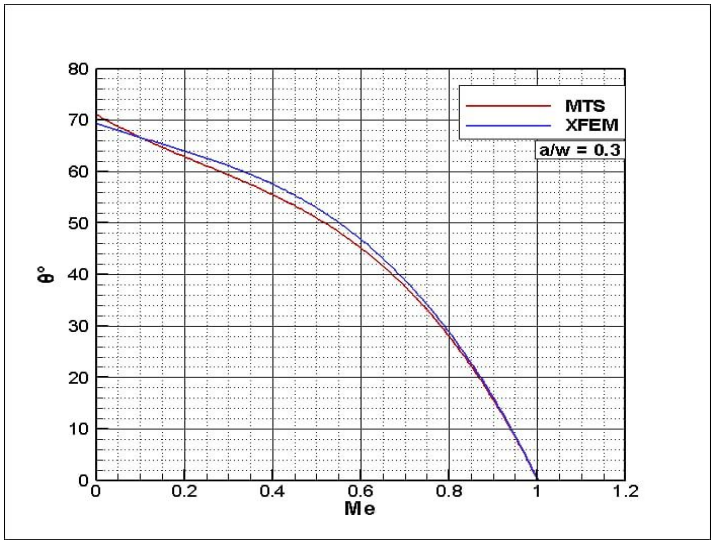


Fig14. Graph for SCB

©IJRASET: All Rights are Reserved


III.CONCLUSION

Bye performing XFEM analysis in ABAQUS software on different types of specimens, we can conclude that crack Initiation Angle from MTS theory and Experimental data were similar to XFEM .

REFERENCES

[1] M.R. Ayatollahi, M.R.M Aliha, Analysis of a new specimen for mixed Mode fracture tests on brittle materials, Engineering Fracture Mechanics 76 (2009) 15631573
[2] T.N. Chakherlou, H.N. Maleki, B. Abazadeh, Investigating bolt clamping force effect on the mixed mode fracture strength and stress intensity factor for an edge crack in PMMA specimens, Materials Science and Engineering A 533 (2012)71 81
[3] Mahdi Rezaei,M.R.M. Aliha, Experimental and Theoretical Study of Fracture Paths in Brittle Cracked Materials Subjected to Pure Mode II Loading, Applied Mechanics and Materials Vol. 70 (2011) pp 159-164
[4] M.M. Hassani, M.R.M. Aliha, M.R. Ayatollahi, Mixed mode brittle fracture In PMMA .An experimental study using SCB specimens, Materials Science and Engineering a 417 (2006) 348356
[5] M.R.M. Aliha, M.R. Ayatollahi, Geometry effects on fracture behaviour of Polymethyl methacrylate, Materials Science and Engineering a 527 (2010) 526530
[6] S. K. MAITI and R. A. SMITH, Criteria for brittle fracture in biaxial tension, engineering fracture Mechanics Vol. 19, No. 5, and pp. 79WO4, 1984
[7] J. F. KNOTT, T. M. MACCAGNO, The fracture behaviour of pmma in Mixed modes I and II, Engineering Fracture Mechanics Vol. 34, No.1, pp. 65-86,198
[8] R. Pakzad, M. R. M. Aliha, M. R. Ayatollahi, Numerical Analyses of a Cracked Straight-Through Flattened Brazilian Disk Specimen under Mixed-Mode Loading, American Society of Civil Engineers, 2014.
[9] N. Moes, J. Dolbow and T. Belytschko, a Finite Element Method for Crack Growth without Remeshing, International Journal for Numerical Methods in Engineering, Vol. 46, No. 1, 1999, pp. 131-150.
[10] Kamal Keswani, Krishna Lok Singh, A.Arokkiaswamy, Computation of SIF And Crack Growth Simulation using XFEM Techniques, International Conference on Advanced Research in Mechanical Engineering (ICARME-2012).
[11] C. M. Weaver, P. A. Rigg, J. A. Cordes, A. Haynes, XFEM Analyses of Critical Cracks in a Pressure Tap for a 40mm Gun Breech, U.S. Army/ARDEC, Picatinny Arsenal, NJ 07806-500
[12] ASTM Designation: D 638 - 02a, Standard Test Method for Tensile Properties of Plastics
[13] Elements of Fracture Mechanics by Prashant Kumar, 1999, Wheeler Publishing, India
[14] Bhattacharjee D, Knott JF., Eject of mixed mode I and II loading on the Fracture surface of polymethyl methacrylate (PMMA). Int J Fracture 1995; 72:35981.
[15] Smith DJ, Ayatollahi MR, Pavier MJ. On the consequences of T-stress in Elastic brittle fracture. Proc Roy Soc a 2006; 462:241537.

©IJRASET: All Rights are Reserved

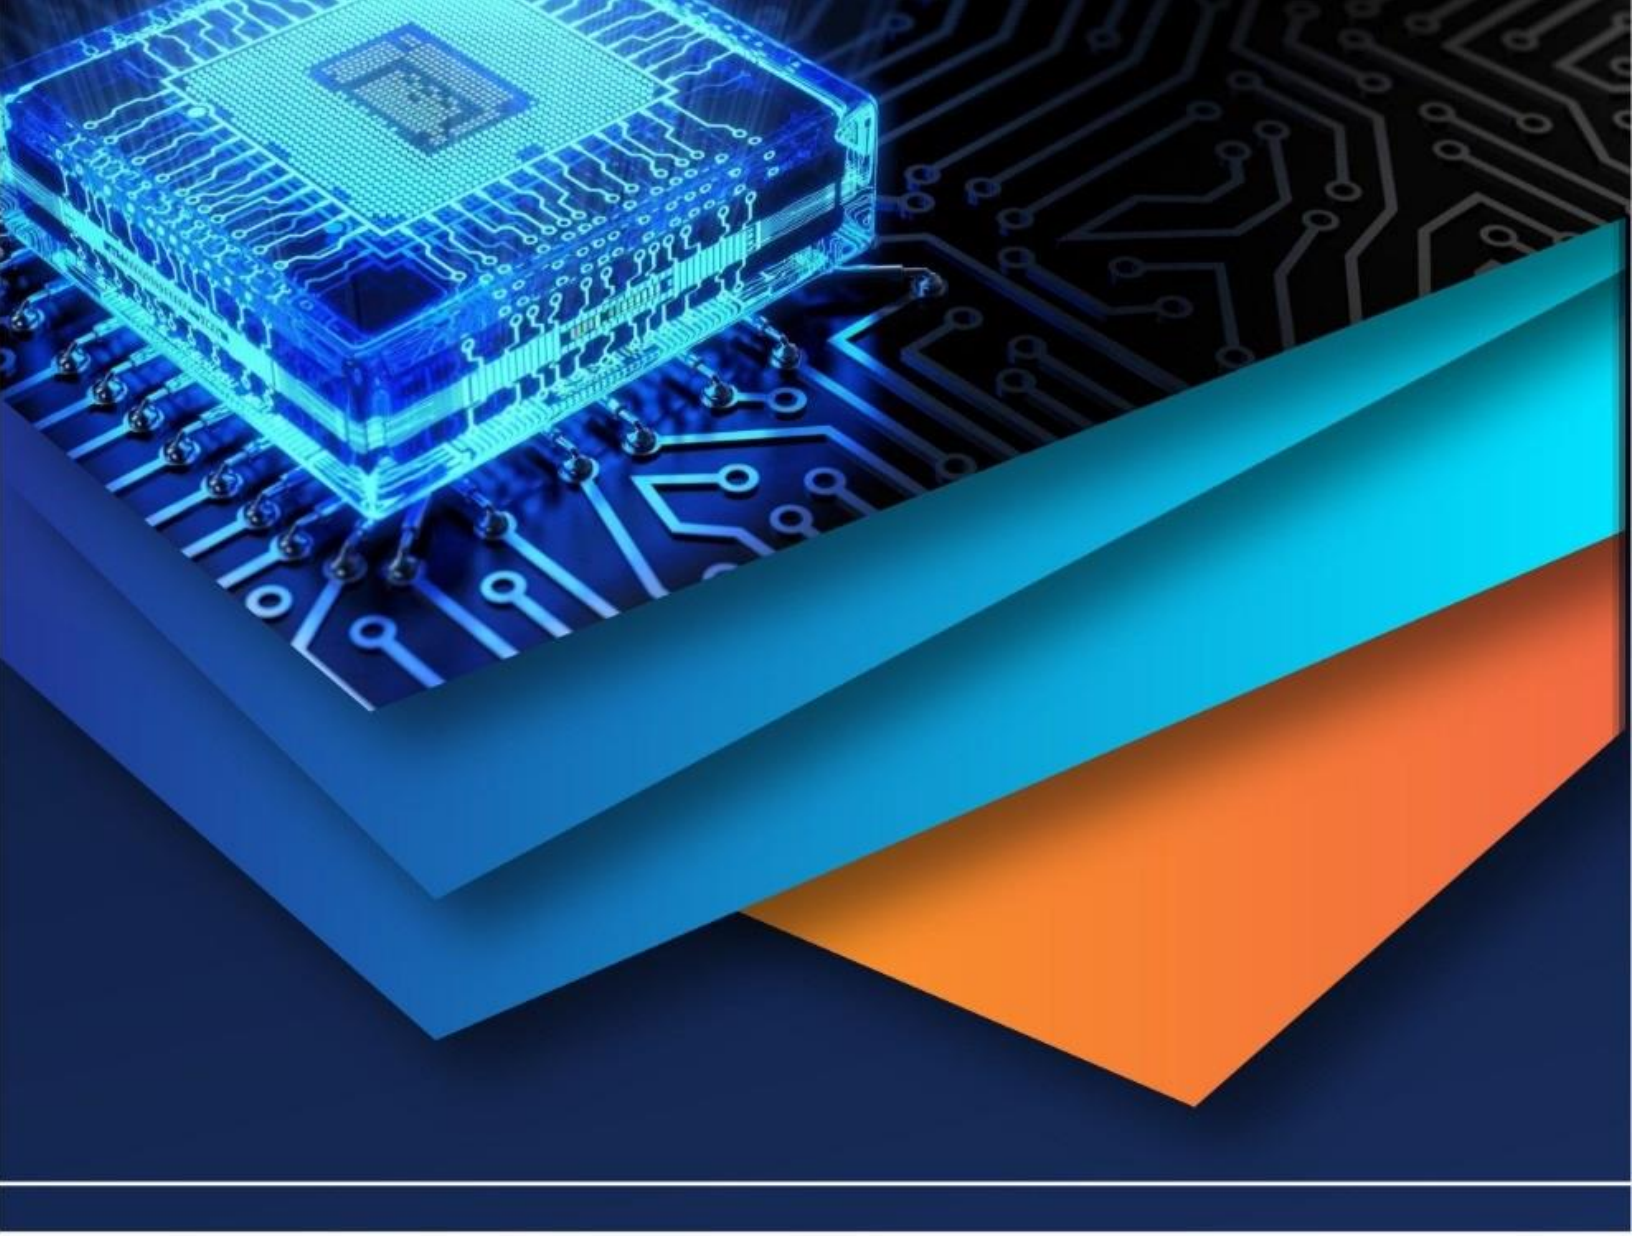

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)