



# IJRASET

International Journal For Research in  
Applied Science and Engineering Technology



---

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 9      Issue: IV      Month of publication: April 2021**

**DOI: <https://doi.org/10.22214/ijraset.2021.33943>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Analysis of Tuned Liquid Damper

Rechal Chawhan<sup>1</sup>, Nikhil Pitale<sup>2</sup>, S S Solanke<sup>3</sup>

<sup>1</sup>PG student, Structural Engineering, G.H. Raisoni College of Engineering, Nagpur,

<sup>2,3</sup>Assistant Professor, Civil Engineering, G.H. Raisoni College of Engineering, Nagpur

**Abstract:** The aim of this paper is to study the behavior of tuned liquid damper (TLD). When the structure is in harmonic seismic excitation. The tuned liquid damper is a device used to reduce the structural vibration. It is simply a tank filled with water which is situated at the top of structure. The tuned liquid damper uses the phenomenon of sloshing effect to reduce the vibration of structure. In this paper we are going to model the tuned liquid damper for a building using the ETABS software and the comparison of result between the building with tuned liquid damper and the building without tuned liquid damper is done.

**Keywords:** Tuned liquid damper, harmonic, seismic, excitation, sloshing, vibration.

## I. INTRODUCTION

Earthquake are one of the most dangerous natural calamities which is destructive in nature. Earthquake of higher intensity may cause huge damage.

It not only harms the living being but also causes tremendous effect over structure. To safeguard the structure and to overcome from such problem, many devices and technologies are available. One of the techniques called tuned liquid damper (TLD) is an effective method to reduce the effect of earthquake and to safeguard the structure. [5]

The tuned liquid damper is container which is rigid in nature and generally rectangular in shape which is rigidly fixed at top of building or structure.

Depending on the space available, the container may be of many small tank combinations or a large single tank.[2] The structural vibration can be reduced by TLD through the sloshing effect which dissipate the energy. In recent research, it is seen that the TLD are widely used as vibration absorber due to its advantages like lower cost, easy to handle and require less maintenance. tuned liquid damper can be placed as number of small tanks or a single huge tuned liquid damper tank.[7]

## II. TYPES OF TUNED DAMPERS

To deal with natural calamity like earthquake, different types of damper are available. These different types of damper use different working principles. They also have different efficiency, durability and effectiveness which depends on various factors. [1] So following are different types of damper

- A. Tuned liquid damper
- B. Viscous tuned mass damper
- C. Dashpot type tuned mass damper
- D. Cable type tuned mass damper

## III. OBJECTIVES

- A. To study and analysis, the effect of TLD on building using software ETABS
- B. To get significant results which shows that TLD dissipate the energy of earthquake and move structure Elastically by using dampers.
- C. To reduce the dynamic response of the system by using TLD

## IV. METHODOLOGY

The following are the steps use to analysis the tuned liquid damper

- 1) Modelling of the structure using ETABS
- 2) Designing the Tuned liquid Damper for structure
- 3) Modelling of the Tuned liquid damper using ETABS
- 4) Analysis

**A. Modelling of Structure using ETABS**

1) *Properties of the RCC frame*

- a) Type of building – RCC
- b) Story – G+6
- c) Floor height – 3.5 m
- d) Grid in x and y direction – 3 and 4 respectively.

2) *Defining material Properties*

- a) Grade of concrete – M30
- b) Grade of steel – Fe500
- c) Density of concrete- 25 KN/ m<sup>3</sup>

3) *Defining the frame Sections*

- a) Beam size – 230 mm x 300 mm and 230 mm x 380mm
- b) Column size – 600 mm x 600 mm

4) *Defining the slab Section*

Slab thickness – 125 mm

5) *Defining Load Pattern*

- a) Live load – 2 KN/m<sup>2</sup>
- b) Floor finish – 1.5 KN/m<sup>2</sup>
- c) Dead load - width x depth x density of concrete
- d) Importance factor – 1
- e) Seismic zone – v
- f) Seismic zone factor - 0.36
- g) Response of reduction factor – 5

6) *Defining Time History Function:*

We use Bhuj Earthquake data to define time history function

**B. Modeling of Structure With Tuned Liquid Damper**

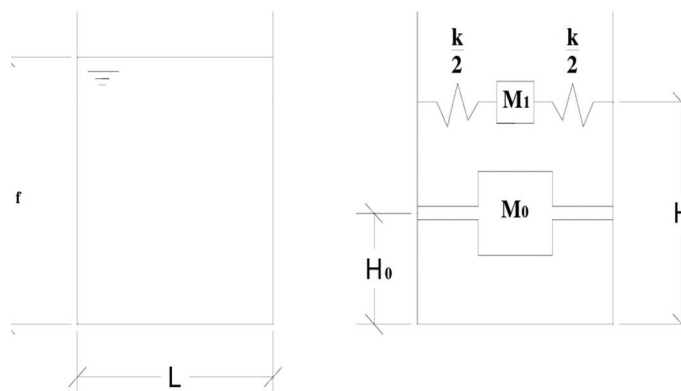


Fig 1: Lumped mass model for a rectangular Tuned liquid damper.

For modelling of structure with tuned liquid damper we use the same data of building without tuned liquid damper. Now for modelling tuned liquid damper the column size is same as that of building. Then we define wall section of 150 mm. We require M1, M0 and K.[3] As shown in Fig. 1 which can be calculate by using formula as shown below:

$$m_f = \rho \cdot h \cdot f \cdot b \cdot L$$

$$M_0 = \frac{\tan h (\sqrt{3} * (L/2) / hf)}{(\sqrt{3} * (L/2) / hf)} . mf$$

$$M_1 = \frac{0.83 . \tan h (1.6 * hf (\frac{L}{2}))}{(1.6 * hf (\frac{L}{2}))} . mf$$

$$H_0 = 0.38 . hf . [ 1 + \alpha (\frac{mf}{M_0} - 1) ]$$

$$H_f = hf . [ 1 - 0.33 . (\frac{mf}{M_0}) (\frac{L/2}{hf})^2 + 0.63 \beta (\frac{L/2}{hf}) . \sqrt{0.28 (\frac{mf \cdot (L/2)}{M_1 \cdot hf}) - 1} ]$$

$$K = 3.g . M_1^2 . hf / mf . L^2$$

Where, mf is mass of fluid, r is density of fluid, hf if height of fluid inside the tank, b is width of tank L is length of tank, =2.0 and =1.33.

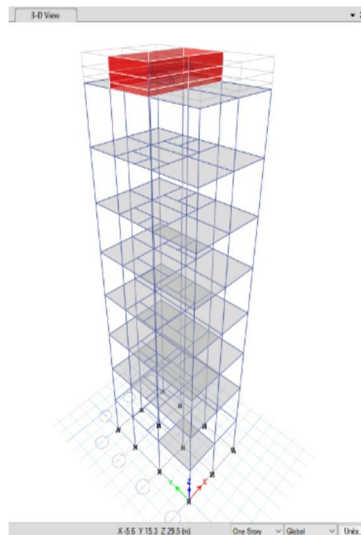


Fig 2: Model of building with tuned liquid damper.

## V. RESULT

Table 1: Maximum Displacement of Building Without Tuned Liquid Damper Due To Earthquake Load in X-Direction

Story	Elevation	X-Dir mm	Y -Dir mm
Terrace	28	23.837	0.318
Story 6	24.5	22.153	0.296
Story 5	21	19.747	0.262
Story 4	17.5	16.633	0.218
Story 3	14	12.99	0.168
Story 2	10.5	9.052	0.113
Story 1	7	5.124	0.061
Plinth	3.5	1.696	0.02
Base	0	0	0

Table 2: Maximum Displacement of Building With Tuned Liquid Damper Due To Earthquake Load in X-Direction

Story	Elevation	X - Dir mm	Y - Dir mm
Tank	29.5	19.904	0.154
Terrace	28	19.897	0.153
Story 6	24.5	18.848	0.136
Story 5	21	16.853	0.121
Story 4	17.5	14.172	0.101
Story 3	14	11.039	0.077
Story 2	10.5	7.675	0.051
Story 1	7	4.336	0.026
Plinth	3.5	1.433	0.008
Base	0	0	0

Table 3: Maximum Displacement of Building Without Tuned Liquid Damper Due To Earthquake Load in Y-Direction

Story	Elevation	X-Dir mm	Y -Dir mm
Terrace	28	0.063	23.572
Story 6	24.5	0.059	21.976
Story 5	21	0.053	19.652
Story 4	17.5	0.046	16.601
Story 3	14	0.037	12.997
Story 2	10.5	0.028	9.077
Story 1	7	0.018	5.148
Plinth	3.5	0.006	1.701
Base	0	0	0

Table 4: Maximum Displacement of Building With Tuned Liquid Damper Due To Earthquake Load in Y-Direction

Story	Elevation	X - Dir mm	Y - Dir mm
Tank	29.5	0.05	19.669
Terrace	28	0.058	19.435
Story 6	24.5	0.054	18.448
Story 5	21	0.049	16.545
Story 4	17.5	0.042	13.954
Story 3	14	0.034	10.898
Story 2	10.5	0.025	7.595
Story 1	7	0.016	4.301
Plinth	3.5	0.005	1.42
Base	0	0	0

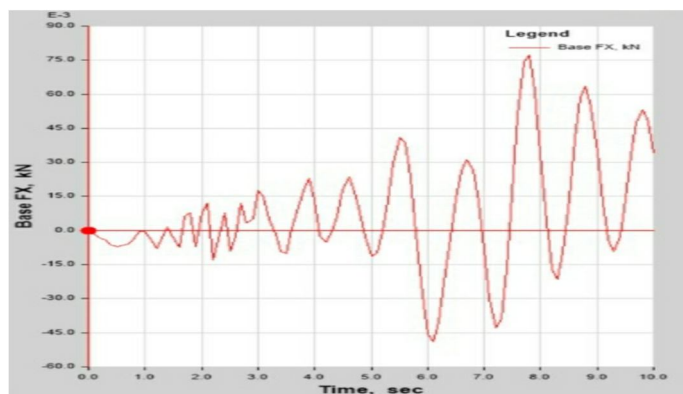


Fig 3: Time history plot of building without TLD

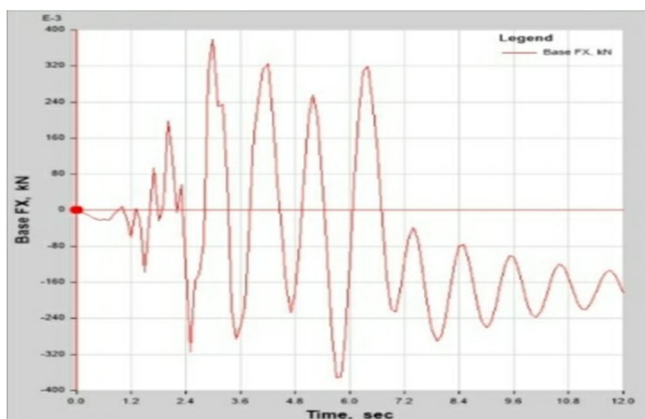


Fig 4: Time history plot of building with TLD

## VI. CONCLUSION

The main object of paper is to analysis the tuned liquid damper and to compare the result between the building with tuned liquid damper and the building without tuned liquid damper. So, according to the result the displacement of building get reduces by some amount if we use the tuned liquid damper.

- A. The tuned liquid damper can be use significantly on tall buildings to reduce the structural excitation and to control the structural damage.
- B. Efficiency of TLD is based on various parameters i.e., mass ratio, depth ratio, number of tanks, running ratio.
- C. The TLD become more effective with decrease in natural period of structure.
- D. Tuned liquid damper offer greatly improved seismic/wind performance for conventional structure.

## REFERENCES

- [1] Samanta<sup>1</sup> and P. Banerji<sup>2</sup>,2017, "Structural control using modified tuned liquid damper",2017, The 14th World Conference on Earthquake Engineering . v. 29, pp. 507-602.
- [2] Chidige Anil Kumar<sup>1</sup>, E Arunakanthi<sup>2</sup>,2017, "A Seismic Study on Effect of Water Tank Modelled as TMD.", International Journal of innovation research in science, Engg. & tech. Vol. 6,pp.1903-1909
- [3] Dorothy Reed , Harry Yeh, Jinkyu Yu, Sigurudur Gardarsson , 2019, " Tuned liquid damper under large amplitude excitation. ",
- [4] Dhirendra K. Pandey, Mohit K. Sharma, subid K. Mishra , 2019, " A complaint tuned liquid damper for controlling sesmic vibration of short period structure.", International Journal of Advanced Structural Engineering (IJASE).
- [5] Dr. Ashraf El Damatty, Dr. Michael Tait, 2019,"Passive and Semi-active Structure multiple Tuned Liquid Damper System. " Journal of Pressure Vessel Tech. vol. 122, pp 96-104.
- [6] Gilda Espinozaa, Carlos Carrilloa,Alvaro Suazoa,2018, "Analysis of a tuned liquid column damper in non-linear structures subjected to seismic excitations", Journal of wind Engg. And Industrial Aerodynamics.pp,56-62.
- [7] K Henry, J Kane, R Doherty,2020, "Investigation Into Tuning of a Vibration Absorber For a Single Degree of Freedom System ", Elsevier
- [8] Lipika Halder<sup>1</sup>, Richi Prasad Sharma<sup>2</sup> and Emili Bhattacharjee<sup>3</sup>, 2013, "An experimental study on tuned liquid damper for mitigation of structural response. ",International Journal of Advanced Structural Engineering (IJASE).
- [9] Mr. A. Bikram Rana<sup>1</sup>, Mr. S. Bista<sup>2</sup>, Mr. P. Sunagar<sup>3</sup>, 2018,"Analysis of Tuned Liquid Damper (TLD) in Controlling Earthquake Response of a Building using SAP2000", International journal of science and tech. vol.05, pp.2079-2089.
- [10] M Eswarani<sup>1</sup>, S Athul<sup>2</sup>, P Niraj<sup>2</sup>, G R Reddy<sup>1</sup> and M R Ramesh<sup>2</sup>, 2016,"Tuned liquid dampers for multi-storey structure: numerical simulation using a partitioned FSI algorithm and experimental validation. ", Indian Academy of Science, vol. 42, No. 4, pp. 449-465.
- [11] Mohan Murudi\* and Pradipta Banerji\*\*,2012,"Effective control of earthquake response using tuned liquid dampers.", ISET Journal of Earthquake Technology, vol.49 ,No. 3-4, pp. 53-71.
- [12] Mahesh M Pardeshia,\*, Sandhya Mathapatib, Rajeev Shirkec,2014, "Experimental analysis of tuned liquid damper with baffle wall for controlling the earthquake vibrations, International Journal of innovation research in science, Engg. & tech. Vol. 3, pp.190-196
- [13] Pradipta Banerji<sup>1</sup>, 2016,"Tuned liquid damper for control of earthquake response.", World Conference on Earthquake Engineering .
- [14] Patil, Gundopant Rajaram,2020,"Evaluation of Slope Bottom Tuned Liquid Dampers in Reduction of Earthquake Vibrations of Structure ", International Journal of Advanced Structural Engineering.
- [15] Seyed Mehdi Zahrai<sup>1</sup> and Saeed Abbasi<sup>2</sup>, 2018,"Study on possibility of tuned liquid dampers (TLD) in high frequency structure.", International Journal of Advanced Structural Engineering (IJASE).
- [16] T. Novo, H. Varum, F. Teixeira-Dias & H. Rodrigues<sup>1</sup>, M.J. Falcão Silva & A. Campos Costa<sup>2</sup>, L. Guerreiro<sup>3</sup>, 2012,"Tuned liquid dampers simulation for earthquake response control of buildings.",World Conference on Earthquake Engineering .
- [17] T P Nguyen<sup>1</sup>, D T Pham<sup>2</sup> and K T Ngo<sup>1</sup>, 2018,"Effectiveness of multi tuned liquid dampers with slat screens for reducing dynamic responses of structures.",IOP Conference Series : Earth and Environmental Science. Pp 1-13
- [18] Udipt Wamhne,2015,"Two Tank Level Control Systems Using Dynamic Matrix Control and Study of Its Tuning Parameter ", International Journal of Advanced Structural Engineering (IJASE).
- [19] You-Lin Xu, Jia He, 2017, "Smart civil structures", World Conference on Earthquake Engineering .
- [20] Zhipeng Zhaoa, Ruifu Zhanga, Yiyao Jianga,b, Chao Panc, 2019, "A tuned liquid inerter system for vibration control." Journal of wind Engg. And Industrial Aerodynamics, pp 82-96.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)