



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: V Month of publication: May 2021

DOI: <https://doi.org/10.22214/ijraset.2021.34553>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Voice Controlled Robotic Vehicle

Pindi Kiran¹, Kurva Ashok Kumar², Khaja Suhearuddin³, Dr. G. Ganesh Kumar⁴

^{1, 2, 3}Student, Electronics and Communication Engineering, Sreenidhi Institute Of Science and Technology, Ghatkesar, Hyderabad.

⁴Assistant Professor, Electronics and Communication Engineering, Sreenidhi Institute Of Science and Technology, Ghatkesar, Hyderabad

Abstract: *Voice Controlled Robotic Vehicle is an example of controlling the bot with the help of daily used voice commands. An Android app is used for giving input voice commands and in order to control the motion of robotic vehicle. The voice commands given by us is processed by the app and voice module converts speech into text. A controller should be implemented with a Bluetooth module through the UART protocol. The converted text commands reach the controller via Bluetooth. The microcontroller will process this text and take a necessary action to control the motion of the robotic vehicle. The hardware development board used here is Atmega Arduino Board. The software programming part is done in Arduino Ide using Embedded C. The objective of the project described in this paper was to regulate the movement of the robotic vehicle using commands such as Forward, Backward, Left, Right. There is still a plenty of scope for research and development in the project described in this paper.*

Keywords: *Arduino, Embedded C, Bluetooth, Android.*

I. INTRODUCTION

The world is growing at a greater pace and in future we can definitely see robots occupying places of humans in work places where it is harmful for the human beings to work like chemical factories, factories where machinery is used etc. Now-a-days a smart phone is used to control the electronic devices including motors, music, lights etc. In the same way, in this project a smart phone with an application installed in it is used for the control of a robotic vehicle with help of voice human voice commands. The main components used in the project are an Arduino microcontroller board, L293D Motor Driver, HC05 Bluetooth Module, DC Motors. An Android app is used for giving input voice commands and in order to control the motion of robotic vehicle. Voice Module converts the voice into text and will send commands to microcontroller via Bluetooth and micro controller based on the commands received from the android app controls the movement of the robotic vehicle. Programming Arduino is done in Arduino Ide using Embedded C programming language. The prototype will be very helpful to disable people when we use it in wheel chairs etc. The embodiment of camera to the robotic vehicle makes it very much useful for surveillance of border areas, terrorist prone areas or any other places where there is any doubt about suspicious and illegal activities.

II. LITERATURE SURVEY

With reference to press releases by International Federation of Robotics dated September 18, 2019 shows us that there was an annual global sales value of 16.5 billion USD in 2018 and 4,22,000 units were shipped globally in 2018 with an increase of 6 percent compared to the previous academic year. IFR expected an average growth of 12 percent per year from 2020 to 2022. This shows us the demand that a robotics industry is having across the world. Many Researchers contributed various research papers with respect to the concept and ideology. Some of those papers are mentioned below stating their ideology and implementation and technology used.

“Vito M Guardi developed the method of communication between an android application and a microcontroller with the help of Bluetooth technology. His work showed that a micro controller can take actions from the inputs given by an android application”. [1]

“Ranjith Kumar Goud and B. Santosh Kumar has developed a pick and drop robot for the purpose of diffusing a bomb remotely with safety. For the purpose of robotic arm they used a pair of motors and for the purpose of movement they used wheels. The communication for the control of robotic arm is done with the help of Bluetooth technology. They used LPC2148 microcontroller. They have also embedded a wireless camera for the purpose of surveillance. They have made it mainly to use it for military purposes”. [2]


“Xiao Lu, Wenjun Liu, Haixia Wang, Qia Sun^[3] used internet of things to connect smart phone of Android System to robots performing various services using wireless communication, where it is programmed based on TCP socket. The interesting part of their project is the robot can sing, dance and so on according to the command and they made the characteristics visual and portable.” [3]

“Mr. K. Kannan and Dr. J. Selvakumar have written a paper that dealt with the existing speech recognition system and its usage in their project. They have used EasyVr module which is incorporated in their project to convert the input voice commands given by the user into digital values with the help of analog to digital converter (ADC) and compare it with predefined voice commands and transmit those values as per the voice commands in the form of binary bits. They have used ATmega 2560, servo motors, ZigBee module (at the receiver side) . Based on the binary values received by microcontroller via ZigBee module, servo motors will be driven in a continuous loop. The paper helped us to understand about the microcontroller, speech recognition system and its disadvantages and the measures to be taken to make the speech recognition system free of errors”.[4]

III. HARDWARE AND SOFTWARE DESCRIPTION

A. Hardware Components

1) *Chassis*: Chassis is the structural component of our voice controlled Bot.

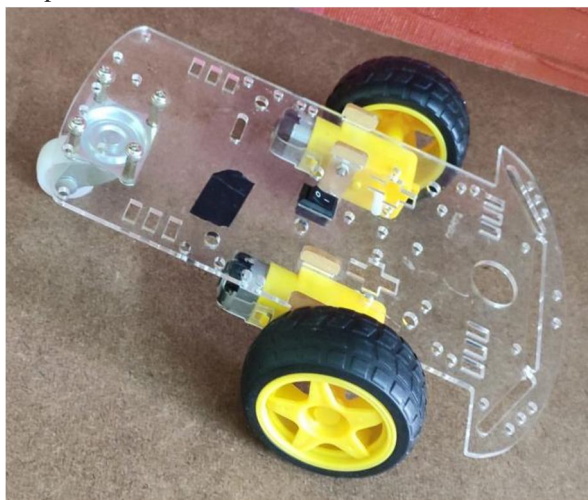

Chassis

.It is analogous to the skeleton in living organisms. It supports the load of our voice controlled Bot . It provides the space for all our components which includes DC motor, Arduino Board, HC05 Bluetooth module, L293D Motor Driver. In our project voice Controlled Bot, we have used two wheel Chassis with a castor wheel at front.

B. DC Motor




DC Motor

In our project called Voice controlled Bot ,we have used a DC Motor with a gearbox of 1:120 ratio, here gearbox has a reduction in speed, which gives much more power to engine. We fix Rubber wheel with 65mm diameter to this DC Motor. The Motor can drive with a input voltage ranging from 3V to 7.5 volts. We supply 5v volts to these DC motors using a Battery from Motor Drivers. With a higher voltage within the given range, we can get more output.

C. Arduino Uno

Arduino Uno is a Micro-controller Board. It has 14 Digital pins, 6 Analog pins, 16MHz ceramic Resonator, a power jack, a USB connection, an ISP header and a reset button. We need to connect our Arduino Board to our Computer using USB connector and we need to program it through Arduino IDE. To start our voice controlled bot we can power up the Arduino Board using power jack or by USB connection.

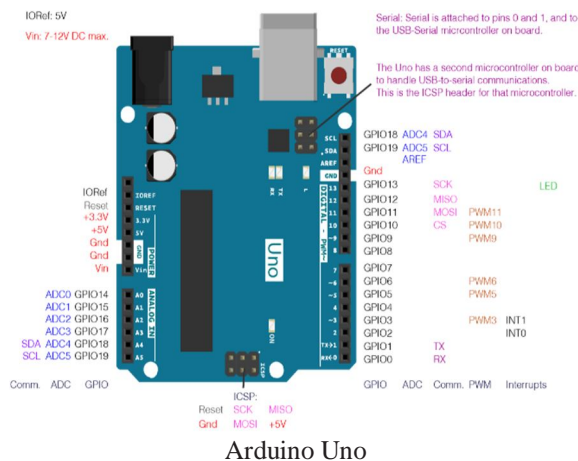

D. L293D Motor Driver



L293D Motor Driver

L293D is a 16 pin Motor Driver IC. It is used to drive motors. L293D IC is capable of driving two DC motors at the same time. Direction of the two motors rotation whether in clockwise or anticlockwise can be controlled by passing the signals from Arduino Board to the motor driver. Based on the instructions received from the Bluetooth Module, Arduino will send the commands to the Motor Driver which are generally logic high or logic low signals. The signals received from the Arduino to the motor Driver are low current signals which are insufficient to drive the motors. So motor driver will convert the low current signals to high current signals which are capable to drive the motors.

E. HC05 Bluetooth Module




HC05 Bluetooth Module

HC05 is a module which allows full duplex wireless Communication. We use this module to have wireless communication between our mobile phone and Arduino Board. HC05 module receives text from the Mobile phone where Mobile Sphone is connected to the Bluetooth Module. Then Bluetooth Module communicates with the Arduino Micro-controller with the help of USART at 9600 baud rate. Using the Serial Port Protocol ,we pair up the HC05 Bluetooth Module with the Arduino Board.

F. Software Description


- 1) **Arduino Voice Control App:** This app is developed with the help of MIT app inventor. Using this app, we will connect the Mobile phone to our HC05 Bluetooth Module. This arduino voice control app will convert the voice commands into text using google assistance. Converted voice commands into text are received by HC05 Bluetooth Module and by serial port protocol those texts will received to the arduino micro-controller.

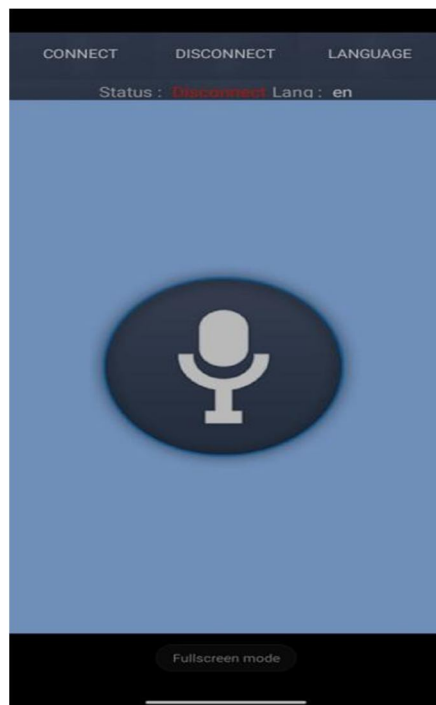

Arduino Voice Control app


G. Arduino IDE

Arduino Integrated Development Environment is a cross-platform application for Windows, Mac OS, Linux written with functions from C and C ++. Used for writing and downloading programs on compatible Arduino boards. Arduino IDE supports C and C ++ languages using special coding rules. Arduino IDE provides a software library from the Wiring project, which provides many common installation and extraction processes. User-coded code requires only two basic functions, starting with the drawing and the main loop system, integrated and linked to the main stub () program in the active cyclic executive and GNU tool chain, integrated with IDE distribution.

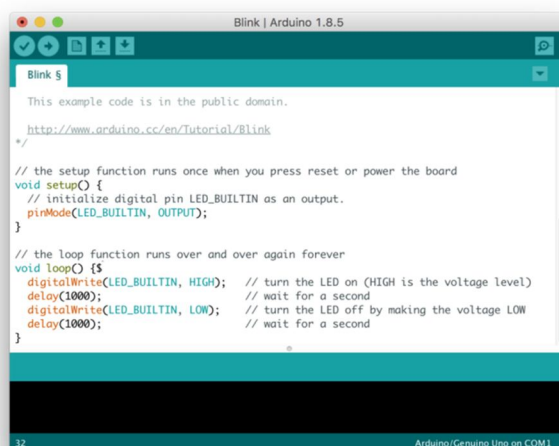


Arduino IDE

IV. WORKING

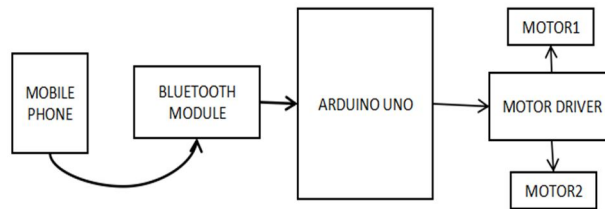

Voice commands are processed over the phone, and the speech-to-text conversion is done within the app using Google's speech recognition technology. The text is then sent to the recipient via Bluetooth. The text is transmitted to the Arduino Uno board using the UART communication protocol Via Bluetooth communication wirelessly. Arduino code checks the received text. Whenever the text is the same thread, Arduino controls the robot's movement in a forward, backward, turn right, turn left & stop by sending commands to the motor Driver.

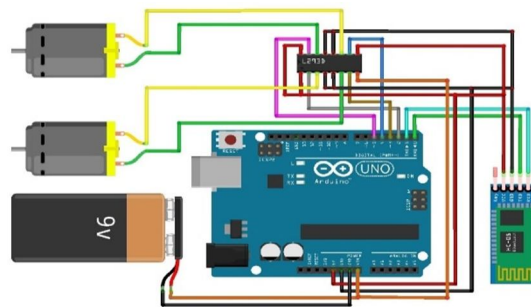

Circuit Diagram

V. APPLICATIONS

- A. The project can be used in wide variety of areas such as military, home security, rescue missions, industries, medical assistance etc.
- B. The Voice Control Robot is useful for disable people and monitoring purpose.
- C. The size of this robot is small, so we can use this robot for spying purpose. It can be used for surveillance.
- D. Robot controlled by smart phone may be used at the territory for disposal of hidden mines.

VI. FUTURE SCOPE

The future prospects of this project are as follows: The project can be brought into application in other mobile operating systems like ios, windows. Usage of wifi over Bluetooth for the wireless communication between smart phone and microcontroller can increase the range to a larger scale. We can embed a camera in front of the robotic vehicle in order to see the surroundings and can be used for surveillance. When we use the same prototype in quadcopter we can capture aerial view.

VII. CONCLUSION

In this paper we have discussed our approach to create a Arduino Integrated voice controlled Robotic Vehicle that runs with the help of an android application installed in the smart phone and we used open source technologies like Arduino. The system is used for real time application and is secure. There is still lot of scope and development for the project.

VIII. ACKNOWLEDGEMENT

Firstly, we are grateful to Sreenidhi Institute of Science and Technology for giving us the opportunity to work on this project. We have fortunate to work under the supervision of our guide Dr. G. Ganesh Kumar. His guidance and ideas have made this project work.

We are very thankful to Dr. K. Sateesh Kumar for being in charge for this project and conduction reviews.

We are also thankful to the HOD of Electronics and Communication Engineering, Dr. S. P. V. Subba Rao for giving us access to all resources that went into building this project.



REFERENCES

- [1] Design of a Bluetooth Enabled Android Application for a Microcontroller Driven Robot By Vito M. Guardi,(May 2014).
- [2] Android Based Robot Implementation For Pick and Retain of Objects By Ranjith Kumar Goud, B. Santhosh Kumar, (Oct 2014).
- [3] Smart phone based robotic control for surveillance applications By M.Selvam,(IJRET 2014).
- [4] Robot Control Design Based On Smartphone by Xiao Lu, Wenjun Liu, Haixia Wang, Qia Sun, IEEE, 978-1-4673-1382, pp-2820-2823, Jun 2013.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)