



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: V Month of publication: May 2021

DOI: <https://doi.org/10.22214/ijraset.2021.34756>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Grid Synchronization Technology by Sensing Frequency and Voltage

Prof. K. M. Dhenge¹, Pranjali S. Pokale², Mansi G. Bhonde³, Sarang D. Khandait⁴

¹Professor, Department Of Electrical Engineering, KDK College Of Engineering, Nagpur, India.

^{2, 3, 4}Student, Department Of Electrical Engineering, KDK College Of Engineering, Nagpur.

Abstract: In this project, we reflect the development of system to have the synchronization failure of any external supply source to the mains on sensing the abnormalities in frequency and voltage beyond acceptable range. Grid synchronization is an important part. There are some power generating units connected to micro grid such as solar, wind or inverter to supply power to the load. This unit need supply power according to the rules of grid. This rules involve maintaining voltage within specified limit and frequency too. In this project, we are planning to implement microcontroller based system to detect the failure and monitor wirelessly with the help of wireless communication devices such as ZigBee.

Keywords: PIC Microcontroller, Grid Voltage Variation, Frequency Variation, relay, PT, ZCD, ZigBee.

I. INTRODUCTION

This project is implemented for synchronizing solar panels or inverter with main supply in commercial building. The three main reasons through which grid synchronization fails are voltage variation, frequency variation, phase angle variation or phase difference. We are intended in this project to construct such a system that includes voltage, frequency and phase differences which gives a breakpoint based on under and over voltage along with the frequency and maintain a strategic distance from any harm to the micro grid. The main objective of this project is to detect the variations in voltage and frequency and sends signal and output to the person who is at long distance monitoring it. This is a demonstration devised to provide such kind of a system that could detect the failure in synchronization working of the micro grid. In case of any external supply source that is supplying to the mains is encountering any kind of abnormalities.


This system could be used in offices, colleges, or any other commercial building where the consumer has different energy sources such as solar inverter. By using this system, the consumer can sync both the sources. In commercial buildings Energy provides the power to progress. Availability of sufficient energy and its proper use in the country can result in its people rising from subsistence level to highest standard of living. Energy exists in different forms in nature but the most important form is the electrical energy. The modern society is so much dependent upon the use of electrical energy that it has become a part and parcel of our life. Several new trends have already employed in the electricity infrastructure. It includes the expansion of the existing grid with micro grids and mega grids, extensive sensors, data processing, visualization tools, etc. Increasing electrical energy demand, modern lifestyles and energy usage patterns have made the world fully dependent on power systems thus the need of a reliable and stable power system grid. However, the power system is a highly nonlinear system, which changes its operations continuously. This project uses the microcontroller PIC family for fast detection and implementation so that the consumer's equipment's and machines should remain safe.

II. BLOCK DIAGRAM

The project is work on the principle of continuously sensing of voltage and frequency of supply sources. In this the system the micro-controller senses the supply voltage and frequency with the help of operational amplifier then these voltage and frequency. Islanding of grid is connected to inverter which is basically managing two parameter.

Voltage and frequency in the program it is so written that the output from 555 timer which is fed to micro-controller goes to be low 48kHz or above 50Hz.

The corresponding output of micro-controller will go high and which will result in relay, on which load is directly connected. If both are not matched the micro controller turn off the output load through relay driver IC. In dimmer start purpose we can easily change the alternator source frequency and voltage and check the working by turn on or off the lamp.

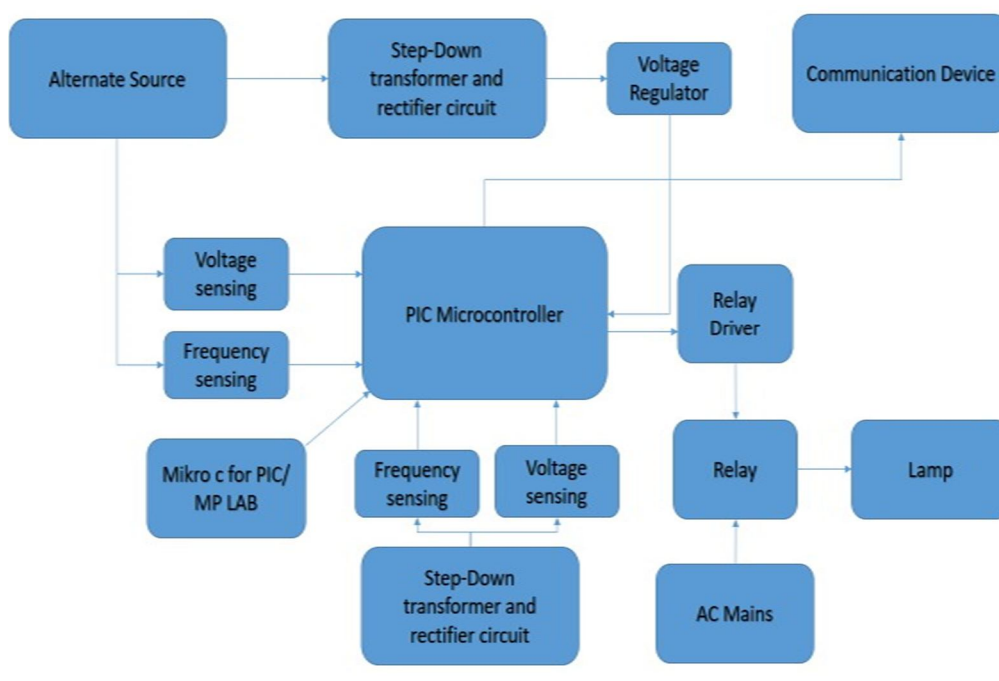

III. CONCLUSION

This project gives brief idea about indicator which senses the abnormalities in voltage as well as in frequency and sends signal and data to receiver so as to detect the synchronization failure of any external supply source to the micro grid. This type of indicators is much needed in most commercial building where number of voltage levels, number of sources and number of load lines are existing. In short it will be beneficial in case of complicated buildings because at present there is not such facility for synchronization in commercial buildings.

REFERENCES

- [1] Amin Safari paper on —A Novel Islanding Detection Technique for Distributed Generation (DG) Units in Power System II. February, 2013 International Journal of Advanced Science and Technology Vol. 51
- [2] Hèctor Beltran, Francisco Gimeno, Salvador Seguí- Chilet and Jose M. Torrel Instituto de Tecnología Eléctrica Av. Juan de la Cierva, 24 - Parc Tecnològic 46980 Paterna, València (Spain) paper on—Review of the Islanding Phenomenon Problem for Connection of Renewable Energy Systems II R. Nicole, "Title of paper with only first word capitalized," J. Name Stand. Abbrev., in press.
- [3] J. B Gupta's 10th edition power system part 2 transmission and distribution of electrical power
- [4] S.N. Singh, S.C. Srivastva, Electric power industry reconstructing in India, Present Scenario and future prospects, Senior Members, IEEE.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)