



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: VI Month of publication: June 2021

DOI: <https://doi.org/10.22214/ijraset.2021.35179>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Automatic Plant Watering System using Arduino Uno and Soil Moisture Sensors

Jay Singh Yadav¹, Neeraj Pal², Govinda Yadav³, Ravi Kumar⁴, Kishan Kumar⁵

^{1,2,3,4,5}B.Tech.Department of Electrical Engineering, Babu Banarasi Das Institute of Technology and Management Lucknow

Abstract: Food creation procedures must be improved as a result of fast interest in food. Since India has horticulture as the primary wellspring of creation, legitimate water system plans are to be utilized for a proficient result .It includes two sensors that estimate the temp. and soil moisture levels of environmental factors. The yield of these sensors is given to the ADC and later to the microcontroller. The microcontroller is contrasted with properties and edge estrims and controls the transfer that controls the engine. The configuration is financially save and furthermore moderate. A minimal effort based automatic irrigation framework using a soil moisture sensor is introduced in this paper in which the dirt gives the moisture sensor it yields on the condition of the dirt and subsequently works with the help of the Arduino. Since farming is given a high requirement in the life of the economy, water is the fundamental factor for better horticultural development. Lack of sufficient water and abundance of water causes damage to plants. Therefore we need a powerful and effective innovation for better farming. Water is the core of the water system structure and water scarcity is a developing issue for the farm. The quantity of water should be checked for better efficiency and maintenance of crops. The water guideline for various yields is varied, as water scarcity or excessive water can be harmful for farming. An emotionally supportive network is being created for an irrigation remote sensor based irrigation water guideline. The prefer framework assesses the water requirement for crops based on soil moisture information deposited by some sensor hubs sent to the farm. Mechanization demonstrated time and cost in a way that is an exceptional aid to business, which is more than what a professional visionary can do in all measurements.

Keywords: Arduino, Irrigation, DTMF, GSM, Induction motor; Irrigation, Soil moisture sensor Agriculture, Soil moisture sensor.


I. INTRODUCTION

It is currently a major test for water safety as around 80% of the water present on earth is used for horticultural reasons. As the population is increasing day by day, interest for food never cuts the bucket so some deep progress has been made for better agricultural development. Thinking about the gadgets area, many keen projects have been executed for agrarian reason


And one of them is a low-cost Arduino-based automatic water system, using soil moisture sensors. It consequently turns ON/OFF contingent upon the states of the dirt. On the off chance that the soil is in arid condition, at that point the engine turns ON consequently also, on the off chance that on the off chance that it is in Wet condition, at that point it consequently gets killed. An Automatic Irrigation framework not just turns ON/OFF contingent upon the dirt work for work. Likewise it saves time too moreover water like too much water poses a risk of plants. In the event that an LED is used, in that indicates that in addition it accumulates depending on the dust Status This paper has six sections as mentioned

Fig.1 Block diagram of the automatic irrigation system

Below Phase II we are currently conducting a writing study frameworks. Part III specifies the equipment used in this project. Part IV explains the process of proposed work, in section VI of the results of the proposed draft has been reviewed, Section VII provides the end and scope of the future and ultimately the indicators are Remote progress was filling in quickly a long time later .These new things are ordered by relying on them the size of the books between the sensory centers. Finding more limited removes light-based

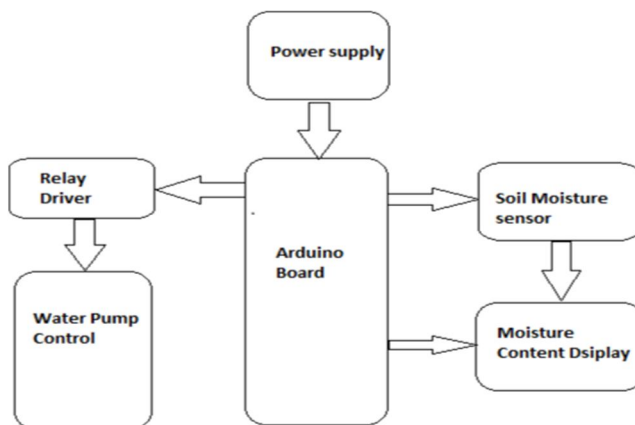

infra red (IR) sensors, highlight the multipoint Correspondence Wireless Personal Area Network (WPAN), long distance communication GSM / GPRS / DTMF in addition, Bluetooth, Zigbee can be used. This hearing-based frame clears the screen water requirement for a particular crop continuously and exports criticism of the regulatory framework a stream of water. Figure 1 Block the default irrigation system diagram. This framework is subtle enough to convey the sign portable for the farmer to control the timing of the water system as well a stream of water. Adequate water supply and strengthening of the water system performance and construction and added savings time and work of the farmers. Sensors designed for soil moisture measurement can also measure temperature pollution control to address issues identified by soil a certain yield. An important test looks dry again semidry regions of agricultural land are water guidelines for plants. Recent developments are trying to gain and resolve it problems. In a few cases the requirement for water distribution is this the biggest problem especially farmers face wisely as a funding problem.

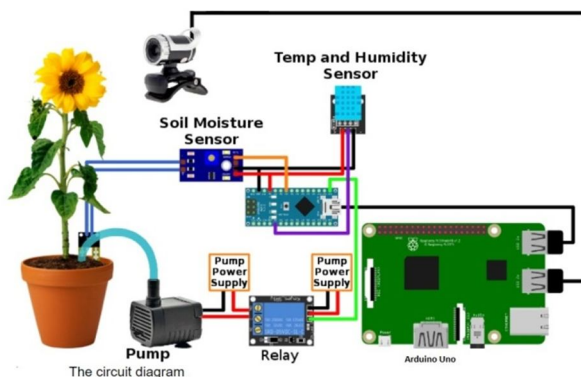

Sensors are used to enhance the dynamic energy of Outline by sending input. Soil moisture sensor receives natural and soil conditions that can be sent back to a framework for success. The structures grew that way Farther away in this setting there are loggers based on ropes expensive and have trouble establishing in real-time interface. This framework measures soil details Moisture content is placed in it and sent to the core Frame with the help of a microcontroller and more electrical gadgets. The test function of this paper is identified by the development of agricultural exercise such as water system, soil temperature and moisture balance we use advances in computer and remote sensors. A remote control sensor for example soil moisture is based Irrigation Water Regulation is an emotional support network it is done in this work. Proposed framework measures the water demand of plants underground Moisture data compiled by several sensory centers transferred to the field. As the total population builds up there is a to increase the application of food composition in the light horticulture is very important. In the agricultural sector, using A competent water system strategy is essential. The a traditional water system process for example

The manual strategy is great as there is unemployment as well in addition there is a high chance of over-watering. Planning a frame designed to make water completely system rating helps reduce personal pleading too water wastage. Total computer scale includes the affected recovery module in the file a microcontroller from the ATMEL family and moreover a GSM module. The AT89S52 is considered due to its height reliability and cost effectiveness. Acquisition module consists of a soil moisture sensor and a heat sensor from which the yield is maintained by the sub-ruler and this means moving a hand in making water siphon. Using an LCD display that displays the attributes of temperature of natural features and humidity soil as well as engine condition. Like progress to the

entire GSM module system is the same filed for the person concerned to be updated with standard notifications about field status in registered number. This ensures stability and efficiency to be treated even without a person. As the engine is operate using transfers and transfers receive orders from microcontroller that works as indicated by temperature and the dampness of the esteems, the loss of water can be seen slightly from there the engine slows down as a result.

II. TECHNOLOGY AND COMPONENT

A. Arduino-UNO

Arduino can be seen as a stage with a mix of planning and equipment.

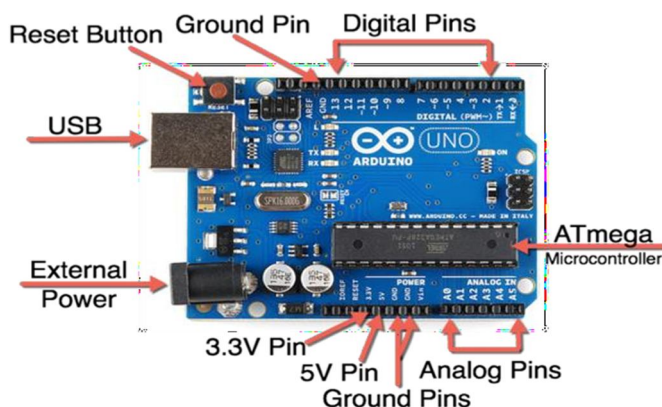


Figure 3 Arduino-UNO

A small controller containing 28 anchors. Arduino is built with a gem oscillator, voltage controller and ADC. It Can be used in 7-12v external storage. Arduino is built with a gem oscillator, voltage controller and ADC. There are 14 advanced details and production pins in it. There will be six easy pins where each pin gives 10 goal pieces. Arduino can interact with both systems at the same time equipment where the system can be typed, made and can be transferred to the board with help with a program called Arduino Integrated Environmental Development (IDE).

B. Soil Moisture Sensor

Soil moisture sensor is Electronic gadget used to determine volumetric the amount of water content in the soil, In terms of materialso-called electrical or dielectric restrictions are consistent, this is pollution the moisture sensor determines the moisture content in the soil. This soil moisture sensor contains Nickel from nickel has excellent conductivity and will not erode the ground regardless of its long-term use. So it is common that it is used for long-term reasons.

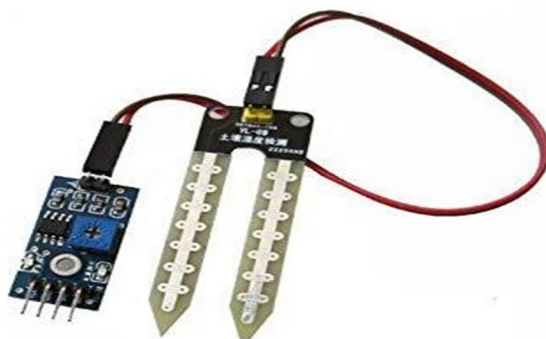


Figure 4 Soil moisture sensor

C. Relay Module

This Transfer can be identified as power button used to turn on / off avery large current. The transmission consists of an electromagnetwhich is a telephone coil and acts as a non-permanent magnetism wherever energy goes.



Figure 5 Relay

D. Liquid Crystal Display


LCD is a combination of both the combination and firmness used to deliver the image that is visible and moreover to show something in computer clocks, laptops and more. Icon it consists of two partition sheets and a liquid gemstone arrangement among them. This LCD can be used with arduino by linking it to arduino.

E. ADC

The ADC used here is 12 bit MCP3208 ADC ready for use of embedded embedded systems has CMOS technology. Its performance has been marked as high again it consumes less energy compared to other ADCs. Input power ranges from 2.7V to 5.5V. It has only one end input. As it is a 12 bit ADC, we can get an accurate result where the microcontroller works and changes the state of motor field.

III. METHODOLOGY

The block diagram below illustrates the plan temporarily of the framework. As a first step, temperature measurements of environmental factors and the relative humidity of various soils observed at different times for one full day. On that the standard deviation of attributes is determined again

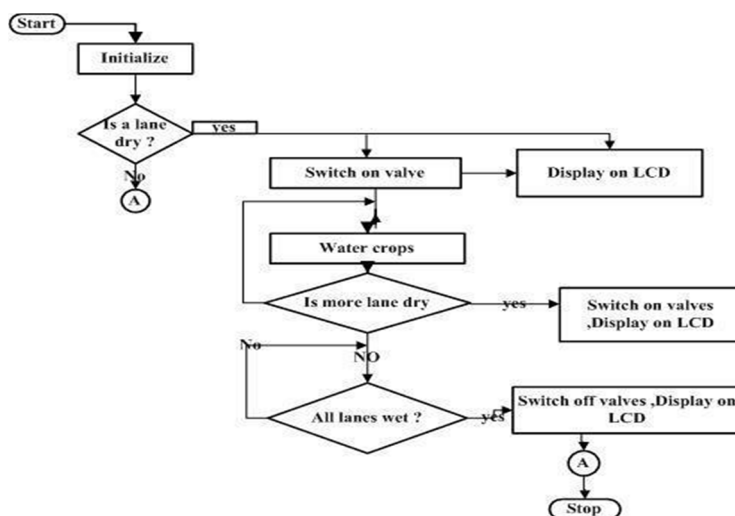

Flow Chart

at the end the moisture content was taken as 72% again that temperature is 40°C. The LM35D is temperature a sensor used to measure natural temperature factor and PW16448 that sensitivity to that waste. It measures soil moisture content. Sensory production provided by ADC converting to computer structure as well that yield is given to the microcontroller. Microcontroller compares details and parameters looks. Closed the probability that the data rate for wet columns is less than 72% independent with the engine temperature will be turned on. In the event that the temperature of the data exceeds 40°C, engine turned on. This is ON and the Engine is off manually moving as a switch. All this time temperatures and humidity are displayed using i 16 × 2 LCD display.

IV. RESULT

After making the proposed draft, the test was still in place performed soil tests on different days what is said inside the bar chart below. It seems when the plant is physically irrigated using more than water and when it has finished using the sensor, it uses a small amount of water. A try trim generated from different dates. This irrigation is done from a different perspective parameters such as climate, plant type and type of the ground. In case the weather is cool then it requires a small amount of water and incases in the event of heat at that time point requires a large amount of water per day. As mentioned inside the chart, if possible watering is done physically at the time most of the use of water and fresh water will be particularly long. In that case, where irrigation is done physically at the time and the amount of water can lead to the transfer of the plant as well.

V. CONCLUSION & FUTURE SCOPE

If possible Arduino and soil used at the same time acknowledging wet conditions irrigation will done automatically. The proposed humidity sensor is derived from robotic water. The framework of the system is built using remote sensors. The proposed framework measures water needs plants on the basis of soil moisture details collected a few sensory centers sent within the field. It is concluded that the proposed framework was implemented investment funds that differ from water use as well power. The program can move forward by joining computer framework as RS232 is provided within region. In the event of an error within the framework, the agricultural expert can be taught about frame interference DTMF Transceiver and as a result put the call on variable farmer number. In addition the GSM module can be used to send a message to the farmer in the event of an error it happens.

REFERENCES

- [1] J.Y.Shin, G.Y.Yun, J.T.Kim, Evaluation of Daylighting Effectiveness and Energy Saving Potentials of Light-Pipe Systems in Buildings, Indoor Built Environment, vol. 21, no.1, pp. 129-136, 2012.
- [2] M. Kocij, F. Kundracik, S. Darula, R. Kittler, Availability of luminous flux below a bended light-pipe: Design modeling under optimal daylight conditions; Solar Energy, vol. 86, pp. 2753-2761, 2012
- [3] G.E.Toledoa, A. V.Pelegrinia, A. Hermanna, Design parameters for solar light pipes in the Brazilian context; International Journal of Sustainable Engineering, vol. 9, no. 4, pp. 251-258, 2016.
- [4] L. Shao, A.A. Elmualim, I. Yohannes, Mirror lightpipes. Daylighting performance in real buildings, Lighting Research and Technology, vol 30, pp. 37-44, 1998.
- [5] K.Vasilakopoulou, A. Synnefa, D. Kolokotsah, T.Karlessia M. Santamounisa, Performance prediction and design optimisation of an integrated light pipe and artificial lighting system; International Journal of Sustainable Energy, vol. 35, no. 7. pp.675-685, 2016.
- [6] O.Sikula, J.Mohelniková, J.Pla' seek, Thermal analysis of light pipes br insulated fat roof: Energy and Buildings, vol.85, pp. 436-444, 2014
- [7] G Oakley, S. B. Rifit and L. Shao, Daylight Performance of Lightpipes: Solar Energy, vol. 69, No. 2, pp. 89-98, 2000.
- [8] P. Mandal, B. Roy, Matlab Simulation of Indoor General Lighting with Luminaire IES File, Light & Engineering, vol.24, No.2, pp. 118-127, 2016,
- [9] R.Perez, R.Seals and J Michalsky. All-weather model or sky luminance distribution-preliminary configuration and validation, Solar Energy, vol.50, No.3, pp. 235-245, 1993.
- [10] CIE(International Commission on illumination), Spatial distribution of daylight: CIE Standard general sky, CIE Standard SOIT/E:2003. CIE Enetral Bureau, Vienna.
- [11] R.Perez, P.Incichen, R.Seals, Modelling daylight availability and irradiance components fom direct and global irradiance, Solar Energy, vol. 44, No.5, pp. 271-289, 1990.
- [12] Solar Energy Center, Ministry of New and Renewable Energy, Govt. of India .
- [13] X. Zhang and T. Muneer, Mathematical model for the performance of light pipes: Lighting Research and Technology, vol. 32, pp. 141-146, 2000
- [14] G.C. Topp, J.L. Davis, and A.P. Annan, Electro-magnetic determination of soil water content: measurements in axial transmission lines, Water Resources Research 16 (1980) 574-582.
- [15] H. Navarro-Hellín , J. Martínez-del-Rincon, R. Domingo-Miguel , F. Soto-Valles and R. Torres-Sánchez, A decision support system for managing irrigation in agriculture, Computers and Electronics in Agriculture 2016.
- [16] APSRU (Agricultural Production System Research Unit). Data collection for crop simulation modeling, Queensland, Australia: Commonwealth Scientific and Industrial Research Organization, 1995, pp.43.
- [17] R.J. Hanks, and G.L. Ashcroft, Applied soil physics. Soil water and temperature applications. Advanced series in agricultural review 8. New York, USA: Springer-Verlag. 1980 pp.60.
- [18] A.J. Clemens, Feedback Control for Surface Irrigation Management in: Visions of the Future. ASAE Publication 04-90. American Society of Agricultural Engineers, St. Joseph, Michigan, 1990, pp. 255-260.
- [19] B.B. Barry, The Intel Microprocessors, 8086/8088, 80186, 80286, 80386, AND 80486, Architecture, Programming, and Interfacing, Third Edition, Prentice Hall, 1994.
- [20] D.D. Fang Meier, D.J. Garrote, F. Mansion, and S.H. Human, Automated Irrigation Systems Using Plant and Soil Sensors. In: Visions of the Future. ASAE Publication 04-90. American Society of Agricultural Engineers, St. Joseph, Michigan, 1990, pp. 533- 537.

ABOUT THE AUTHORS



Jay Singh Yadav is the final year student of B.Tech. in Electrical Engineering from Babu Banarasi Das Institute of Technology and Management (BBDITM), Lucknow. His area of interest is Power Electronics, Electrical Machine, Measurements & Instrumentation, Renewable Energy Sources and Energy Conservation. Neeraj Pal is the final year student of B.Tech. in Electrical

Engineering from Babu Banarasi Das Institute of Technology and Management (BBDITM), Lucknow. His area of interest is Power, Renewable Energy and Machine.



Neeraj Pal is the final year student of B.Tech. in Electrical Engineering from Babu Banarasi Das Institute of Technology and Management (BBDITM), Lucknow. His area of interest is Power, Renewable Energy and Machine.



Ravi Kumar is the final year student of B.Tech. in Electrical Engineering from Babu Banarasi Das Institute of Technology and Management (BBDITM), Lucknow. His area of interest is Machine, Energy Efficiency and Drives.



Govinda Yadav is the final year student of B.Tech. in Electrical Engineering from Babu Banarasi Das Institute of Technology and Management (BBDITM), Lucknow. His area of interest is Power Electronics, Machine and Drives.



Mr. Kishan Kumar received B.Tech. Degree in Electronics and Instrumentation from College of Engineering and Rural Technology (CERT), Meerut (Uttar Pradesh Technical University, Lucknow) in 2003, And M.Tech. Degree in Wireless Communication and Server Network (Electronics Communication Engineering) from Babu Banarasi Das University, Lucknow. He has published four research papers in International Journals. Currently, he is working as an Assistant Professor in the department of Electrical and Electronics Engineering Babu Banarasi Das Institute of Technology and Management (BBDITM), Lucknow. He had total six year of experience in BBDITM. His research area of interest includes Transducer and Sensor, Wireless Communication and Sensor Networks, Renewable energy, and Energy Efficiency and Conservation.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)