



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 Issue: VI Month of publication: June 2021

DOI: <https://doi.org/10.22214/ijraset.2021.36159>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

An Overview of Wear and How to Improve Wear Resistance

Yashlendra Kumar¹, Mohd Imran Ansari²

^{1,2}Vivekananda College of Technology & Management, Aligarh-202001, Dr. A.P.J Abdul kalam Technical University, Lucknow-UP, India

Abstract— Wear is discussed in this study, as well as its impact on component performance and lifespan. It was mentioned how researchers are working to enhance the performance of materials. Due to enhanced hardness and finer grain structure, increased wear resistance has been recorded. Due to the particle strengthening process, it has also been observed that particle reinforcement improves wear resistance.

Keywords— Wear resistance, Fatigue, Corrosive, Defects, Hardness.

I. INTRODUCTION

Wear is material gradual loss from surface component as a result of machining techniques like contact with substances or body motion. The variables that influence the wear of a surface are mechanical properties, frequency of load, metallurgical characteristics of the material, ambient conditions, thermal and geometrical form of a surface [1]. Wear to a material can happen in a variety of ways. The rubbing effect of a harder material against the weight of a softer may create abrasive wear. The impaction into the material surface caused erosive wear of solid, liquid, or gas particles/droplets. The sliding motion of the two bodies, with or without the push, is caused by adhesive wear. In most cases, wear is followed by corrosion behavior, and catastrophic damage was determined in the two combined of industrial components in various ways. Paper manufacture, pulp and mining, chemical industries are among the businesses that require moist environmental conditions. Corrosion and wear are caused by several processes and the combined impact of these causes component life to be reduced [2, 3]. When surrounding circumstances include high speed component or high velocity air impacting components with particulate matter, wear becomes aggressive. Situation may be contrasted and explained using aircraft wing wear caused by high-speed aircraft flying through air containing particles.

Wings are important for producing lift in an aircraft and are subjected to extreme climatic conditions when in flight. Multiple elements, such as the size of aircraft, weight to be carried, speed limitations, aircraft's function, and rate of ascent must all be addressed during wing design. The wing's construction involves the need to keep its aerodynamic form under severe stress and loading. The spars and ribs that make up the wing structure are coated with metal. The major structural components of the wing are spars, which begin from fuselage and finish at the wing tip, and carry load carried by the wing. Corrosive, fretting, Abrasive, adhesive, fatigue or erosive, wear can occur in aircraft. Abrasive wear occurs when a tougher substance scrapes against a softer one, causing material to be removed. Corrosive wear is caused by chemical reactions between corroding and base materials.

Other forms of clothing are frequently worn with it. Adhesive wear is caused by frictional contact between materials, such as movement of wear particles on material's surface. When two surfaces scrape against each other cyclically, fretting wear etc. Erosive wear is caused by transient sliding motion caused by contact of liquid or solid surfactant molecules. Fatigue wear or interface fatigue is degrading of substance owing cyclic stress, which leads to crack commencement. Cracks propagate throughout the item, ultimately causing it to breakdown.

For aeronautical components, wear becomes increasingly important. The damage produced by wear involves changes in the surface's microscopic structure. Small surface defects caused by wear alter the geometric shape and cause the shear layer to move. The most common fatigue defect on the surface of the samples is significant parameters. Significant energy reductions in the boundary may be characterized by excessive roughness, which can influence parasitic drag. Roughness can have a major impact on the material's performance. For a long time, roughness and its effects have been the subject of inquiry and research.

The friction generated erosive wear on surface of an airplane's wings is caused either by relative velocity of wind as well as airplane. Such wear is what causes the roughness on the aircrafts' exterior. The roughness of surfaces is exacerbated by ice build-up, sometimes called as aircraft icing [2], and particulates hitting aircraft's wing. Overall impact of wear necessitates creation of techniques for enhancing component performance and lifespan. Impact of erosive wear of wind will be different in various regions of wing due to varying flight conditions and wind speed. As consequence, the surface's roughness distribution changes throughout its dimension and cross - sections [4].

During flight, water droplets below freezing temperatures in sky come into touch with the surface of an aircraft's wings, producing icing. The quantity of oxygen in the atmosphere, the shape of the drops, and the temp all influence the type and intensity of aircraft icing on wing surface. When such drops and particle meet, body and blades of aeroplane freeze. Ice causes decrease of lift, zeroark pitch angle, and friction increases on airplane's blades. Friction wear is caused by dust, dirt, and other particulate matter striking the surfaces of large aircraft and engines.

Adhesive wear occurs when wear particles and accompanying dust brush against surface [2,3].

Aerodynamic forces are created when an aero foil-shaped body, such as airplane, moves through air, allowing plane to fly. Lift refers to component of aerodynamic force that is perpendicular to aircraft's path of movement, whereas drag refers to component that is parallel to motion. On the aircraft wing, friction force resists drag force. The friction, and hence drag, increases as roughness of surface increases. When flying, it is desirable and cost-effective to reduce drag as much as possible. Fluid mechanics defines the boundary layer as layer of fluid directly next to surface.

Fluid viscosity causes the bulk of the drag experienced by the body of an aeroplane. When the aircraft wings increase in surface roughness, early turbulence separation of borders arises. Boundary layer detaches at lower angles of attack due to this change in the boundary layer's separation phenomenon.

Due to direct and indirect impacts, such effects are not restricted to aircraft wings, as other mechanical components have been discovered [3].

To endure environment, the surface of wings is composed of metal. Even though metals have a high wear resistance, the extremes of in-flight climatic conditions and the rapid speed of aircraft create extensive pitting and wear on wing surface. As a result, choosing the right material for the wing surface is critical. As result, knowledge of the wear behavior of aircraft wings and other comparable components is required. The wear resistance of aluminum alloys is always being improved via research. In the parts that follow, we'll go through some of the most important contributions.

A. Aerospace Applications of Aluminum

Material selection is the most essential element of the aviation industry. A small departure from the stated standard in the construction, upkeep, or repair of an aircraft or similar application may lead to the destruction of lives, property, and financial investment.

Aluminum is being used in aerospace components for many years due to its favorable characteristics. Aluminum is the fourth most soft metal, the fifth highest flexible, and also has a high corrosion resistance. Aluminum is non - magnetic and has a good capacitance. By producing bespoke aluminum alloys with the appropriate alloying components, certain of the properties of aluminum may be enhanced. On the other hand, some aircraft use sheets as thick as 0.356 in. [5,6].

In the creation of new product and manufacturing methods, the aircraft industry has always been a pioneer. The driving factors underlying product and process are weight loss, efficiency improvements, and cost reduction. Innovative materials have a major influence in the aviation sector, including economic and environmental challenges. [7].

Due to composites' capacity to provide a range of characteristics depending on the application, they have largely replaced aluminum alloys and pure aluminum in many applications. Various reinforcing particle types may be used to create composites with enhanced wear resistance, mechanical properties tensile strength, and hardness, other properties.

Oxidant's dispersion Reinforcement polymers too were developed for high-temperature applications. In the manufacture of ODS, mechanical alloying is utilized to create materials with such ductility framework and tough oxides particles dispersed across. Reinforcement compounds are employed due to various their excellent thermal stability.

B. Composites that Improve Wear Resistance

In 2006, Kok and Ozdin used the vortex method to create Al (2024)-Al₂O₃ composites with 10, 20, and 30% Al₂O₃ particles. Using a pin-on-disc wear test equipment, slide wear tests have been conducted with specimens gliding on SiC abrasive strips of different weight fractions at varied loading conditions. Transverse speed mostly during wear process, Alumina particulate concentration and molecular weight, grain length of SiC abrasive strips, and pressure used in test specimen were all investigated for their effects on wear behavior of generated composites. SEM (Scanning electron microscopy) was used to examine composites' wear process. Because base metal enabled SiC to enter and cut surface deeply, composites experienced considerable plastic deformation and had excellent

wear resistance. In samples with small Al_2O_3 , microscopic slicing and microscopic plowing are seen as being most critical wearing processes, while crushing was discovered as being the most essential theory in specimens with large Al_2O_3 particles. Increases in Alumina particulate composition improved wear resistance, while increases in wear rate, wear loading, and abrasion grain sizes reduced wear resistance, according to results. [8] It was discovered that particle size of Al_2O_3 is more important than the particle concentration.

Wear resistance has been observed in bimodal reinforcement composites with larger SiC particles in the hybrids powdered. The increased toughness of these materials with bi - modal reinforcing was attributed to ability of large SiC particles to bear greater amount of the applied load and prevent tiny aluminum nanoparticles from being pulled during wear action. Comparing of molecular weight of Al_2O_3/SiC resulted, reduced in weight loss with decreasing particle size, as shown in Fig. 1 [10].

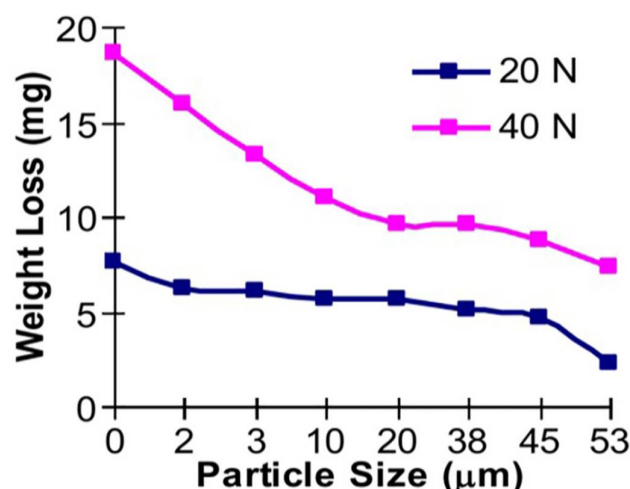


Figure.1 Various $Al_2O_3/SiCp$ weight reduction estimates [10].

Thirumalai et al. attempted to determine the optimal amount of B4C reinforcement for improving the wear resistance of aluminium alloys in 2015. Using the stir-casting process, 3 percent, 6 percent, 9 percent, and 12 percent B4C, as well as set amount of 3 percent graphite powder, were combined into aluminium alloy to make aluminium hybrid composites. The wear resistance of resulting hybrid composites was evaluated at varied weights and sliding speeds. The B4C reinforcement of up to 9% was shown to be effective in increasing wear resistance of aluminium alloy, according to findings. The inclusion of graphite offers lubrication, while B4C increases the matrix material's strength [11].

Material matrix composite properties were improved as result of composite manufacturing. Surface characteristics necessary at the surface, on the other hand, may only be enhanced by modifying the surface using appropriate techniques. Various standard and unconventional methods of surface alteration or surfacing have been attempted. Surface surfacing can be utilized to achieve improved characteristics in situations Aircraft surface wings need considerable wear resistance. Surface treatment involves surface treatment rather than bulk material, which can therefore be cost-effective provided proper treatment, is employed. Some welding techniques have also been used for cladding, which is surface of materials on interior components. In the next part, we'll look at some of the trials that have been conducted to enhance surface hardness and wear resistance.

Gregory outlined the fundamentals of hard facing in 1978, as well as possible hard facing processes, process choices, coating materials, requirements, and parameters [12][13].

Surface modification can be accomplished by reinforcing certain particles into matrix surface, resulting in composite in limited region at surface with characteristics comparable superior than bulk material composite production. This may be accomplished by melting tiny area near the surface and then adding particles to melt before it solidifies. The phenomenon may be realized using traditional welding techniques, as well as unusual means like as lasers and plasmas, as well as inventing novel methods.

By using the laser cladding method, Wang et al. attempted to manufacture in 2002, composite coatings of the self-lubricating and improved wear of clay matrix CaF_2/Al_2O_3 on $Al-2O_3$ substrates. The laser coating was done by

means of a 5 kW continuously CO₂ laser wave production apparatus in ambient air. Ceramic powders were combined in various ratios to create the mixtures. Al₂O₃ with 30% CaF₂ and Al₂O₃ with 100% CaF₂, both having a particle size of 320 mesh. These mixes were pre-applied to surface of 4 mm thick substrate. Before the laser treatment, the specimens were warmed to 650°C. To minimize cracking, the samples were gently cooled after the cladding process by placing them on plate heated with 2 kW electric burner. In the inter-framework portions of laser clad CaF₂/ Al₂O₃ composite coatings, Unique plate-like Al₂O₃ primary phase framework, and uniformly scattered sphere CaF₂ solid lubricating particles, as demonstrated in Fig. 2, were observed by microstructural examinations.

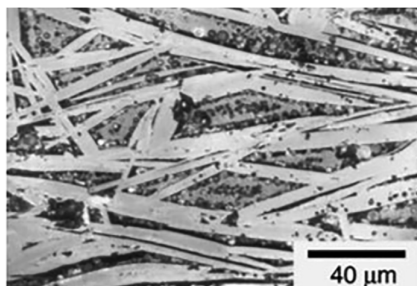


Figure.2 Laser ablation was used to produce the microstructure of the covering [14].

When compared to a 100% Al₂O₃ laser clad ceramic coating, laser clad CaF₂/ Al₂O₃ self-lubricating composite coating had very excellent wear resistance and a low friction coefficient [14].

In 2003, Lu et al. used laser cladding on austenitic stainless-steel substrates to produce wear-resistant Ni–Mo–Si reinforced composite coverings. Polymer composites had fine morphology with Mo Ni Si main nerve fibers having Mo Ni Si/NiSi eutectic portions inter granular, according to researchers. Due to strong atomic bonding, coverings' toughness has been found to be significantly higher. The coatings outperformed base metal in dry sliding wear testing, which was ascribed to sample's outstanding resistance to micro-cutting and ploughing, as seen in TEM (transmission electron microscope) image of specimen having completed drying wear behavior test. The image shows smoothly worn surface without any holes or scrapes on the coating's face, as seen in Fig 3. High ferrite atom binding among reinforcements & substrate improved adhesion toughness [15].

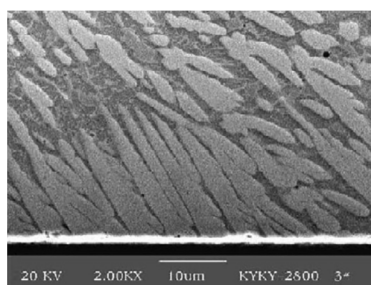


Figure.3 SEM picture of the composites layer's damaged surface [15].

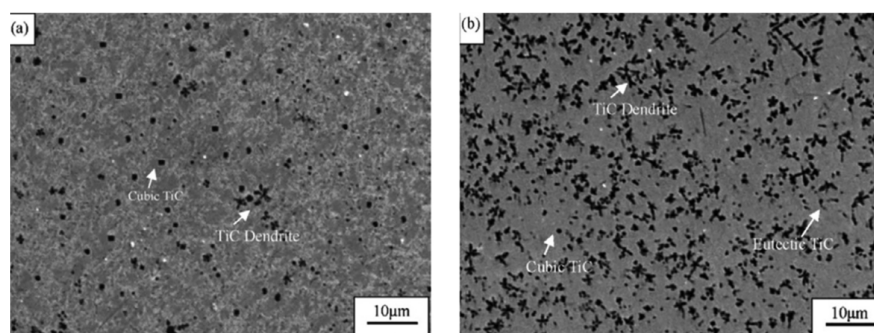


Figure.4 a) equitably spread TiC grains in the planar laminate sheet b) cubic TiC carbides, eutectic carbides, and primary TiC carbide dendrites SEM image [16].

The consistent distribution of TiC particles in matrix was attributed to this, albeit few tiny agglomerations were also seen. By reacting FeTi with graphite powders, cubic TiC carbides and needle-shaped eutectic TiC carbides were detected in microstructural study. Primary TiC particles radially developing dendrites were also seen. SEM images of evenly dispersed TiC particles are shown in Fig. 4(a), A Fig shows cubic TiC carbides, eutectic carbids, and primary TiC carbides dendrites formed radially. 4(b). The rapid reinforcing process, due to dispersion of the phase formed by rehabilitation particles in composite layer developed, is confirmed by these carbides implanted in clad layer [16].

Base metal was melted and composite was formed using GTAW. The production of TiC particles by interaction between ferrotitanium and graphite powders during melting phase in TIG welding was shown by study of acquired internal microstructure. In alloyed layer, these particles were found to be evenly dispersed. The microhardness of the powder layer was observed to grow when the thickness of the layer was increased. TiC carbide particles with average size of 1–4 μ m were found to be evenly dispersed in matrix, resulting in increased microhardness. The uniform distribution in alloyed layer of TiC carbides is shown in the fig. 5. Uniform distribution was caused by the solid/fluid interface with particles interacting and trapping particles. Pushing produces segregation at some solidified regions, whereas trapping leads in uniform particle distribution within inter-dendritic development zones. The alloyed layer's hardness was observed to enhance as welding current was increased [17].



Figure.5 SEM picture of carbide dispersion in polymer composites [17].

Figure.6(a–d) shows SEM images of composite coatings comprising 0, 3, 13, and 20 wt. % TiO₂ and Al₂O₃. The TiO₂ and Al₂O₃ are visible as lamellas that are evenly dispersed.

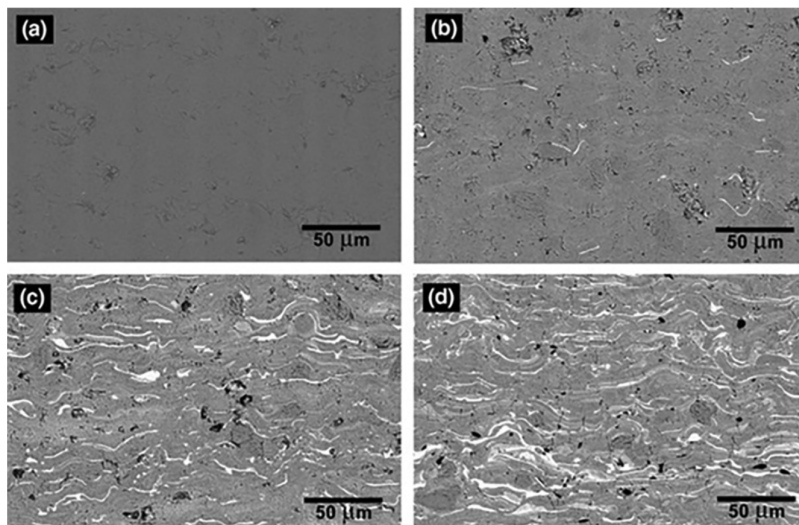


Figure.6 Inter SEM micrographs of Al₂O₃/xTiO₂ composite coatings, where (a)–(d) represent samples containing 0, 3, 13, and 20 wt% TiO₂, correspondingly. [18].

The hardness of deposited coating decreased as the TiO₂ concentration increased, but the fracture toughness increased. The wear resistance of coatings coated only with Al₂O₃ was found to be lower than that of coatings applied with mixed powders. The presence of TiO₂ splats was shown to be the cause of the increased toughness and hardness of layers placed with uniformly introduced in powders form [18].

A GTAW torch was used to melt surface in a nitrogen atmosphere. In comparison to untreated steel surface, the modified surface was extremely wear resistant. TiN, Ti₂N heavily populated dendrites were discovered at surface of microstructure. High energy input has been shown to promote nitrogen dissolution in liquid melt, resulting in higher titanium nitride concentration. In comparison to the steel substrate, the improved layer had 5 times reduced friction [19].

Sharma et al. attempted to utilize TIG arc on micro-alloyed steel substrates in 2018 to consolidate Al and TiO₂ powder mixes. The powder was mixed uniformly and created paste then placed on base plates and moved on TIG arc using NaSiO₃ as binder. The hardness of composite layers are improved by 1.88–2.24 times when compared to parent metal, according to results of hardness test. The development of Al₂O₃ reinforced steel matrix composite and martensite transition were cited as reasons for increase in hardness.

II.CONCLUSIONS

When considering the enhancement of material characteristics, the notion of creating composites and nano-composites is gotten to be promising. However, correct selection of appropriate reinforcement particles, size, and amount is essential. The characteristics of hardness and wear resistance were found to increase considerably when reinforcement particles were added. Stir casting has been recommended as a method for mass manufacturing based on observations from composites fabrication research. Metal matrix composites and nano-composites, on the other hand, have not been investigated in areas of machining, welding, and structural and property repeatability, restricting their usage in extremely sensitive applications. Mining equipment and brake drums are two examples of areas where cast iron components have replaced by composites owing to their stiffness, strength, and light weight. Due to lack of research and development in subject, industries such as aircraft, automobiles, and railways have not used composites extensively.

Surfacing was used to accomplish both economy and the necessary characteristics gained by particle reinforcement. This was feasible because the majority of the materials utilized had poor wear characteristics, but the surface attributes of those materials may be improved by coatings.

Wear resistance, which is a key factor in determining component life and performance, should be improved as much as possible. For wear resistant materials, such as metal and aluminium alloys in particular. However, due to its outstanding characteristics and small weight, aluminium cannot be ignored.

The use of non-traditional methods for coating and manufacturing of surface composites, on the other hand, becomes uneconomical and problematic. Aluminum and aluminium alloys have not been subjected to the same procedures employed to produce surface or coating composite on steel. Most researchers have developed these coatings on steel substrates using traditional procedures, such as applying a paste with some binding agent and then melting the layer and forming the composite using a welding arc. For steel substrates, the creation of surface composites utilizing traditional techniques without utilize of binder still has to be investigated.

REFERENCES

- [1] J.R. Davis, U.S.A., ASM Int. (2001) 1–10.
- [2] O. Gohardani, Dept. of Power and Prop. Cranfield Univ., 2011.
- [3] Z. Han, W. Yin, J. Zhang, J. Jiang, S. Niu, L. Ren, J. Bionic Eng. 10 (4) (2013) 479–487.
- [4] F. Salazar, A. Barrientos, Sensors 13 (2013) 11772–11781. [5] M.J.F. Gándara, Mater. Tehnol. 47 (3) (2013) 261–265.
- [5] R.C. Dorward, T.R. Pritchett, Mater. Des. 9 (2) (1988) 63–69.
- [6] M. Peters, C. Leyens, Mat. Sci. & Engg., Inst. of Mat. Res., DLR, German Aerospace Center, Cologne, Germany, III.
- [7] M. Kok, K. Ozdin, J. Mater. Process. Technol. 183 (2007) 301–309.
- [8] A. Włodarczyk-Fligier, L.A. Dobrzanski, M. Adamiak, JAMME 2 (2008) 147–150.
- [9] N. Altnkok, I. Ozsert, Findik, F, Acta Phys. Pol. A 124 (1) (2013) 11–19.
- [10] T. Thirumalai, R. Subramanian, S. Dharmalingam, N. Radika, A. Gowrisankar, Mater. Technol. 49 (1) (2015) 9–13.
- [11] E.N. Gregory, “Hardfacing”, Tribology Int., The Welding Inst., Abington Hall, Abington, Cambridge CB1 6AL, UK, 1978, pp. 129–134.
- [12] R.F. Smart, “Selection of Surfacing Treatment”, Tribology Int., The Welding Inst., Abington Hall, Abington, Cambridge CB1 6AL, UK, 1978, pp. 97–104.
- [13] H.M. Wang, Y.L. Yu, S.Q. Li, Scr. Mater. 47 (2002) 57–61.
- [14] X.D. Lu, H.M. Wang, J. Alloys Compd. 359 (2003) 287–291.
- [15] X.H. Wang, S.L. Song, Z.D. Zou, S.Y. Qu, Mater. Sci. Eng. A 441 (2006) 60–67.
- [16] X.H. Wang, M. Zhang, Z.D. Zou, S.L. Song, F. Han, S.Y. Qu, Surf. Coat. Technol. 200 (2006) 6117–6122.
- [17] N. Dejang, A. Watcharapason, S. Wirojupatump, P. Niranatlumpong, S. Jiansirisomboon, Surf. Coat. Technol. 204 (2010) 1651–1657.
- [18] S. Dyuti, S. Mridha, S.K. Shaha, Adv. Mater. Res. 264–265 (2011) 1427–1432.
- [19] D. Sharma, P.K. Ghosh, S. Kumar, S. Das, R. Anant, N. Kumar, Surf. Coat. Technol. 352 (2018) 144–158.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)