iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 **Issue:** VII **Month of publication:** July 2021

DOI: https://doi.org/10.22214/ijraset.2021.36589

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.429
Volume 9 Issue VII July 2021- Available at www.ijraset.com

Seismic Effects on Different Structural Members

Shobhit Gajbhiye[1], Sandeep Gaikwad[2]
[1] *Post Graduate Scholar,* [2] *Professor, Department of Civil Engineering, Tulsiramji Gaikwad Patil College of Engineering & Technology, Nagpur, Maharashtra, India*

Abstract: ***Civil engineers deal with constructing differing types of structures with guaranteeing safety, sturdiness and utility. Currently days "earthquake "is a natural tragedy that affects the structures with their safety and utility. The quantity of harm that earthquake will cause to structures is rely upon sort of building, sort of soil, Technology used for earthquake resistance, and last however not the smallest amount Location of building. Effects of earthquake area unit mostly counting on sort of soil within which foundation of building is finished as a result of earthquake changes the motion of ground that results the failure foundation. Therefore it's vital to check the behavior of various soils at the time of construction of structures. Earthquake will be resisted by varied technologies utilized in building, one amongst these area unit shear wall. It improves the structural performance of building subjected to lateral forces because of earthquake excitation. Much analysis comes area unit afoot worldwide for development of effective ways for estimating unstable demands for performance-based engineering of buildings.***
Keywords: Seismic effects, Earthquake resistant structures

I. INTRODUCTION

Earthquake causes totally different completely different shaking intensities at different locations and therefore the injury elicited in buildings at these locations are additionally different. An earthquake is earth's shaking or in alternative words unleash of energy because of the movement of tectonic plates. This natural disaster has several adverse effects on earth like ground shaking, landslides; rock falls from cliffs, state change, fire, tidal wave etc.

Buildings are extremely stricken by an earthquake and in some cases they're shattered right down to the bottom level. Once the bottom shaking happens to lower place the building's foundations they vibrate in an identical manner thereupon of the encompassing ground.

The inertia force of a structure will develop cutting impact thereon that successively causes stress concentration on the connections in structure and on the delicate walls. This ends up in partial or full failure of structure. High rise structures have the tendency to enlarge the magnitude of while periodic motions once examination to the smaller one. Each construction contains a resonant prevalence that is the characteristics of structure.

During this quickly increasing and developing world, new structures are being created at a high rate and during this situation it's important to investigate, estimate and value them before being created within the field. Our analysis focuses on the analysis numerous of varied of assorted buildings below static loading and conjointly below the impact of lateral forces that's considering seismic forces in various Zones.

Earthquake engineering plays a very important role in today's infrastructure style method. An earthquake might need a really low risk of incidence in some region, however the likelihood shouldn't be neglected once a structure is made, as a result of albeit there's one shock because of earthquake within the buildings life it is a risk to the resident of the building.

Because the construction of multi-storied has augmented within the recent years and therefore the variety of occupants during a building has being increasing.

Structural designers are given a lot of importance to earthquake elicited loads[seismic loads] for coming up with a building in conjunction with taking into thought the Dead, Live and Wind loads[static loads]. Disasters are sudden occurrences that have unfavorably affected humans because the advent of our survival. In response to such occurrences, there are challenges to mitigate. Expertise in past earthquakes has incontestable that a lot of common buildings and typical strategies of construction lack basic resistance to earthquake forces. In most cases this resistance is achieved by following easy, cheap principles of fine building construction apply.

©IJRASET: All Rights are Reserved

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.429
Volume 9 Issue VII July 2021- Available at www.ijraset.com



Fig. 1: A Total Collapsed Building


II. LITERATURE REVIEW

It is documented that a structure usually responds well on the far side its elastic capability at high seismic loading; nonlinear time-history analysis is thus the foremost correct procedure for the seismic demand calculations. There's apparently no methodology presently on the market to characterize the seismic demand calculations after we observe that in some cases structures, particularly tall structures, "collapse" as a result of strength degradation and/or vital effects. In this apace increasing and developing world, new structures are being made at a high rate and, during this situation, it's important to analyze, estimate and assess them before being made within the field. The current unstable style observe in India is predicated on the force-based style philosophy, with a partial incorporation of the capability style ideas. The FEMA-440 and HAZUS methodologies are used for estimating the unstable performance and vulnerability. It's shown that the Special Moment-Resisting Frame style underneath the present style provisions of Indian standards encompasses a higher chance of injury, as compared with the normal Moment-Resisting Frame style, attributable to the upper allowable final drift limit The quantity of injury that earthquake will done to structures is rely on style of building, style of soil, technology used for earthquake resistance, and last however not the smallest amount location of building. Effects of earthquake area unit for the most part reckoning on style of soil within which foundation of building is finished as a result of earthquake changes the motion of ground that results the failure foundation. Therefore it's vital to review the behavior of various soils at the time of construction of structures. Study focuses on behavior of various varieties of soil at the time of earthquake incidence and shear wall impact on structures. Wind and earthquake loadings are the 2 major forms of lateral dynamic excitations practiced by high-rise buildings. Study evaluates the seismic performance of high-rise buildings primarily designed supported totally different levels of lateral wind hurdles.

III. SEISMIC EFFECTS

A. Masonary Building

Ground vibrations throughout earthquakes cause inertia forces at locations of mass within the building. These forces travel through the roof and walls to the inspiration. The most stress is on making certain that these forces reach the bottom while not inflicting major harm or collapse. Of the 3 elements of a masonry building (roof, wall and foundation). The walls area unit most prone to harm caused by horizontal forces thanks to earthquake. A wall topples down simply if pushed horizontally at the highest in a very direction perpendicular to its plane (termed weak direction), however offers abundant bigger resistance if pushed on its length (termed sturdy direction).

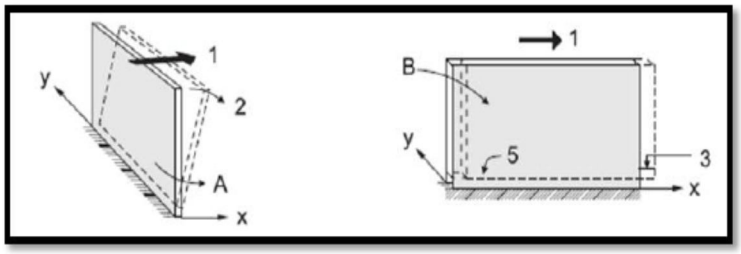

1 - Earthquake force
2 - Overturning
3 - Sliding

FIG. (a) Flexural wall FIG. (b) Shear wall

©IJRASET: All Rights are Reserved

B. Layout And Structure

In tall buildings with massive height-to base size magnitude relation, the horizontal movement of the floors throughout ground shaking is massive. In buildings with massive set up space like warehouses, the horizontal seismic forces are often excessive to be carried by columns and walls. In general, buildings with straightforward pure mathematics in set up have performed well throughout robust earthquakes. Buildings that have fewer columns or walls during an explicit floor or with outstandingly tall floor tend to wreck or collapse that is initiated in this floor. With increase in building height, this collision is often a bigger downside. Once building heights don't match, the roof of the shorter building could pound at the mid-height of the column of the taller one; this may be terribly dangerous.

C. Twisting

Just like once you sit on a rope swing - a wood cradle tied with fiber ropes to the sturdy branch of Associate in nursing recent tree. Buildings too square measure like these rope swings; merely that they are inverted swings. The vertical walls and columns square measure a bit like the ropes, and conjointly the ground is simply just like the cradle. Buildings vibrate back and forth throughout earthquakes. Buildings with over one level square measure like rope swings with over one cradle. Similarly, in buildings with unequal structural members (i.e., frames and/or walls) jointly the floors twist a couple of vertical axis and displace horizontally. Likewise, buildings, that have walls alone on two sides (or one side) and versatile frames on the other, twist once agitated at all-time low level. Twist in buildings, called torsion by engineers, makes utterly totally different components at an identical floor level to maneuver horizontally by different amounts. This induces loads of hurt at intervals the frames and walls on the side that moves loads of. It is best to cut back (if not absolutely avoid) this twist by making sure that buildings have symmetry in organize (i.e., uniformly distributed mass and uniformly placed lateral load resisting systems). If this twist cannot be avoided, special calculations got to be done to account for this further shear forces at intervals the fashion of buildings; the Indian unstable code (IS 1893, 2002) has provisions for such calculations.

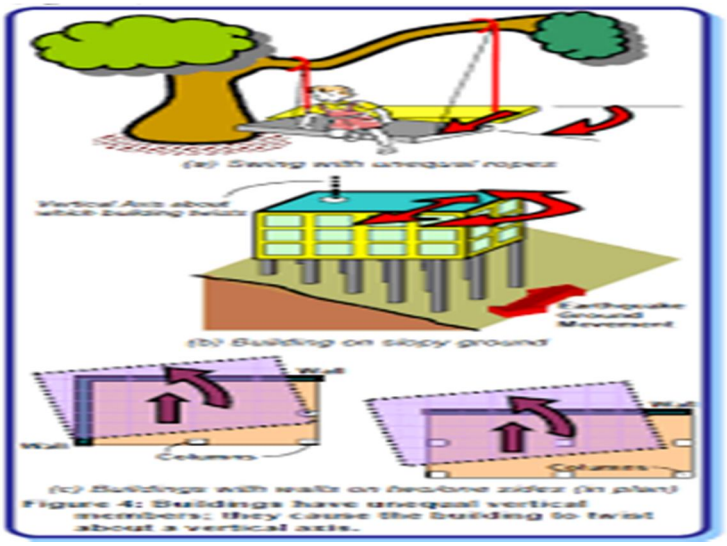


Fig. 2: Twisted Building

IV. GUIDELINES FOR RESISTANT BUILDINGS

In addition to the most earthquake style code 1893 the BIS (Bureau of Indian Standards) has revealed alternative relevant earthquake style codes for earthquake resistant construction.

A. Masonry Structures (IS-13828 1993)

1) Horizontal bands ought to be provided at support ,lintel and roof levels as per code
2) Providing vertical reinforcement at vital locations like corners, internal and external wall junctions as per code.
3) Grade of mortar ought to be as per codes such as for various earthquake zones.
4) Irregular shapes ought to be avoided each in set up and vertical configuration.
5) Quality assurance and correct acquisition should be ensured in the slightest degree value with none compromise.

©IJRASET: All Rights are Reserved

B. RCC Framed Structures (IS-13920)

1) In RCC framed structures the spacing of lateral ties ought to be unbroken nearer as per the code
2) The hook within the ties ought to be at one hundred thirty five degree rather than ninety degree for higher anchoragement.
3) The arrangement of lateral ties within the columns ought to be as per code and should be continued through the joint yet.
4) Whenever laps area unit to be provided, the lateral ties (stirrups for beams) ought to be at nearer spacing as per code.

The engineers don't arrange to build earthquake proof buildings that will not get broken even throughout the rare however sturdy earthquake; such buildings will be too sturdy and place along too expensive. Instead, the engineering intention is to make buildings earthquake resistant; such buildings resist the implications of ground shaking, although they're planning to urge broken severely however wouldn't collapse throughout the sturdy earthquake. Thus, safety of individuals and contents is assured in earthquake-resistant buildings, and thereby a disaster is avoided. This is a major objective of unstable vogue codes throughout the globe. The earthquake vogue philosophy is additionally summarized as follows:

a) Beneath minor however frequent shaking, the most members of the building that carry vertical and horizontal forces shouldn't be damaged; however, building elements that don't carry load could sustain fixable damage.
b) Beneath moderate however occasional shaking, the most members could sustain fixable harm, whereas the opposite elements of the building could also be damaged specified they will even ought to get replaced once the earthquake.
c) Beneath robust however rare shaking, the most members could sustain severe (even irreparable) harm, however the building shouldn't collapse.

V. INDIAN SEISMIC ZONES

The variable earth science at totally different completely different locations within the country implies that the chance of damaging earthquakes going down at different locations is different. Thus, a unstable zone map is needed to spot these regions. Supported the amount of intensities sustained throughout damaging past earthquakes, the 1970 version of the zone map divided Bharat into 5 zones – I, II, III, IV and V. the most changed Mercalli (MM) intensity of unstable shaking expected in these zones area unit V or less, VI, VII, VIII, and IX and better, severally. Elements of range boundary within the north and north-east, and the Kachchh space within the west were classified as zone V. The unstable zone maps area unit revised from time to time as a lot of understanding is gained on the earth science, the seismo-tectonics and also the unstable activity within the country. The Indian Standards provided the primary unstable zone map in 1962 that was later revised in 1967 and once more in 1970. The map has been revised once more in 2002 and it currently has solely four unstable zones – II, III, IV and V. The area unites falling in unstable zone I within the 1970 version of the map are unified with those of unstable zone II. Also, the unstable zone map within the land region has been changed. Madras currently comes in unstable zone III as against in zone II within the 1970 version of the map. This 2002 unstable zone map isn't the ultimate word on the unstable hazard of the country, and thence there will be no sense of self-complacency during this regard. The national unstable Zone Map presents a large-scale read of the unstable zones within the country. Native variations in soil kind and earth science can't be diagrammatic at that scale. Therefore, for necessary comes, like a significant dam or a nuclear energy plant, the unstable hazard is evaluated specifically for that web site. Also, for the needs of urban designing, metropolitan area unites are micro-zoned. Unstable micro-zonation accounts for native variations in earth science, native profile, etc.

VI. CONCLUSION

Technology is accessible to drastically mitigate the earthquake connected disasters. This can be confirmed by lowest harm usually with none loss of life once moderate to severe earthquake strikes developed countries, wherever as even a moderate earthquake cause's large devastation in developing countries as has been discovered in recent earthquakes. The explanation being that earthquake resistant measures area unit strictly followed in these countries wherever intrinsically tips area unit miserably desecrated in developing countries. The administration system is economical and effective in developed countries, and its not constant in developing countries – therefore the government ought to make sure the implementation of earthquake resistant style tips. Therefore it's here that civil engineers generally and structural engineers specifically have an excellent role to play in mitigating the sufferings caused by earthquake connected disasters. To make our structure safe against seismic loading, we've got to extend the share of steel. As we tend to continue higher aspect of earthquake zones, the deflection worth increase. The analysis of researches within the space of seismic effects on structures over past decades reveals that the performance of a building/structure is mostly evaluated on basis of assorted performance parameters within which major ones was Base shear, story drift, story displacement, period of time, and comparison of pushover curves. The performance is tormented by pure mathematics of structure, form of material, malleability parameters, loading sorts and zones of earthquake.

©IJRASET: All Rights are Reserved

Whenever a structure having completely different irregularity, it's necessary to analyze the building in numerous earthquake zones. From several past studies it's clear that impact of earthquake on structure is often minimizing by providing shear wall, base isolation etc. The lateral displacement of the building is reduced because the proportion of irregularity increases.

VII.FUTURE SCOPE

A. We should create various cost effective design solutions to make structures vulnerable to earthquakes even large earthquakes.
B. We should keep in mind that traditional structures in earthquake prone areas did include special construction features making them less vulnerable to disasters.
C. Challenges therefore are to create new techniques and to improve existing ones so that the performance of structures can be improved.


VIII. ACKNOWLEDGEMENT

I would like to thank first my project guide Prof. Sandeep Gaikwad for their guidance and invaluable words of advice, support and help given to me to do this review paper. Secondly, I would like to thank my parents and friends for their appreciation and belief in me.

REFERENCES

[1] Seismic Analysis of Buildings on Different Types of Soil with and without Shear Wall: A Review Runbahadur Singh1,a) Oshin Victor 2,b) and Shilpa Indra Jain3,c) 1, 2, 3 Department of Civil Engineering, Shri Vaishnav Vidyapeeth Viswavidyalaya, Indore (M.P) 453111, AIP Conference Proceedings 2158, 020007 (2019)
[2] Effects of the Seismic Vertical Component on Structural Behavior – An Analytical Study of Current Code Practices and Potential Areas of Improvement M. Dana, A. Cussen, Y.N. Chen, C. Davis, M. Greer, J. Houston, P. Littler and A. Roufegarinejad. Tenth U.S. National Conference on Earthquake Engineering Frontiers of Earthquake Engineering July 21-25, 2014
[3] Athens Journal of Technology and Engineering - Volume 5, Issue 3 – Pages 251-276 The Effect of Wind Loads on the Seismic Performance of Tall Buildings By Shilpa Nirma, Thilakarathna, Naveed Anwar, Pramin Noracha, Fawad Ahmed Naja
[4] Hindawi Advances in Civil Engineering Volume 2019, Article ID 1482736 Research Article Analysis of the Seismic Demand of High-Performance Buckling-Restrained Braces under a Strong Earthquake and Its Aftershocks Luqi Xie, Jing Wu , Qing Huang, and Chao Tong
[5] Chapter 1 Seismic Design Principles in Structural Codes
[6] Article On the Seismic Design of Structures with Tilting Located within Seismic Region Federico Valenzuela-Beltrán ,Sonia E. Ruiz , Alfredo Reyes-Salazar and J. Ramón Gaxiola-Camacho
[7] Structural Engineering and Geomechanics - Vol. II - Structural Design For Earthquake Resistance: Past, Present And Future - Rajesh P Dhakal
[8] Earthquake Resistant Buildings : design & construction pratices
[9] Earthquake Resistant Design of structures by Naresh Dixit P S on 24 February 2016.
[10] Some Concepts in Earthquake Behaviour of Buildings C.V. R. Murty, Rupen Goswami, A. R. Vijayanarayanan, Vipul V. Mehta
[11] Earthquake Resistant Engineering Structures V 203On the pushover analysis as a method for evaluating the seismic response of RC buildings P. P. Diotallevi & L. Landi Department of Civil Engineering DISTART, Bologna University, Italy
[12] Analysis in Seismic Provisions for Buildings: Past, Present and Future Peter Fajfar
[13] Earthquake-Resistant Design Concepts An Introduction to the NEHRP Recommended Seismic Provisions for New Buildings and Other Structures FEMA P-749 / December 2010
[14] NIST Special Publication 832, Volume 2 Earthquake Resistant Construction Using Base Isolation
[15] Earthquake Resistant Techniques and Analysis of Tall Buildings by kamalesh bhowmik on 14 november 2016.
[16] Review Paper on Seismic Analysis of Multistoried RCC Building Due to Mass Irregularity
[17] International Journal of Trend in Scientific Research and Development (IJTSRD) Volume 4 Issue 4, June 2020 ISSN: 2456 – 6470 Advanced Earthquake Resistant Building Techniques Victor Jebaraj R, Brightsingh Arulraj
[18] International Research Journal of Engineering and Technology (IRJET) ISSN: 2395-0056 p-ISSN: 2395-0072 Analysis of Multistoried Building in Different Seismic Zones with Different Soil Conditions Arun Babu , Ajisha
[19] IJSDR1606072 International Journal of Scientific Development and Research (IJSDR) review paper on seismic analysis of multistoried rcc building due to mass irregularity

©IJRASET: All Rights are Reserved

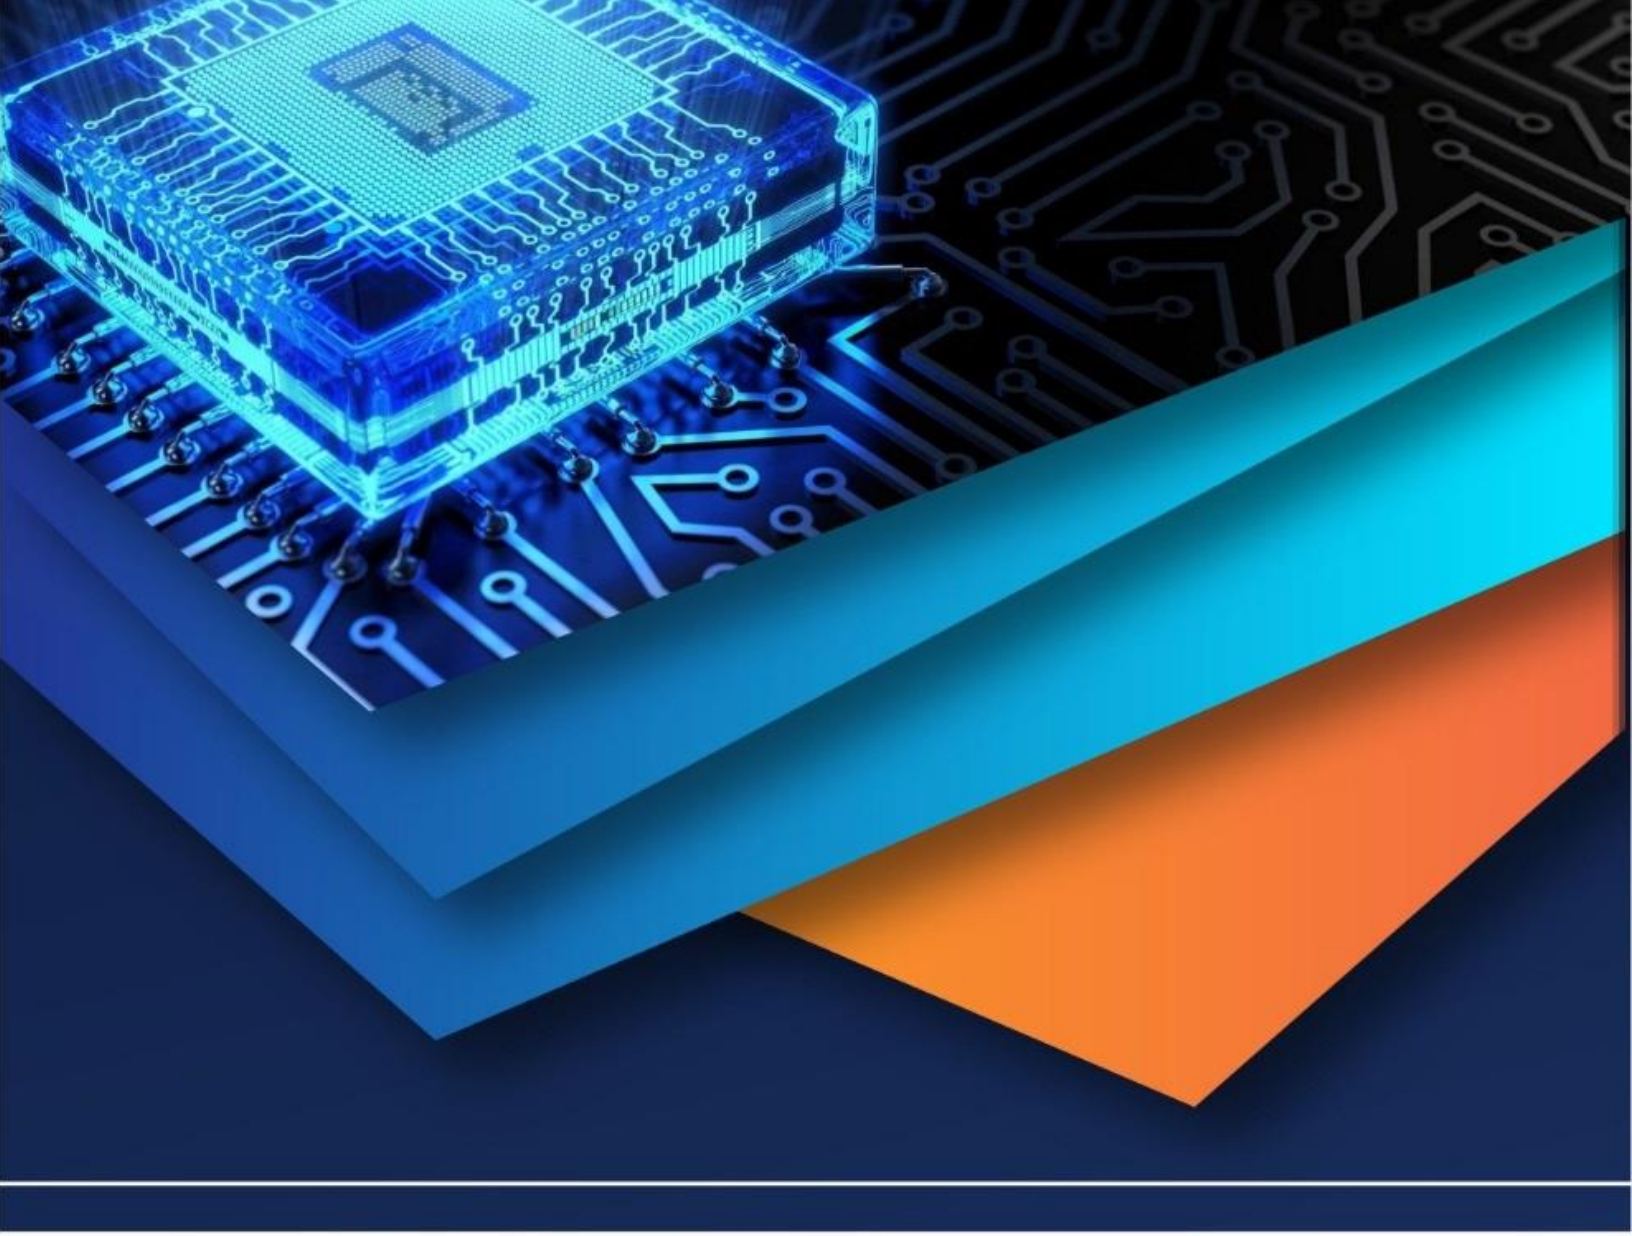

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)