



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 9      Issue: VII      Month of publication: July 2021**

**DOI: <https://doi.org/10.22214/ijraset.2021.37222>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Dielectric Relaxation and Thermodynamic Study of Caffeine-Chloroform Solution using TDR

A. R. Lathi

Associate Professor, A.E.S. College, Hingoli, Maharashtra, India

**Abstract:** The Complex permittivity of caffeine – Chloroform solution for different temperature and various concentrations have been measured in the range of 10MHz to 30 GHz using Time Domain Reflectometry. From complex permittivity spectra, Static dielectric constant ( $\epsilon_0$ ) and relaxation time ( $\tau$ ) were determined using nonlinear least square fit method. Using Eyring rate equation, for different molar concentration of caffeine Enthalpy of Activation  $\Delta H$  and Entropy of Activation  $\Delta S$  were determined.

**Keywords:** Caffeine, Static dielectric constant, relaxation time, thermodynamic parameter.

## I. INTRODUCTION

Caffeine is natural stimulant, most commonly found in tea, coffee. It works as stimulating brain and nervous system [1]. In 1827 a scientist named Oudry discovered caffeine in tea [2]. Caffeine is colourless compound in silky needles. Caffeine is nitrogenous compound. It is used for nerve and heart stimulant as a medicine [3]. Caffeine is extracted using chloroform from tea. Extraction process depends upon plants and solvent selected [4]. The pure caffeine is extremely toxic and must be handled with mask and gloves.

The present paper reports the static dielectric constant ( $\epsilon_0$ ), relaxation time ( $\tau$ ), Enthalpy and Entropy of activation for different molar concentration in the frequency range 10 MHz to 30GHz using Time Domain Reflectometry.

## II. EXPERIMENTAL DETAILS

### A. Material

Caffeine was purchased from OTTO chemie India. Using chloroform as a Solvent, different concentrations in molar fraction were prepared.

### B. Experimental Setup and Procedure

The Tektronics model No. DSA8200 sampling oscilloscope with 30 GHz bandwidth with TDR module 80E08 with Step generator unit was used. The experimental setup is as shown in Fig. 1

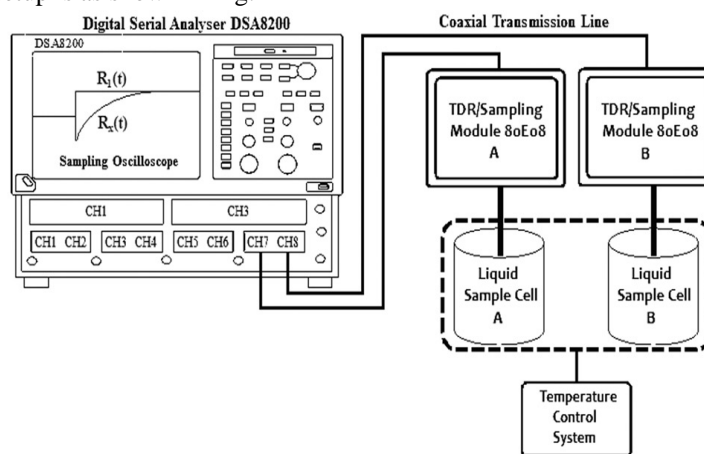


Fig. 2 Experimental setup of TDR

The complex permittivity spectra were studied using TDR method [5-7]. The complex permittivity of solution was observed in frequency range 10 MHz to 30 GHz at different temperature.

### III. RESULT AND DISCUSSION

The time dependent data were processed to obtain complex reflection coefficient Spectra  $\rho^*(\omega)$  over the frequency range 10 MHz to 30 GHz using fourier transformation [8,9] as

$$\rho^*(\omega) = \frac{e^{-j\omega t}}{j\omega d q(\omega)} \quad \text{-- (1)}$$

The complex permittivity spectra  $\varepsilon^*(\omega)$  were obtained from  $\rho^*(\omega)$  by applying a bilinear Calibration method [10].

The Caffeine – Chloroform solution at all molar concentration could fit Debye type dispersion [11]. Experimental values of  $\varepsilon^*(\omega)$  were fitted to Debye equation.

$$\varepsilon^*(\omega) = \varepsilon_{\infty} + \frac{\varepsilon_0 - \varepsilon_{\infty}}{(1 + j\omega\tau)} \quad \text{-- (2)}$$

#### A. Static Dielectric Constant ( $\varepsilon_0$ ) and Relaxation Time ( $\tau$ )

Using non linear least square fit method [12] with Debye equation 2, Static dielectric constant ( $\varepsilon_0$ ) and relaxation time ( $\tau$ ) are obtained. These dielectric parameters for different temperatures and different concentration of caffeine are listed in table 1.

Table 1 (A) Dielectric relaxation parameters for solution of Caffeine – Chloroform at different concentration at temperature 25°C

25°C			
Concentration of Caffeine in Molar (M)	$\varepsilon_0$	$\tau$ (ps)	$\varepsilon_{\infty}$
0	4.82(1)	6.87(4)	2.00(1)
0.1	4.97(1)	7.15(5)	2.00(1)
0.2	4.96(1)	7.9(5)	2.00(1)
0.3	4.92(1)	8.65(8)	2.00(1)
0.4	5.03(1)	8.94(9)	2.00(1)
0.5	5.07(2)	9.34(11)	2.00(1)

Table 1 (B) Dielectric relaxation parameters for solution of Caffeine – Chloroform at different concentration at temperature 20°C

20°C			
Concentration of Brucine in Molar (M)	$\varepsilon_0$	$\tau$ (ps)	$\varepsilon_{\infty}$
0	4.98(6)	7.33(11)	2.22(7)
0.1	5.08(1)	7.56(5)	2.00(1)
0.2	5.08(8)	8.43(4)	2.00(1)
0.3	5.08(1)	8.23(6)	2.00(1)
0.4	5.21(1)	8.42(9)	2.00(1)
0.5	5.20(2)	9.91(12)	2.00(1)

Table 1 (C) Dielectric relaxation parameters for solution of Caffeine – Chloroform at different concentration at temperature 15°C

15°C			
Concentration of Brucine in Molar (M)	$\varepsilon_0$	$\tau$ (ps)	$\varepsilon_{\infty}$
0	5.53(2)	5.83(6)	2.02(3)
0.1	5.52(1)	6.37(2)	2.00(1)
0.2	5.53(8)	6.95(3)	2.00(1)
0.3	5.55(1)	7.78(4)	2.00(1)
0.4	5.68(2)	8.39(15)	2.00(1)
0.5	5.42(2)	8.38(12)	1.88(1)

Variation of static dielectric constant ( $\epsilon_o$ ) with molar concentration of caffeine – chloroform at various temperature is as shown in fig.2

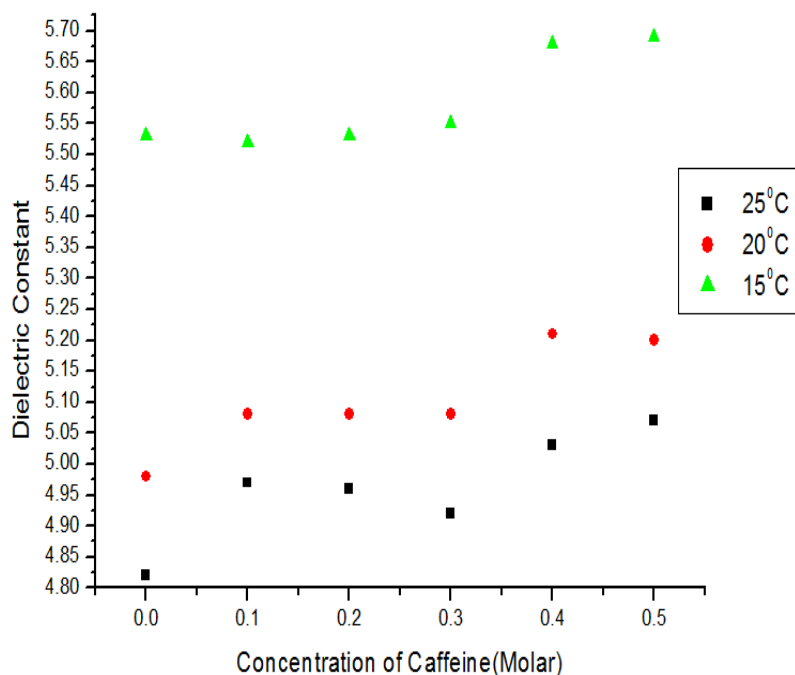


Fig. 2 Variation of static dielectric constant with molar concentration of Caffeine - Chloroform at various temperatures

Variation of relaxation time with temperature at different concentration is shown in fig.3

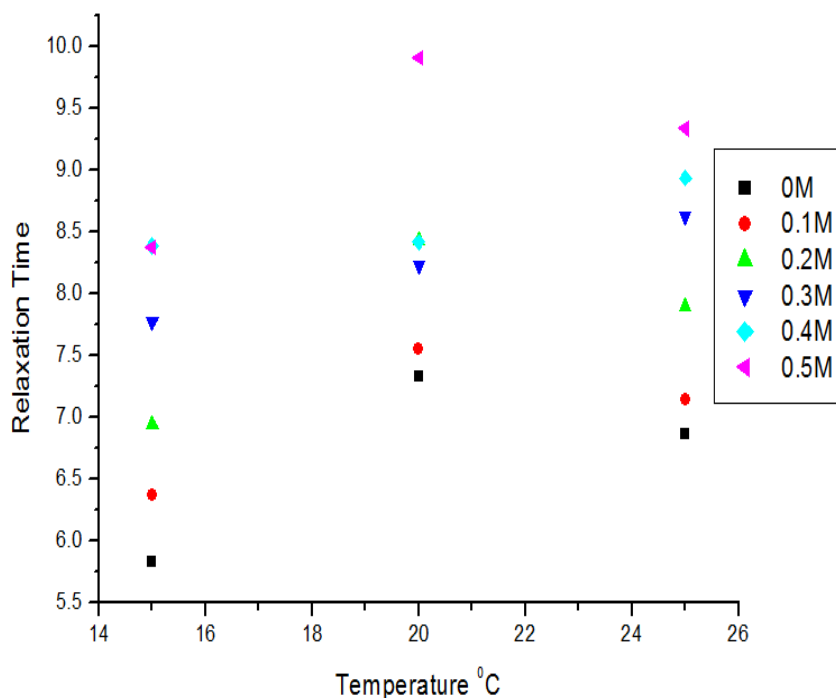


Fig. 3 Variation of relaxation time with molar concentration of Caffeine - Chloroform at various temperatures

### B. Determination of Thermodynamic Parameters

Using Eyring equation, the energy of activation of relaxation process can be determined from relaxation time ( $\tau$ ), the Enthalpy of activation ( $\Delta H$ ) and Entropy of activation ( $\Delta S$ ) are calculated from Eyring rate equation[13,14].

$$\tau = \frac{h}{kT} \exp \frac{\Delta H - T\Delta S}{RT} \quad \text{-- (3)}$$

The Arrhenius plot of  $\log(\tau T)$  versus  $1000/T$  is as shown in fig.4

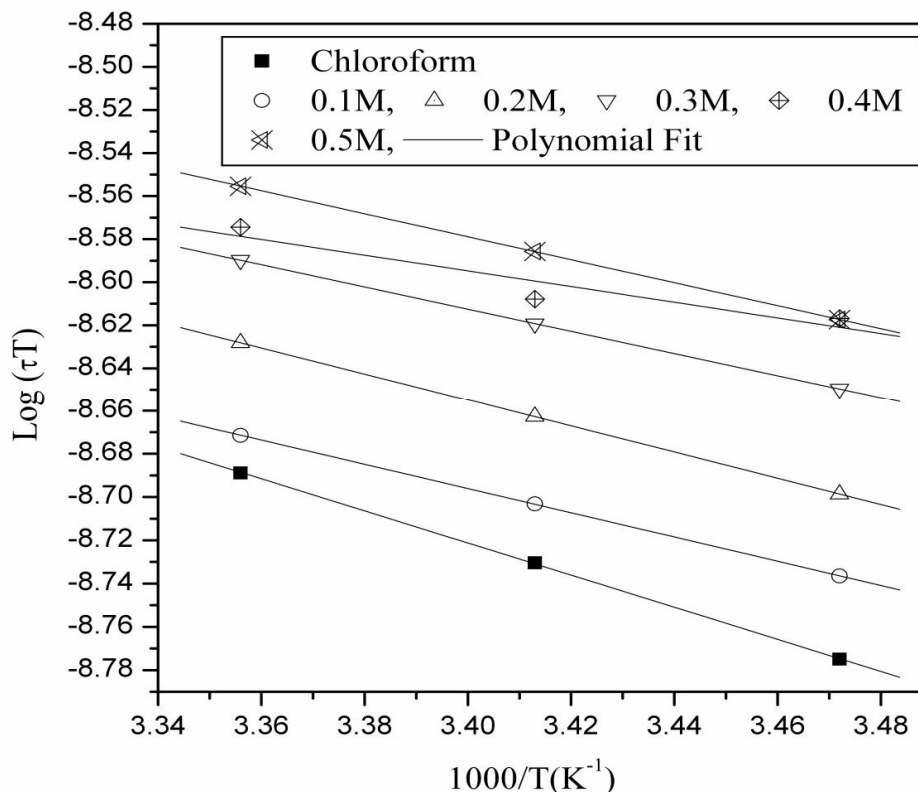


Fig. 4 The Arrhenius plot of  $\log(\tau T)$  versus  $1000/T$  for Caffeine – Chloroform solution

The values of Enthalpy of activation ( $\Delta H$ ) and Entropy of activation ( $\Delta S$ ) are obtained from Eyring equation. These values are reported in table 2

Table 2 – Enthalpy and Entropy of activation for Caffeine - Chloroform solution

Concentration of Caffeine (M)	Enthalpy of Activation $\Delta H$ (KJ mole <sup>-1</sup> )	Entropy of Activation $\Delta S$ (J mole <sup>-1</sup> J <sup>-1</sup> )
0M	-14.26(11)	0.150(4)
0.1 M	-10.76(9)	0.161(3)
0.2 M	-11.68(10)	0.157(3)
0.3 M	-9.86(1)	0.163(3)
0.4 M	-6.94(2)	0.173(8)
0.5 M	-10.26(9)	0.161(3)

### IV. CONCLUSION

Static dielectric constant ( $\epsilon_o$ ) increases with increase concentration of Caffeine, It also increases with decreases in temperature. Relaxation time ( $\tau$ ) increases with increase in concentration of Caffeine. Enthalpy of activation ( $\Delta H$ ) is negative i.e. heat energy is released. Such reactions are called Exothermic reaction [15].

## V. ACKNOWLEDGEMENT

Author A.R. Lathi thanks to J.E.S. College, Jalna and School of Physical Sciences, Swami Ramanand Teerth Marathwada University, Nanded.

## REFERENCES

- [1] Nehlig A, Daval JL, Debry, G "Brain Research – Reviews", Vol 17, issue 2, May-August 1992, pp 139-170.
- [2] Bennett A. Weinberg, Bonnie K. Bealer, 'The world of Caffeine' Rotledge Pub., Newyork & London.
- [3] O. P. Agrawal, 'Organic Chemistry Natural Products Vol. I' Krishna Prakashan Meeru
- [4] El – Din, A. M. M. N. and S. H. Abu-Raiia, J. Food Sci., 23, 241-245 (1995).
- [5] R.H. Fattepur, M.T. Hosamani, D.K. Deshpande, J. chem. Phys. 101(11), 9956, 1994.
- [6] A.C. Kumbharkhane, S.M. Puranik, S.C. Mehrotra, J.chem. soc. Faraday Trans. 87(10), 1569, 1991.
- [7] R.B. Talware, P.G. Hudge, Y.S. Joshi and A.C. Kumbharkhane. J-Physical and chem. Of Liquids, 2011, 1-11, I first.
- [8] H. A. Samulon, "Spectrum Analysis of transient response curves" Proc. IRE. 39, 175 (1951).
- [9] C. E. Shannon, "Communication in the Presence of Noise", Proc. IRE. 37, 10 (1949).
- [10] R.H. Cole, J.G. Berberian, S. Mashimo, G. Chryssikos, A. Burns and E. Tombari, J. Appl. Phys. 66(2), 793, (1989).
- [11] P. Debye, Polar molecules (The chemical catalogue company, New york) (1929).
- [12] P.R. Bevington, Data Reduction and Error Analysis for the Physical Sciences (McGraw- Hill New York, 1969)
- [13] H. Eyring, J. chem. Phys. 4, 283 (1926).
- [14] J.B. Hasted "Aqueous dielectric" Chapman and Hall, London (1973).
- [15] B.S. Bahl, G.D. Tuli, Arun Bahl, "Essentials and Physical chemistry" S. Chand and Company Ltd., New Delhi.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)