



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 2

Issue: IV

Month of publication: April 2014

DOI:

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Investigate the Performance of Mobile Ad Hoc Routing Protocols under Mobility Model Using OPNET

Mohit Kakkar, Jasbir Singh Saini

Department of Computer Science Engineering
GNDEC, Ludhiana

Abstract: A Mobile Ad-Hoc networks (MANETs) is collection of autonomous wireless nodes that are arbitrarily located which move dynamically by changing its network connectivity without the use of any pre-existent infrastructure. The behavior of ad-hoc network is characterized as non-deterministic (interference, multipath, hidden and exposed node problem make wireless channel very difficult to predict). Its routing protocol should not only capable of finding the optimized routes between the source and destination, but should also be adaptive in terms of changing load conditions of the network, changing state of the nodes and changing state of the environment. In this paper we evaluate the performance the performance of ad hoc routing protocols i.e TORA (Temporary Ordered Routing Algorithm), OLSR (Optimized Link State Routing) and GRP (Gathering Based Routing Protocol) under Pathway Mobility model by undertaking three parameters such as delay, load and throughput.

Keywords- MANET, TORA, OLSR, GRP, OPNET, Pathway and Overlap Mobility Model

I.INTRODUCTION

A MANET is a multi hop ad-hoc wireless network and self configuring network of mobile routers connected by wireless links (sometimes called a Mobile Mesh Network) the union of which forms an arbitrary topology. Interest in MANETs is due to the promise of ubiquitous connectivity beyond that currently being provided by the Internet. Firstly, MANETs are easily deployed allowing a plug-and-communicate method of networking. Secondly, MANETs do not need central management so used in military operations where units are moving around the battle field and a central field cannot be used for synchronization [1]. Thirdly, MANETs need no infrastructure, thus reducing the cost of establishing the network so useful in disaster recovery where there is not enough time or resources to install and configure an infrastructure. The growth of technology and the increase in wi-fi capable laptops, mobile

phones, MP3 players and other small portable devices has created a genuine reason for the population of MANET [2].

In mobile ad hoc network, nodes do not rely of any existing infrastructure. Instead, the nodes themselves form the network and communicate through means of wireless communications. Mobility causes frequent topology changes and may break existing paths. Routing protocols for ad hoc networks can be classified into two major types: proactive and on-demand. Proactive protocols attempt to maintain up-to-date routing information to all nodes by periodically disseminating topology updates throughout the network. On demand protocols attempt to discover a route only when a route is needed.

The general problem of modelling the behaviour of the nodes belonging to a mobile network has not a unique and straightforward solution. Mobility and disconnection of mobile hosts pose a number of problems in designing proper routing schemes for effective communication between any source and destination.

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND
ENGINEERING TECHNOLOGY (IJRASET)

In Pathway Mobility Model, Initially, the nodes are placed randomly on the edges of the graph. Then for each node a destination is randomly chosen and the node moves towards this destination through the shortest path along the edges. Upon arrival, the node pauses for T time and again chooses a new destination for the next movement. This procedure is repeated until the end of simulation.

II. SIMULATION SETUP

We check these protocols by three parameters such as throughput, delay and load. We used two scenarios i.e. 35 nodes, and 75 nodes.

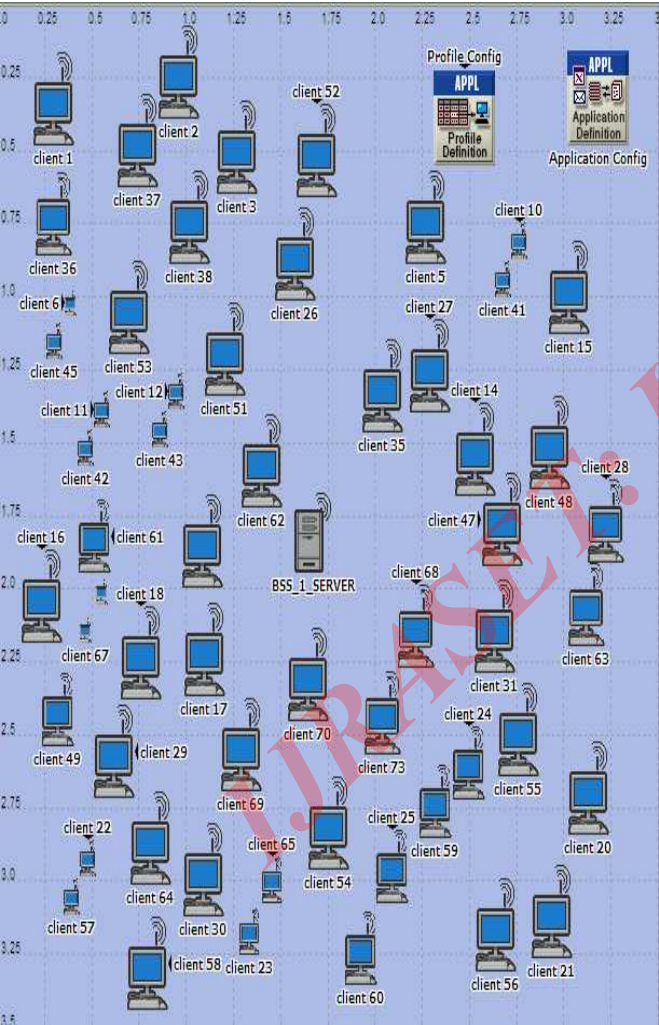


Fig.1.1. Simulation Nodes (Pathway Model)

Parameter	Value
Simulator	Opnet 14.5
Area	3.5×3.5 Km
Wireless MAC	802.11
Number Of Nodes	35, 75
Mobility Model	Pathway Mobility
Data Rate	11 Mbps
Routing Protocols	TORA,OLSR and GRP
Simulation Time	300 seconds

Table 1.1: Simulation parameters

III. RELATED WORK

D geetha et al.[4] in this paper an attempt has been made to compare the performance of two prominent on demand reactive routing protocols for MANETs: Temporally Ordered Routing Algorithm (TORA), Dynamic Source Routing (DSR) protocols. This subjected the protocols to identical loads and environmental conditions and evaluates their relative performance with respect to quantitative metrics; throughput, average delay, packet delivery ratio and routing load. From the detailed simulation results and analysis of presented, we use NS-2 simulator for simulation of DSR and TORA protocol and variation occurs in mobility of packets, time interval between

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND ENGINEERING TECHNOLOGY (IJRASET)

the packets sent and packet size of packets sent in throughout the protocols.

N. Adam et al.[5] in their paper described the formal evaluation of performances of three types of MANET routing protocols when the node density or the number of nodes varies. The protocols included the Dynamic Source Routing (DSR), Ad Hoc On-demand Distance Vector (AODV) and Temporally Ordered Routing Algorithm (TORA) protocol. The analysis had been done theoretically and through simulation using an Optimized Network Engineering Tools (OPNET) Modeler. Using OPNET Modeler software, these performances had been analyzed by the following metrics: packet delivery ratio, end-to-end delay, packet dropped, routing load and end-to-end throughput.

S. R. Biradar et al.,[6] have compared the performance of two on-demand routing protocols for mobile ad hoc networks Dynamic Source Routing (DSR) and Ad Hoc On-Demand Distance Vector Routing (AODV). They demonstrate that even though DSR and AODV both are on-demand protocol, the differences in the protocol mechanics can lead to significant performance differentials. The performance differentials are analyzed using varying mobility.

IV. RESULTS AND DISCUSSION

1. THROUGHPUT:

It is the total size of useful packets that received at all the destination nodes. It is the total number of bits (in bits/sec) forwarded from wireless LAN layers to higher layers in all WLAN nodes of the network.

It is observed that:

- a) OLSR outperforms both TORA and GRP in overall performance for both models pathway and overlap.
- b) As the number of nodes increase throughput for OLSR also increases. It is due to the availability of routing tables before the communication commences. On the other hand, TORA and GRP has to find the path spontaneously.
- c) In case of TORA considerable time overhead occurs due to the Route creation process where a source broadcasting and destination reply establishes an acyclic graph.

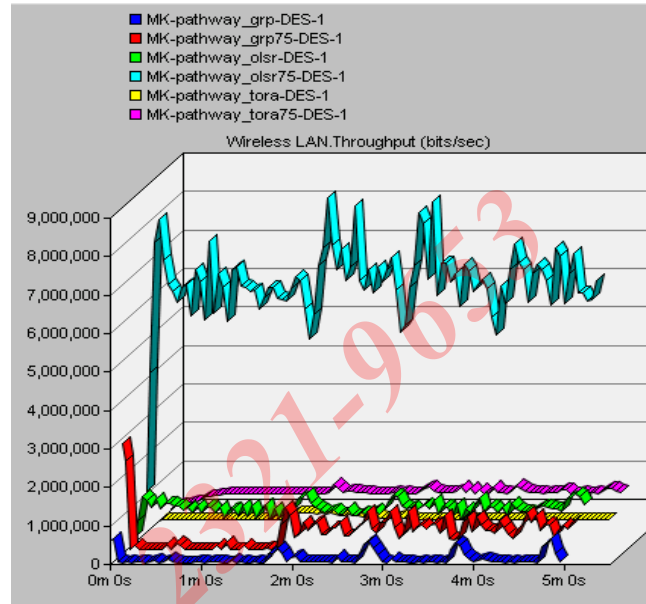


Fig. 1.2. Throughput (Pathway Model)

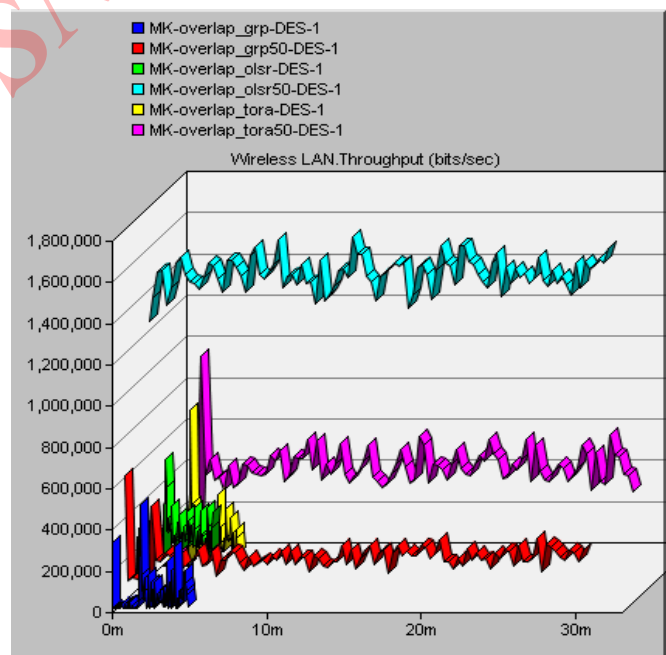


Fig. 1.3. Throughput (Overlap Model)

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND ENGINEERING TECHNOLOGY (IJRASET)

2. Load:

It is the total data traffic (in bits/sec) received by the entire WLAN. Load represents the capacity and efficiency of network. More load means more capable is network of handling the data traffic.

It is observed that:

- OLSR sends more data information as compared to TORA and GRP because in OLSR routing information is pre-maintained that reduces the amount of control information.
- GRP being a hybrid protocol GRP Shows an average performance with unpredictable changes.
- TORA reactive protocol is busier in maintaining control information than other two because every time data is to be sent, first the route has to be established.

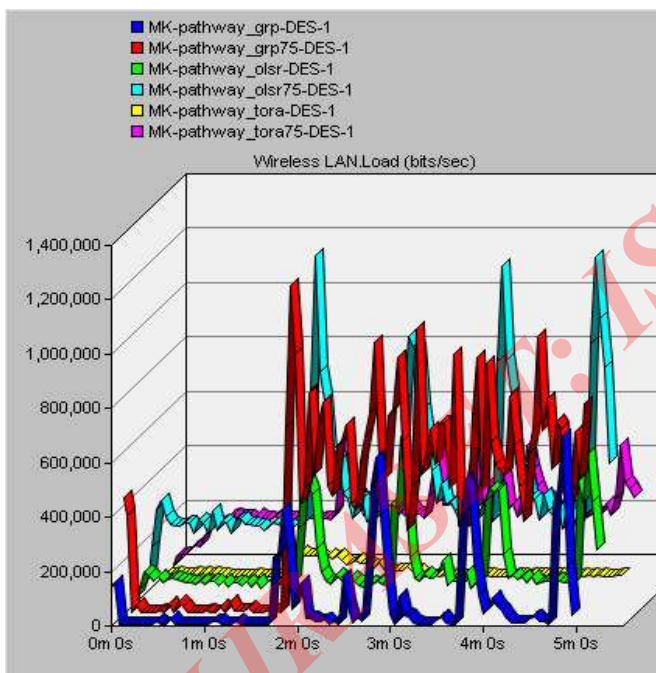


Fig. 1.3. Load (Pathway Model)

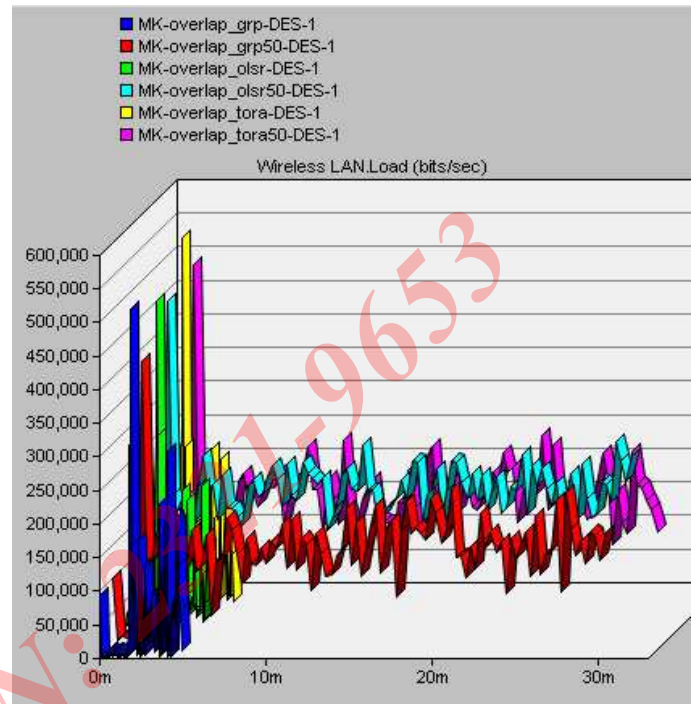


Fig. 1.4. Load (Overlap Model)

3. Delay:

The packet End-to-End delay is the time of generation of a packet by the source up to the destination reception. So this is the time that a packet takes to go across the network. This time is expressed in sec. Hence all the delays in the network are called packet end-to-end delay, like buffer queues and transmission time. Following figure provides a comparative analysis of Delay for GRP, TORA and OLSR for 25 and 75 nodes density.

It is observed that:

- GRP has the minimum delay of all three protocols. Whereas TORA suffers from largest time overhead.
- OLSR delay lies in between TORA and GRP.
- We observe increase in delay as the number of nodes increase and this is particularly significant in case of TORA. For GRP this increase is relatively small and for OLSR this is medium.

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND ENGINEERING TECHNOLOGY (IJRASET)

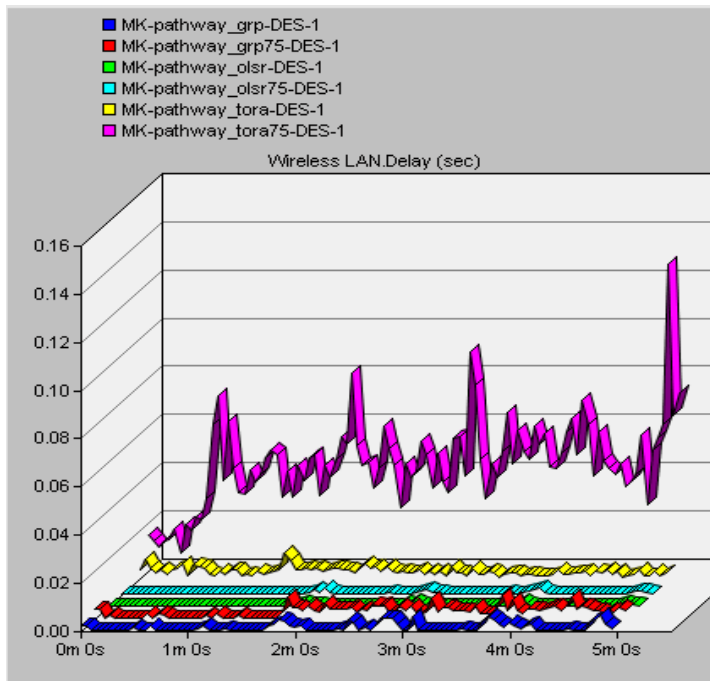


Fig.1.4 Delay (Pathway Model)

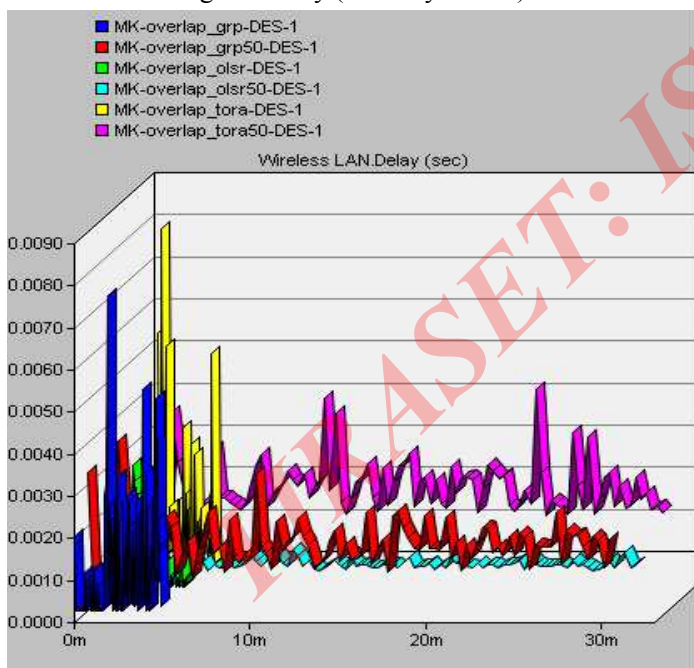


Fig.1.5 Delay (Overlap Model)

V. CONCLUSION

We have evaluated the three performance measures i.e. Load, End-to-end delay and Throughput with Pathway mobility model while taking 35 and 75 as the node density. From the extensive simulation results, it is found that OLSR shows the best performance in terms of throughput, and GRP in Load and Delay. Reactive protocol lacks behind Hybrid and Proactive protocols. The study of these routing protocols shows that the OLSR is better in MANET according to our simulation results but it is not necessary that OLSR perform always better in all the networks, its performance may vary by varying the network. At the end we came to the point from our simulation and analytical study that the performance of routing protocols vary with network and selection of accurate routing protocols according to the network, ultimately influence the efficiency of that network in magnificent way. In future, We will compare the performance of Pathway mobility model with Overlap mobility model for these three routing protocols and analyse the changes taking place in varying node density.

VI. REFERENCES

- [1] Bai, Fan, Helmy, Ahmed (2006) "A Survey of Mobility Models in Wireless Adhoc Networks." (Chapter 1 in Wireless Ad-Hoc Networks. Kluwer Academic. 2006).
- [2] S. Das, C. E. Perkins, E. Royer, "Ad Hoc On Demand Distance Vector (AODV) Routing", IETF Draft, June 2002.
- [3] S. Mohapatra, P. Kanungo "Performance analysis of AODV, DSR, OLSR and DSDV Routing Protocols using NS2 Simulator" International Conference on Communication Technology and System Design, 2011.
- [4] Amandeep Verma, Dr. Manpreet Singh "Performance Analysis of Routing Protocols for Ad hoc Networks" Int. J Comp Sci. Emerging Tech Vol-2 No 4 August, 2011.

INTERNATIONAL JOURNAL FOR RESEARCH IN APPLIED SCIENCE AND ENGINEERING TECHNOLOGY (IJRASET)

- [5] Kuldeep Vats, Monika Sachdeva, Dr. Krishan Saluja "Simulation and performance Analysis of OLSR, GRP, DSR Routing Protocol using OPNET "International Journal of Emerging trends in Engineering and Development Issue 2, Vol.2 (March-2012) .
- [6] D GEETHA , T SARIKA "Performance Analysis of TORA & DSR Routing Protocols in Mobile Ad-hoc Networks" International Journal of Electronics and Computer Science Engineering, 2010.
- [7] N. Adam, M.Y. Ismail, J. Abdullah "Effect of Node Density on Performances of Three MANET Routing Protocols" 2010 International Conference on Electronic Devices, Systems and Applications (ICEDSA2010).
- [8] S. R. Biradar, Hiren H D Sarma, Kalpana Sharma, Subir Kumar Sarkar , Puttamadappa C "Performance Comparison of Reactive Routing Protocols of MANETs using Group Mobility Model" International Conference on Signal Processing Systems, 2009.
- [9] Ashish Bagwari, Raman Jee, Pankaj Joshi, Sourabh Bisht "Performance of AODV Routing Protocol with increasing the MANET Nodes and its effects on QoS of Mobile Ad hoc Networks" International Conference on Communication Systems and Network Technologies, 2012.
- [10] Arindrajit Pal, Jyoti Prakash Singh, Paramartha Dutta, Paulomi Basu and Doyel Basu "A Study on The Effect of Traffic Patterns on Routing protocols in Ad-hoc Network Following RPGM Mobility Model" International Conference on Signal Processing, Communication, Computing and Networking Technologies (ICSCCN 2011), 2011.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)