



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 4      Issue: VII      Month of publication: July 2016**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call:  08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# **Design Construction and Performance evaluation of Solar operated Dual purpose Refrigerator using thermoelectric module**

Pradeep G. Bokde<sup>1</sup>, Y. M. Jibhakate<sup>2</sup>

<sup>1</sup>Mechanical Engineering Department, KITS College of Engineering, Ramtek, Nagpur

<sup>2</sup>Asso. Prof. Mechanical Engineering Department, KITS College of Engineering, Ramtek, Nagpur

**Abstract—** This project outlines the implementation of photovoltaic driven refrigerator cum heating system powered from solar panels with a battery bank. Different from conventional refrigeration systems thermoelectric refrigeration based on the Peltier effect, does not require any compressor, expansion valves, absorbers, condensers or solution pumps. Moreover, it does not require working fluids or any moving parts, which is friendly to the environment and results in an increase in reliability. It simply uses electrons rather than refrigerants as a heat carrier. Nowadays, thermoelectric refrigeration devices have a distinct place in medical applications, electronic applications, scientific equipment and other applications, where a high-precision temperature control is essential.

The device is powered by a Non-conventional energy resource, here PV Cells. The difference between the existing methods and this model is that a thermoelectric cooling system refrigerates without use of mechanical devices (Conventional Condenser fins and Compressor) and without refrigerant too. Since the Peltier module is compact in size, refrigeration or heating system can be designed according to the user's requirements (in desired size and shape).

**Keywords—** Solar Panel, Dual Purpose Refrigerator and Thermoelectric Module.

## **I. INTRODUCTION**

The current tendency of the first world is to look at renewable energy resources as a source of energy. This is done for the following two reasons firstly the lower quality of life due to air pollution and secondly due to the pressure of ever increasing world population puts on our natural energy resources. From these two facts comes the realization that the natural energy resources available will not last indefinitely. Therefore, the ideal solution would be to use some type of renewable energy resource to provide these houses with energy without an expensive electrical grid connection.

Thermoelectric systems are solid-state heat devices that either convert heat directly into electricity or transform electric power into thermal power for heating or cooling. Such devices are based on thermoelectric effects involving interactions between the flow of heat and electricity through solid bodies. These phenomena are called Seebeck effect and Peltier effect, can be used to generate electric power and heating or cooling. Solar energy is the most low cost, competition free, universal source of energy as sun shine's throughout. This energy can be converted into useful electric energy using photovoltaic technology. The steady state reduction of price per peak watt and simplicity with which the installed power can be increased by adding panels are attractive features of PV technology.

Thermoelectric refrigeration replaces the three main working parts with a cold junction, a heat sink and a DC power source. The refrigerant in both liquid and vapor form is replaced by two dissimilar conductors. The cold junction (evaporator surface) becomes cold through absorption of energy by the electrons as they pass from one semiconductor to another instead of energy absorption by the refrigerant as it changes from liquid to vapor. The compressor is replaced by a DC power source which pumps the electrons from one semiconductor or another. A heat sink replaces the conventional condenser fins, discharging the accumulated heat energy from the system. The difference between two refrigeration methods is that a thermoelectric cooling system refrigerates without use of mechanical devices except perhaps in the auxiliary sense and without refrigerant.

## **II. PRINCIPLE OF SOLAR POWER GENERATION**

The principle of power generation behind solar cell consists of the utilization of the photovoltaic effect of semiconductors. When such a cell is exposed to light, electron-hole pairs are generated in proportion to the intensity of the light. Solar cells are made by bonding together p-type and n-type semiconductors. The negatively charged electrons move to the n type semiconductor while the

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

positively charged holes move to the p-type semiconductor. They collect at both electrodes to form a potential. When the two electrodes are connected by a wire, a current flows and the electric power thus generated can be transferred to an outside application.

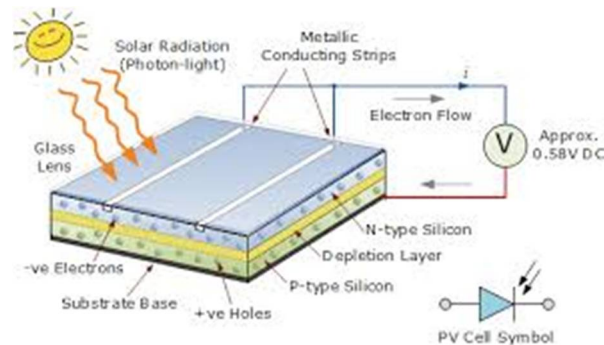


Fig. 1 Principle of PV Cell

### III. THERMOELECTRIC MODULE

It consists of two or more elements of n and p-type doped semiconductor material. That is connected electrically in series. These semiconductor materials are mounted between two ceramic substrates. In p-material charge carriers are holes and in n-material charge carriers are electrons. Both these p and n-type materials are made up of Bismuth Telluride. N-type material is doped in such a way that it will have an excess of electrons and P-type material is doped in such a way that it will have a deficiency of electrons. As the electron moves from the lower energy state i.e. from p-material to a higher energy state in i.e. n-material energy is absorbed which resulting in cooling effect. As the electron moves from the higher energy state i.e. from n-material to a lower energy state in i.e. p-material energy is released which resulting in heating effect.

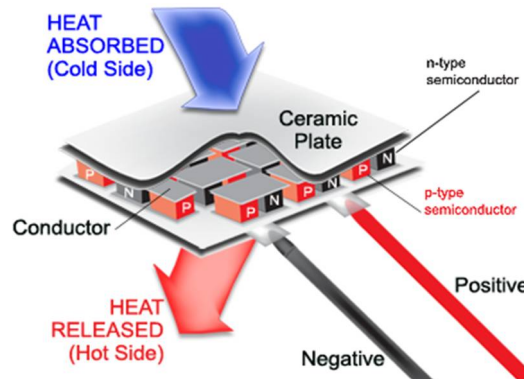


Fig. 2 Thermoelectric module

### IV. THERMOELECTRIC MODULE SPECIFICATIONS

Model: TEC1-12706

- A. Size: 40mm x 40mm x 4mm
- B. Operates from 0~15.2 V DC and 0~6 A in a good condition with heat sink.
- C. Current will rise to 4 A.
- D. Operating Temperature limit: -30°C to 70°C
- E. Max power consumption: 60 Watts

Heat sink = 90mm×90mm×25mm

Cooling fan = 90mm×90mm×25mm

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)



Fig. 3 Thermoelectric module with Heat sink and Cooling fan

### V. EXPERIMENTAL SETUP



Fig. 4 Experimental setup diagram

The construction set up for this system requires following parts:-

- A. Solar panel
- B. Charge controller
- C. Battery
- D. Thermoelectric module
- E. Heat sink
- F. Cooling fan
- G. Cooling and Heating compartment

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

### VI. WORKING



Fig. 5 Thermoelectric refrigerator

Firstly constructing a cooling compartment of size  $230\text{mm} \times 155\text{mm} \times 155\text{mm}$  [L×W×H] and two heating compartment of size  $230\text{mm} \times 155\text{mm} \times 185\text{mm}$  [L×W×H]. These three compartments are made by using 1mm aluminum sheet. The cooling and first heating compartments are separated by providing 30mm insulation in between them. The second heating compartment is placed on left side of first heating compartment, which will be separated by providing insulation between them. Foam insulation is used as insulation. The outer surface of cooling and two heating compartment is surrounded by same 50mm foam insulation. The overall outer surface of thermoelectric refrigerator is surrounded by metal sheet. So in this way thermoelectric refrigerator is constructed.

Figure shows the thermoelectric refrigerator. Solar panel is the most important part of this system. Solar panel consists of a silicon semiconductor material when this material absorbs light energy it strikes atom to flow electron through the material. This flow of electron is known as electric current. This electric current is stored in the battery which connected to solar panel by means of wire and in between these there is a charge controller which restricts the flow of energy from battery to solar panel during night time or cloudy days.

From battery this electric current is supplied to thermoelectric module, cooling and exhaust fan. When an electric current is supplied to the module which present in cooling compartment then it will absorb the heat from component [liquid pouch] which placed in cooling compartment and liberate these heat to the atmosphere with the help of heat sink. So in this way cooling will take place inside the cooling compartment. Cooling fan is provided over the surface of heat sink which blows the air over the surface of heat sink in order to cool it.

The heat which is going to be waste in the environment is used for heating purpose in heating compartment. This can be done by placing thermoelectric module at the interface between cooling and heating compartment. The heat sink and cooling fan is placed inside the heating compartment as shown in figure is used for generating the heat in heating compartment. So in this way heating will take place inside the first heating compartment. The temperature in the first heating compartment is very high which affects the cooling inside the cooling compartment. So in order to remove that high amount of heat second heating compartment is constructed which is place on left side of first heating compartment. At the interface between first and second heating compartment exhaust fan is provided which extract the heat from first heating compartment and stored in second heating compartment. So in this way heating can also be done in second heating compartment.

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

### VII. OBSERVATION TABLE

For Cooling: Atmospheric condition: 33.2°C

Time [min]	Cooling compartment temperature [°C]
0	33.2
5	27.7
10	24.7
15	23.2
20	22
25	21.2
30	20.4
35	19.7
40	20.9
45	19.1
50	17.9
55	17.4
60	17
65	16.6
70	16.2
75	15.9
80	15.6
85	15.3
90	15

For Heating: Atmospheric condition: 35°C

Time [min]	First Heating compartment temperature [°c]	Second Heating compartment temperature [°c]	Heat sink temperature [°c]
0	35	35	35
5	38.7	35.5	57.5
10	43	36.6	64
15	47	38.2	67.3
20	50.8	40	70.8
25	54.3	41.5	72
30	57.3	43.2	73.6
35	60	44.7	78

### VIII. CALCULATION

When the designed solar thermoelectric refrigerator was tested, it was found that the inner temperature of the refrigeration area was reduced from 33.2°C to 15°C in approximately 90 min, a difference of 18.2°C. Below is an example, which shows how the coefficient of performance of the refrigerator [COP] was calculated. The refrigerator is used to cool a 0.3Liter of water from 33.2°C to 15°C in approximately 90 min.

Properties of water are:-

$$\text{Density} = 1000 \text{ Kg/m}^3$$

$$\text{Specific heat} = 4.186 \text{ KJ/KgK}$$

Mass of water,

$$M = \rho \times V$$

$$= 1000 \times 0.3 \times 0.001$$

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

$$= 0.3 \text{ Kg}$$

Cooling capacity

$$\begin{aligned} Q &= M \times C \times \Delta T \\ &= 0.3 \times 4186 \times [33.2-15] \\ &= 22855.56 \text{ J} \\ Q &= \frac{22855.56}{\text{Time}} \\ &= \frac{22855.56}{90 \times 60} \\ &= 4.232 \text{ W} \end{aligned}$$

Work input

$$\begin{aligned} W &= \text{Number of Batteries} \times V \times I \\ &= 3 \times 12 \times 0.7 \\ &= 25.2 \text{ W} \end{aligned}$$

Coefficient of Performance

$$\begin{aligned} \text{COP} &= Q / W \\ &= \frac{4.232}{25.2} \\ &= 0.167 \end{aligned}$$

### IX. ADVANTAGES

- A. No Freon's or other liquid or gaseous refrigerants required
- B. Noise less operation
- C. Compact size and light weight
- D. High reliability
- E. Precise temperature control
- F. Relatively low cost and high effectiveness

### X. APPLICATION

- A. It can be uses as remote place where electric supply is not available.
- B. In restaurants /hotels
- C. Laboratory and scientific instruments
- D. Medical and pharmaceutical equipment.
- E. Military applications.

### XI. GRAPH

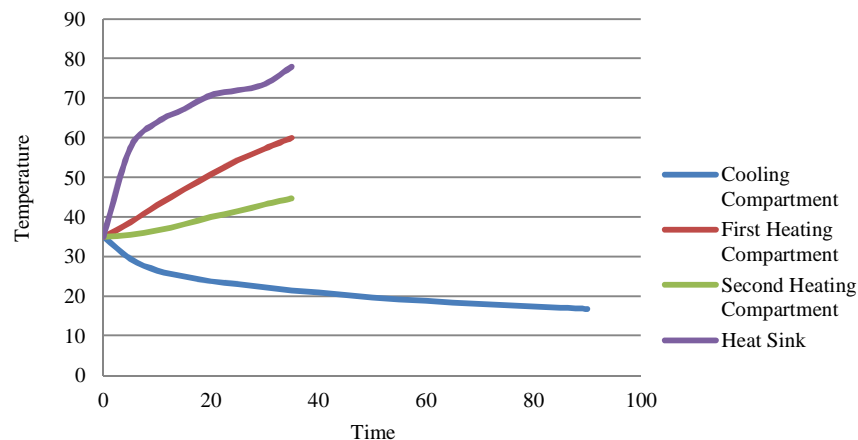


Fig. 6 Temperature Vs Time plot

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

### XII. CONCLUSION

In this work, a portable solar thermoelectric refrigerator unit was fabricated and tested for the cooling purpose. The refrigerator was designed based on the principle of a thermoelectric module to create a hot side and cold side. The cold side of the thermoelectric module was utilized for refrigeration purposes whereas the rejected heat from the hot side of the module was eliminated using heat sinks and fans is used for heating purpose. In order to utilize renewable energy, solar energy was integrated to power the thermoelectric module in order to drive the refrigerator. Furthermore, the solar thermoelectric refrigerator avoids any unnecessary electrical hazards and provides very environmentally friendly product. In this regard, the solar thermoelectric refrigerator does not produce chlorofluorocarbon [CFC], which is believed to cause depletion of the atmospheric ozone layer. In addition, there will be no vibration or noise because of the difference in the mechanics of the system. In addition the rejected heat from the solar thermoelectric refrigerator is negligible when compared to the rejected heat from conventional refrigerators. Hence, the solar thermoelectric refrigerator would be less harmful to the environment. A 0.3L of water was used as the refrigerated object in these tests. Experiment and analysis on the prototype were conducted mainly under sunny outdoor conditions. It was found that the system performance was strongly dependent on the intensity of solar insulation and the temperature difference of hot and cold sides between the thermoelectric modules. The maximum temperature difference under outdoor conditions was found to be 18.2°C.

The energy efficiency of solar thermoelectric refrigerators, based on currently available materials and technology, was still lower than its compressor counterparts. Nevertheless, a marketable solar thermoelectric refrigerator would be made with an acceptable performance through some improvements. For example, further improvement in the COP may be possible through improving module contact-resistance, thermal interfaces and heat sinks. In addition, this could be achieved by including more modules in order to cover a greater surface area of the refrigeration box.

### REFERENCES

- [1] Sabah A. Abdul-Wahab, Ali Elkamel, "Design and experimental investigation of portable solar thermoelectric refrigerator", article in renewable energy, January 2009.
- [2] Taylor R.A., Solbrekken G.L, "Comprehensive system-level optimization of thermoelectric devices for electronic cooling applications, components and packaging technologies", IEEE Transactions on page(s): 23 - 31 Volume :31, Issue: 1, March 2008.
- [3] Fukutani K., Shakouri, Ali, "Design of bulk thermoelectric modules for integrated circuit thermal management, components and packaging technologies", IEEE Transactions on page(s): 750 - 757 Volume: 29, Issue: 4, Dec 2006.
- [4] Surith Nivas M, Vishnu Vardhan D, Raam kumar PH, Sai Prasad S, Ramya K , " Photovoltaic driven dual purpose thermoelectric refrigerator for rural India", International Journal of Advancements in Research & Technology, Volume 2, Issue 6, June 2013.
- [5] Umesh V. Sangale, Priyanka Jhavar, G.R.Seloskar, "Thermoelectric refrigeration by using solar energy for domestic appliance", International Journal of Research in Advent Technology, Vol.3, No.1, January 2015.
- [6] Manoj B. Dhawade, Ekta Mourya, Anurag Yadav, David Samuel, Suprabh t A. Mohod, Vaibhav N Deshpande, "Review on portable solar thermoelectric refrigerator cum air cooler", International Journal of Advance research in Science and Engineering, Vol. No.4, Issue10, October 2015.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)