



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 4      Issue: VIII      Month of publication: August 2016**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# **Reliability and Security in Data Transmission Using Wireless Sensors**

Prabhat Jonathan<sup>1</sup>, Garima Garg<sup>2</sup>

<sup>1</sup>M.Tech(CSE), <sup>2</sup>Assistant Professor

Computer Science and Engineering Department, SGI, Samalkha, Kurukshetra University, Kurukshetra

**Abstract:** *Wireless sensor networks can be utilized in a broad variety of applications ranging from battlefield surveillance in military, through remote patient monitoring in medicine to forest fire detection in environmental applications. Majority of WSN applications require at least some level of security. In order to achieve the needed level, secure and robust routing is necessary. Secure data transmission is a critical issue for wireless sensor networks (WSNs). Clustering is an effective and practical way to enhance the system performance of WSNs. Cluster-based data transmission in WSNs has been investigated by researchers to achieve the network scalability and management, which maximizes node lifetime and reduce bandwidth consumption by using local collaboration among sensor nodes. In this work, we have designed a routing protocol named reliable and secure data transmission protocol (RSDT) which is secure and reliable and the results will be compared with other routing protocols of same category such as secure and efficient data transmission (SET) protocols for WSNs, called SET-IBOOS, the identity-based online/offline digital signature (IBOOS) scheme. RSDT will use same concept of signature as used in SET-IBOOS.*

**Keywords:** *Energy Efficient WSN, Hierarchical routing, cluster head*

## **I. INTRODUCTION**

Wireless sensor networks consist of many small compact devices, equipped with sensors (e.g. acoustic, seismic or image sensors), that form a wireless network. Each sensor node in the network collects information from its surroundings, and sends it to a base station, either from sensor node to sensor node i.e. multi hop, or directly to a base station i.e. single hop [1]. A wireless sensor network may consist of hundreds or up to thousands of sensor nodes and can be spread out as a mass or placed out one by one. The sensor nodes collaborate with each other over a wireless media to establish a sensing network, i.e. a wireless sensor network. Because of the potentially large scale of the wireless sensor networks, each individual sensor node must be small and of low cost. The availability of low cost sensor nodes has resulted in the development of many other potential application areas, e.g. to monitor large or hostile fields, forests, houses, lakes, oceans, and processes in industries. The sensor network can provide access to information by collecting, processing, analyzing and distributing data from the environment [2]. In many application areas the wireless sensor network must be able to operate for long periods of time, and the reliability as well as security of transmitting data is necessary [1].

## **II. RELATED WORK**

In this paper [1], The authors propose two secure and efficient data transmission (SET) protocols for CWSNs, called SET-IBS and SET-IBOOS, by using the identity-based digital signature (IBS) scheme and the identity-based online/offline digital signature (IBOOS) scheme, respectively. In SET-IBS, security relies on the hardness of the Diffie-Hellman problem in the pairing domain. SET-IBOOS further reduces the computational overhead for protocol security, which is crucial for WSNs, while its security relies on the hardness of the discrete logarithm problem. The authors show the feasibility of the SET-IBS and SET-IBOOS protocols with respect to the security requirements and security analysis against various attacks. In [2], the authors formulate the secret-sharing-based multipath routing problem as an optimization problem. The disjoint multipath routing scheme with secret sharing is widely recognized as one of the effective routing strategies to ensure the safety of information. This kind of scheme transforms each packet into several shares to enhance the security of transmission. A three-phase disjoint routing scheme called the Security and Energy-efficient Disjoint Route (SEDR) is proposed. Based on the secret-sharing algorithm, the SEDR scheme dispersively and randomly delivers shares all over the network in the first two phases and then transmits these shares to the sink node. The authors in [3]

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

presented a new routing mechanism, which integrates FEC codes and selective encryption scheme for providing both QoS and secure data transmission in WSN. In the proposed protocol, RS coding is used to provide reliability and security. The sink node decides on the paths selection process in order to satisfy the reliability or the delay requirements by an application and the number of these paths is determined to enhance the reliability. The research article [4] presents the development of the real test bed of BIOSARP routing protocol. The test bed consists of 10 sensor nodes (TELOSB). The BIOSARP routing protocol based WSN performs well and its adaptable behavior to the environmental changes ensures reliable data transfer. In [5], the authors propose and evaluate the performance of a secure routing protocol that take into account the existence of multi path between sender and destination to transmit data in several paths. In [6], the authors present an algorithm to enable the base station to securely compute predicate count or sum even in the presence of such an attack. This attack-resilient computation algorithm computes the true aggregate by filtering out the contributions of compromised nodes in the aggregation hierarchy. The research community proposed a loss-resilient aggregation framework called synopsis diffusion, which uses duplicate insensitive algorithms on top of multipath routing schemes to accurately compute aggregates (e.g., predicate count or sum). In [7], the authors presented a WSN routing protocol defined as Biological inspired Self- Organized Secure Autonomous Routing Protocol (BIOSARP) enhances Secure Real-Time Load Distribution (SRTLTD) with an autonomous routing mechanism. In the BIOSARP mechanism, an optimal forwarding decision is obtained by using improved Ant Colony Optimization (IACO). In IACO, the pheromone value/probability is computed based on the end-to-end delay, remaining battery power, and link quality metrics. The proposed BIOSARP has been designed to reduce the broadcast and packet overhead in order to minimize the delay, packet loss, and power consumption in WSN. In [8], the authors design an end to end secure communication protocol in randomly deployed WSNs. The protocol is based on a methodology called differentiated key pre-distribution. The core idea is to distribute different number of keys to different sensors to enhance the resilience of certain links. The authors also provide detailed discussion on a potential attack (i.e. biased node capturing attack) to our solutions, and propose several countermeasures to this attack. An energy-efficient secure routing protocol for WSNs with a stationary sink is proposed in [9]. Using the location information of the sink, the proposed routing protocol builds the sink-oriented grids to ensure the path availability from the source to the sink. Choosing the next hop dynamically by taking the advantage of the node location and residual energy information, an energy-efficient path for data delivery is selected. The authors [10] have designed new pair wise key establishment schemes in WSN using deterministic pre distribution techniques based on combinatorial designs. Combinatorial trades were applied for the first time for key pre distribution in WSNs. The authors also present a new construction of strong Steiner trades. The authors initiated the study of triple key distribution in sensor networks, and applied it in secure routing, secure data aggregation and in communication in clustered sensor networks. Polynomial-based scheme is applied so that every three nodes indeed have a common (and unique) key. This scheme is  $c$ -secure, where  $c$  is degree of polynomials used. The authors [11] present the Secure SOURCE-BASED Loose Synchronization (SOBAS) protocol to securely synchronize the events in the network, without the transmission of explicit synchronization control messages. In SOBAS, nodes use their local time values as a onetime dynamic key to encrypt each message. In this way, SOBAS provides an effective dynamic en-route filtering mechanism, where the malicious data is filtered from the network. In this work [12], the authors presented a distributed security framework (DSF) for heterogeneous wireless sensor networks. In this framework, the authors dynamically use the available memory space of regular nodes to store a subset of defense schemes to provide security against multiple attacks. The gateway is responsible for updating this subset according to the current likelihood of the occurrence of an attack in its cluster. Warning scheme can enable the regular nodes to install the defense schemes in advance of potential forthcoming attacks. In this paper [13], the authors propose a routing technique to provide adequate source-location privacy with low energy consumption. The authors introduce this technique as the Sink Toroidal Region (STaR) routing. With this technique, the source node randomly selects an intermediate node within a designed STaR area located around the SINK node. The STaR area is large enough to make it unpractical for an adversary to monitor the entire region. Furthermore, this routing protocol ensures that the intermediate node is neither too close, nor too far from the SINK node in relations to the entire network.

### III. IBOOS SCHEME FOR CLUSTERED WIRELESS SENSOR NETWORK

An IBOOS scheme [1] implemented for CWSNs consists of following four operations, specifically, setup at the BS, key extraction and offline signing at the CHs, online signing at the data sending nodes, and verification at the receiving



## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

nodes [1]:

- A. Setup. The BS (as a trust authority) generates a master key  $msk$  and public parameters  $param$  for the private key generator (PKG), and gives them to all sensor nodes.
- B. Extraction. Given an ID string, a sensor node generates a private key  $sekID$  associated with the ID using  $msk$ .
- C. Offline signing. Given public parameters and timestamp  $t$ , the CH sensor node generates an offline signature  $SIG$  offline, and transmits it to the leaf nodes in its cluster.
- D. Online signing. From the private key  $sekID$ ,  $SIG$  offline and message  $M$ , a sending node (leaf node) generates an online signature  $SIG$  online.
- E. Verification. Given ID,  $M$ , and  $SIG$  online, the receiving node (CH node) outputs “accept” if  $SIG$  online is valid, and outputs “reject” otherwise.

In Step 1, at the beginning of the setup phase of a new round, the BS first broadcasts its ID, a nonce (number used once), and the denotation of the starting time  $T_s$  of the current round to all sensor nodes, which is used for the signature signing and verification in the setup phase. In Step 2, a sensor node decides whether to become a CH for the current round, based on the threshold  $T(n)$  compared with numbers from 0 to 1, which is set as follows:

$$T(n) = \frac{\rho}{1 - \rho \times \left( r \bmod \left\lfloor \frac{1}{\rho} \right\rfloor \right)} \cdot \frac{E_{cur}(n)}{E_{init}(n)} \quad \forall n \in G_n,$$
$$T(n) = 0 \quad \forall n \notin G_n.$$

Dynamic clustering algorithm preferably with multiplying the ratio of residual energy of the current sensor node (i.e.,  $E_{cur}(n)/E_{init}(n)$ ) to increase the energy efficiency in the clustering, where  $E_{cur}(n)$  is the current energy, and  $E_{init}(n)$  is the initial energy of the sensor node.  $\rho$  is a priori determined value which stands for the desired percentage of CHs during one round (e.g.,  $\rho = 10\%$ ),  $r$  is the current round number, and  $G_n$  is the set of sensor nodes that have not been CHs in the last  $1/\rho$  rounds. If the value of determined number is less than the threshold, the sensor node elects itself as a CH. The sensor node who decides to become a CH broadcasts the advertisement message (adv) to the neighboring nodes in the network, which is concatenated with the signature. In Step 3, the sensor node, which decides to be a leaf node, picks a CH to join based on the largest received signal strength of adv messages. Then, it communicates with CH  $i$  by sending a join\_request (join) message, which is concatenated with the destination CH's ID  $ID_i$ , its own ID  $ID_j$ , time stamp  $T_s$ , and the digital signature. In Step 4, a CH  $i$  broadcasts an allocation message to its cluster members for communication during the steady-state phase, yet to be concatenated with the signature. In Step 5, according to the TDMA schedule from Step 4, each leaf sensor node  $j$  transmits the encrypted data  $C_j$  in a packet to its CH. In this way, each CH collects messages from all members in its cluster, aggregates and fuses data. In Step 6, CHs send the aggregated data  $F$  to the BS, yet to be concatenated with the digital signature. The steady-state phase consists of multiple reporting cycles of data transmissions from leaf nodes to the CHs, and is exceedingly long compared to the setup phase. In this way, energy consumption of each and every node is calculated. This process will be repeated until the whole network gets down or number of rounds finished.

### IV. METHODOLOGY

The foundation of proposed protocol lies in the realization that the base station is a high-energy node with a large amount of energy supply. Thus, proposed protocol utilizes the base station to control the coordinated sensing task performed by the sensor nodes. In proposed protocol, the following assumption are to be considered. • A fixed base station is located in center of the region • The sensor nodes are energy constrained with a uniform initial energy allocation. • The nodes are equipped with power control capabilities to vary their transmitted power.

Each node senses the environment at a fixed rate and always has data to send to the base station. • All sensor nodes are immobile. • The Key concept of SET-IBOOS is used as it ease. So, we assume that we are securing the data in same way as in IBOOS.

The radio channel is supposed to be symmetrical. Thus, the energy required to transmit a message from a source node to a destination node is the same as the energy required to transmit the same message from the destination node back to the source node for a given SNR (Signal to Noise Ratio). Moreover, it is assumed that the communication environment is contention and error free. Hence, there is no need for retransmission. The steps of the algorithm are: 1. Initially, base station is set up at the center of region and nodes are setup in that particular region and each node will have equal energy. 2. In round 1, Cluster Head will be created according to probability condition. 3. The decision of each node to become cluster head is taken based on the suggested percentage of cluster head nodes  $p$ . A sensor node chooses a random number,  $r$ , between 0 and 1. If this random number is less than a threshold

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

value,  $T(n)$ , the node becomes a cluster-head for the current round. The threshold value is calculated based on an equation that incorporates the desired percentage to become a cluster-head, the current round, and the set of nodes that have not been selected as a cluster-head in the last  $(1/P)$  rounds, denoted by  $G$ .  $T(n)$  is given in eq. (1). Optimal number of cluster heads is estimated to be 10% of the total number of nodes. Probability of node to become cluster head will vary according to given equation:  $p(i) = P * n * RE * EN / (TE * Ea)$  (2) where,  $P$  = probability to become cluster head which is 0.1.  $n$  = no. of nodes  $RE$  = remaining energy of a particular node  $EN$  = Initial energy of a particular node  $TE$  = Total Energy of the Network  $Ea$  = Average energy of network Average energy of network is given by equation: Average energy =  $TE * (1 - r / r_{max}) / n$ ; (3) where,  $TE$  = Total Energy of the Network  $r$  = current round  $r_{max}$  = total no. of rounds  $n$  = no. of nodes Now, the modified formula for choosing cluster head is given in eq (1). 4. Then, Nodes sends the data to their respective cluster heads and energy consumption will be calculated. 5. Cluster Head will aggregate the data and send it to the base station and energy consumption will be calculated for each node and cluster heads.

### V. IMPLEMENTATION AND RESULTS

#### A. Parameter Value Table

- 1) Network Parameters Network field: 100 x 100m
- 2) N (Number of nodes): 100
- 3) Initial energy: 1 J
- 4)  $E_{elec}$  ( $E_{Tx}$  &  $E_{Rx}$ ): 50nJ/bit
- 5)  $\epsilon_{fs}$  (free space): 10 pJ/bit/m<sup>2</sup>
- 6)  $\epsilon_{mp}$ : 0.0013 pJ/bit/m<sup>4</sup>
- 7) EDA: 5 nJ/bit/signal
- 8)  $E_{off}$ : 5  $\mu$ J/ signature
- 9)  $E_{on}$ : 12.37  $\mu$ J/ signature
- 10) Data packet size: 4000 bits
- 11) Tool used: MATLAB 7.6.0

#### 5.2 Results

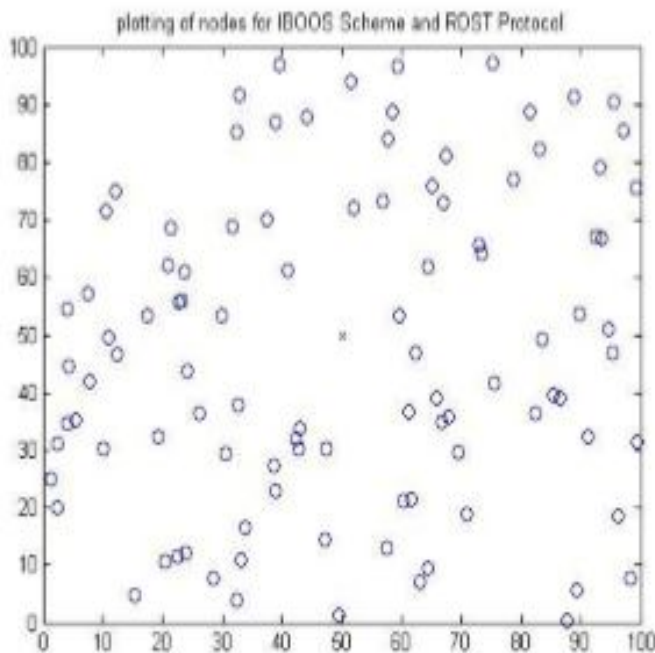
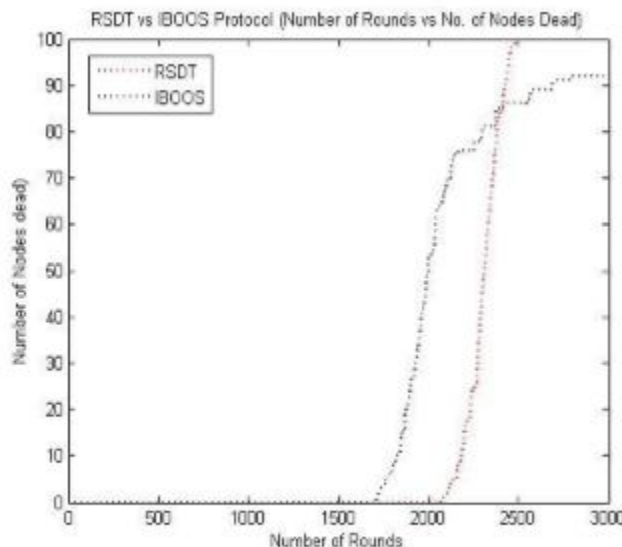
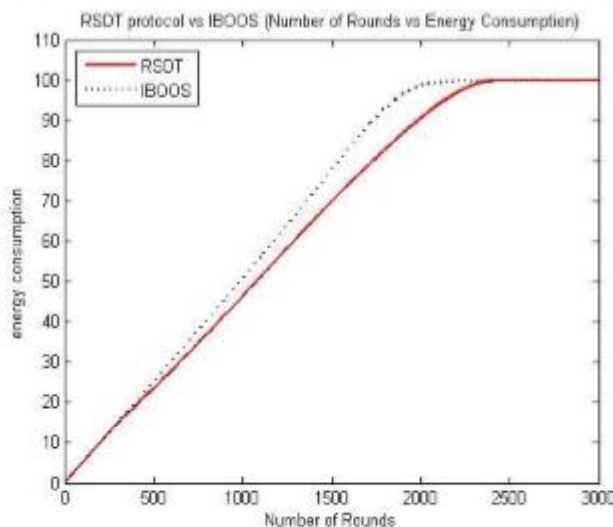


Figure 1: Deployment of nodes and base station

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)



**Figure 2: Number of Rounds vs Number of Nodes Dead**



**Figure 3: Number of Rounds vs Energy Consumption**

### REFERENCES

- [1] Huang Lu, "Secure and Efficient Data Transmission for Cluster-Based Wireless Sensor Networks", IEEE TRANSACTIONS ON PARALLEL AND DISTRIBUTED SYSTEMS, VOL. 25, NO. 3, MARCH 2014 pp. 750- 761.
- [2] Nikolaos A. Pantazis, Stefanos A. Nikolidakis and Dimitrios D. Vergados, "Energy-Efficient Routing Protocols in Wireless Sensor Networks: A Survey" IEEE COMMUNICATIONS SURVEYS & TUTORIALS, VOL. 15, NO. 2, SECOND QUARTER 2013 pp. 551- 591.
- [3] Abderrahmen Guermazi, "An Efficient Key Distribution Scheme to Secure Data-Centric Routing Protocols in Hierarchical Wireless Sensor Networks", The 2nd International Conference on Ambient Systems, Networks and Technologies (ANT) Procedia Computer Science, 2011, pp. 208-215.
- [4] Carlos Velasquez, " Multipath Routing Network Management Protocol for Resilient and Energy Efficient Wireless Sensor Networks", Information Technology and Quantitative Management, ITQM 2013 Procedia Computer Science 17, 2013, pp. 387 – 394.
- [5] SIVA D. MURUGANATHAN, DANIEL C. F. MA, ROLLY I. BHASIN, "A Centralized Energy-Efficient Routing Protocol for Wireless Sensor Networks", IEEE Radio Communications, March 2005.
- [6] Stephanie Lindsey, Cauligi Raghavendra, " Data Gathering Algorithms in Sensor Networks Using Energy Metrics", IEEE TRANSACTIONS ON PARALLEL AND DISTRIBUTED SYSTEMS, VOL. 13, NO. 9, SEPTEMBER 2002.
- [7] Omar Cheikhrouhou, Anis, "LNT: a Logical Neighbor Tree for Secure Group Management in Wireless Sensor Networks", The 2nd International Conference on Ambient Systems, Networks and Technologies (ANT), Procedia Computer Science 5, 2011 pp. 198-207.
- [8] Meenakshi Tripathi, M.S.Gaur, V.Laxmi, "Comparing the Impact of Black Hole and Gray Hole Attack on LEACH in WSN", The 8th International Symposium on Intelligent Systems Techniques for Ad Hoc and Wireless Sensor Networks (IST-AWSN) Procedia Computer Science 19, 2013. [9] Rashmi Ranjan Sahoo, Moutushi Singh, Biswa Mohan Sahoo, "A Light Weight Trust Based Secure and Energy Efficient Clustering in Wireless Sensor Network: Honey Bee Mating

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- Intelligence Approach”, International Conference on Computational Intelligence: Modeling Techniques and Applications (CIMTA), 2013.
- [9] Minh Tuan Nguyen and Nazanin Rahnavard , “Cluster-Based Energy-Efficient Data Collection in Wireless Sensor Networks utilizing Compressive Sensing”, IEEE Military Communications Conference, 2013.
- [10] Mostafa I. Abd-El-Barr Maryam M. Al-Otaibi Mohamed A. Youssef, “WIRELESS SENSOR NETWORKS- PART II: ROUTING PROTOCOLS AND SECURITY ISSUES”, IEEE, May 2005.
- [11] Seyit A. Camtepe, Bulent Yener, “Combinatorial Design of Key Distribution Mechanisms for Wireless Sensor Networks“, IEEE/ACM TRANSACTIONS ON NETWORKING, VOL. 15, NO. 2, APRIL 2007.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)