



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5

Issue: I

Month of publication: January 2017

DOI:

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Investigation of Tribological Behaviour Properties in Coated Carbide Tools for Steels Turning Operation

D. Venkatesa Prabu¹, R. Nandhakumar², A. Sathishkumar³, R. Chandiran⁴

^{1,2,3,4} Assistant Professor, Department Of Mechatronics Engineering, Mahendra College of Engineering, Salem, Tamilnadu, India

Abstract: When competing with the industrial productivity, respecting the general rules of work and ecology of the environment system by avoiding various types of lubricating liquid, solid or any other form of machining, research is directed towards the steels with improved machinability and coating cutting tools. In order to best understand this, new and modern study parameters related to the cutting phenomenon have to be used, so it will be closer to the tribology of contact tool/chip/workpiece. In this context, the interaction of tribological of pairs of materials with improved machinability steels / coated carbide tools and the relationship between the friction coefficient, cutting speed, tool wear and surface quality will be studied. In this case a tribometer designed to identify the friction coefficient in difficult cutting conditions is used. The following steels (42CrMo4, 27MnCr5), TiN, AlTiN coated carbide tools have been used in the experimental work.

Keywords: Tribology, Coated Tool, Wear, Roughness, Friction Co-efficient, Specific Cutting Force

I. INTRODUCTION

In metal cutting operations, the turning process, which is the object of this study represents 33% of this domain . There is a constant search for new techniques to improve the productivity while preserving the environment from harmful waste. The rational implementation of such techniques passes indeed by a deep knowledge of the cutting process and the control of different parameters. Lubricants are not desirable as a solution to minimise the heating of the tool / work piece; because of the permanent and progressive conditions of ecologists and; in some way it must be environmentally adapted. Looking for a better productivity of metal cutting is therefore a major concern of researchers. Steels with improved machinability; various coatings of cutting tools, machining at high speeds, the study of tribological interface tool-chip-workpiece, constantly improve product quality and productivity. The main purpose is to participate in the development of new ways of machining or new techniques of programming and control to improve productivity. Depending on the machining conditions, the wear process of cutting tools can affect one, two or all active faces of the tool and This can lead to inaccurate tolerances of the machined parts. The wear of cutting tools can occur through erosion, abrasion, adhesion and diffusion and Such problems, essentially of tribological, nature vary considerably from one family to another family of steels. Materials characterization is essential in developing new products of steels and. Therefore, it is necessary to develop an accurate cutting simulation to identify optimal conditions in terms of cutting tool materials, tool geometry and coating in order to support the improvement of productivity and machining operations an]. When the cutting speeds are higher than 280 m/min and contact pressures in GPa are also higher, this will lead the designers of machine tools to verify their calculations on the basis of important constraints. The system is known as the pin-on-disk system, which is unfortunately not able to simulate the contact conditions in cutting, since the conditions (temperature, pressure) are not real and . The phenomena occurring at the interface of the tool-chip (secondary shear zone) and at the interface of the toolworkpiece may be identified by the new tribometer in order to achieve a precise modeling using finite element methods In order to characterize some materials developed by Ascométal within the LTDS, and particularly the friction coefficient between cutting tool and machined metal, the exchange of heat flow, tool wear, quality of machined surface, series of tests on an axial tribometer have been carried out (Fig 1). The tribological phenomena at the interface tool / machined surface / chip are very complex to model and yet they are the key behavior of the tool, including its resistance to wear. The present work lays out experimental results on the TiN and AlTiN wear behaviour when applying an aggressive machining on 42CrMo4 and 27MnCr5 steels. In addition, surface quality degradation, cutting force and heat flow evolution are related to the tool wear.

In fact, all the computer codes treat this problem as a constant Coulomb friction, while the occurrence of intense adhesion phenomena as well as chemical reactions and diffusion processes can be noticed . Coated carbide tools have proved their

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

performance in relation to the uncoated tools and It is of importance to optimize the cutting parameters, such as sliding speed, the feed per revolution and the lifetime of the tool in order to ensure proper control of machining. A new rule concerning the adherence of friction and sliding speed in machining is on prospect to .

II. EXPERIMENTAL PROCEDURE

The tests were performed in the Laboratory of Tribology and System Dynamics (LTDS) Saint Etienne, France, using round bars made of 42CrMo4 and 27MnCr5 steels with 80 mm diameter and 600 mm length with improved machinability. The longitudinal turning and tribological cutting operations (in orthogonal cutting), were performed on conventional lathe (Gazeneuve). The chemical composition of the material to be tested is given in Table 1. The machine being used is Gazeneuve lathe (Figs. 1 and 2), equipped with KISTLER 9257B standard dynamometer with the objective to measure in real time the three force components along x , y , z .



Fig. 1. Cutting test and machining on an instrumented Gazeneuve lathe installation

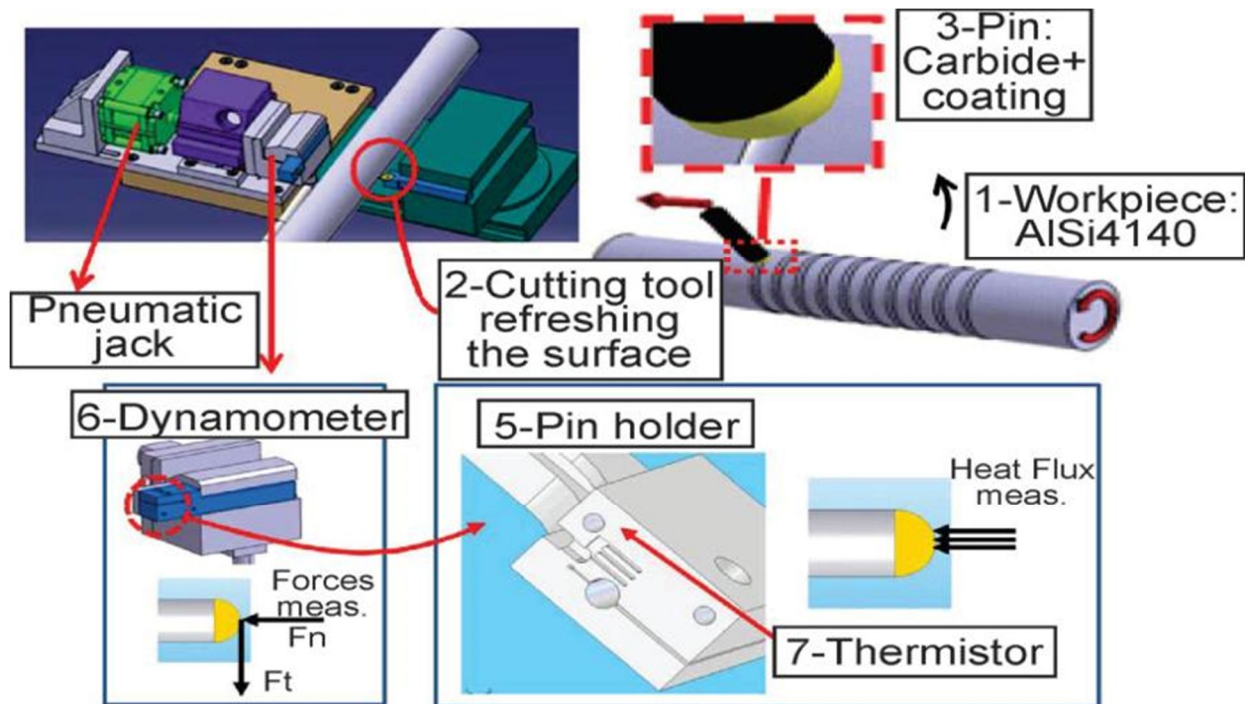


Fig. 2. Measure principles on a tribometer intended to acquire the efforts and the heat flow

An interface for acquisition of heat flow is directly connected to the pin holder whose principle is based on thermistor transducers

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

(Fig. 2). The tests have been carried out in a dry environment without lubrication. Wear has been investigated taking into consideration the following parameters: feed rate, f , 0.8 mm/rev for cutting and 2 mm/rev for scratching, cut depth, ap of 2 mm and cutting speed V_c between 20 and 180 m/min.

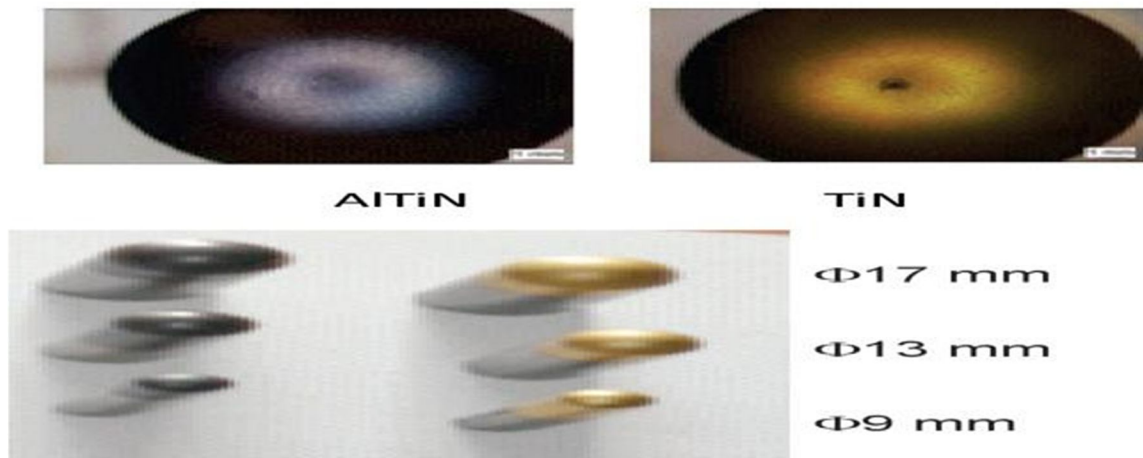


Fig. 3. The different colors of pins coated and their diameter F17, 13 and 9 mm

Roughness measurements have been obtained by means of a surfest 301 roughness meter.

After each test, the work piece is dismantled in order to explore the striations and different measures, then reassembled the bar for the next test after turning with a carbide tool and then polished with a very fine sandpaper to get a better surface possible for the next test. Machining parameters are given after each result. The carbide coated pins, AlTiN, TiN (Fig. 3), with spherical heads and of different diameter 9, 13 and 17 mm (Fig. 3), used for stripping have a finite surface by polishing them on a machining center using 5 axes with the aim to get a better possible surface quality. Stock removal tool with a removable patch made of carbide coated surface is used to regenerate the wear. In order to measure the wear resistance, a device based on the variation of the width and the depth of the scratch (flank wear or crater) is adapted to an optical microscope.

III. RESULTS AND DISCUSSION

A. Effect of Cutting Speed on the Coefficient of Friction

The tribological cutting tests on 42CrMo4 steel with a hardness (HB 290), using TiN and TiAlN pins of diameter 13 obtained by PVD at different speeds, are shown in (Fig. 4).

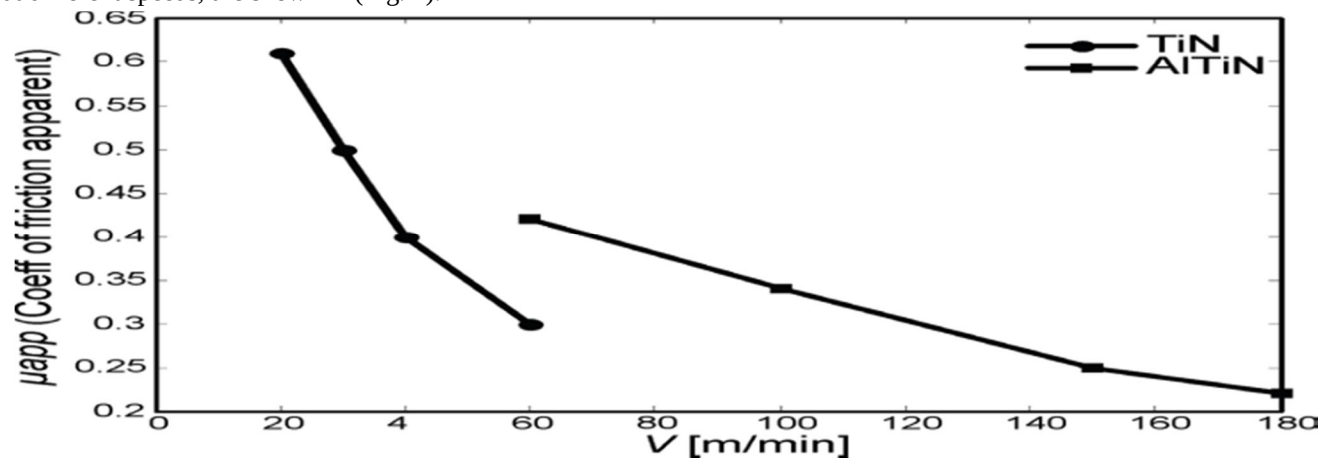


Fig. 4. Effect of cutting speed on the coefficient of friction

The test bench can generate furrows along the specimen as shown in (Fig. 2). It has been noticed that the coefficient of friction decreases considerably when increasing the cutting speed. For the TiN pin, the fall is precipitous until a speed of 60 m/min is

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

achieved. The AlTiN pin behaves otherwise by falling steadily until 0.23 to a speed of 180 m/min. Here, the apparent friction coefficient which is calculated through the measure of the effort using the following equation, should be mentioned:

$$\mu_{macr} = FT / FN . \quad (1)$$

B. The effect of normal stress on the heat flow transmitted to the pin

Fig. 5 shows the heat flow evolution transmitted to the pin. Beyond this value, the slope of the flow growth decreases. In fact, and during the contact pin / work piece at a cutting speed of 120 m/min, intense heat is created and increase steadily as the normal stress increases. At 600 N value, the transmitted heat flow to the pin becomes regular and linear. A rapid growth of the heat flow transmission between 200 and 400 N can be noticed.

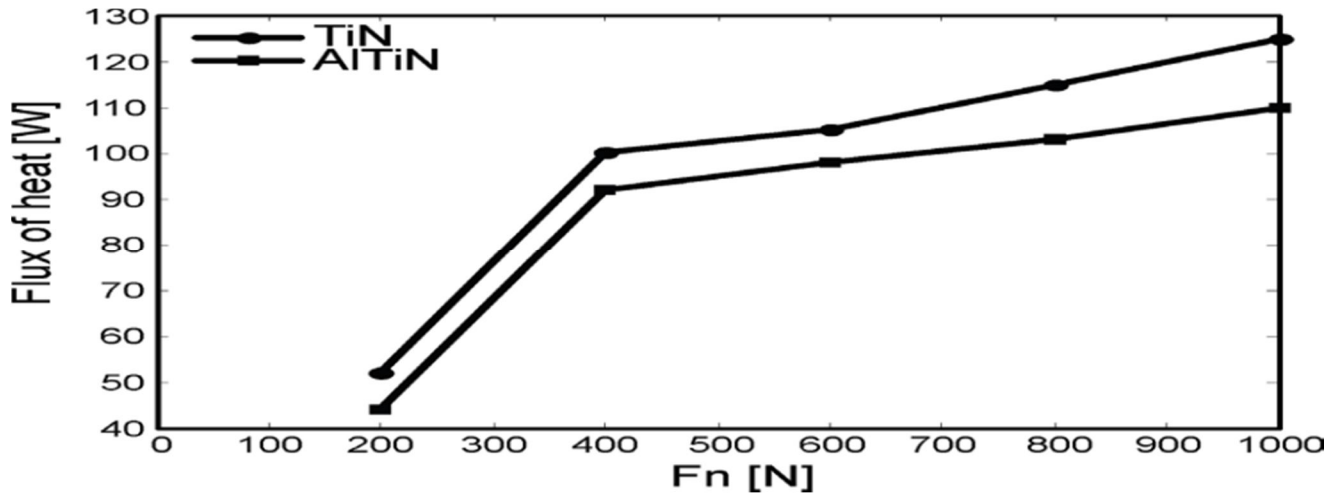


Fig. 5. Effect of the normal force on the heat flow transmitted to the pin

It is noticed that at 400 N, the appearance of the heat flow changes significantly. This can be explained by the effect of heat diffusion across the pin.

C. Wear as a Function of Time

During longitudinal turning and in order to prepare the next test, it is of importance to measure the wear of TiN coated carbide inserts as shown in Fig. 1 and meanwhile searching the interaction between the two forms of wear (flank VB and crater KT) as function of time of cutting. It can be noticed from Fig. 6 that the curves are continuous.

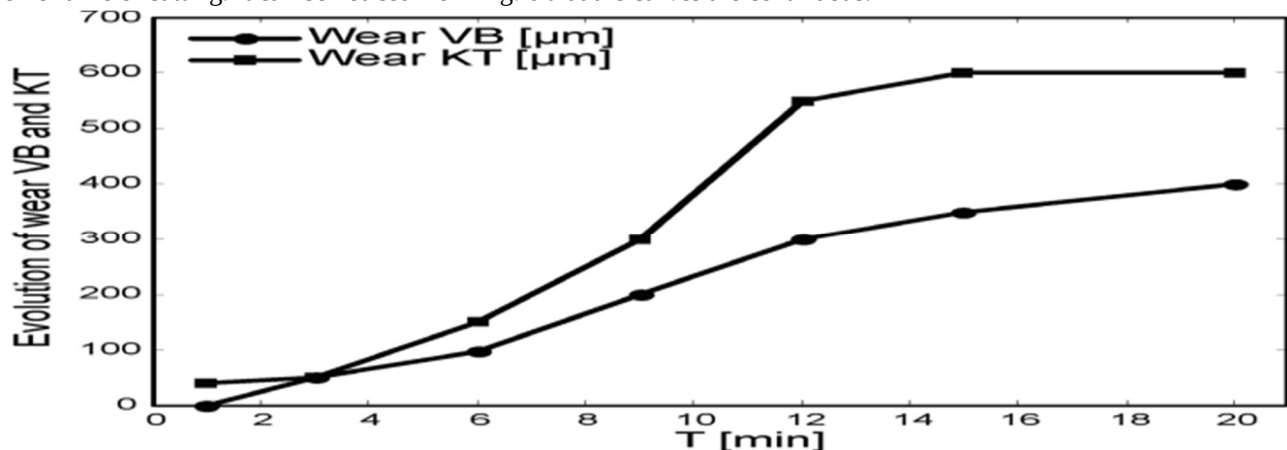


Fig. 6. Evolution of wear VB and KT with time for the cutting speed 150 m/min

After a rapid wear at the beginning of the test, the shape of frontal wear VB becomes almost linear. Beyond 0.4 mm the crater wear rate (KT) increases quickly. For finish operations (following ISO standard ISO 3685-1977 (F) 0.3 mm wear finish and 0.6 mm for draft), which is the case, the flank wear VB which is more representative it is then taken into account. Both wear VB and KT

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

combined lead to the collapse of the insert.

D. Evolution of the Roughness as a Function of Wear

As can be seen from the three curves in Fig.7 and at different speeds, it can be noticed that the surface finish obtained (work piece) with unworn tools is almost regular (near $0.4 \mu\text{m}$). Gradual damage of the surfaces corresponding to the increased wear can also be noticed. In the case where $VB = 300 \mu\text{m}$ is taken as a wear criterion, a significant degradation of the surface which results in an increase in the value of Ra can be noticed. In fact, for fixed upper limit of roughness to $Ra = 0.6 \mu\text{m}$, it has been observed that the lifetime of the plate is significantly reached.

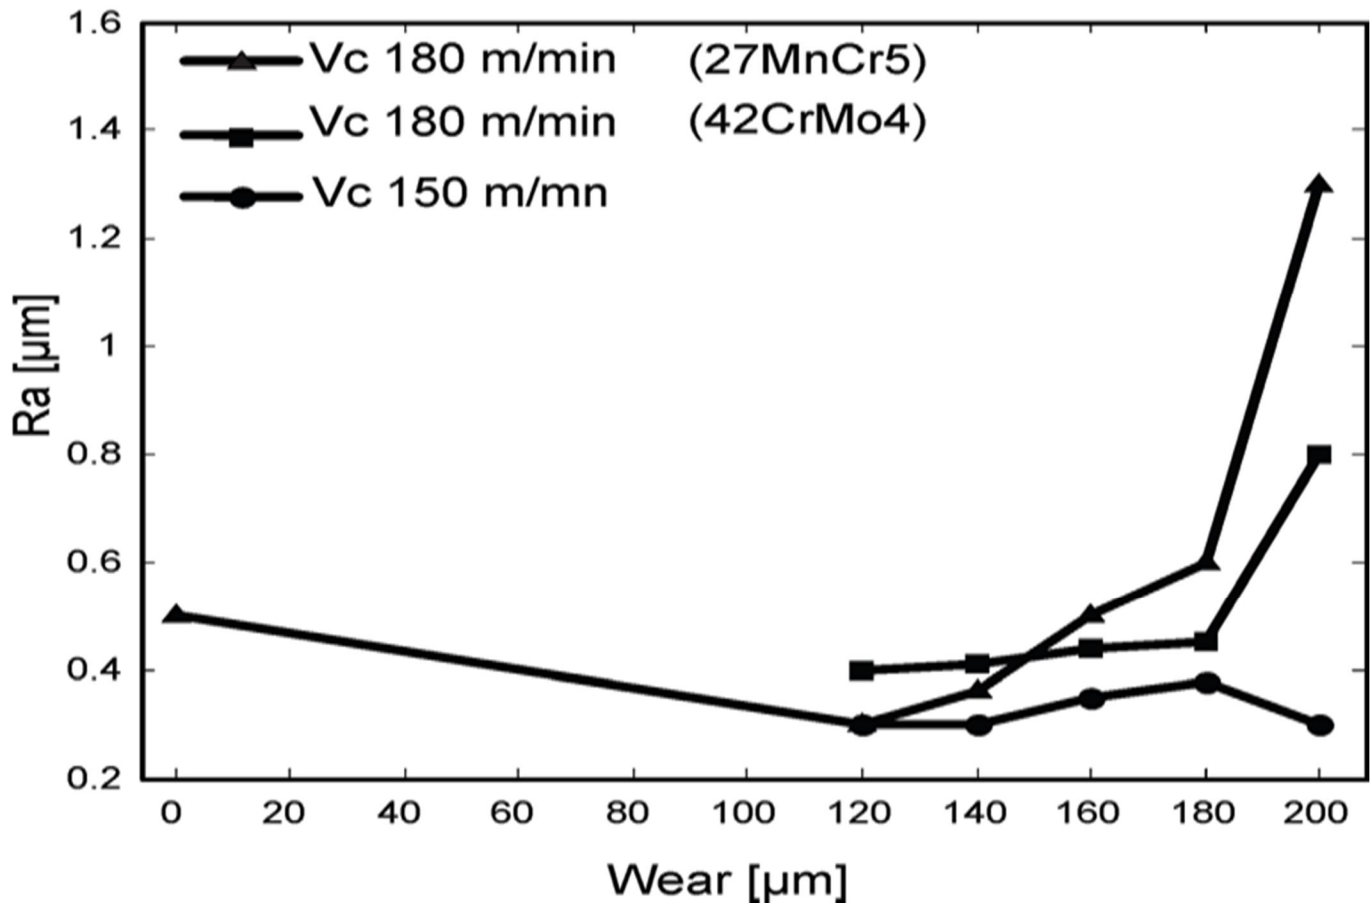


Fig. 7. Roughness Ra as a function of wear VB

E. Observation of Worn Pieces


Observation of friction pins allows us to reinforce the assumptions made when interpreting friction measurements. It particularly expresses the respective behavior of materials towards adhesion, diffusion or other tribological phenomena of the contact couple materials (workpiece-pin). At the end of the experimental test, the optical and electronic micrographes of the pin show that the damaged surface is very torn. This is due to severe adhesive wear. This result is confirmed by the adhesion of iron deposits detached from the piece (Fig. 8).

Three different types of observation have been performed: on a binocular microscope, on a scanning electron microscope (SEM), and finally an EDS (Energy-dispersive X-ray spectroscopy) chemical analysis of elements found on the surface of the pins. The SEM technique is based on the principle of electron-matter interactions. It is therefore sufficient to scan the electron beam over its entire surface. Moreover, the SEM used in the laboratory can also analyze the spectrum of X-ray by dispersive energy using a microprobe EDS or EDX (energy dispersive X-ray spectroscopy). The analyses of structure and composition are performed in a single step, which has the advantage of a fast data acquisition. The observation of pins with a binocular microscope gives little information about their wear. It is quite difficult to distinguish between areas where the coating has been damaged and areas that


International Journal for Research in Applied Science & Engineering Technology (IJRASET)

have been coated by the adhesion of 27MnCr5. The SEM observations are made after being cleaned pins with ultrasound and acetone. This partly reduces steel deposits on the surface, allowing greater precision of analysis..

27MnCr5

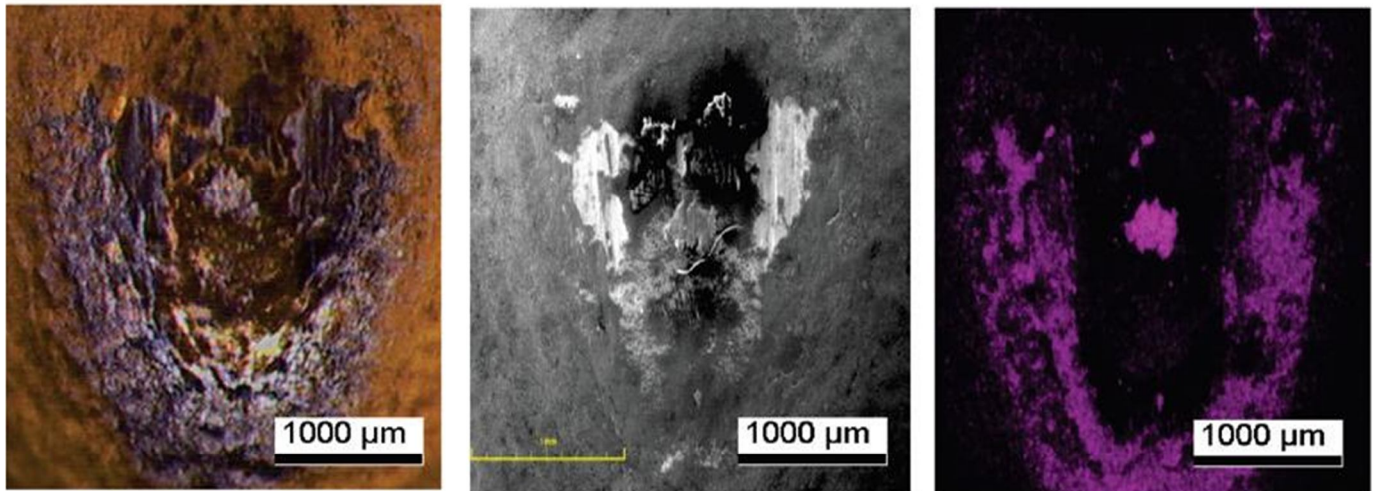

42CrMo4

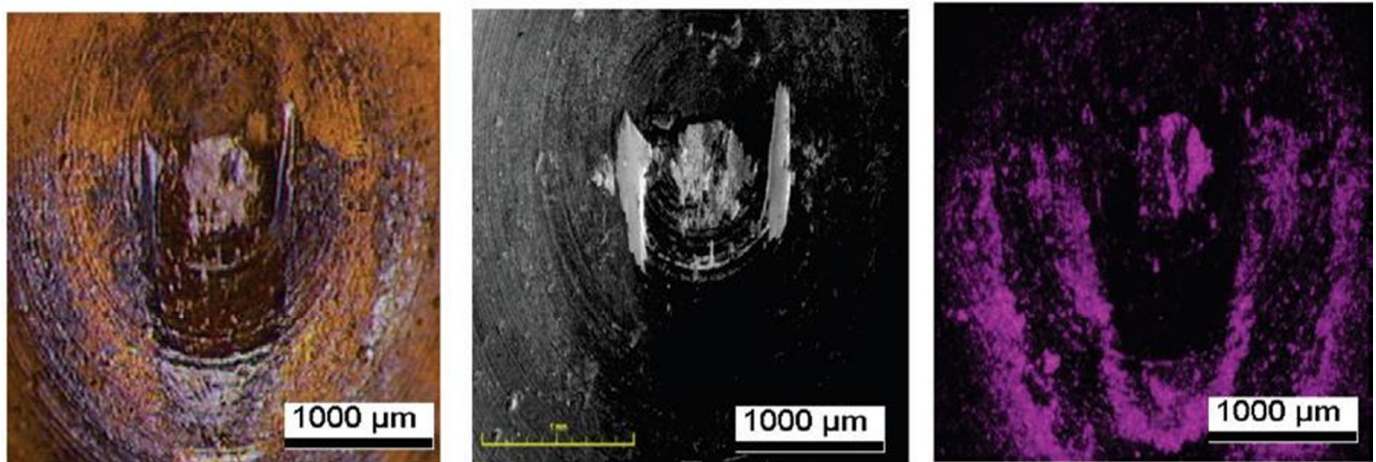

Binocular
microscope

SEM

Analysis EDS
Iron element

Fig. 8. Observation and analysis of the wear of the pins to after 30 min of different friction types of observation $V_c = 80$ m/min, $f = 2$ mm/rev

The resulting images show the existence of two types of alteration of the coating depending on the type of the material used. The pin being rubbed against 27MnCr5 rods shows an adhesive wear, with a tearing of two plates at the ends of the contact zone. The center of this same zone is protected by adhesive deposits which are shown in black. For the 42CrMo4 material pin, there is a clear presence of two trenches left by the edges of the grooves. Here one can talk about an abrasive wear, since such marks are parallel to the direction of motion. The existence of these two types of wear which are specific to each material is common in the tribological behavior when a couple of materials is used. The adhesive regime often leads to sudden changes of wear which can be due to simple modifications of friction parameters. EDS analyses do not provide further information. Only deposits of the Iron element in the case

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

of 42CrMo4 confirmed by the density of the alloy, the net propensity to adhere more firmly to the friction surface of the pins compared to 27MnCr5 alloy.

F. Observation of Track Turning

It is well noticed the existence of striations which are parallel to the pin sliding direction, which qualify this kind of wear as soft abrasion wear. This observation seems consistent with the difference between the two materials in contact. In addition, there is a discharge of matter towards the edges of tracks (groove), a sign of ploughing, due to the steel ductility. The observation of the pin at the end of the test very clearly shows a non-uniform wear of the head of the pin.

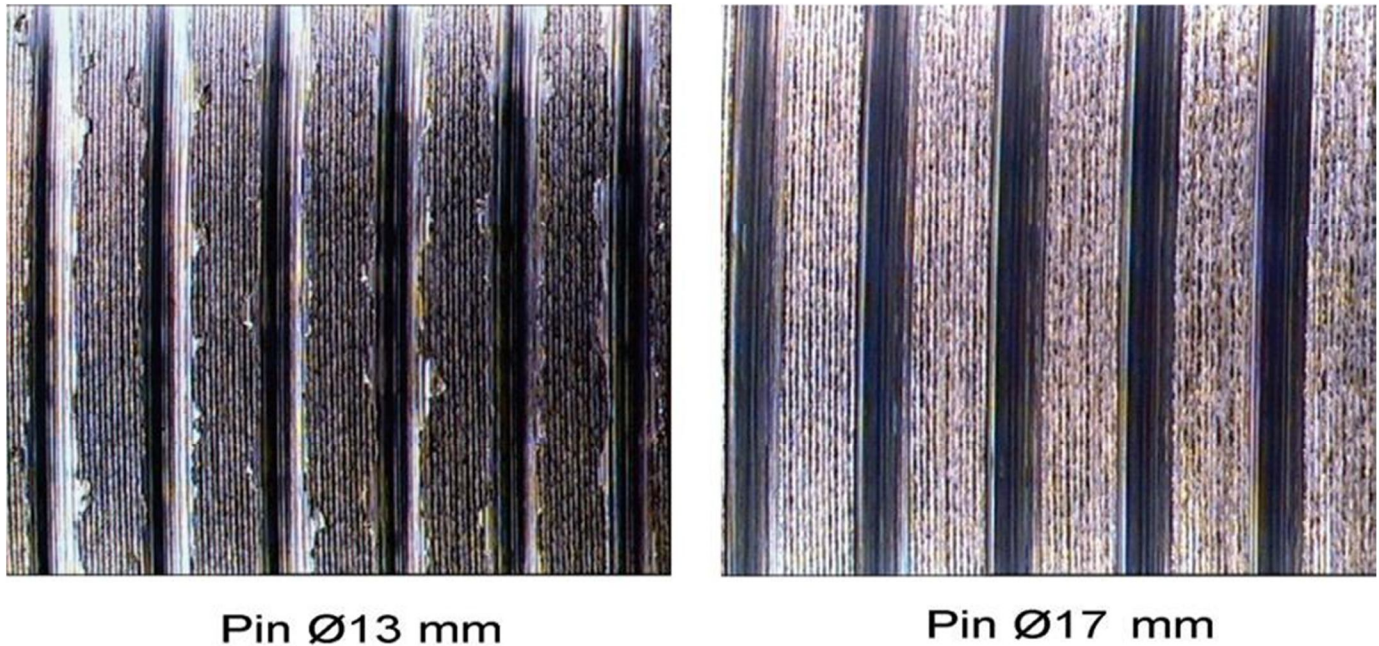


Fig. 9. Comparison of scratches obtained after scratching using pins Ø13 mm and diameters Ø17 mm; 42CrMo4 - magnification $\times 1$
- $V_c = 80$ m/min

The widths of scratches observed on 27MnCr5 bars remain relatively constant (Fig. 9), during testing. Only those left by the pins in the bars of standard material, increase furtively after the first twenty minutes of friction. This seems to confirm the destabilizing of the recorded coefficients of friction. Therefore, there is a slight difference in behavior on the friction with time between the two alloys. The scratches left in the 27MnCr5 alloy are in fact much larger than those left on of 42CrMo4 alloy (about 1.8 mm) showing a more pronounced wear of the pin associated with the 27MnCr5 alloy (about 1.25 mm). After each friction testing, the used piece is removed from the lathe to take measurements of scratch widths left by the pin on it. Measurements are performed in the middle of the specimen (and therefore at the middle of the experiment). These data will enable us to assess the contact local pressure, to express the densities flow, and to evaluate the speed impact on the sliding conditions of the pin.

III. CONCLUSIONS

A. The main conclusions are

It has been noted that the coefficient of friction between TiN and 42CrMo4 alloy is better than that between AlTiN and 42CrMo4 alloy at a speed of 60 m/min.

The heat flow transmitted to the TiN pin at high pressure (for an applied force greater than 400 N) is more important for TiN pin than for AlTiN pin.

During the tests, it could be noticed that the flank wear VB and crater wear KT become more and more important, especially at high cutting speeds (more than 150 m/min). They often result in the breakdown of the tool nose and then they result in the inaccuracy of the tolerances of the workpiece.


The surface quality is better for low rate of wear VB (lower than 200 μm); beyond this value the roughness Ra increases as function of the cutting speed V_c .

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

The system set-up has showed that the apparent friction coefficient decreases considerably by increasing the cutting speed. This model also showed the important effect of temperature on contact pressure. The most distinguished wear phenomenon in this case is the abrasive wear which appears by the side of grooving tools. Abrasion is caused by hard particles existing in the material being machined. In this case, particular attention should be given to work pieces dimensioning, tolerances, surface quality and machining precision which could be significantly affected. The graphs found in this work can serve as abacus for selecting the optimum cutting speed, the interpolation surface quality product and service life of the tool optimum.

REFERENCES

- [1] Jaspers, S.P.F.C., Dautzenberg, J.H. (2002). Material behaviour in conditions similar to metal cutting: flowstress in the primary shear zone. *Process and Technology*, vol. 122, no. 2-3, p. 322-330, DOI:10.1016/S0924-0136(01)01228-6.
- [2] Osel, T. (2006). The influence of friction models on finite element simulations of machining. *International Journal of Machine Tools and Manufacture*, vol. 46, p. 518-530, DOI:10.1016/j.ijmachtools.2005.07.001.
- [3] Ryckelynck, D., Meiller, M. (2002). Friction modeling of tool workpiece contact for the finite element simulation of cutting process. *Mechanics and Industries*, vol. 3, p. 323-332, DOI:10.1016/S1296-2139(02)01172-7.
- [4] Galoppia, G.D.S., Stipkovic Filhoa, M., Batalhaa, G.F.(2006). Hard turning of tempered DIN 100Cr6 steel with coated and no coated CBN inserts. *Journal of Materials Processing Technology*, vol. 179, no. 1-3, p. 146-153, DOI:10.1016/j.jmatprotec.2006.03.067.
- [5] Belhadi, S., Mabrouki, T., Rigal, J.F., Boulanouar, L. (2005). Experimental and numerical study of chip formation during straight turning of hardened AISI 4340 Steel. *Proceedings of the Institution of Mechanical Engineers, Part B: Journal of Engineering Manufacture*, vol. 219, no. 7, p. 515-524, DOI:10.1243/095440505X32445.
- [6] Bouchelaghem, H., Yallesse, M.A., Amirat, A., Belhadi, S. (2007). Wear behaviour of CBN tool when turning hardened AISI D3 steel. *Mechanika*, vol. 65, no. 3, p.57-65.
- [7] Farhat, Z.N. (2003). Wear mechanism of CBN cutting tool during high-speed machining of mold steel. *Materials Science and Engineering: A*, vol. 361, no. 1-2, p. 100-110, DOI:10.1016/S0921-5093(03)00503-3.
- [8] Qi, H.S., Mills, B. (1996). On the formation mechanism of adherent layers on a cutting tool. *Wear*, vol. 198, no. 1-2, p. 192-196, DOI:10.1016/0043-1648(96)80023-8.
- [9] Zemzemi, F., Bensalem, W., Rech, J., Dogui, A., Kapsa, P. (2007). New tribometer designed for the characterization of the friction properties at the tool/chip/workpiece interfaces in machining. *Tribotest*, vol. 14, p. 11-25, DOI:10.1002/tt.50.
- [10] Chaari, R., Abdennadher, M., Louati, J., Haddar, M. (2011). Modelling of the 3D machining geometric defects accounting for workpiece vibratory behaviour. *International Journal of Simulation Modelling*, vol. 10, no. 2, p. 66-77, DOI:10.2507/IJSIMM10(2)2.173.
- [11] Senthil Kumar, A., Raja Durai, A., Sornakumar, T. (2006). Wear behavior of alumina based ceramic cutting tools on machining steels. *Tribology International*, vol. 39, no. 3, p. 191-197, DOI:10.1016/j.triboint.2005.01.021.
- [12] Appa Rao, G., Srinivas, M., Sarma, D.S.(2004). Effect of thermomechanical working on the microstructure and mechanical properties of hot isostatically pressed superalloy inconel 718. *Materials Science and Engineering*, vol. 383, no. 2, p. 201-212, DOI:10.1016/j.msea.2004.05.062.

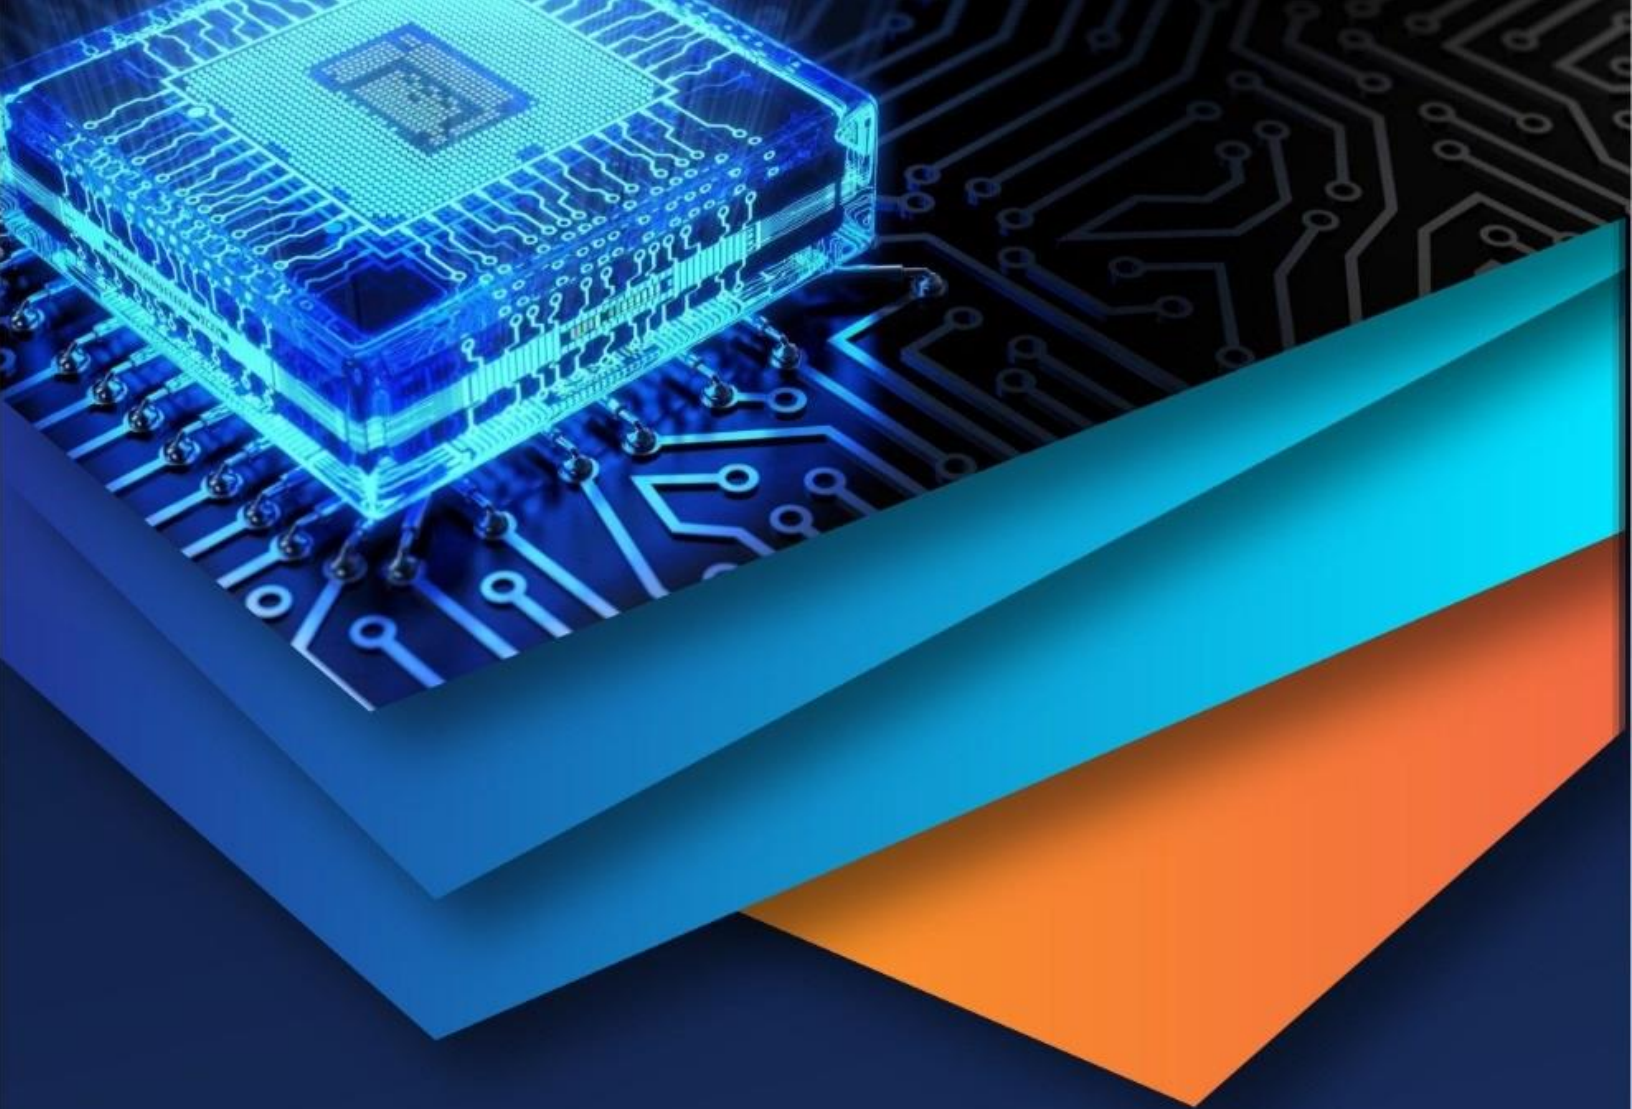

10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)