



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5 Issue: IV Month of publication: April 2017

DOI: <http://doi.org/10.22214/ijraset.2017.4219>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

A Review on Recent Routing Protocols in Field of Wireless Communication

Ritu Rani¹, Anita Kumari²

¹ Student, ² Assistant Professor, Department of Electronics and Communication, Rayat Bahra University, India

Abstract: Routing is used to find the shortest distance between the different nodes from source to destination. Routing is basically used to find the efficient path to send the packets from source to destination. In the traditional technique, the main focus was on the distance. But as the time passes, so many issues took place which becomes a hindrance for achieving efficient routing in WSN. This study provides an overview to the concept of routing. The type of routing is also discussed under this in section 1. Section 2 represents the various issues and challenges that falls on the way to achieve effective route for data transfer. Section 3 represents the concept of trust based routing, in which all the trust models are defined in brief along with their pros and cons. Section 4 represents the work that already had been done in this work. Section 5 is winding up of the study by presenting the whole research in brief.

Keyword: Wireless Sensor Network, Clustering, Routing, Trust Value, Quality of Services.

I. INTRODUCTION

Routing is a process which is used for transferring a message from sender to receiver. In routing, forwarded message follows a route to receiver node. Route is made up by connecting the nodes with each other. It is performed on telephone network, electronic data networks and transportation networks. We are focusing on the electronic data networks such as internet in this report.

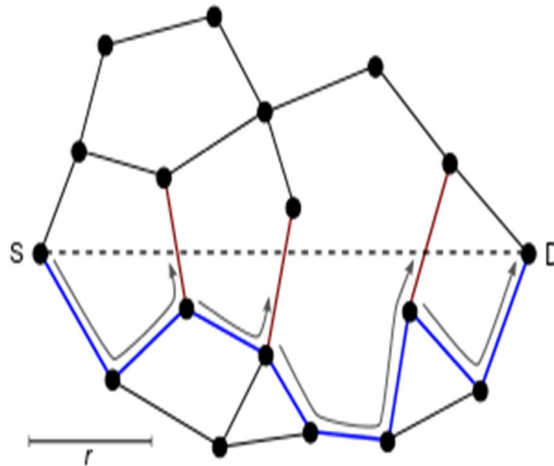


Figure1: example of Routing [27]

The diagram (Figure 1) shows the basic working of routing where there is a source and destination from where data packet has to be sent. And the defined route (shortest and less congested) has been selected for the communication.

Packet switching networks and general purpose computers do routing whereas in packet switching network, packets are routed from source to destination through the intermediate nodes known as network hardware devices (routers, bridges, gateways, switches) and general purpose computers also routes packets from source to destination but there is not specialized hardware thus it may suffer from limited performance. [8] The process routing involves the routing tables that contain the information about the routers and their routing paths as well to the destination. Consequently, construction of routing tables are efficient part of the routing as it is going to be stored in the memory of the routers. Path chose by the routing algorithm depends upon the type of algorithm as most routing algorithm choose one path at a time but in case of multipath routing techniques, choose multiple alternative path for communication. Routing path that are overlapped or have equal routes described in the routing tables are installed in terms of priority:

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

A. Prefix-Length

Where subnet masks length is longer are preferred.

B. Metric

According to this parameter, a lower metric cost is preferred valid in one and same routing protocol.

C. Administrative Distance

Learned route from a more reliable routing protocol is preferred valid between different routing protocols. To represent the route, a single routing table has been assigned in structured addresses thus in large networks, structured addressing performs better than unstructured addressing. As the technology enhances, routing is becoming prominent technology on the internet. Unstructured addressing or bridging is used within localized environments. [10] Routing is also differs in terms of its types. Some of them are

D. Unicast that Provides Delivery to a Single Specific Node




Figure2: Unicast Routing [27]

E. Broadcast that Delivers a Single Message to all the Nodes Available in the Network



Figure 3: Broadcast Routing [27]

F. Multicast Delivers the Message to that Group of Nodes Who Shows Interest in Receiving the Message



Figure 4: Multicast Routing [27]

G. Anycast Delivers the Message to any Node Basically Which is Nearest to the Source



Figure 5: Any cast Routing [27]

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

H. Geocast that Transforms the Message to Geographic Area



Figure 6: Geocast Routing [27]

From all these routing techniques, unicast is the dominant one and in this report we are using it for routing algorithms. After the discussion of the routing casting types, now we will describe the nature of the routing which means whether the routing is static or dynamic?

In static or non-dynamic routing, manually configured routing tables has been used. These types of routing are considered for small networks as there is more chances of direct route to be blocked soon which is the basic drawback of this network.[22] Example of static routing is PSTN i.e. public switched telephone network. Thus, for the large networks, we must find another way as it is not feasible. Static networks using pre computing routing tables but in case of dynamic ad hoc networks, routing tables generated according to the traffic at present on the network automatically.[23] This network gets their info from routing protocols. It will helps in avoiding failures and blockages in network. Dynamic routing algorithms are used in routing information protocol i.e. RIP and open-shortest-path-first-protocol i.e. OSPF. It is the most emerging technology in routing and dominates the internet.

II. ROUTING CHALLENGES AND DESIGN ISSUES

Depending on the application, different architectures and design goals/constraints have been considered for sensor networks.

A. Node Deployment

It is application dependent and affects the performance of the routing protocol. The deployment is either deterministic or self-organizing. Deterministic node deployment refers to the installing the nodes manually whereas in self-organizing the nodes are installed manually.

B. Power Consumption

Since the transmission power of a wireless radio is proportional to distance, multi-hop routing i.e. route through multiple nodes consumes less amount of energy whereas in single hop routing the higher amount of energy is consumed by the communication process.

C. Data Aggregation/Fusion

In case of multi-hop routing the problem of data aggregation exists. Data aggregation is a process in which the data from multiple hops is collected at one. The data collection or aggregation can be done by using the commands like suppression, min and max etc. As computation would be less energy consuming than communication, substantial energy savings can be obtained through data aggregation.

D. Node capabilities

Depending on the application a node can be dedicated to a particular special function such as relaying, sensing and aggregation since appealing these functionalities at the same time on a node might quickly drain the energy of that node.

E. Lifetime of Nodes

Lifetime of nodes is determined by the amount of remaining energy at the nodes. If the remaining energy at a node is zero then the node will be declared as dead node. If nodes consumes higher amount of energy for data transferring or communication then the

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

amount of remaining energy will be nil due to which the nodes will be declared as dead. The greater number of dead nodes in a network leads to the slower processing and degrades the process of the networks.

III. TRUST MODEL BASED ROUTING

Trust Value has a valid and imperative value in case of Wireless Sensor Network. WSN consists of small sensor nodes and trust value is related to these sensor nodes. The reliability and trust worthiness of nodes is represented in the terms of trust values. It highly depends upon the nature of the task. On the basis of this criterion it is divided into two categories as follows:

- A. Social Trust
- B. QoS Trust

In social trust consider truthfulness, and solitude, altruism and connectivity factors of a node. QoS consider power, energy, task completion capacity of nodes, reliability etc.

Generally trust is classified in two categories such as behavioral trust which stands for trust worthiness between user and organization, and computational trust defines the trust worthiness between computers devices and networks.

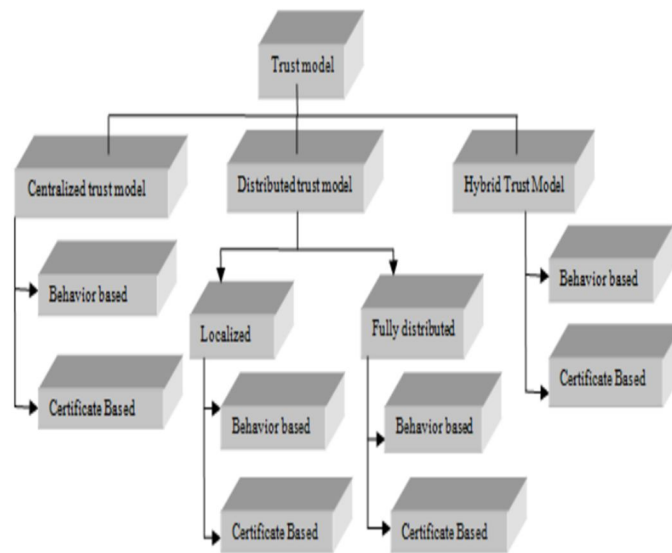


Figure7 Taxonomy of Trust Model

C. The figure 7 describes the Taxonomy of Trust Model. Accordingly Trust Model have Three Categories as Follows

- 1) Centralized Trust Model
- 2) Distributed Trust Model
- 3) Hybrid trust model

Table1. Pros and Cons of Trust Models

Structure	Pros	Cons
Centralized	Less complex calculations and consumption of memory	Communication transparency, less reliability and scalability
Distributed	High reliability and scalability	Complex calculations
Hybrid	Less communication overhead than centralized and less memory	Large computational overhead than centralized, large memory requirement than centralized , less reliable and scalable compared to distributed

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Centralized Trust Model contains a centralized server which calculates the trust value of all of the nodes in the network.

In Distributed Trust Model the trust value of the each and every node is calculated individually or locally. Every node evaluates locally the trust value of other nodes which led to the enhancement in the complexity of calculations which indirectly increases the computational outlay. In this model a table is maintained regarding the updated records of trust values for whole network.

Hybrid Trust Model is the combination of both the trust models i.e. centralized model and distributed model.

The advantages and disadvantages regarding three trust model is represented in the table below (table 1).

IV. RELATED WORK

- A. Cheng-Fu Chou (2005), [1] proposed straight line routing algorithm i.e. SLR that is being used in wireless sensor network. SLR algorithm does not want any type of geographic information to find the event and query path for a network. SLR performed better in comparison with rumor routing in terms of energy consumption, path quality and ratio of successful routing. SLR saves more energy consumption and ratio of finding a best path improves.
- B. Rani, P.K. (2014), [2] focus on the advent of next hop graph which is generated through the ring based super node structure. Results show that the proposed technique performed better in terms of accuracy, connectivity and topological characteristics also. Proposed approach follows the graph and cut algorithm where SLR evaluates the optimal path for data transmission. Experiments have shown that the proposed algorithm provides accuracy and efficacy.
- C. Adnan Fida (2014), [3] proposed a route optimization technique known as COMPARE named as communication and position aware reconfigurable route optimization which provides end to end transmission. Route has selected after checking the quality of the link of the network through the probability of the successfully receiving packets over a link. After the selection of the path, route is reconfigured. At the end, experiments have been performed and results show that proposed approach is better than conventional approach.
- D. Prosenjit Bose (2001), [4] focused on the unit graphs for communication where nodes are defined as points in the plane and two nodes can communicate with each other only if the distance between these two nodes is less than some fixed unit defined earlier. Firstly distributed algorithm has been used for routing but there should be no duplication of packets and also ensures that the packet reached at the destination. After this algorithm further broadcasting and geo-casting can also be used. Simulations have been performed and results show the performance of different algorithm.
- E. Xiaocong Jin (2014), [5] focused on the geographic routing protocol named as "TIGHT" used for radio mobile ad hoc networks. This proposed approach offers primary user and secondary users in which secondary users can use the whole channel without affecting the primary users in a network. TIGHT provides three modes such as greedy nodes, optimal and suboptimal nodes. In the greedy mode, packet routes from the greedy geographic forwarding and reaches at the primary users region and then routes the packets around the primary user region from where greedy forwarding resume. Primary users may active occasionally so it works best in that condition. On the hand optimal and suboptimal modes works best when primary users remain active most of the time. Experiments have been performed to check the performance of the TIGHT.
- F. Charu Wahi (2012), [6] Mobile ad hoc network is defined without the help of any centralized infrastructure. Thus due to the nodes mobility, network do not follow the same criteria or topology for the network. From several years, different techniques have been proposed and developed to obtain highly efficient network for mobile ad hoc networks. This paper involves number of techniques, their comparison and representation in a network. Simulations have been performed under different scenario.
- G. Parminder Kaur (2012), [7] in this paper routing protocols are used to distribute the energy within a network efficiently. Data gathering and transmission has done through the proposed approach known as CHIRON named as Chain based hierarchical routing protocol. This proposed technique is helpful in transmits the gathered data to the chain leaders. One chain leader sends the data to another chain leader having same covering angle. This process continues in a sequential manner results that it is helpful in reducing energy consumption as well as the lifetime of the network.
- H. Alex Hinds (2013), [8] revolves around the MANET protocols, its functionality from earlier (DSDV) to advanced protocols (MAODV), their improvements and developments etc. This paper considers the researched work in MANET technology and simulation results shows the performance of available protocols.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

V. CONCLUSION

In this section it is concluded that the objective behind this study is to have a deep knowledge regarding routing and its various aspects like factors that can influence the process of routing. Large and complex technique has been developed for routing but these were not so efficient. As in earlier Wireless Sensor Network protocols are used to improve the energy efficiency and to enhance the lifetime of the network. In this process first of all the whole network is divided into small clusters. The number of these clusters can vary from network to network. And then from these clusters, cluster heads are selected then cluster heads collect the sensed data from clusters and then forward this collected data to the base station and sink node. The only problem in traditional work was the criteria opted for selection of cluster heads. Earlier only trust value was considered for selecting the cluster heads. The node having maximum trust value was selected as a cluster head. Additionally none of the algorithm had been applied to the network for the purpose of optimization. This increases the efficiency of the network but only up to certain limited point. This process leads to the reduction in security of the network as a single node can become cluster head again and again. Therefore the main problem was less number of parameters was considered for cluster head selection.

VI. ACKNOWLEDGMENT

I want to show my gratitude to Assistant Professor Anita Kumari for guiding me while implementing the entire project work.

REFERENCES

- [1] Cheng-Fu Chou, Jia-Janmg Su and Chao-Yu Chen, "Straight line routing for wireless sensor networks", IEEE Symposium on Computers and Communications, June 2005.
- [2] P. Kavitha Rani and E. Kannan, "My way — Routing in multi hop heterogeneous wireless sensor networks using straight line algorithm. V2", November 2014, IEEE, vol 2, pp. 1-4.
- [3] Adnan Fida, Muhammad Iqbal and Trung Dung Ngo, "Communication- and position-aware reconfigurable route optimization in large-scale mobile sensor networks", EURASIP, 2014.
- [4] Prosenjit Bose, Pat Morin, Ivan Stojmenović and Jorge Urrutia, "Routing with Guaranteed Delivery in Ad Hoc Wireless Networks", Wireless Network, November 2001, vol. 7, no. 6, pp. 609-616.
- [5] Xiacong Jin, Rui Zhang, Jingchao Sun and Yanchao Zhang, "TIGHT: A Geographic Routing Protocol for Cognitive Radio Mobile Ad Hoc Networks", IEEE Transactions on Wireless Communications, August 2014, vol. 13, no. 8, pp. 4670-4681.
- [6] Charu Wahi, Sanjay Kumar and Sonbhadra, "Mobile Ad Hoc Network Routing Protocols: A Comparative Study", IJASUC, April 2012, vol. 3, no. 2, pp. 21-31.
- [7] Parminder Kaur and Mrs. Mamta Katiyar, "Improved Chain Based Routing Protocol for WSN", IJARCSSE, November 2012, vol. 4, no. 11, pp. 872-877.
- [8] Alex Hinds, Michael Ngulube, Shaoying Zhu, and Hussain Al-Agrabi, "A Review of Routing Protocols for Mobile Ad-Hoc Networks (MANET)", IJNET, February 2013, vol. 3, no. 1, pp. 1-5.
- [9] Yan Sun, Haiqin Liu and Min Sik Kim, "Energy-Efficient Routing Protocol in Event-Driven Wireless Sensor Networks", IEEE, May 2010, pp. 1-5.
- [10] Samer A. B. Awwad, Chee Kyun Ng, Nor Kamariah Noordin and Mohd. Fadlee A. Rasid, "Cluster Based Routing Protocol for Mobile Nodes in Wireless Sensor Network", Springer, DOI 10.1007, May 2010, pp. 251-281.
- [11] R. Rajeshwari and Mr. B. Prakash, "Towards Energy Efficient Cluster Based Approach In Wireless Sensor Networks Using Mobile Sink", IJETCSE, March 2015, vol. 13, no. 1, pp. 183-186.
- [12] Arun K. Kumar and Krishna M. Sivalingam, "Energy-Efficient Mobile Data Collection in Wireless Sensor Networks with Delay Reduction using Wireless Communication", IEEE, 2010.
- [13] Chu-Fu Wang, Jau-Der Shih, Bo-Han Pan and Tin-Yu Wu, "A Network Lifetime Enhancement Method for Sink Relocation and Its Analysis in Wireless Sensor Networks", IEEE Sensors Journal, June 2014, vol. 14, no. 6, pp. 1932-1943.
- [14] Shounak Chakraborty and Ajoy Kumar Khan, "A Noble Approach for Self Learning and Cluster based Routing Protocol with Power Efficiency in WSN", IEEE, 2014, pp. 773-777.
- [15] Rui Chen, Yongsheng Ding, Kuangrong Hao and Feng Li, "An Event and Rule-driven Immune Clustering Routing Algorithm of Wireless Sensor Network with Mobile Sink", IEEE, November 2015, pp. 196-202.
- [16] Ez-Zaidi Asmaa and Rakrak Said, "Efficient data collection in wireless sensor networks using mobile sink", IEEE, April 2014, vol.14.
- [17] Priya Vyas and Manoj Chouhan, "Survey on Clustering Techniques in Wireless Sensor Network", International Journal of Computer Science and Information Technologies, 2014, vol. 5, no. 5, pp. 6614-661.
- [18] Ping Yang, Liu Jing, Liang Fei and Yang Zhengbo, "An Energy Effective Routing Algorithm for Event-driven Wireless Sensor Networks", IEEE, October 2015, pp. 96-99.
- [19] Haitao Zhang and Cuiping Liu, "A Review on Node Deployment of Wireless Sensor Network", International Journal of Computer Science Issues, November 2012, vol. 9, Issue 6, No 3, pp. 378-383.
- [20] Guillermo Molin, Enrique Alba and El-Ghazali Talbi, "Optimal Sensor Network Layout Using Multi-Objective Metaheuristics", Journal of Universal Computer Science, June 2008, vol. 14, no. 15, pp. 2549-2565.
- [21] Asis Nasipuri, Luke Van der Zel and Ralph McKosky, "Design Considerations for a Large-Scale Wireless Sensor Network for Substation Monitoring", IEEE International Workshop on Practical Issues in Building Sensor Network Application, 2010, pp. 866-873.
- [22] Jianguo SHAN, Lei DONG, Xiaozhong LIAO, Liwei SHAO, Zhigang GAO and Yang GAO, "Research on Improved LEACH Protocol of Wireless Sensor Networks", 2013, pp. 75-77.
- [23] Meena Malik, Dr. Yudhvir Singh and Anshu Arora, "Analysis of LEACH Protocol in Wireless Sensor Networks", International Journal of Advanced Research

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- in Computer Science and Software Engineering, February 2013, vol. 3, no. 2, pp. 178-183.
- [24] Chunyao FU, Zhifang JIANG, Wei WEI and Ang WEI, "An Energy Balanced Algorithm of LEACH Protocol in WS", IJCSI International Journal of Computer Science Issues, January 2013, vol. 10, no. 1, pp. 354-359.
- [25] S Taruna and Megha R. Tiwari, "Event Driven Hierarchical Cluster based Routing Protocol for Wireless Sensor Network", International Journal of Advanced Research in Computer Science and Software Engineering, April 2013, vol. 3, no. 4, pp. 549-556.
- [26] Shinichi Momma Taiju Mikoshi ; Toyofumi Takenaka, "Power aware routing and clustering scheme for wireless sensor Networks", IEEE, June 2010, pp. 1-6.
- [27] PROSENJIT BOSE "Routing with Guaranteed Delivery in Ad Hoc Wireless Networks □", Natural Science and Engineering Research , 2001, Vol 7, pp 609-616.
- [28] Dhanashri V, Ambekar Amol D. Bhoi and R. D Kharadkar, "A Survey on Sensors Lifetime Enhancement Techniques in Wireless Sensor Networks", International Journal of Computer Applications, 2014, vol. 107, no. 19.
- [29] Kemal Akkaya and Mohamed Younis, "A survey on routing protocols for wireless sensor networks", ELSEVIER, May 2005, vol. 3, no. 3, pp. 325-349.
- [30] Sunita Rani and Er.Tarun Gulati, "An Improved PEGASIS Protocol To Enhance Energy Utilization in WSN", International Journal of Computing and Corporate Research, May 2012, vol. 2, no. 3.
- [31] Sharath S.T and Veena N, "Quad Clustering Routing Protocol to Enhance the Stability in WSN", IJIRCCCE, April 2014, vol. 2, pp. 3982-3988.
- [32] B. Manzoor, N. Javaid, O. Rehman, M. Akbar, Q. Nadeem, A. Iqbal and M. Ishfaq, "Q-LEACH: A New Routing Protocol for WSNs", ELSEVIER, 2013, vol. 19, pp. 926-931.
- [33] M. J. Handy, M. Haase and D. Timmermann, "Low Energy Adaptive Clustering Hierarchy with deterministic Cluster-Head Selection", IEEE, 2002, Pp 1-5.
- [34] Lalita Yadav and Ch. Sunitha, "Low Energy Adaptive Clustering Hierarchy in Wireless Sensor Network (LEACH)", IJCSIT, 2014, vol. 5, no. 3, pp. 4661-4664.
- [35] Mahesh K. Marina and Samir R. Das, "Routing in Mobile Ad Hoc Networks", Ad Hoc Networks, 2005, pp. 63-90.
- [36] Zygmunt J. Haas Marc R. Pearlman and Prince Samar, "The Zone Routing Protocol (ZRP) for Ad Hoc Networks", July 2002.
- [37] Min-Woo Ryu, Si-Ho Cha, Jin-Gwang Koh and Kuk Hyan Cho, "Position-based Routing Algorithm for Improving Reliability of Inter-Vehicle Communication", Korean Society Of Internet Information, January 2011, vol. 5.
- [38] Monica R Mundada Savan Kiran , Shivanand Khobanna , Raja Nahusha Varsha and Seira Ann George, "A Study On Energy Efficient Routing Protocols In Wireless Sensor Networks", International Journal of Distributed and Parallel Systems, May 2012, vol. 3, no. 3, pp. 311-330.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)