



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5 Issue: VII Month of publication: July 2017

DOI:

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Virtual Mouse Using Hand Gesture Recognition

Kishore Prabakar¹

¹Student, Department of information technology, PSG College of Technology, Coimbatore, Tamilnadu, India

Abstract: As the computer technology is growing up, the importance of human computer interaction is rapidly increasing. Most devices use touch screen technology which cannot be affordable to all the applications. A virtual human computer interactive module such as virtual mouse, can be an alternative way for the traditional touch screen. The objective is to create an hand tracking application to interact with system, and develop a virtual human computer interaction module. This module can be used for creating an interface between computer and human using hand gestures. This module is expected to gain abundance of attention because of its applications for human machine interface and its most futuristic design.

Keywords - Virtual mouse, Human-computer Interaction (HCI), Hand gesture, Image Processing

I. INTRODUCTION

As the technology is improving day by day, the importance of human computer interaction is rapidly increasing. But this technology is still in its nascent stage to be used on systems of different applications. A virtual mouse using hand gesture recognition is a system that allows users to give mouse inputs to computer without using an actual mouse hardware. To the extreme, it can also be called as hardware because it uses a camera for tracking hands. A virtual mouse can usually be operated with multiple input devices, which may include an actual mouse or a computer keyboard. Many people had tried to define gestures but their actual meaning is still arbitrary. For a successful communication, a sender and a receiver must have the same set of information for a particular gesture. As per the context of our project we calculate the movements of hands to define the movement of mouse pointer and use gesture recognition to perform various mouse events.

The primary step in gesture recognition systems is the detection of hands and the segmentation of the corresponding image regions. This segmentation is crucial because it isolates the task-relevant data from the image background, Computer Vision Techniques for Hand Gesture Recognition before passing them to the subsequent tracking and recognition stages. Various methods have been proposed in the literature that utilize a several types of visual features and, in many cases, their combination. Such features are skin color, shape, motion and anatomical models of hands.

II. LITERATURE REVIEW

TABLE I

EXISTING SYSTEM AND DRAWBACKS

No	AUTHORS	DESCRIPTION	DRAWBACKS
1	Angel, Neethu.P.S	Real-Time Static and Dynamic Hand Gestures Recognition	The hand tracking has to be specifically adapted for each user. This system was implemented only in a restricted to the indoor environment. This system is prone to noise and sensitive to the change of the illumination.
2	J.L. Raheja, A.Chaudhary, K.Singal	Proposed using hsv algorithm but this uses special sensor kinect to capture image and processes it.	User has to spend more money for the sensor.
3	Abhik Banerjee, Abhirup Ghosh	Mouse Control using a Web Camera based on Colour Detection	The presence of other coloured objects in the background might cause the system to give an erroneous response. If the resolution of the camera is too high then the system might run slow.

III.PROBLEM STATEMENT

Generally for personal use in computers and laptops we use a physical mouse or touchpads invented a long time ago and in this project requirement for external hardware is completely eliminated by using human computer interaction technology we detect hand movements and gestures for mouse movements and mouse events.

IV.PROPOSED SYSTEM

The proposed system makes use of the webcam for tracking the user's hand and to recognize the gestures for the purpose of interaction with the system. The threshold boundary is introduced for faster detection of hand and recognition of gestures. Mouse activities are done by recognizing the gestures. The work will be extended for real time tracking and additional mouse activities. To solve the problems, a system can be used called Gesture Recognition System. A primary goal of this gesture recognition is to create a system which can identify specific human gestures and use them to convey information to control traffic signals as per traffic controller's wish and also for controlling the mouse. Fig 1 shows the flow of the system.

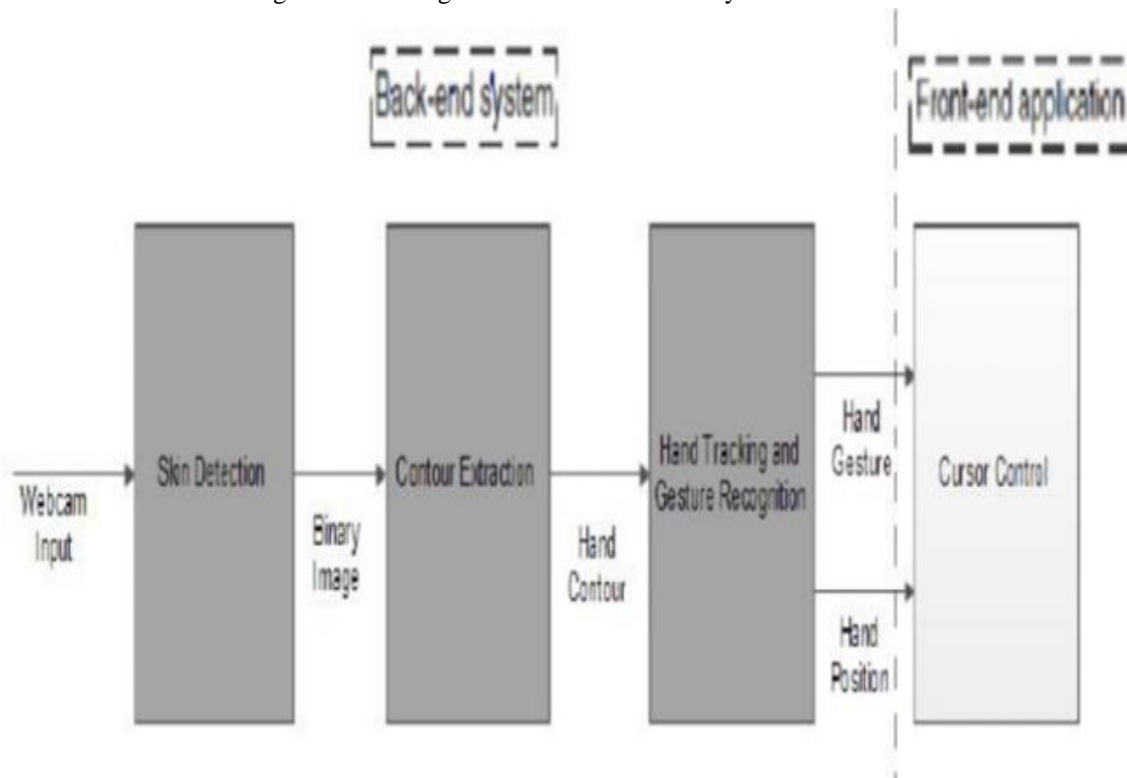


Fig 1 Block DiagramThe various steps involved in the proposed system are explain as follows:

A. Web Camera

The purpose of Web camera is to capture the human generated hand gesture and movements store its image in memory. The package called Java Media Framework is used for storing image in memory and again calling the same program after particular interval. From this image we capture mouse events and movements.

B. Skin Detection

Skin detection is the process of finding skin-colored pixels and regions in an image or a video .A skin detector typically transforms a given pixel into an appropriate color space and then use a skin classifier to label the pixel whether it is a skin or a non-skin pixel.

C. Contour Extraction

To find the movement information, the input data is assumed to be non-stationary or moving. When hands move in the spatial-time space, sequence of an image is generated, motion detector is able to track the moving hand by examining the local gray-level changes.

D. Hand Tracking and Gesture Recognition

A real time hand gesture tracking technique which can track the moving hand and then extract the hand shape from complex background. It is a simple and reliable method developed as a real-time image processing subsystem. This method is robust and reliable in complex background. For tracking the moving hand and then for extracting the hand shape fast and accurately, the trade-off between the computation complexity and robustness need to be considered.

E. Event Handling

After successful identification of gestures next task is to assign an event to each of the gestures. This includes controlling mouse, performing its various applications like scroll, drag, select,click and pasting any folder from one place to another, both left and right clicks and scrolling.

V. ALGORITHM DESIGN

Algorithm is HSV which stands for hue, saturation, and value, It is also often called as HSB (*B* for brightness). HSV algorithm is simple transformations of device-dependent RGB models, the physical primary colors they define depend on the colors of the red, green, and blue primaries of the device or of the particular RGB space, and on the gamma correction used to represent the amounts of those primaries. At the end, each unique RGB object has unique HSL and HSV absolute color spaces to accompany it (just as it has unique RGB absolute color space to accompany it), and the same numerical HSL or HSV values (just as numerical RGB values) may be displayed differently by different devices. The HSB or HSV, model describes colors in terms of hue, saturation, and value (brightness).Hue corresponds directly to the concept of hue in the Color Basics section. The advantages of using hue are the relationship between tones around the color circle is easily identified. Shades, tints, and tones can be generated easily without affecting the hue.Saturation corresponds directly to the concept of tint in the Color Basics section, except that full saturation produces no tint, while zero saturation produces white, a shade of gray, or black. Value corresponds directly to the concept of intensity in the Color Basics section. Pure colors are produced by specifying a hue with full saturation and value. Shades are produced by specifying a hue with full saturation and partial value.

Tints are produced by specifying a hue with partial saturation and full value. Tones are produced by specifying a hue and partial saturation and value. White is produced by specifying zero saturation and full value, regardless of hue.

Black is produced by specifying zero value, regardless of hue or saturation. Shades of gray are produced by specifying zero saturation and partial value. One of the biggest advantage of HSV is that each of its attributes corresponds directly to the basic concepts of color, which makes it simple.

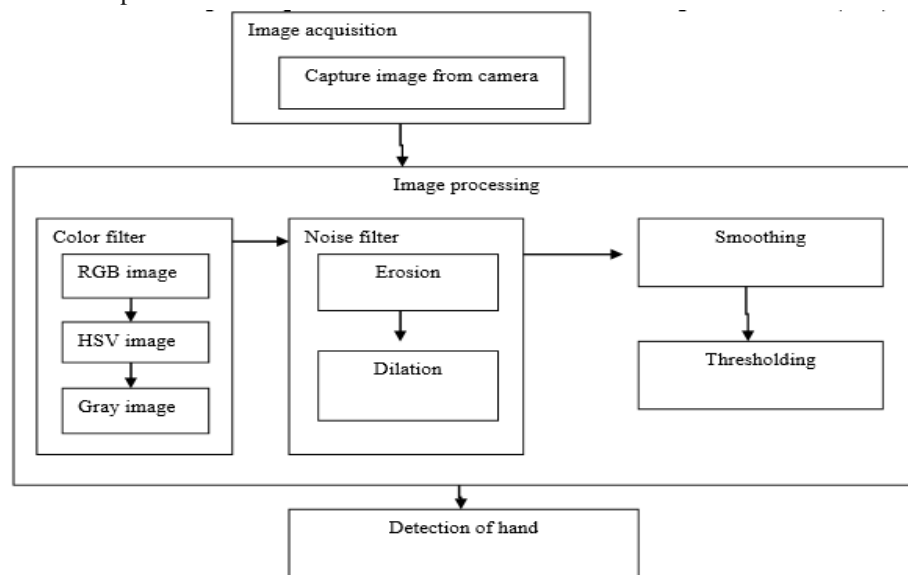


Fig 2 HSV Model

The various steps involved in the HSV model are explain as follows

A. Image acquisition

A single web camera is used to capture a series of images. Image acquisition is the creation of photographic images, such as of a physical scene or of the structure of an object. The term is often assumed to imply or include the processing, compression, storage, and display of such images.

B. Color filter

An improved color based segmentation technique was applied to segment the skin areas in a picture and use of skin based segmentation in face recognition. An essential part is skin-colour pixels assumed in finding appearances in colored images and chromaticity estimations of distinctive colour spaces could be productively utilized for the information picture or image. The pictures that are taken from the camera are in the format of RGB that are converted in to HSV values and then other operations are performed. Segmentation of the color image was done into skin and non-skin areas are the first stage of face detection. They divided image segmentation in to four kinds pixel, edge, region and model based on specific application and working environment. The diversity of color spaces provides the ability to select the proper color space that can be utilized well under different environment conditions.

C. Image processing

Signal processing is another form of image processing for which the data is an image, such as photos, frames of video etc. The result of image processing can be either an image or a set of characteristics or parameters related to the image. Many of algorithms for image-processing techniques involve using the image as a two dimensional signal and applying standard signal processing techniques to it. Image processing usually refers to DIP digital image processing, but optical and analog image processing are also possible. In this project image processing refers to splitting each and every pixel of the image into RGB components. Erosion will remove the unwanted details or background and the dilation will load the defects to get interested area (hand).

D. Thresholding

After extracting the region that is moving object, the thresholding on the frame difference can be applied for the extraction of the possible moving region in complex background. Traditional thresholding methods, such as Otsu thresholding are not suitable for the case of detecting motion difference. Instead, a simple thresholding technique is used to extract moving regions.

VI. CONCLUSIONS

Based on hand gesture recognition and image processing this paper provides an alternate solution for touchpads and traditional mouse. However, it is difficult to get stable results because of the variety of lighting and skin colors of human races but still we can get better results by changing algorithm using gray scale. Using this model we have developed an application where we can control mouse with the hand movement and gesture for other added features such as mouse clicks, scrolling, zoom etc. (showing 1 finger does single click and vice versa). The framework may be useful for controlling different types of games and many other applications dependent on the control of user like presentations, computers with multiple displays, media player controls etc.

Future work can involve better algorithm for fast detection of hand and gesture and even artificial intelligence can be added so that the system responds differently to different users based on their usage and introduce an infrared sensor so it can detect hands perfectly when the lighting conditions are not good.

REFERENCES

- [1] Abhik Banerjee, Abhirup Ghosh, 2015, "Mouse Control using a Web Camera based on Colour Detection" International Journal of Electrical Electronics & Computer Science Engineering Volume 2, Issue 4.J. Breckling, Ed., The Analysis of Directional Time Series: Applications to Wind Speed and Direction, ser. Lecture Notes in Statistics. Berlin, Germany: Springer, 1989, vol. 61.
- [2] Angel, Neethu.P.S, 2013, Real-Time Static and Dynamic Hand Gesture Recognition International Journal of Scientific & Engineering Research Volume 4
- [3] J.L. Raheja, A. Chaudhary, K. Singal, 2011, "Tracking of Fingertips and Centre of Palm using KINECT", In proceedings of the 3rd IEEE International Conference on Computational Intelligence, Modelling and Simulation.
- [4] Hojoon Park, "A Method for Controlling the Mouse Movement using a Real Time Camera", 2008, Brown University, Providence, RI, USA, Department of computer science.
- [5] Chu-Feng Lien, "Portable Vision-Based HCI – A Real-time Hand Mouse System on Handheld Devices", National Taiwan University, Computer Science and Information Engineering Department.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)