



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 14 **Issue:** X **Month of publication:** October 2026

DOI: <https://doi.org/10.22214/ijraset.2026.85146>

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Adaptive Machine Learning in Non-Stationary Environments: A Systematic Review of Concept Drift Detection and Mitigation in Data Streams

Shubashini Govind Raj

MSc Data Science, University of Nottingham, United Kingdom

Abstract: The proliferation of high-velocity data streams in domains such as IoT, cybersecurity, and financial technology has exposed the limitations of static machine learning models. When the underlying data distribution changes over time, a phenomenon known as concept drift occurs, leading to severe model degradation [1]. This paper presents a systematic review of 29 foundational and contemporary studies on concept drift detection and adaptation. We categorize detection mechanisms into statistical, window-based, and model-based approaches, while evaluating adaptation strategies ranging from dynamic ensembles to lightweight incremental learning [16]. Furthermore, we address compounding challenges, including class imbalance and the emergence of novel classes [2], [30]. By synthesizing recent advancements, this review provides a comprehensive roadmap for developing robust, real-time, and resource-efficient streaming machine learning systems [27].

I. INTRODUCTION

Machine learning models traditionally operate under the assumption that training and testing data are drawn from the same independent and identically distributed (IID) stationary distribution [5]. However, in real-world streaming applications, this assumption is frequently violated. Concept drift occurs when the statistical properties of the target variable, conditional on the input features, change over time [1]. Distinguishing concept drift from mere data (covariate) drift or transient noise is a fundamental challenge in stream mining [12]. Early foundational work established the critical need for real-time classification systems capable of adapting to sudden, gradual, or recurring drift scenarios without requiring exhaustive historical data storage [7]. Recent literature emphasizes that failing to address concept drift results in rapid performance decay, making continuous adaptation not merely an optimization, but a strict operational requirement [18].

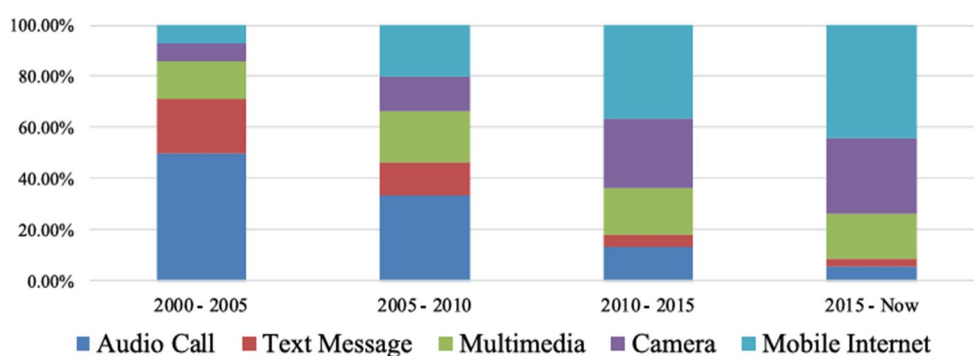


Figure 1: Visual taxonomy of concept drift manifestations in data streams [1]

II. METHODOLOGY OF THE REVIEW

This review synthesizes literature spanning foundational algorithms to modern deep learning adaptations. The selected papers were evaluated based on their contribution to detection sensitivity, computational scalability, and real-world applicability [24]. We specifically focused on studies that address not only theoretical detection but also practical mitigation in resource-constrained or high-stakes environments [20], [22]. The review protocol aligns with recent systematic review standards, ensuring a balanced representation of statistical, ensemble, and deep learning methodologies [21].

III. CONCEPT DRIFT DETECTION MECHANISMS

Effective adaptation is predicated on accurate and timely detection. Detection methodologies can be broadly classified into three paradigms: error-rate monitoring, data distribution monitoring, and model-based monitoring [16].

A. Statistical and Window-Based Detection

Statistical methods, such as the Page-Hinkley test or Kolmogorov-Smirnov test, monitor the distribution of incoming data or model errors to identify significant deviations [9]. Window-based approaches, like ADWIN (Adaptive Windowing), dynamically resize a sliding window of recent data to maintain statistical homogeneity, automatically shrinking the window when a drift is detected [19]. While highly effective, these methods must carefully balance the trade-off between detection delay and the false alarm rate [1].

B. Model-Based and Novel Class Detection

Advanced frameworks monitor the internal parameters or decision boundaries of the model itself. For instance, monitoring the volatility of incremental model updates can signal subtle drifts before they impact overall accuracy [29]. Furthermore, complex environments require systems to distinguish between a drifted known class and an entirely novel, previously unseen class, a challenge addressed by specialized novel class detection frameworks [30].

Table 1: Comparison of Detection Methods

Detection Paradigm	Representative Algorithm	Strengths	Weaknesses	Key Reference
Error-Rate Monitoring	DDM, EDDM	Simple, low computational overhead	High false positives under noise	[7], [19]
Data Distribution	ADWIN, K-S Test	Detects drift before accuracy drops	Computationally expensive for high dimensions	[9], [19]
Model-Based	Incremental Parameter Monitoring	High sensitivity to subtle shifts	Requires access to model internals	[29], [30]
Ensemble Diversity	Dynamic Weighted Majority	Robust, handles recurring concepts	High memory footprint	[6], [23]

IV. ADAPTATION AND MITIGATION STRATEGIES

Once drift is detected, the system must adapt. Adaptation strategies are generally categorized as **passive** (continuously updating the model regardless of drift) or **active** (triggering a specific update mechanism only upon drift detection) [5].

A. Ensemble Learning Approaches

Ensemble methods are the gold standard for stream adaptation due to their inherent diversity. Frameworks like **ElStream** dynamically weight base classifiers based on their recent prequential performance, allowing the ensemble to gracefully degrade and recover during sudden drifts [6]. Furthermore, maintaining a repository of historical models enables rapid re-adaptation when recurring concepts re-emerge, a critical feature for seasonal or cyclical data streams [23]. However, researchers caution that poorly managed ensembles can suffer from "over-adaptation," where diversity is destroyed, necessitating diagnostic repair mechanisms [17].

B. Addressing Compounding Challenges: Class Imbalance

Concept drift rarely occurs in isolation; it is frequently compounded by severe class imbalance, particularly in anomaly detection and fraud scenarios [8]. Standard drift detectors often fail under these conditions because the minority class is overshadowed by the majority class shift [2]. Recent advancements integrate cost-sensitive learning and dynamic resampling techniques directly into the stream learning pipeline, ensuring that the model remains sensitive to minority class drift without sacrificing overall scalability [11].

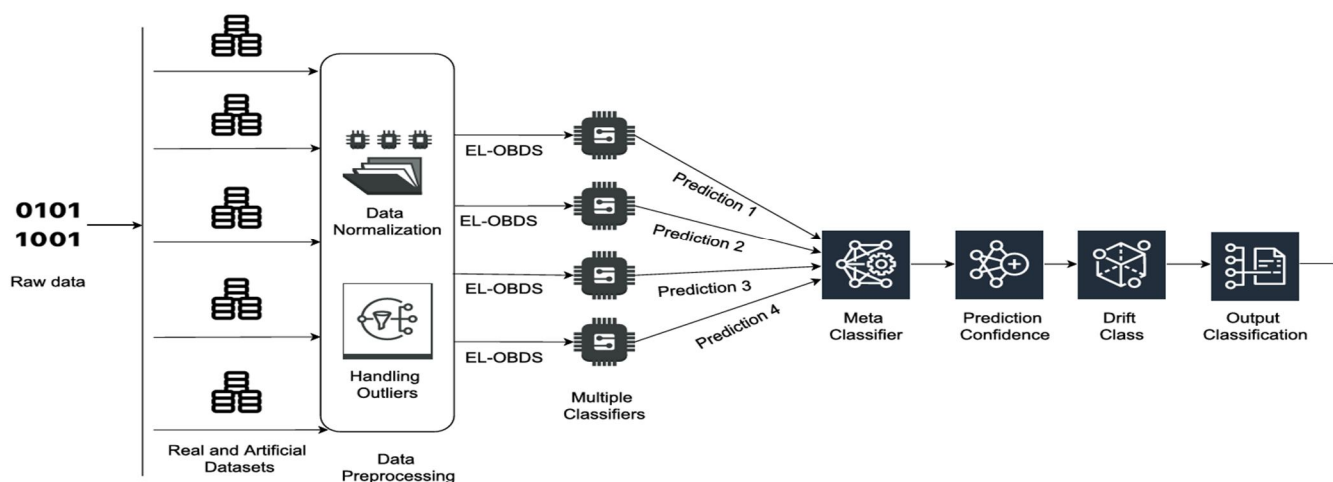


Figure 2: Dynamic ensemble weighting mechanism for concept drift adaptation [6]

V. REAL-WORLD APPLICATIONS AND SYSTEM CONSTRAINTS

Theoretical advancements must translate to practical, deployed systems. This section highlights how concept drift mitigation is applied across critical domains.

A. IoT and Cybersecurity

Intrusion detection systems (IDS) in IoT environments face adversarial concept drift, where attackers deliberately alter their patterns to evade static models [3]. Lightweight, online deep learning frameworks have been developed specifically for edge devices, providing continuous adaptation with minimal memory and computational footprint [20]. Distributed adaptation techniques further allow edge nodes to update locally while periodically synchronizing with a central cloud model, preserving bandwidth [4].

B. Financial Fraud and Time-Series Forecasting

In financial streaming data, fraud patterns evolve rapidly. Adaptive machine learning models that utilize incremental learning and dynamic thresholds have proven highly effective in reducing false negatives in real-time transaction streams [11], [14]. Similarly, in time-series forecasting, specialized mitigation strategies like sliding window retraining and elastic weight consolidation (EWC) in neural networks prevent catastrophic forgetting while adapting to new temporal trends [21], [26].

C. MLOps and Decision Support

From a systems engineering perspective, managing drift is now a core component of MLOps. Modern pipelines explicitly monitor for both data drift and concept drift, triggering automated retraining workflows when thresholds are breached [12]. This ensures that data-driven decision support systems remain reliable and actionable, even as the underlying big data streams evolve [22].

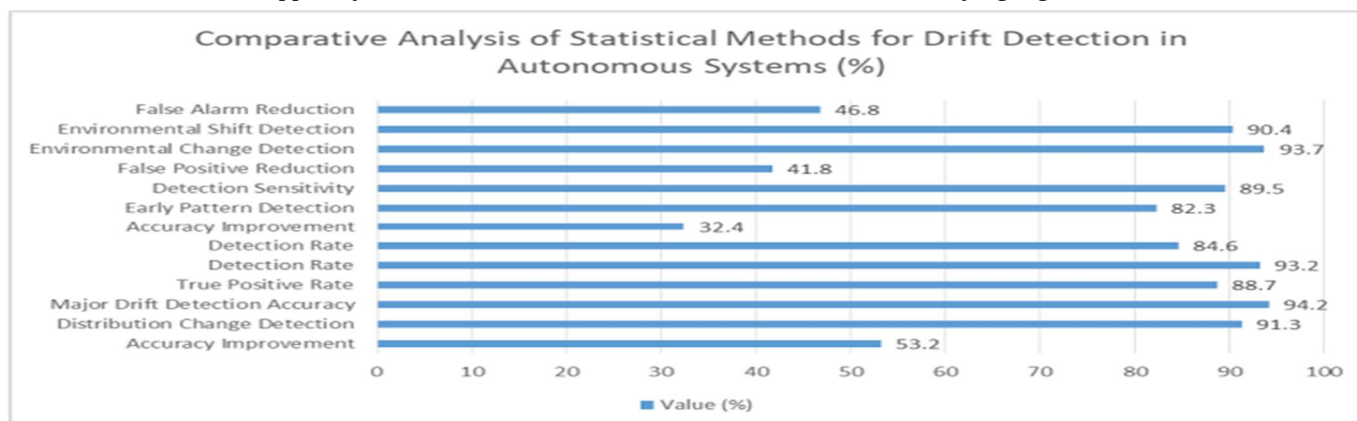


Figure 3: Automated MLOps pipeline for continuous concept drift monitoring and mitigation [12]

VI. OPEN CHALLENGES AND FUTURE DIRECTIONS


Despite significant progress, several grand challenges remain in stream learning. First, Explainable AI (XAI) in streaming contexts is underdeveloped; understanding *why* a model adapted to a drift is crucial for high-stakes domains like healthcare and finance [27]. Second, Green AI demands that adaptation algorithms be evaluated not just on accuracy, but on their computational and energy cost, particularly for edge deployments [10], [27]. Finally, the simultaneous handling of feature drift (changing input space) alongside concept drift requires more sophisticated, multi-layered monitoring architectures [25].

VII. CONCLUSION

Concept drift remains one of the most formidable challenges in machine learning for non-stationary data streams. This review has synthesized the evolution of the field, from foundational statistical detectors to modern, lightweight deep learning adaptation frameworks. While ensemble methods and incremental learning provide robust solutions, the future of stream mining lies in developing resource-efficient, explainable, and MLOps-integrated systems capable of handling compounding challenges like class imbalance and novel class emergence [8], [30]. By adopting the adaptive strategies reviewed herein, practitioners can build resilient machine learning systems that maintain high performance in the face of continuous, real-world change [24].

REFERENCES

- [1] J. Lu et al., "Learning under Concept Drift: A Review," arXiv preprint arXiv:2004.05785, 2020.
- [2] T. R. Hoens, R. Polikar, and N. V. Chawla, "Learning from streaming data with concept drift and imbalance: an overview," *Progress in Artificial Intelligence*, vol. 1, no. 1, pp. 89–101, 2012.
- [3] O. A. Wahab et al., "Intrusion Detection in the IoT Under Data and Concept Drifts: Online Deep Learning Approach," *IEEE Internet of Things Journal*, 2022.
- [4] H. Mehmood et al., "Concept Drift Adaptation Techniques in Distributed Environment for Real-World Data Streams," *Smart Cities*, vol. 4, no. 1, 2021.
- [5] A. S. Iwashita and J. P. Papa, "An Overview on Concept Drift Learning," *IEEE Access*, vol. 7, pp. 1532–1547, 2018.
- [6] I. A. Abbasi et al., "ElStream: An Ensemble Learning Approach for Concept Drift Detection in Dynamic Social Big Data Stream Learning," *IEEE Access*, 2021.
- [7] P. B. Dongre, "A review on real time data stream classification and adapting to various concept drift scenarios," *IEEE IADCC*, 2014.
- [8] A. S. Palli et al., "Online Machine Learning from Non-stationary Data Streams in the Presence of Concept Drift and Class Imbalance," *JICT*, 2024.
- [9] N. A. Ali Abdu, "Machine learning in concept drift detection using statistical," 2024.
- [10] M. Tennant et al., "Scalable real-time classification of data streams with concept drift," *Future Generation Computer Systems*, 2017.
- [11] A. Shahapurkar and R. Patil, "Concept drift and machine learning model for detecting fraudulent transactions in streaming environment," *IJECS*, 2023.
- [12] S. B. Mannapur, "Understanding Data Drift and Concept Drift in Machine Learning Systems," *IJSRCSE*, 2025.
- [13] "Big-Data Streaming Applications Scheduling with Online," *DATE*, 2015.
- [14] N. R. Desani and D. R. Chittibala, "Adaptive Machine Learning Models for Real-Time Anomaly Detection in Streaming Data," *IJITMIS*, 2021.
- [15] G. Hovakimyan and J. M. Bravo, "Evolving Strategies in Machine Learning: A Systematic Review of Concept Drift Detection," *Information*, 2024.
- [16] B. Halstead et al., "Analyzing and repairing concept drift adaptation in data stream classification," *Machine Learning*, 2022.
- [17] S. Wares et al., "Data stream mining: methods and challenges for handling concept drift," *SN Applied Sciences*, 2019.
- [18] H. Wang et al., "Concept Drift Detection for Streaming Data," arXiv:1504.01044, 2015.
- [19] L. Yang et al., "A Lightweight Concept Drift Detection and Adaptation Framework for IoT Data Streams," arXiv:2104.10529, 2021.
- [20] M. Abdullahi et al., "A Systematic Literature Review of Concept Drift Mitigation in Time-Series Applications," *IEEE Access*, 2025.
- [21] J. Lu et al., "Data-driven decision support under concept drift in streamed big data," *Complex & Intelligent Systems*, 2020.
- [22] "Performance Evaluation of EANT / Online ensembles," *IEEE ICMLA*, 2007.
- [23] H. M. Gomes et al., "Machine learning for streaming data: state of the art, challenges, and opportunities," *ACM SIGKDD Explorations*, 2019.
- [24] A. J. Rabash et al., "Stream learning under concept and feature drift: A literature survey," *Journal of Autonomous Intelligence*, 2023. Review," *Applied Sciences*, 2023.
- [25] "Roadmap of Concept Drift Adaptation in Data Stream Mining, Years Later," *La Trobe University Repository*, 202X.
- [26] "Real-time ranking with concept drift using expert advice," *IEEE HPCC*, 2012.
- [27] Z. Yang et al., "A Novel Concept Drift Detection Method for Incremental Learning in Nonstationary Environments," *IEEE TNNLS*, 2020.
- [28] M. Masud et al., "Classification and Novel Class Detection in Concept-Drifting Data Streams under Time Constraints," *IEEE TKDE*, 2011.

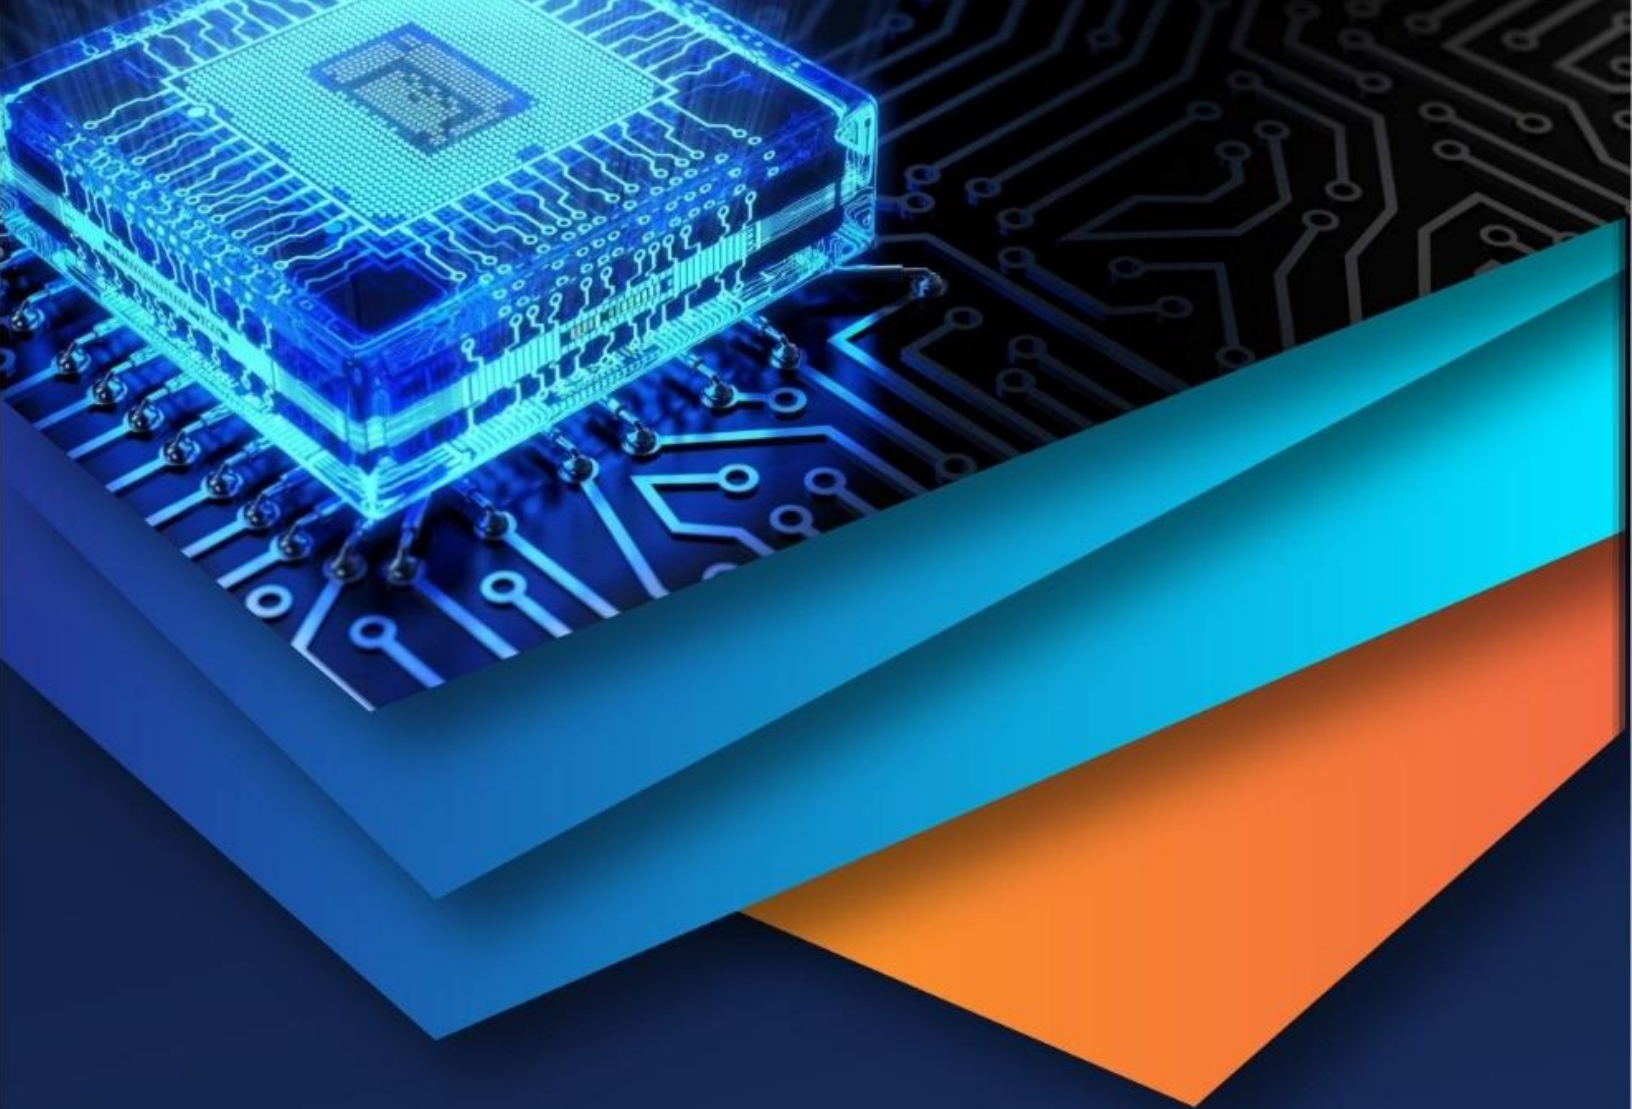

10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)