



IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 10 Issue: VII Month of publication: July 2022

DOI: https://doi.org/10.22214/ijraset.2022.45604

www.ijraset.com

Call: 🕥 08813907089 🔰 E-mail ID: ijraset@gmail.com



## Analysis of IoT Data Transfer Messaging Protocols on Application Layer

Ms. Shilpa B.Sarvaiya<sup>1</sup>, Dr. D.N. Satange<sup>2</sup>, Prof. Ather Iqbal<sup>3</sup>

<sup>1</sup>Department of Computer Science Vidyabharati Mahavidyalaya, Amravati, <sup>2</sup>Department of Computer Science Narsamma Hirayya Arts Commerce & Science, Amravat, <sup>3</sup>HOD Department of Computer Science Vidyabharati Mahavidyalaya, Amravati

Abstract: Now on a daily basis during a smarter embedded world, have Internet of Things. IoT have lot of things for the embedded systems, and it's the potential to remodel our world with the assistance of it. Internet of Things (IoT) or Web of Things (WoT) is emerging technology and it wireless network between two or more objects or smart things connect via Internet. IoT classified in two types first is within IoT and second side is outside of IoT.

In inside IoT consider as protocols in IoT. In outside of IoT consider as sensor, actuators, etc., those are physically possible. In within IoT consider as protocol and IoT have own Protocol Stack. Protocol Stack has different layer like Application Layer, Transport Layer, Internet Layer and Physical/Link Layer. The judgmental role goal of IoT is to confirm effectual communication between two objects and build a sustained bond among them using different application. The application Layer liable for providing services and determining a group of protocol for message passing at the application Layer. This paper understands Application Layer Data Transfer Messaging Protocol like MQTT, AMQT, COAP, XMPP, DDS, HTTP, RESTFULL, and WEB-SOCKET. Also describe which sort of architecture (like Request/Response, Client/Server and Publish/Subscribe) and security (like DTLS, TCL/SSL and HTTPS) support in those protocols that decide upon appropriate protocol supported application needs.

Keywords: IoT, WoT, M2H, M2M, MQTT, AMQT, COAP, XMPP, DDS, HTTP, RESTFULL, WEB-SOCKET.

## I. INTRODUCTION

IoT has significantly changed ones perspective of living style. It has enabled many non-living objects to behave smartly and intellectually according to the circumstance and environment. A growing number of physical objects are being connected to the Internet at an unprecedented rate realizing the idea of the Internet of Things (IoT).

The IoT envisions hundreds or thousands of end-devices with sensing, actuating, processing, and communication capabilities able to be connected to the Internet [1]. The captured data needs a direction to be Transferred, Modified, Controlled, Acknowledged, Stored or Exported to other devices. These tasks can be performed through suitable protocols. Typically, IoT is expected to offer advanced connectivity of devices, systems, and services that goes beyond, Human-to-Machine (H2M), Machine-to-Machine (M2M) communications. In section 2 studies the literature review, in section 3 explain the working of the data transfer protocols between the transmitter and the receiver is given. Section 4 Analyse the result and discuss, section 5 gives the conclusion of the work, the comparisons of the messaging protocols is important to choose a suitable design platform.

1) Human To Machine Communications In IoT (H2M): Human to Machine communication originally emerged from Telemetry technology, and its main aim was to measure data and automatically transmit it from remote sources typically by cable or a radio.Nowdays, plethora of sensors are being developed, which have better perceptual abilities than humans and can detect information that humans cannot.

Affordable electronic devices halved to an increasing number of them being connected to the Internet. The smart IoT devices open up the possibility to reduce the burden on the user end by equipping everyday objects. Human-to-Machine communication is a very important development in Internet of Things.Fiqure 1 shows the human to machine interaction and its relation to the IoT.Figure 1 shows the elaborate human to machine interaction which demonstrates the use of sensors, actuators, cognition unit and processing unit.

The data transfer in HMI model is based on the cognitive ability of the human. The machine sends the control data to the actuator unit to perform the required action.



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 10 Issue VII July 2022- Available at www.ijraset.com

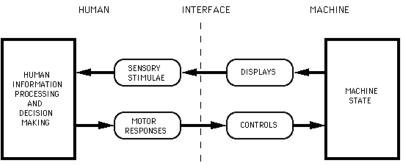


Figure 1: Human to Machine Interaction

2) Machine To Machine Communications In Iot (M2m): Machine to Machine (M2M) is a broad term that can be used to describe any technology that enables networked devices to exchange information and perform actions without the manual assistance of humans. It forms the basis for a concept known as the Internet of Things (IoT).Key components of an M2M system include sensors.RFID, a Wi-Fi or cellular communications link and autonomic computing software programmed to help a networked device interpret data and make decisions.M2M communications expands telemetry's role beyond its common use in science and engineering and places it in an everyday setting. People already are using M2M, but there are many more potential applications as wireless sensors networks and computers improve, benefitting the concept to be amalgamated with other technology. The main goal of M2MC is to enable the sharing of information between electronic systems autonomously; Figure 2 shows the amalgation of Machine to Machine and IoT in real time. In other words Machine to Machine refers to technologies that allow both wireless and wired systems to communicate with other devices.M2M application protocols take a fundamental role in communication efficiency: Protocol overheads, necessary number of management or control and information messages, reliability and security. All these impact the number and size of transmissions consequently, the energy and bandwidth consumptions in a mobile device. It finds it major application in protocols namely MQTT, AMQT, COAP, XMPP, DDS, HTTP, RESTFULL, and WEB-SOCKET.

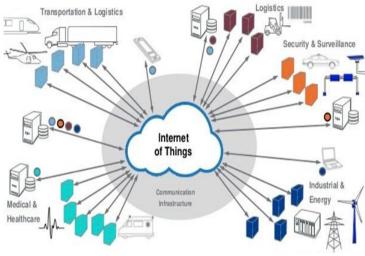


Figure 2: Amalgamation of M2M and IoT

## II. RELATED WORK

Internet of Things (IoT) is emerging technology. Show in previous section inside of IoT describe as protocols. By studying paper regarding IoT and IoT protocol related IETF standards paper show Application Layer protocols focus basically on message exchange between applications and the Internet [2]. A Data Transfer Protocol is a standardised format for transmitting data between two devices. The type of protocol used can determine the variables. Application Layer work with other layer like Transport Layer, Internet Layer and Physical Layer. In this paper our aim to provide comprehensive survey to describe all main eight Application Layer Protocols.



## A. IoT Ecosystem

Figure 3 shows a 7-Layer model of IoT Ecosystem. At the bottom Layer is the market or application domain. The second layer consists of sensors that enable the application. The third layer consists of interconnection layer that allows the data generated sensors to be communicated, usually to a computing facility, data centre, or a cloud. Finally the top layer consists of services that enable the market and may include energy management, health management, education, transportation etc. [3].



Figure 3: IoT Ecosystem

In this paper, we concentrate on the Session Layer. This layer itself can be shown in a Multi-Layer stack as shown in figure 4.We have shown only the Data link, Network, and Transport or Session Layers. The data link layer connects two IoT elements which generally could be two sensors or the sensor and the gateway device that connects a set of sensors to the Internet. Often there is a need for multiple sensors to communicate and aggregate information before to the Internet. Specialized protocols have been designed for routing among sensors and part of the routing layer. The Session Layer protocols enable messaging among various elements of the IoT communication subsystem. A number of security and management protocol have also been developed for IoT as shown in the figure.

Session		MQTT, SMQTT, CoRE, DDS,	Security	Management IEEE 1905,	
		AMQP , XMPP, CoAP,	TCG,		
Network	Encapsulation	6LowPAN, 6TiSCH, 6Lo, Thread,	Oath 2.0, SMACK, SASL.	IEEE 1451, 	
	Routing	RPL, CORPL, CARP,	ISASecure, ace, DTLS, Dice,		
Datalink		WiFi, Bluetooth Low Energy, Z-Wave, ZigBee Smart, DECT/ULE, 3G/LTE, NFC, Weightless, HomePlug GP, 802.11ah, 802.15.4e, G.9959, WirelessHART, DASH7, ANT+, LTE-A, LoRaWAN,			

Figure 4: Protocols for IoT

## **III. IOT APPLICATION LAYER MESSAGING PROTOCOLS**

A communication protocol is nothing but a language that is used by objects to interact among them. In simple words, a protocol is a set of rules that must be obeyed by the communicating objects. Communication Protocols are extremely essential in heterogeneous systems; where the objects interacting may be heterogeneous in nature, needing a common framework for them to interact. This section reviews standards and protocols for message passing in IoT Application Layer proposed by different standardization [2].All most Web-based application and IoT application are IP based and they use TCP and UDP for transport. However, there are several message distribution functions that are common among many IoT applications; it is desirable that these functions be implemented in an interoperable standard ways by different applications. Those protocols are:

 MQTT (Message Queuing Telemetry Transport Protocol): MQTT (Message Queue Telemetry Transport) was develop by or introduce by IBM in 1999 and standardized by OASIS in 2013 to target come up with lightweight M2M communication [3].It is Publish/Subscribe Protocol architecture similar to Client/Server Protocol show in figure 5 below. The importance of MQTT Protocol is due to its simplicity and the no need of high CPU and memory usage (reason is the lightweight protocol) [4].MQTT



## International Journal for Research in Applied Science & Engineering Technology (IJRASET) ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 10 Issue VII July 2022- Available at www.ijraset.com

supports a wide range of different devices and mobile platforms. At Transport Layer TLS/SSL security provides to MQTT.Show above figure 5 there three components are there Publishers, a Broker and Subscribers. Publishers are generally lightweight sensors that connect with a broker and send data to a broker and go back to sleep. Subscribers are IoT applications that interested in data send by sensors and also connect with a broker, so broker send interested data to subscribers. The brokers classify sensor data in Topics and send them to subscribers interested in the Topics. This all thing is on IoT point of View [5].

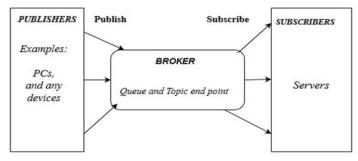


Figure 5: Working of MQTT Protocol

2) CoAP (Constrained Application Protocol): CoAP (Constrained Application Protocol) is used for low power and low memory embedded devices where it can be used for communication instead of HTTP.Currently there is HTTP Protocol available with Request/Response paradigm but HTTP has many features and more footprint [5].HTTP runs over TCP where TCP will need more resources due to three way handshake and many more complex mechanism. Now for low power embedded devices, there is no need of this heavy protocols and we can optimize it to run over TCP.As CoAP is a Restful web Transfer Protocol for use with constrained networks. CoAP uses Client/Server model of approach same as HTTP.It is designed for constrained networks with low overhead and lower footprint [6].




Figure 6: Constrained Application Protocol

3) AMQP (Advanced Message Queuing Protocol): The Advanced Message Queuing Protocol (AMQP) is a protocol that across from the financial industry. Security is managed with the use of the TLS/SSL Protocols. Its run over TCP.AMQP is follow Publish/Subscribe communication Protocol for messaging [6,7].AMQP is same like MQTT but AMQP have advantage its store data then forward it, and this features used at when network disruptions that time ensures reliability. Show in figure 7 below a broker divide into two part Exchange and Queue. Exchange responsibility to receive Publishers messages and distribute to Queue. A queue is based on Pre-define Roles and Condition and it's basically send message to subscribers who subscribe those data.

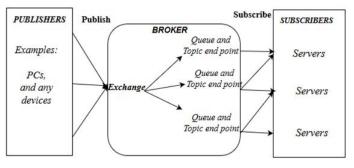


Figure 7: Advanced Message Queuing Protocol



International Journal for Research in Applied Science & Engineering Technology (IJRASET) ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 10 Issue VII July 2022- Available at www.ijraset.com

4) XMPP (Extensible Messaging and Presence Protocol): Extensible Messaging and Presence Protocol (XMPP) is a Messaging Protocol that was designed originally for chatting and message exchange applications. It was standardized by IETF in 1999 named as jabber In all Application Layer Protocols only XMPP Protocol support Publish /Subscribe and Request/Response model and it's depend on application developers to develop application which model they use [8]. It does not provide any quality of service guarantees and, hence, is not practical for M2M communications. XMPP is IP based communication protocol with Extensible Mark-up Language (XML) support [9].

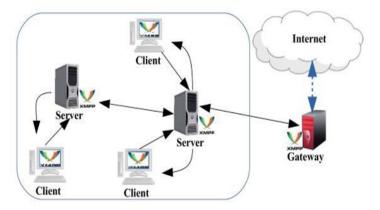


Figure 8: Extensible Messaging and Presence Protocol

5) DDS (Data Distribution Service): Data Distribution Service (DDS) is another Publish/Subscribe Protocol that is designed by the Object Management Group (OMG) for M2M communications. It defines two sub layers: Data-Centric Publish-Subscribe (DCPS) which disseminates information to subscribers and Data-Local Reconstruction Layer (DLRL) which is an optional and is an interface to the DCPS functionalities. It shares data among distributed objects [9].




Figure 9: Data Distribution Service

6) HTTP (Hyper Text Transfer Protocol): HTTP is specially designed for Internet. It was developed by Tim Berners Lee and later standardized by IETF in 1997.Though HTTP uses Request/Response architecture, it doesn't use topics.HTTP is based on Representational State Transfer (REST), an architectural style that makes information available as resources identified by URIs [8].HTTP is simple text based protocol where no fixed header size is defined. It has features on Persistent and Non-Persistent connections.by default TCP is used as HTTP's Transport Protocol, but HTTP doesn't have any QoS support [9].HTTP is very powerful protocol, but it's relatively expensive in implementation and network resource usage. This makes it difficult to adopt HTTP as it is for IoT networks.HTTP transfers a large number of small packets over web but overhead of HTTP causes many problems, such as consumption of network resources and large delays [10].



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 10 Issue VII July 2022- Available at www.ijraset.com

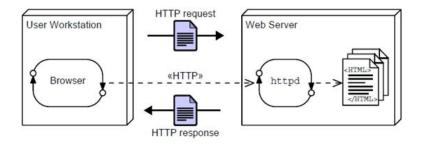


Figure 10: Working of Hyper Text Transfer Protocol

7) RESTFULL (REpresentational State Transfer): Representational State Transfer (RESTFUL Services) is an engineering that gives web administrations which permit correspondence and information trade between various gadgets utilizing HTTP in IoT condition [5].REST utilizes the HTTP strategies GET,POST,PUT,and DELETE to give an asset arranged informing framework where all activities can be performed essentially by utilizing the synchronous request/response HTTP commands. RESTFUL services use the secure and reliable HTTP which is the proven worldwide Internet language. It can make use of TLS/SSL for security [9].


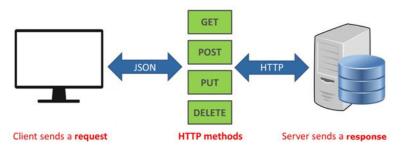


Figure 11: Working of RESTFULL Protocol

8) WEB-SOCKET: The WEB-SOCKET Protocol provides two ways for communication between clients and a remote server. Web-Socket provides security similar to the security model used HTTPS Protocol. For browsing Application Layer used and web-Socket work on TCP Transport Layer Protocol, so they need to interact and communicate with host those who connect with remote. Web-Socket is a Web-based Protocol that works on the single TCP channel and provides full duplex communications. Web-Socket starts session without Publish/Subscribe and Request/Response models like previous protocols [9, 10].





ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 10 Issue VII July 2022- Available at www.ijraset.com

### IV. RESULT AND DISCUSSION

To interconnect objects to transfer data and to publish information over a network without requiring Human-to Human or Humanto-Computer interaction is now possible. That is why the IoT application programmers are faced with the challenges of choosing an appropriate communication protocols for their resource-constrained applications.

Performance Evaluation: In The process of Subscription-Publication, the challenge is to accomplish the message delivery with a high efficiency, a low latency and a low packet loss rate using one of reliability and QoS level. Otherwise, it is up to the application to select the appropriate QoS level for its publications and subscriptions, thus the decision to use one of these levels impacts on the application performance as well as on the use of bandwidth and battery life of devices. However, although the traditional protocol's effectiveness, the need for a suitable protocol for IoT applications involving constrained devices is necessary because the biggest obstacle in the functioning of these devices is energy consumption. Both MQTT and CoAP protocols are being implemented for Mesh-Networking applications in networks in order to allow inter-standard communication between lightweight end nodes. Data transfer Protocols are rapidly emerging and integrating the IoT market as leading lightweight messaging protocols for constrained devices.

Each protocol offers unique benefits and each poses challenges and tradeoffs. The strengths and issues of these eight protocols are summarized in Table 1 [9, 10]. The purpose of this evaluation is to choose the use of either MQTT or CoAP according to the best throughput and lowest latency resulted in the presence of different criteria. AMQP can be integrated with TLS in order to ensure secure communication. DDS, RESTFUL, and WEB-SOCKET is an excellent quality of service levels and reliability quarantees. XMPP is very secure protocol which supports encryption, authentication, and access control. MQTT and CoAP use different transmission protocols of TCP and UDP. CoAP present the best performances in terms of both throughput and latency.

Sr.No	Criteria	MQTT		AMOP	XMPP	DDS	HTTP	RESTFU	WEBSOCKET
								L	
1	Year	1999	2010	2003	1999	2004	1997	2000	2011
2	RESTFUL	No	Yes	No	No	No	Yes	Yes	yes
3	Transport Protocol	TCP	UDP	TCP	TCP	TCP/UDP	TCP	TCP/UDP	ТСР
4	Publish/Subscribe	Yes	Yes	Yes	Yes	Yes	No	No	No
	Model								
5	Request/Response	No	Yes	No	Yes	No	Yes	Yes	YES
6	Security	SSL	DTLS	SSL	SSL	SSL/DTLS	SSL	SSL/TLS	TLS
7	QoS	yes	Yes	Yes	No	Yes	No	NO	NO
8	Header Size	2	4	8					
9	XML Support	No	No	No	Yes	No	Yes	Yes	Yes
10	Encoding Format	Binary	Binary	Binary	Character	Binary	Text	Text	Text
11	Default Port	1883/8883	5683/5684	5671/5672	5222/5223	7400/7401	80/443	23450/tcp	RFC 6455
12	Proxy Support	Partial	Yes	Yes	Yes	Yes	Yes	Yes	Yes

 Table 1: Comparative Analysis of IoT Data Transfer Messaging Protocols

### V. CONCLUSION

In this paper, we made a shot to supply survey on the embedded world and/or Machine to Human (M2H), Machine to Machine (M2M) communication around Data transfer Messaging Protocols. During this paper we have analyzed and compared messaging protocols for IoT systems. Started our discussion with MQTT then discussed, MQTT, AMQT, COAP, XMPP, DDS, HTTP, RESTFULL, and WEB-SOCKET. Each of these protocols has their different pros, cons and is meant for particular scenarios. Also we performed comparative analysis of this protocol which is in a position to assist us to choose appropriate messaging protocol depending upon application requirements.

There are three major components for implementing IoT on different applications: Security, Privacy and Trust. While increasing the expansion of IoT, Security is more important for reliable data transferred among the billions of smart objects. This paper concentrates on Application Layer Data Transfer Messaging Protocols on IoT devices. CoAP having light weight and consume low energy; CoAP is utilized on many applications of IoT. To secure data transferred, CoAP combined with DTLS Protocols named as Datagram Transport Layer Security Protocols because the safety agent. So, in future we concentrate on Security in Application Layer Protocols.



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 10 Issue VII July 2022- Available at www.ijraset.com

#### REFERENCES

- Ms.B.Sarvaiya, Dr.S.S. Sherekar, Dr.V.M.Thakare, "Study of Security Challenges in Multi-layered Structure and Various Attacks on IOT", AIC 2K18 Annual IETE Convention International Journal of Electronics, Communication And Soft Computing Science & Engineering (IJECSCSE), Impact Factor- 4.526, ISSN :2277-9477, 29 and 30 September-2018.
- Jayavardhana Gubbi et al. "Internet of Things (IoT): A Vision, Architecture Elements, and Future Directions", In Future Generation Computer Systems, PP.1645-1660, and ISSN: 0167-739X, 2013 IEEE.
- [3] Kushal Reshamdalal, "A Comprehensive Study of Application Layer Protocols (ALP)", International Journal of Innovations & Advancement in Computer Science (IJIACS), ISSN 2347-8616, Volume 6, Issue 10 October 2017 IEEE.
- [4] Tanya Mohan Tukade, R.M.Banakar, "Data Transfer Protocols in IoT-An Overview", International Journal of Pune and Applied Mathematics, ISSN: 1311-8080, Volume 118, No.16 2018 IEEE.
- [5] Fathia Ouakasse, Said Rakrak, "A Comparative Study of MQTT and CoAP Application Layer Protocols via. Performances Evaluation", Journal of Engineering and Applied Sciences. ISSN: 6053-6061, Volume 13, No 15.2018 IEEE.
- [6] Yuang Chen, Thomas Kunz, "Performance Evaluation of IoT Protocols under a Constrained Wireless Access Network", 2016 International Conference on Selected Topics in Mobile & Wireless Networking(MoWNeT). ISSN: 5090-1743, 2016 IEEE.
- [7] Danish Bilal Ansari, Atteeq-Ur-Rehman, Rizwan Ali Mughal, "Internet of Things (IoT) Protocols: A Brief Exploration of MQTT and CoAP", International Journal of Computer Applications. ISSN: 0975-8887, Volume 179, No.27, March 2018 IEEE.
- [8] Suvam Monanty, Sagar Sharma, Vaibhav Vishal, "MQTT-Messaging Queue Telemetry Transport IoT based Messaging Protocol", International Research Journal of Engineering and Technology (IRJET). ISSN:2395-0056, Volume 03, Issue 09, SEP 2016 IEEE.
- [9] Makkad Asim, "A Survey on Application Layer Protocols for Internet of Things (IoT)", International Journal of Advanced Research in Computer Science, ISSN: 0976-5697, Volume 8, No.3, March-April 2017 IEEE.
- [10] Sagar P Jaikar, Dr.Kamatchi R.Iyer, "A Survey of Messaging Protocols for IoT Systems", International Journal of Advanced in Management Technology and Engineering Sciences, ISSN: 2249-7455, Volume 8, Issue II, FEB 2018 IEEE.











45.98



IMPACT FACTOR: 7.129







# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 🕓 (24\*7 Support on Whatsapp)